

**JURNAL 1
PEMROGRAMAN PERANGKAT BERGERAK**

**MODUL 01
RUNNING MODUL**



**Disusun Oleh :
Nadia Tambunan 103122400005
Kelas SE-08-01**

**Asisten Praktikum :
Abu Abdirrahman Humaid Al-Atsary
Aflah Rizkyadhafin Nurfikri**

**Dosen Pengampu :
Yudha Islami Sulistya, S.Kom., M.Cs.**

**PROGRAM STUDI S1 SOFTWARE ENGINEERING
FAKULTAS INFORMATIKA
TELKOM UNIVERSITY PURWOKERTO**

2026

JURNAL 1

A. SOAL

TUGAS:

1. Membuat Project Flutter

Buatlah sebuah project Flutter baru dengan nama **MOD1_NIM** menggunakan **Visual Studio Code**. Dokumentasikan / *screenshot* setiap langkah pengerjaan mulai dari membuat *project* hingga berhasil menjalankan *program*-nya.

2. Pastikan project dapat dijalankan pada emulator Android.

KETERANGAN PENGUMPULAN:

- Kumpulkan **file PDF** yang berisi *screenshot* tampilan langkah pengerjaan beserta dengan hasilnya, sertakan juga **code**-nya.
- Kumpulkan **file ZIP** yang berisi folder **lib** dari **project** yang telah dibuat.

Contoh Output:



B. JAWABAN

Source code

```
import 'package:flutter/material.dart';

void main() {
  runApp(const MyApp());
}
```

```

class MyApp extends StatelessWidget {
  const MyApp({super.key});

  // This widget is the root of your application.
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Flutter Demo',
      theme: ThemeData(
        // This is the theme of your application.
        //
        // TRY THIS: Try running your application with "flutter
run". You'll see
        // the application has a purple toolbar. Then, without
quitting the app,
        // try changing the seedColor in the colorScheme below
to Colors.green
        // and then invoke "hot reload" (save your changes or
press the "hot
        // reload" button in a Flutter-supported IDE, or press
"r" if you used
        // the command line to start the app).
        //
        // Notice that the counter didn't reset back to zero;
the application
        // state is not lost during the reload. To reset the
state, use hot
        // restart instead.
        //
        // This works for code too, not just values: Most code
changes can be
        // tested with just a hot reload.
        colorScheme: .fromSeed(seedColor: Colors.deepPurple),
      ),
      home: const MyHomePage(title: 'Flutter Demo Home Page'),
    );
  }
}

class MyHomePage extends StatefulWidget {
  const MyHomePage({super.key, required this.title});

  // This widget is the home page of your application. It is
stateful, meaning

```

```

    // that it has a State object (defined below) that contains
fields that affect
    // how it looks.

    // This class is the configuration for the state. It holds the
values (in this
    // case the title) provided by the parent (in this case the
App widget) and
    // used by the build method of the State. Fields in a Widget
subclass are
    // always marked "final".

    final String title;

    @override
    State<MyHomePage> createState() => _MyHomePageState();
}

class _MyHomePageState extends State<MyHomePage> {
    int _counter = 0;

    void _incrementCounter() {
        setState(() {
            // This call to setState tells the Flutter framework that
something has
            // changed in this State, which causes it to rerun the
build method below
            // so that the display can reflect the updated values. If
we changed
            // _counter without calling setState(), then the build
method would not be
            // called again, and so nothing would appear to happen.
            _counter++;
        });
    }

    @override
    Widget build(BuildContext context) {
        // This method is rerun every time setState is called, for
instance as done
        // by the _incrementCounter method above.
        //
        // The Flutter framework has been optimized to make
rerunning build methods
        // fast, so that you can just rebuild anything that needs

```

```

updating rather
    // than having to individually change instances of widgets.
    return Scaffold(
      appBar: AppBar(
        // TRY THIS: Try changing the color here to a specific
color (to
        // Colors.amber, perhaps?) and trigger a hot reload to
see the AppBar
        // change color while the other colors stay the same.
        backgroundColor:
Theme.of(context).colorScheme.inversePrimary,
        // Here we take the value from the MyHomePage object
that was created by
        // the App.build method, and use it to set our appbar
title.
        title: Text(widget.title),
      ),
      body: Center(
        // Center is a layout widget. It takes a single child
and positions it
        // in the middle of the parent.
        child: Column(
          // Column is also a layout widget. It takes a list of
children and
          // arranges them vertically. By default, it sizes
itself to fit its
          // children horizontally, and tries to be as tall as
its parent.
          //
          // Column has various properties to control how it
sizes itself and
          // how it positions its children. Here we use
mainAxisAlignment to
          // center the children vertically; the main axis here
is the vertical
          // axis because Columns are vertical (the cross axis
would be
          // horizontal).
          //
          // TRY THIS: Invoke "debug painting" (choose the
"Toggle Debug Paint"
          // action in the IDE, or press "p" in the console), to
see the
          // wireframe for each widget.
          mainAxisAlignment: .center,


```

```

        children: [
          const Text('You have pushed the button this many
times:'),
          Text(
            '$_counter',
            style: Theme.of(context).textTheme.headlineMedium,
          ),
        ],
      ),
    ),
    floatingActionButton: FloatingActionButton(
      onPressed: _incrementCounter,
      tooltip: 'Increment',
      child: const Icon(Icons.add),
    ),
  );
}
}


```

Screenshot Output

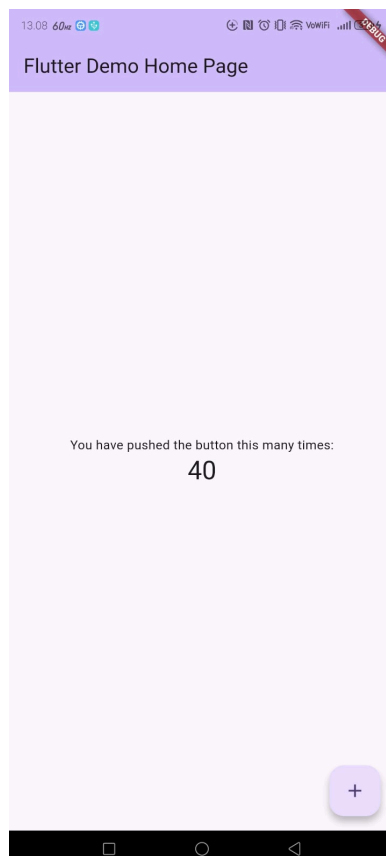


Deskripsi Program


1. Install Extension Dart

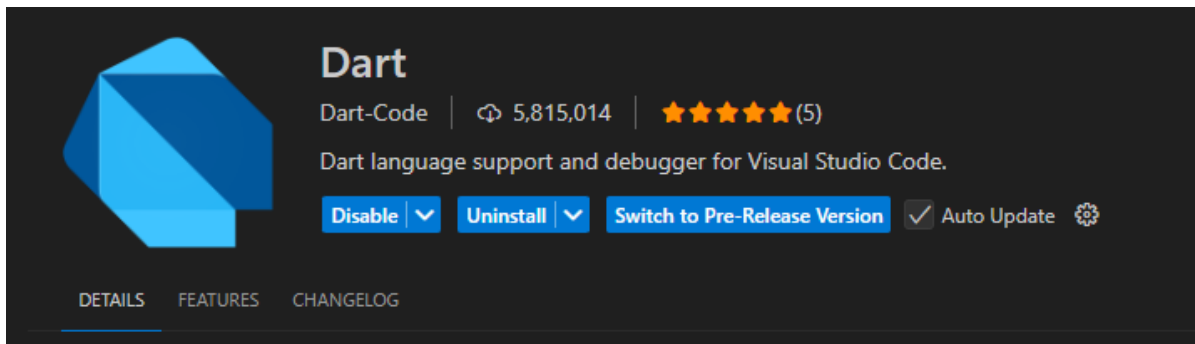


2. Install Extension Flutter

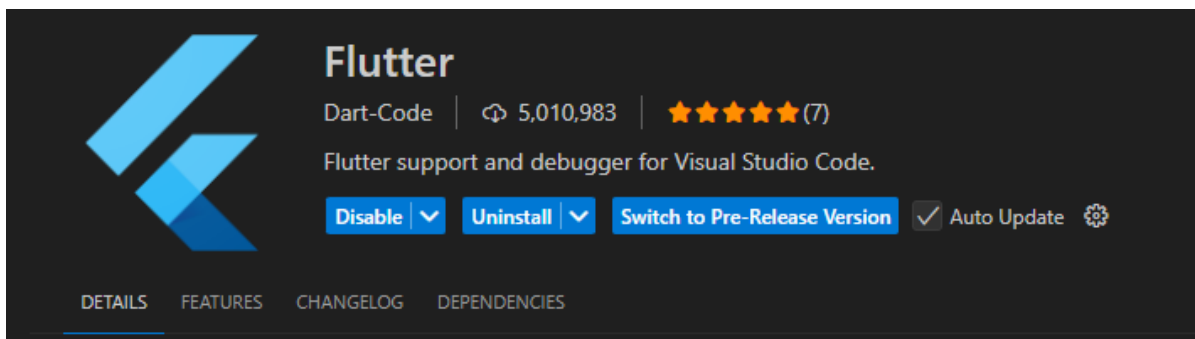


3. ctrl + shift + p, lalu cari flutter, kemudian klik Create New Project

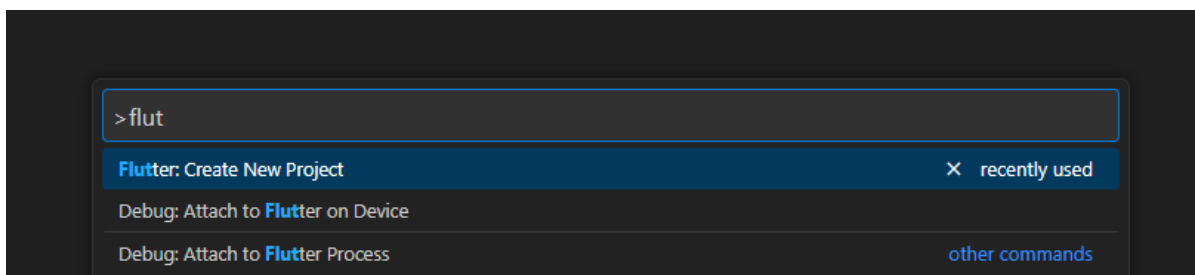


4. Pilih Application

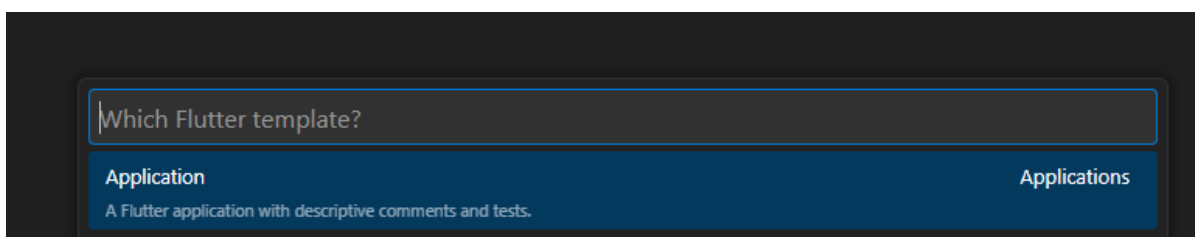


5. Pilih Folder

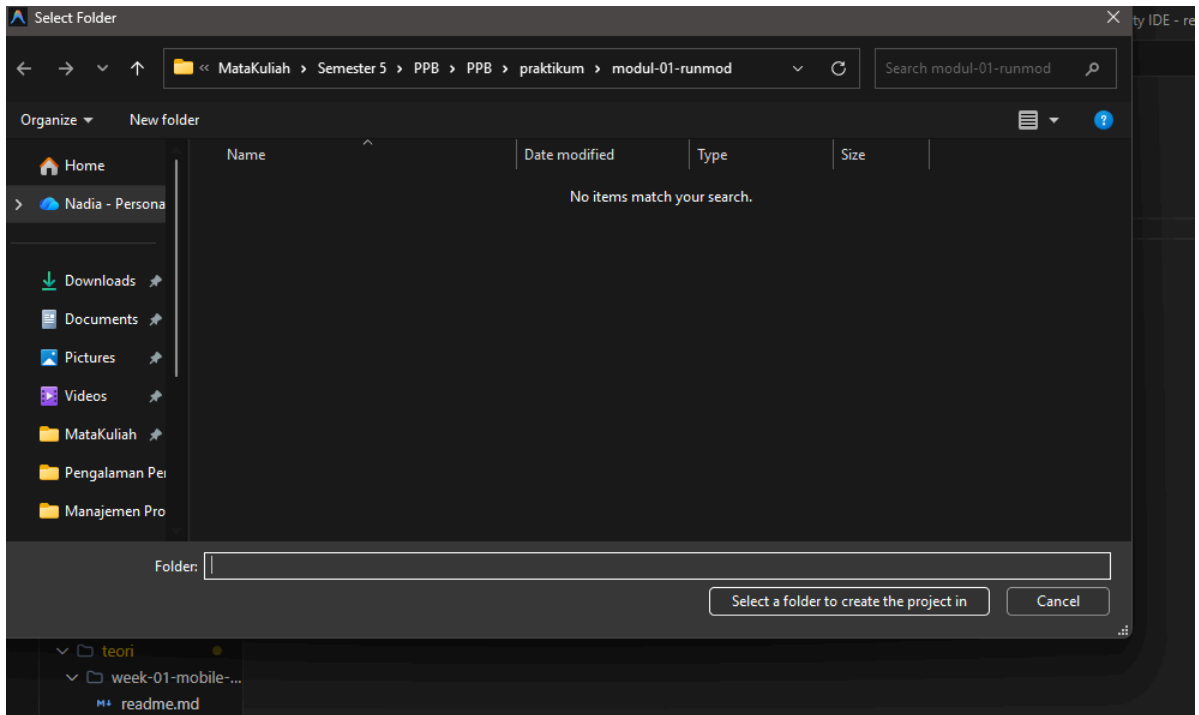


6. Kasih Nama project

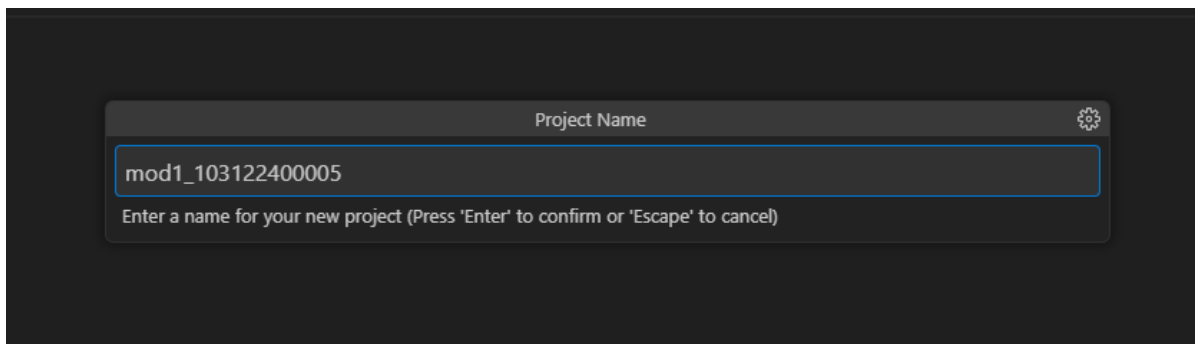

7. Pilih projectnya untuk platform apa aja

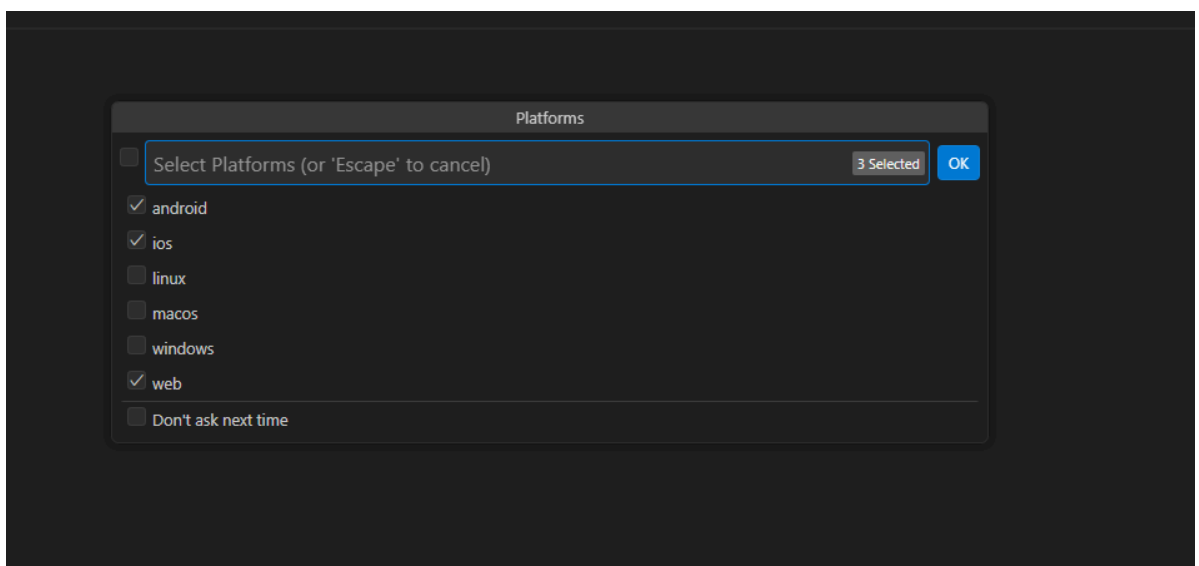


8. Framework project sudah terbuat

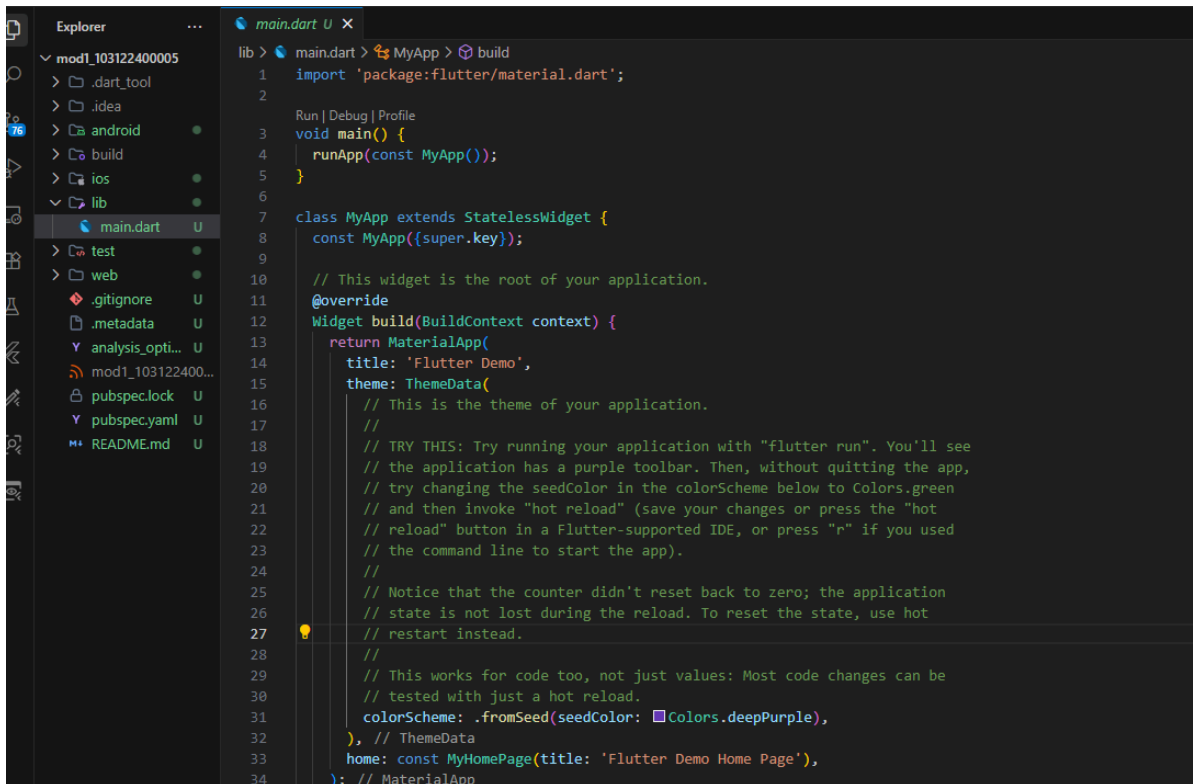

```
lib > main.dart > MyApp > build
1 import 'package:flutter/material.dart';
2
3 Run | Debug | Profile
4 void main() {
5   runApp(const MyApp());
6 }
7
8 class MyApp extends StatelessWidget {
9   const MyApp({super.key});
10
11   // This widget is the root of your application.
12   @override
13   Widget build(BuildContext context) {
14     return MaterialApp(
15       title: 'Flutter Demo',
16       theme: ThemeData(
17         // This is the theme of your application.
18         // TRY THIS: Try running your application with "flutter run". You'll see
19         // the application has a purple toolbar. Then, without quitting the app,
20         // try changing the seedColor in the colorScheme below to Colors.green
21         // and then invoke "hot reload" (save your changes or press the "hot
22         // reload" button in a Flutter-supported IDE, or press "r" if you used
23         // the command line to start the app).
24         //
25         // Notice that the counter didn't reset back to zero; the application
26         // state is not lost during the reload. To reset the state, use hot
27         // restart instead.
28         //
29         // This works for code too, not just values: Most code changes can be
30         // tested with just a hot reload.
31         colorScheme: .fromSeed(seedColor: Colors.deepPurple),
32       ), // ThemeData
33       home: const MyHomePage(title: 'Flutter Demo Home Page'),
34     ); // MaterialApp
```

9. Nah karena laptop saya kasian kalau disuruh menjalankan emulator, saya sambungin aja langsung ke hape untuk nge run project. Yang pertama saya connect android saya ke laptop dengan USB


10. Kemudian saya jalankan flutter devices

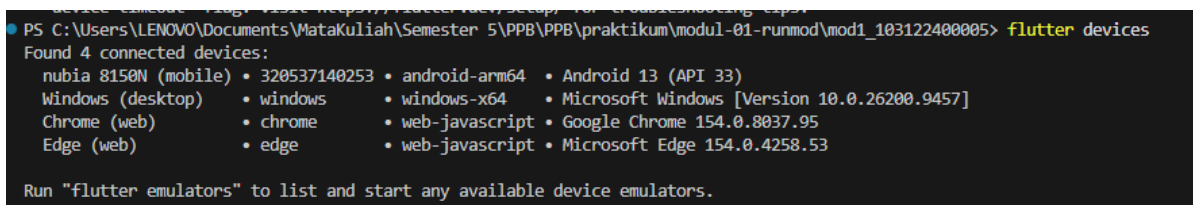

```
PS C:\Users\LENOVO\Documents\MataKuliah\Semester 5\PPB\PPB\praktikum\modul-01-runmod\mod1_103122400005> flutter devices
Found 4 connected devices:
nubia 8150N (mobile) • 320537140253 • android-arm64 • Android 13 (API 33)
Windows (desktop) • windows • windows-x64 • Microsoft Windows [Version 10.0.26200.9457]
Chrome (web) • chrome • web-javascript • Google Chrome 154.0.8037.95
Edge (web) • edge • web-javascript • Microsoft Edge 154.0.4258.53

Run "flutter emulators" to list and start any available device emulators.
```

11. Kemudian saya jalankan perintah flutter run -d nomor yang muncul setelah identitas hape kita



```
PS C:\Users\LENOVO\Documents\MataKuliah\Semester 5\PPB\PPB\praktikum\modul-01-runmod\mod1_103122400005> flutter run -d 320537140253
Launching lib\main.dart on nubia 8150N in debug mode...
Running Gradle task 'assembleDebug'...
509.9s
```