

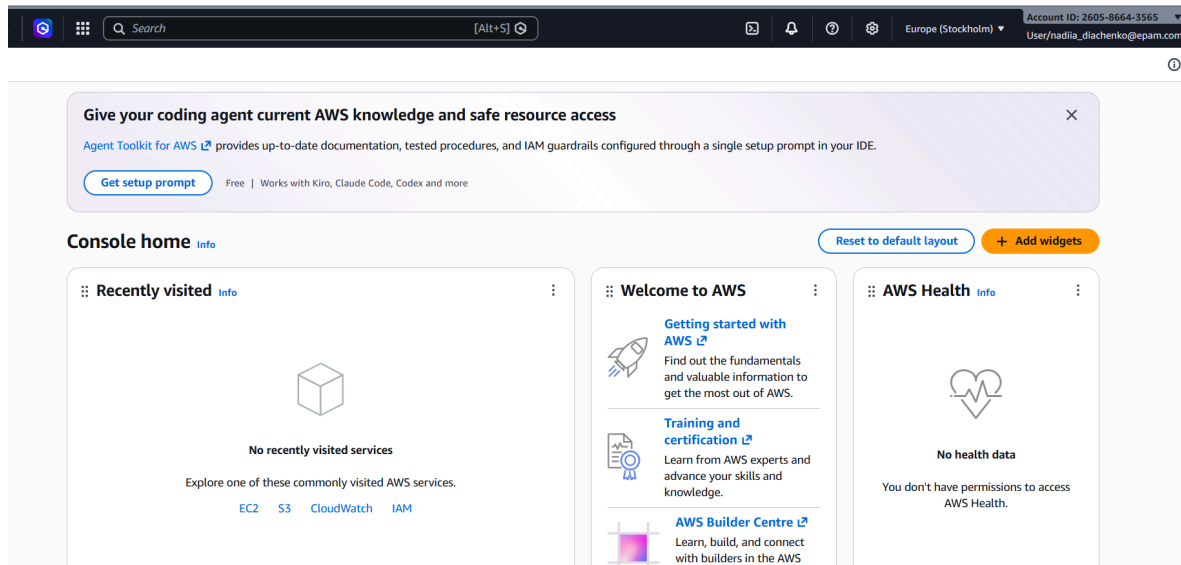


AWS TASK1

Logged in with provided credentials

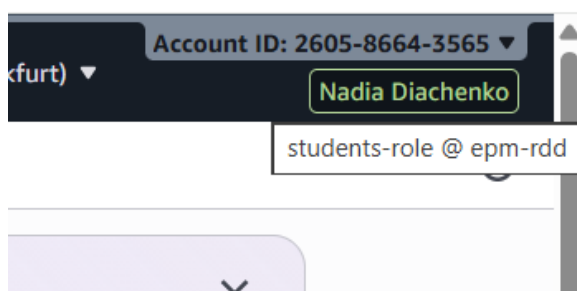

Role is switched

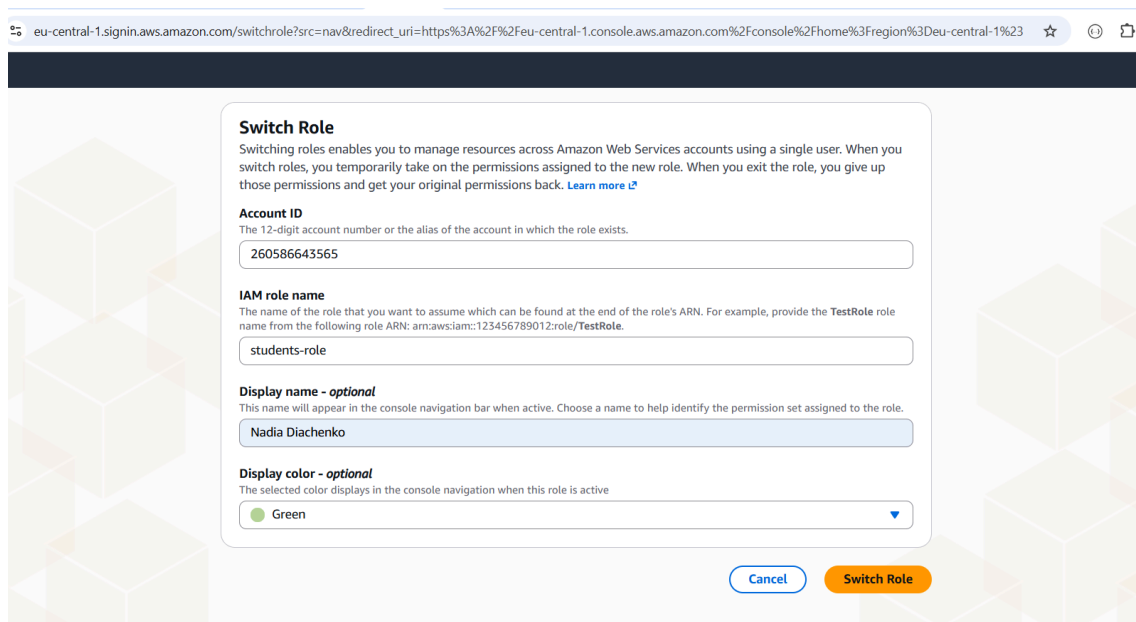

AWS CLI installed

```
C:\WINDOWS\system32\cmd. x + v

Microsoft Windows [Version 10.0.26200.9168]
(c) Microsoft Corporation. All rights reserved.

C:\Users\user>aws --version
aws-cli/2.0.30 Python/3.7.7 Windows/10 botocore/2.0.0dev34
C:\Users\user>
```

AWS CLI set up. Student-role is configured

```
C:\WINDOWS\system32\cmd. x + v

If the browser does not open or you wish to use a different device to authorize this request, open the following URL:
https://epam.awsapps.com/start/#/device

Then enter the code:

DFVW-NQFT
The only AWS account available to you is: 260586643565
Using the account ID 260586643565
The only role available to you is: User
Using the role name "User"
CLI default client Region [None]: eu-central-1
CLI default output format [None]:
CLI profile name [User-260586643565]: user-role-260586643565

To use this profile, specify the profile name using --profile, as shown:

aws s3 ls --profile user-role-260586643565

C:\Users\user>set AWS_PROFILE=user-role-260586643565


C:\Users\user>aws sts get-caller-identity --profile students-role
{
  "UserId": "AROATZLBMUBW65XATEWMA:botocore-session-1787051948",
  "Account": "260586643565",
  "Arn": "arn:aws:sts::260586643565:assumed-role/students-role/botocore-session-1787051948"
}

C:\Users\user>
```


The bucket is created - nadiia-diachenko-dwh-bucket

```
C:\Users\user>aws s3 mb s3://nadiia-diachenko-dwh-bucket --region eu-central-1 --profile students-role
make_bucket: nadiia-diachenko-dwh-bucket

C:\Users\user>
```

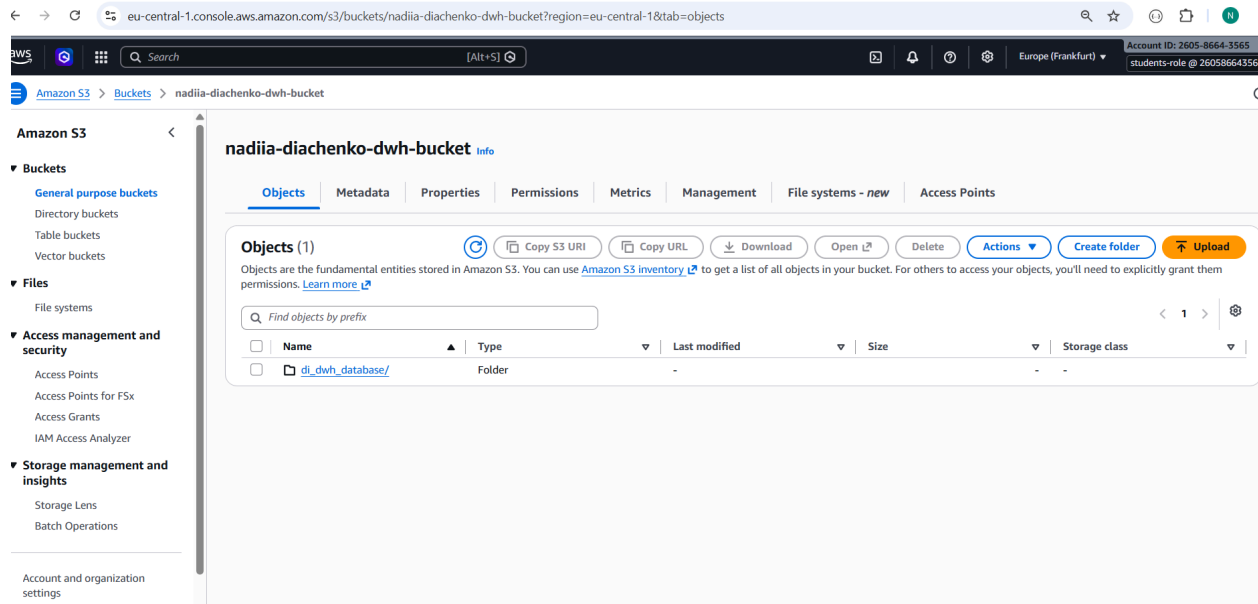

The DWH tables are uploaded to S3 bucket
Database:n_diachenko_dwh_db

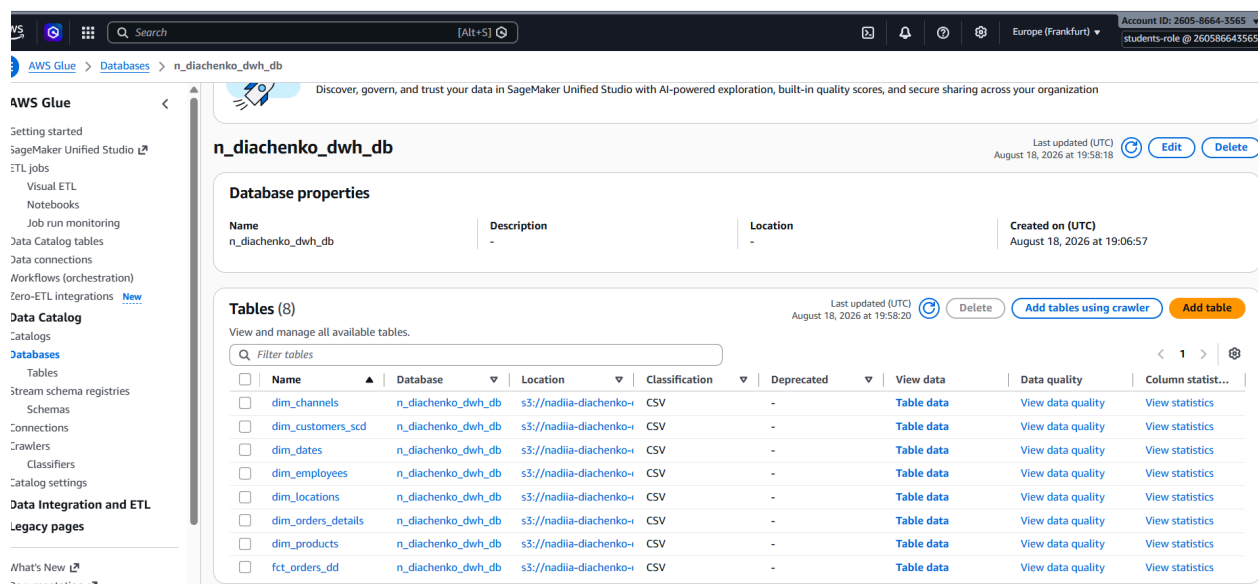

The crawler is configured - n_diachenko_dwh_db_crawler

One crawler successfully created
The following crawler is now created: "n_diachenko_dwh_db_crawler"

n_diachenko_dwh_db_crawler

Last updated (UTC)
August 18, 2026 at 19:30:55

Run crawler

Edit

Delete

Crawler properties

Name n_diachenko_dwh_db_crawler	IAM role dilab-glue-role	Database n_diachenko_dwh_db	State READY
Description -	Security configuration -	Lake Formation configuration -	Table prefix -
Maximum table threshold -			

Advanced settings

Crawler runs

Schedule

Data sources

Classifiers

Tags

Crawler runs (0)

The list of crawler runs for this crawler.

Filter data

Filter by a date and time range

Stop run

View CloudWatch logs

View run details

Crawler run

Crawler successfully starting
The following crawler is now starting: "n_diachenko_dwh_db_crawler"

Notifications

n_diachenko_dwh_db_crawler

Last updated (UTC)
August 18, 2026 at 19:36:27

Run crawler

Edit

Delete

Crawler properties

Name n_diachenko_dwh_db_crawler	IAM role dilab-glue-role	Database n_diachenko_dwh_db	State READY
Description -	Security configuration -	Lake Formation configuration -	Table prefix -
Maximum table threshold -			

Advanced settings

Crawler runs

Schedule

Data sources

Classifiers

Tags

Crawler runs (1)

The list of crawler runs for this crawler.

Filter data

Filter by a date and time range

Stop run

View CloudWatch logs

View run details

Start time (UTC)	End time (UTC)	Current/last duration	Status	DPU hours	Table changes
August 18, 2026 at 19:36...	August 18, 2026 at 19:37...	37 s	Completed	0.113	8 table changes, 0 partition changes

The query on Athena service is completed

eu-central-1.console.aws.amazon.com/athena/home?region=eu-central-1#/query-editor/history/9bb47f26-eff0-4424-98bd-f0698b637b38

Amazon Athena > Query editor tabs

Editor Recent queries Saved queries Query settings

Athena now supports typeahead code suggestions to speed up SQL query development
Typeahead suggestions are turned on by default. You can change this setting in query editor preferences.

Data source: AwsDataCatalog
Catalogue: None
Database: n_diachenko_dwh_db

Tables and views: Create Filter tables and views

Tables (8): dim_channels, dim_customers_scd, dim_dates, dim_employees, dim_locations, dim_orders_details, dim_products, fct_orders_dd

Views (0)

Query 1: 1 SELECT 2 c.subchannel, 3 COUNT(f.order_surr_id) AS total_orders, 4 SUM(f.fct_order_amount) AS total_sales 5 FROM fct_orders_dd f 6 JOIN dim_channels c 7 ON f.subchannel_surr_id = c.subchannel_surr_id 8 GROUP BY c.subchannel 9 ORDER BY total_sales DESC;

SQL Ln 9, Col 27

Run again Explain L2 Cancel Clear Create

Query results Query status

Completed

Results (5)

#	subchannel	total_orders	total_sales
1	iOS App	9234	9067652.929999998
2	Mobile Web	9044	8567532.620000014
3	BuyEverything	9055	8445426.58

Table property example

eu-central-1.console.aws.amazon.com/athena/home?region=eu-central-1#/query-editor/history/9bb47f26-eff0-4424-98bd-f0698b637b38

Amazon Athena > Query editor tabs

Editor Recent queries Saved queries Query settings

Athena now supports typeahead code suggestions to speed up SQL query development
Typeahead suggestions are turned on by default. You can change this setting in query editor preferences.

Data source: AwsDataCatalog
Catalogue: None
Database: n_diachenko_dwh_db

Tables and views: Create Filter tables and views

Tables (8): dim_channels, dim_customers_scd, dim_dates, dim_employees, dim_locations, dim_orders_details, dim_products, fct_orders_dd

Views (0)

Query 1: 1 SELECT 2 c.subchannel, 3 COUNT(f.order_surr_id) AS total_orders, 4 SUM(f.fct_order_amount) AS total_sales 5 FROM fct_orders_dd f 6 JOIN dim_channels c 7 ON f.subchannel_surr_id = c.subchannel_surr_id 8 GROUP BY c.subchannel 9 ORDER BY total_sales DESC;

SQL Ln 9, Col 27

Run again Explain L2 Cancel Clear Create

Query results Query status

Completed

Results (5)

Table properties

Table name	Database name	Data source name
dim_channels	n_diachenko_dwh_db	AwsDataCatalog

Table description	Create time	Data source type
-	2026-08-18T22:37:11.000+03:00	AWS Glue Data Catalog

Last access time	Serialization lib	Has encrypted data
2026-08-18T22:37:11.000+03:00	org.apache.hadoop.hive.serde2.lazy.LazySimpleSerDe	false

Location	Input format	Output format
s3://nadia-diachenko-dwh-bucket/dl_dwh_database/schema_bl_dm/dim_channels/	org.apache.hadoop.mapred.TextInputFormat	org.apache.hadoop.hive qljo.HiveIgnoredKeyTextOutputFormat