Terraform Nginx

Muhammad Zaky Abdurrahman

E41231763 / D

Struktur Folder

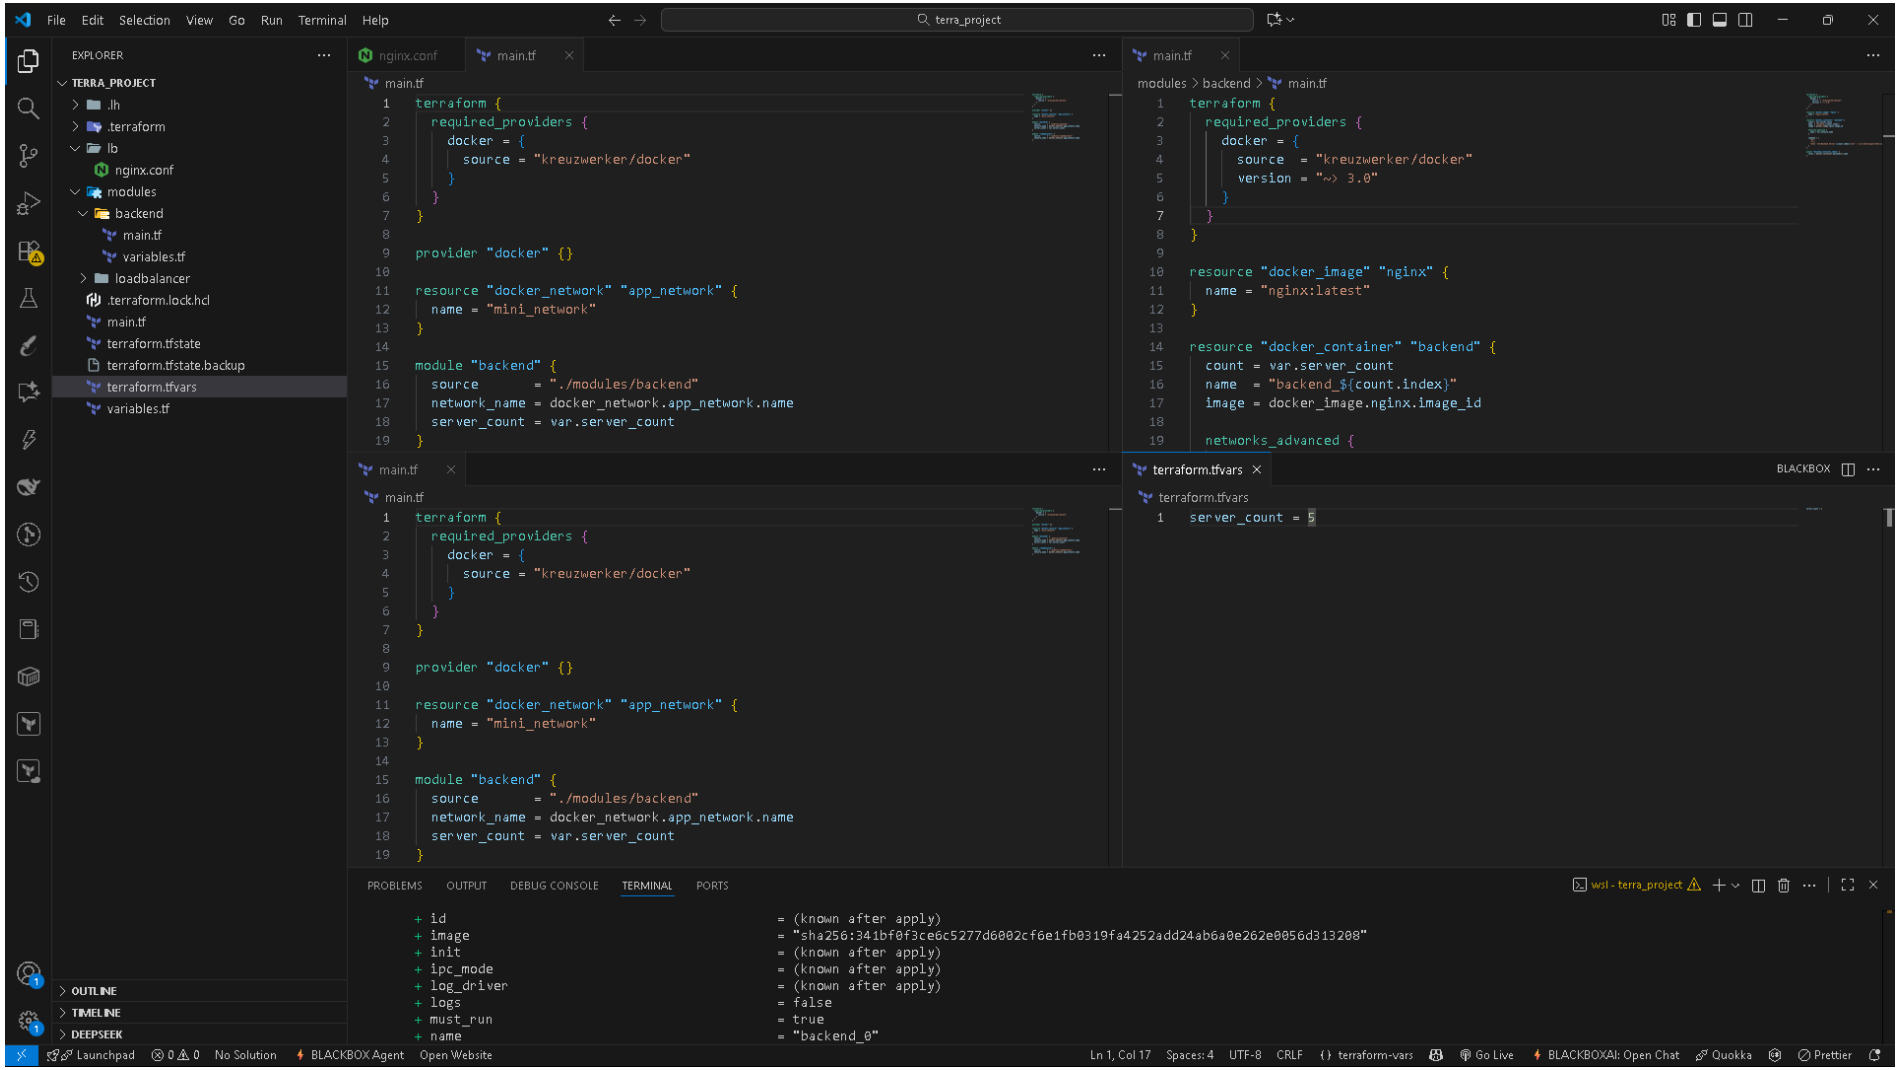

Terraform init

```
root@Aisya:/home/zaky/terra_project# terraform init

Initializing the backend...
Initializing modules...

Initializing provider plugins...
- Reusing previous version of kreuzwerker/docker from the dependency lock file
- Using previously-installed kreuzwerker/docker v3.6.2

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

Terraform plan

```
root@Aisya:/home/zaky/terra_project# terraform plan
module.loadbalancer.docker_image.nginx: Refreshing state... [id=sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208nginx:latest]
module.backend.docker_image.nginx: Refreshing state... [id=sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208nginx:latest]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
  + create

Terraform will perform the following actions:

  # docker_network.app_network will be created
  + resource "docker_network" "app_network" {
      + driver      = (known after apply)
      + id          = (known after apply)
      + internal    = (known after apply)
      + ipam_driver = "default"
      + name        = "mini_network"
      + options     = (known after apply)
      + scope       = (known after apply)
    }

  # module.backend.docker_container.backend[0] will be created
  + resource "docker_container" "backend" {
      + attach                                      = false
      + bridge                                      = (known after apply)
      + command                                     = [
          + "sh",
          + "-c",
          + "echo '<h1>Backend Server 0</h1>' > /usr/share/nginx/html/index.html && nginx -g 'daemon off;'",
        ]
      + container_logs                              = (known after apply)
      + container_read_refresh_timeout_milliseconds = 15000
      + entrypoint                                  = (known after apply)
      + env                                         = (known after apply)
      + exit_code                                   = (known after apply)
      + hostname                                    = (known after apply)
      + id                                          = (known after apply)
      + image                                       = "sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208"
      + init                                        = (known after apply)
      + ipc_mode                                    = (known after apply)
      + log_driver                                  = (known after apply)
      + logs                                        = false
      + must_run                                    = true
      + name                                        = "backend_0"
      + network_data                                = (known after apply)
      + network_mode                                = "bridge"
      + read_only                                   = false
      + remove_volumes                              = true
      + restart                                     = "no"
```

Terraform apply

```
Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.
root@Aisya:/home/zaky/terra_project# terraform apply
module.backend.docker_image.nginx: Refreshing state... [id=sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208nginx:latest]
module.loadbalancer.docker_image.nginx: Refreshing state... [id=sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208nginx:latest]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
  + create

Terraform will perform the following actions:

  # docker_network.app_network will be created
  + resource "docker_network" "app_network" {
      + driver      = (known after apply)
      + id          = (known after apply)
      + internal    = (known after apply)
      + ipam_driver = "default"
      + name        = "mini_network"
      + options     = (known after apply)
      + scope       = (known after apply)
    }

  # module.backend.docker_container.backend[0] will be created
  + resource "docker_container" "backend" {
      + attach                                      = false
      + bridge                                      = (known after apply)
      + command                                     = [
          + "sh",
          + "-c",
          + "echo '<h1>Backend Server 0</h1>' > /usr/share/nginx/html/index.html && nginx -g 'daemon off;'",
        ]
      + container_logs                              = (known after apply)
      + container_read_refresh_timeout_milliseconds = 15000
      + entrypoint                                  = (known after apply)
      + env                                         = (known after apply)
      + exit_code                                   = (known after apply)
      + hostname                                    = (known after apply)
      + id                                          = (known after apply)
      + image                                       = "sha256:341bf0f3ce6c5277d6002cf6e1fb0319fa4252add24ab6a0e262e0056d313208"
      + init                                        = (known after apply)
      + ipc_mode                                    = (known after apply)
      + log_driver                                  = (known after apply)
      + logs                                        = false
      + must_run                                    = true
      + name                                        = "backend_0"
      + network_data                                = (known after apply)
      + network_mode                                = "bridge"
      + read_only                                   = false
      + remove_volumes                              = true
```

Docker container

nginx_lb	28ee41dc8332	341bf0f3ce6c	8080:80	0%	10 minutes ago
backend_2	0343d58b11ae	341bf0f3ce6c		0%	10 minutes ago
backend_3	e711523e1266	341bf0f3ce6c		0%	10 minutes ago
backend_4	87ff77db0964	341bf0f3ce6c		0%	10 minutes ago
backend_0	99fa9d2fdd96	341bf0f3ce6c		0%	10 minutes ago
backend_1	9d8b24c58bd9	341bf0f3ce6c		0%	10 minutes ago
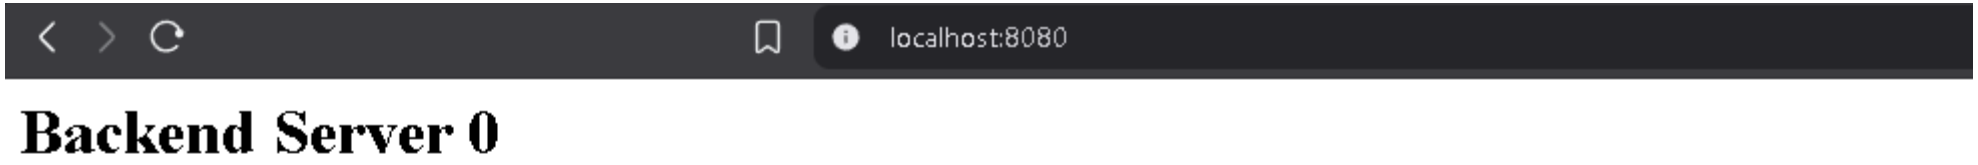
Hasil Web