




C:\WINDOWS\system32\cmd. X



Microsoft Windows [Version 10.0.26200.8655]
(c) Microsoft Corporation. All rights reserved.

C:\Users\jagad>git --version
git version 2.54.0.windows.1

C:\Users\jagad>|

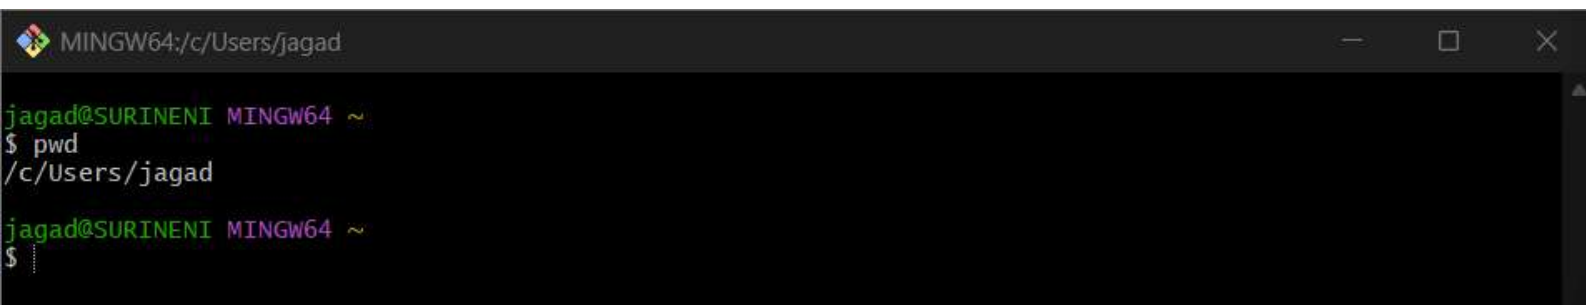A screenshot of a MINGW64 terminal window. The title bar at the top shows the MINGW64 logo, the path "MINGW64:/c/Users/jagad", and standard window controls (minimize, maximize, close). The terminal content shows a user prompt "jagad@SURINENI MINGW64 ~" followed by the command "pwd" and its output "/c/Users/jagad". A second prompt "jagad@SURINENI MINGW64 ~" is shown with a cursor on a new line.

```
MINGW64:/c/Users/jagad  
jagad@SURINENI MINGW64 ~  
$ pwd  
/c/Users/jagad  
jagad@SURINENI MINGW64 ~  
$
```

MINGW64:/c/Users/jagad/git-demo/git-demo

jagad@SURINENI MINGW64 ~/git-demo (master)

```
$ git -v
git version 2.54.0.windows.1
```

jagad@SURINENI MINGW64 ~/git-demo (master)

```
$ pwd
/c/Users/jagad/git-demo
```

jagad@SURINENI MINGW64 ~/git-demo (master)

```
$ mkdir git-demo
```

jagad@SURINENI MINGW64 ~/git-demo (master)

```
$ cd git-demo
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ vim welcome.py
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ git config --global user.name "SURINENI JAGADEESH"
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ git config --global user.email "jagadeeshreva569@gmail.com"
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=schannel
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
user.name=SURINENI JAGADEESH
user.email=jagadeeshreva569@gmail.com
core.repositoryformatversion=0
core.filemode=false
core.bare=false
core.logallrefupdates=true
core.symlinks=false
core.ignorecase=true
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ git init
Initialized empty Git repository in C:/Users/jagad/git-demo/git-demo/.git/
```

jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)

```
$ ls -la
total 1
drwxr-xr-x 1 jagad 197610  0 Jun 17 19:40 ./
drwxr-xr-x 1 jagad 197610  0 Jun 17 19:38 ../
drwxr-xr-x 1 jagad 197610  0 Jun 17 19:40 .git/
```

MINGW64:/c/Users/jagad/git-demo/git-demo

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git add welcome.py
warning: in the working copy of 'welcome.py', LF will be replaced by CRLF the next time Git touches it
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git status
On branch master
```

No commits yet

```
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   welcome.py
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git commit -m "first step into commands in git bash"
[master (root-commit) c846f33] first step into commands in git bash
 1 file changed, 2 insertions(+)
 create mode 100644 welcome.py
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ vim welcome.py
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git add welcome.py
warning: in the working copy of 'welcome.py', LF will be replaced by CRLF the next time Git touches it
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   welcome.py
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git commit -m "this is the version -2"
[master 57808d4] this is the version -2
 1 file changed, 2 insertions(+), 1 deletion(-)
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ cat welcome.py
print("hi this is my first demo class at devops version-1")
print("next i created files and check status version-2")
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git log --oneline
57808d4 (HEAD -> master) this is the version -2
c846f33 first step into commands in git bash
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git checkout ^C
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)
$ git log --oneline
```

```
57808d4 (HEAD -> master) this is the version -2  
c846f33 first step into commands in git bash
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo (master)  
$ git checkout c846f33  
Note: switching to 'c846f33'.
```

You are in 'detached HEAD' state. You can look around, make experimental changes and commit them, and you can discard any commits you make in this state without impacting any branches by switching back to a branch.

If you want to create a new branch to retain commits you create, you may do so (now or later) by using `-c` with the switch command. Example:

```
git switch -c <new-branch-name>
```

Or undo this operation with:

```
git switch -
```

Turn off this advice by setting config variable `advice.detachedHead` to false

HEAD is now at c846f33 first step into commands in git bash

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo ((c846f33...))  
$ cat welcome.py  
print("hi this is my first demo class at devops")
```

```
jagad@SURINENI MINGW64 ~/git-demo/git-demo ((c846f33...))  
$ |
```



git-demo

6/17/2026 7:58 PM

File folder




welcome.py

6/17/2026 7:21 PM

PY File

1 KB

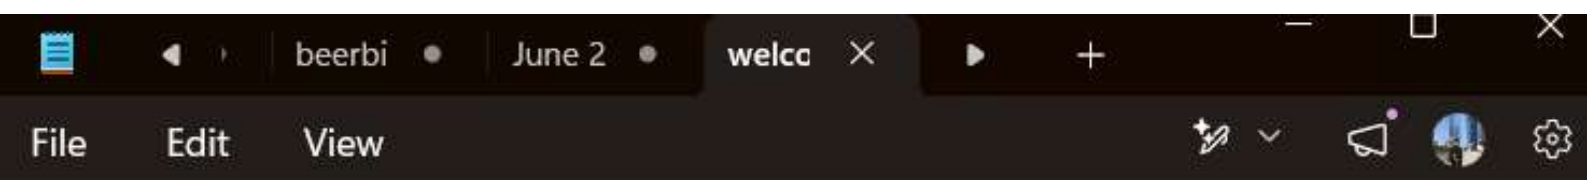

```
print("hi this is demo class -1 ")
```

