

Result: PASS

Topic	Percentage Correct
Flex Cards	100%
OmniScripts	66%
Integration Procedures	70%
Data Raptors	91%
Calculation Procedures & Matrices	80%
Integrated Troubleshooting and Deployment	83%

Congratulations! You have successfully completed the certification exam to become a Salesforce Certified OmniStudio Developer. You are now a member of the Salesforce Certified OmniStudio Developer community of Certified Professionals!

Exit Test

8776A0887EF9D0A06ABD3C34EFC499FB

Assessment Summary

Number of Items 60
Answered:
Number of Items 0
Unanswered:
Number of Items Marked 0
for Review:

Answers

<u>1. AD</u>	<u>2. C</u>	<u>3. B</u>	<u>4. BC</u>
<u>5. C</u>	<u>6. A</u>	<u>7. D</u>	<u>8. C</u>
<u>9. D</u>	<u>10. AB</u>	<u>11. C</u>	<u>12. A</u>
<u>13. C</u>	<u>14. BC</u>	<u>15. D</u>	<u>16. A</u>
<u>17. C</u>	<u>18. CA</u>	<u>19. CB</u>	<u>20. CD</u>
<u>21. D</u>	<u>22. A</u>	<u>23. BD</u>	<u>24. A</u>
<u>25. D</u>	<u>26. AC</u>	<u>27. B</u>	<u>28. A</u>
<u>29. B</u>	<u>30. D</u>	<u>31. A</u>	<u>32. A</u>
<u>33. C</u>	<u>34. BA</u>	<u>35. D</u>	<u>36. CA</u>
<u>37. A</u>	<u>38. C</u>	<u>39. D</u>	<u>40. D</u>
<u>41. A</u>	<u>42. B</u>	<u>43. D</u>	<u>44. A</u>
<u>45. C</u>	<u>46. A</u>	<u>47. BD</u>	<u>48. C</u>
<u>49. D</u>	<u>50. D</u>	<u>51. C</u>	<u>52. CA</u>
<u>53. D</u>	<u>54. D</u>	<u>55. A</u>	<u>56. C</u>
<u>57. A</u>	<u>58. A</u>	<u>59. CA</u>	<u>60. D</u>

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

60 of 60. A developer is creating a Flexcard for a new Community page. The Flexcard will display case information along with actions to close the case and update the case, and it will be styled using the Community's theme.

What must the developer do to configure the Flexcard for deployment in a Community?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Configure the Component Visibility in the Custom Component
- B. ☐ Add the Flexcard's API name to the Flexcard Player component
- C. ☐ Set the Deployment property in Card Configuration to "Community"
- D. ☒ Set the Target property in Publish Options to "CommunityPage"

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

59 of 60. A developer is creating a Flexcard and needs to display additional information using a flyout.

Which two types of components can the developer embed in the flyout?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☒ An OmniScript
- B. ☐ A Data Mapper
- C. ☒ A child Flexcard
- D. ☐ An Integration Procedure

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Parent OmniScript

Structure: Script Configuration, SetValuesContextId, GetContextAccountId, DisplayContextId

SetValuesContextId: Element Name: SetValuesContextId, Element Label: SetValuesContextId

Context Value Map: Element Name: AccountId, Type: JSON Node, Value: { "AccountId": "ContextAccountId" }

Show Preload Components: AICall, AICallKnowledge

Embedded OmniScript :

Structure: Script Configuration, SetValuesContextId, GetContextAccountId, DisplayContextId

SetValuesContextId: Element Name: SetValuesContextId, Element Label: SetValuesContextId

Context Value Map: Element Name: AccountId, Type: JSON Node, Value: { "AccountId": "ContextAccountId" }

Show Preload Components: AICall, AICallKnowledge

5776A0887EF9D0AD64B03C74EFC499FB

- A. ☒ The LWC PubSub Message flag in the Set Values action of the parent OmniScript has not been set.
- B. ☐ A developer failed to include a Navigate Action Element to pass data from the parent OmniScript.
- C. ☐ Both parent and embedded OmniScripts have the same element name for the Set Values element.
- D. ☐ The flag passDataJSON in the parent OmniScript is not configured correctly.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

2025 KRYTERION, Inc. and KRYTERION, Li

Salesforce Certified OmniStudio Developer

Time Remaining

Show

58 of 60. A customer sets up two LWC OmniScripts, one embedded into another. AccountId is set in a Set Values element in the parent OmniScript. The AccountId set in the parent OmniScript is used to set another Set Values element ContextAccountId in the embedded OmniScript. The embedded OmniScript is activated.

While previewing the OmniScript flow from the parent, it is found that AccountId is set correctly in the parent OmniScript. However, ContextAccountId in the embedded OmniScript is not set with the AccountId from parent OmniScript. On previewing the embedded OmniScript individually, it is found that ContextAccountId is set correctly.

What is the reason for this? Refer to the exhibits below.

Parent OmniScript :

Structure: Script Configuration, SetValuesContextId, GetContextAccountId, DisplayContextId

SetValuesContextId: Element Name: SetValuesContextId, Element Label: SetValuesContextId

Context Value Map: Element Name: AccountId, Type: JSON Node, Value: { "AccountId": "ContextAccountId" }

Show Preload Components: AICall, AICallKnowledge

Embedded OmniScript :

Structure: Script Configuration, SetValuesContextId, GetContextAccountId, DisplayContextId

SetValuesContextId: Element Name: SetValuesContextId, Element Label: SetValuesContextId

Context Value Map: Element Name: AccountId, Type: JSON Node, Value: { "AccountId": "ContextAccountId" }

Show Preload Components: AICall, AICallKnowledge

Time Remaining

Show

57 of 60. A developer needs to display the following information together on one Flexcard:

- account name, address, phone number, website
- primary contact first name, contact last name, address, phone number, email

The account information must always be visible, and the contact information should only be visible as needed by the user.

Which approach should the developer use to display the contact information on the card?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ Set the collapsible property on the block element
- B. ☐ Use a Datatable element
- C. ☐ Set the class="collapsible" on the block element
- D. ☐ Use a conditional Flexcard State

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

56 of 60. A developer needs to create a Data Mapper to retrieve the name of an account for a contact.

Following best practices, how should a developer configure the extraction steps?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Account.Name
- B. ☐ Define an extraction step for the Account object, and set the Extract JSON Path to Account:Contact.Name
- C. ☒ Define an extraction step for the Contact object and set the Extract JSON Path to Contact:Account.Name
- D. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact.Account.Name

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

55 of 60. A developer creates an Omniscript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions.

What should the developer use to configure the action that invokes the Omniscript?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ Omniscript Action
- B. ☐ Custom Action
- C. ☐ Lightning Action

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

54 of 60. A company wants to allow agents to send customers a quote for signature. The quote is a document created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.

How should a developer configure this functionality in an Omniscript?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ PDF Action
- B. ☐ Email Action
- C. ☐ DocuSign Signature Action
- D. ☒ DocuSign Envelope Action

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

53 of 60. A developer creates an Integration Procedure with a Set Values and a Data Mapper Extract Action that requires AccountId as a key. When the developer previews the Integration Procedure, the developer enters the AccountId correctly and executes the preview. The developer sees the data extracted by the Data Mapper in the Debug Log, but the response is empty.

What is the likely cause of this issue?

8776A0887EF9D0A08A8D3C34EFC499FB

- A. ☐ The Data Mapper Action did not have the Add Response To Response JSON property set to true.
- B. ☐ The AccountId used for the preview is invalid.
- C. ☐ A Response Action was not added and DR output was not mapped to the Send JSON path
- D. ☒ A Response Action was not added to the Integration Procedure.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

52 of 60. A developer is configuring a Data Mapper Load to save contact data. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the Data Mapper Load?

8776A0887EF9D0A08A8D3C34EFC499FB

Choose 2 answers

- A. ☒ Select RecordType in the Lookup Object list, DeveloperName in the Lookup Field list, and ID in the Lookup Requested Field list.
- B. ☐ Add Link to RecordType object in the Contact Object with the ID field of RecordType object.
- C. ☒ Check Is Lookup property when mapping the fields.
- D. ☐ Select RecordType in the Lookup Object list, ID in the Lookup Field list, and DeveloperName in the Lookup Requested Field list.

100% Correct! You passed this question.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

51 of 60. A developer needs to configure a Data Mapper to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of Data Mapper should the developer use?

8776A0687EF9DD0A06ABD3C34EFC499FB

- A. ☐ Data Mapper Extract
- B. ☐ Data Mapper Load
- C. ☒ Data Mapper Turbo Extract
- D. ☐ Data Mapper Transform

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

50 of 60. A developer builds a new Omniscrypt. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the Omniscrypt to a production org?

8776A0687EF9DD0A06ABD3C34EFC499FB

- A. ☐ Add a Show/Hide condition on the Set Values element.
- B. ☐ Update the ContextId value to specify an id from the production org.
- C. ☐ Deactivate the ContextId key/value pair.
- D. ☒ Delete or deactivate the Set Values element.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

49 of 60. A developer examines data received from an external data source. The data is nested two levels down in the JSON structure.

Which Omnistudio tool could the developer use to simplify this data?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Integration Procedure
- B. ☐ Guided Workflow
- C. ☐ HTTP Action Element
- D. ☒ Data Mapper Transform

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

When the developer executes the Integration Procedure in Preview, the following error message displays: "Required fields are missing: [Last Name]".

How should the developer address this issue?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ The valid field names should be added in the Domain Object Field in the Data Mapper
- B. ☐ The Set Values Action keys should include the Data Mapper Post Action element name path, e.g. LoadContactDetails:lastname
- C. ☒ SetValuesContactDetails should have been added to Additional Input of Data Mapper Post Action in Integration Procedure
- D. ☐ The Data Mapper Post Action in the Integration Procedure should have been executed before the Set Values Action

Time Remaining

Show

48 of 60. A developer has an existing Data Mapper Load that inserts Contact records with inputs as lastName and firstName. The Data Mapper works as expected when previewed.

The developer creates an Integration Procedure to test the Data Mapper and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The Data Mapper and Integration Procedure are set up as shown in the exhibits below.

The screenshot displays the Salesforce OmniStudio interface. The top section shows the 'VLOCITY DATARAPTOR BUNDLE' with a table for 'drLoadContactData'. The table has columns for Interface Type, Input Type, Output Type, Required Permission (Optional), and Description. Below the table, there are tabs for OBJECTS, FORMULAS, FIELDS, OPTIONS, and PREVIEW. The 'FIELDS' tab is active, showing a list of fields for '1 - Contact'. The fields are 'firstName' and 'lastName', both mapped to 'Domain Object Field'.

The bottom section shows the 'STRUCTURE' pane on the left with a list of elements: 'Procedure Configuration', 'SetValuesContactDetails', and 'LoadContactDetails'. The 'SetValuesContactDetails' element is selected. The 'PROPERTIES' pane on the right shows the configuration for 'SetValuesContactDetails'. It includes an 'Element Name' field set to 'SetValuesContactDetails', an 'Element Value Map' table, and a 'RESPONSE TRANSFORMATIONS' section. The 'Element Value Map' table has columns for Element Name, Type, and Value. It contains two rows: 'lastName' with Type 'JSON Node' and Value 'Doe', and 'firstName' with Type 'JSON Node' and Value 'John'. The 'RESPONSE TRANSFORMATIONS' section has fields for 'Response JSON Path' and 'Response JSON Node'.

Time Remaining

Show

47 of 60. Users receive an `APIEX_CPU_LIMIT_EXCEEDED` error when running an Omniscript in a Salesforce Community. The Omniscript includes an Integration Procedure that contains two Data Mappers.

Which two locations should the developer check to troubleshoot the issue?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☐ Community logs
- B. ☒ Action Debugger
- C. ☐ Script Configuration
- D. ☒ Data Mapper configuration

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

46 of 60. An Integration Procedure uses an HTTP action to make a REST API call. The response from the REST API must be converted into a specific XML structure before sending it as an input to another external web service.

How should the developer configure the Integration Procedure to meet this requirement?

8776A0687EF9D0A06ABD3C34EFC499FB

- A. ☒ Use a Data Mapper Transform to convert JSON to XML.
- B. ☐ Use a Remote Action that calls the XMLStreamWriter class.
- C. ☐ Use a Remote Action that calls the XMLStreamReader class.
- D. ☐ Use a Data Mapper Extract and check the XML checkbox on the Output JSON Path.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

45 of 60. A developer has a requirement to create a child Flexcard that contains all of its parent Flexcard's records in a Datatable.

How should the developer configure the parent Flexcard's Data Node?

8776A0687EF9D0A06ABD3C34EFC499FB

- A. ☐ {recordId}
- B. ☐ {records[0]}
- C. ☒ {records}
- D. ☐ {Params.records}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

44 of 60. A developer needs to change some field labels on a Flexcard. The Flexcard is currently deployed to production. The developer decides that the best course of action is to version the Flexcard rather than cloning it.

Which factor would lead the developer to this decision?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ Another team member is developing new actions, fields and styling for the current version of the Flexcard.
- B. ☐ The new version of the Flexcard will be used in a new Console, and the current version of the Flexcard should remain active.
- C. ☐ All instances of the Flexcard must be updated with the changes.
- D. ☐ The new and current versions will be displayed together on the same target.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

43 of 60. A developer creates an Omniscrypt to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The Data Mapper used in the Type Ahead Block has been tested and fetches the correct data.

When previewing the Omniscrypt, the developer enters a name in the Type Ahead Block and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

The screenshot displays the Salesforce OmniStudio configuration interface. On the left, the 'Script Configuration' pane shows a tree view with 'Step1' expanded, containing 'TAContact' and 'GetContact'. The 'TAContact' block is selected. On the right, the configuration for the 'TAContact' block is shown. It includes fields for 'Element Name' (TAContact), 'Field Label' (TypeAhead1), 'Required' (unchecked), 'Label Outside (X Field)' (unchecked), 'Help (Add Action?)' (unchecked), 'Minimum Length' (0), and 'Typeahead Key' (FirstName).

What is the reason that the fields fail to display the fetched data?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ The Typeahead Key is not in the correct format.
- B. ☐ Lookup Mode is not selected in the properties of the Type Ahead Block.
- C. ☐ Use Data JSON is not selected in the properties of the Type Ahead Block.
- D. ☒ FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.

Salesforce Certified OmniStudio Developer

Time Remaining

Show

42 of 60. Why would a developer clone an Integration Procedure instead of versioning it?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ The new Integration Procedure uses a Cache Block.
- B. ☒ The new Integration Procedure will be used independently.
- C. ☐ The new Integration Procedure is replacing stub data.
- D. ☐ The new Integration Procedure is Chainable.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

41 of 60. A developer writes an Omniscript that includes a Data Mapper that updates the Account status based on information provided from the Omniscript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ Check the Upsert Key and Is Required for Upsert checkboxes on the Account ID field.
- B. ☐ Check the Upsert Key checkbox on the Account Status field.
- C. ☐ Populate the Lookup Object and Lookup Fields.
- D. ☐ Check Overwrite Target For All Null Inputs checkbox on the Account ID field.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

40 of 60. Refer to the exhibit below. What is the merge code needed for this Integration Procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP Path URL?

STRUCTURE

Procedure Configuration

DRReadCase

HTTPGetCaseDetails

DRXformCaseData

ResponseAction

8776A0887EF9D0A06ABD3C34EFC499FB

☐ A. `{ {DRReadCase.CaseNumber} }`

☐ B. `{ {CaseNumber} }`

☐ C. `{DRReadCase.CaseNumber}`

☒ D. `{HTTPGetCaseDetails.CaseNumber}`

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining

Show

39 of 60. Refer to the following row-versioned Decision Matrix.

Version 1				
Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
Version 2				
Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Dec311980
Version 3				
Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Jan311980
CA	San Carlos	CA-SC	Jul011980	Dec311980

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

If the developer deletes that row in Version 3, what is the result?

- 8776A0887EF9D0A06ABD3C34EFC499FB
- ☐ A. The row is deleted in Version 3 and Version 1.

☐ B. The row is deleted in all versions.

☐ C. The row is deleted in Versions 2 and 3 but will remain in Version 1.

☒ D. The row is deleted only in Version 3.

☐ Mark this item for later review.

Time Remaining

Show

38 of 60. A developer needs to display read-only contact information in an Omniscript. The developer will format the information as a table, using merge codes to dynamically include first name, last name, street address, state, postal code, and country from the data JSON.

Which Omniscript element should the developer use to meet this requirement?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Edit Block
- B. ☐ Text Area
- C. ☒ Text Block
- D. ☐ Rich Text Area

View Question History

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

37 of 60. A developer creates a Flexcard with five state elements. Four of the states have a condition. To test the Flexcard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ The first state with true conditions sequenced closest to the top of the Flexcard canvas will display.
- B. ☐ The state sequenced first in the Flexcard canvas will display.
- C. ☐ The first state with a true AND condition, regardless of sequence in the Flexcard canvas, will display.
- D. ☐ The first state with a true nested condition, regardless of sequence in the Flexcard canvas, will display.

View Question History

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

36 of 60. An Omniscript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A Data Mapper Load saves the data. What error could cause this behavior?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☒ The fields that are not updated are read only in Salesforce.
- B. ☐ ContextId is misspelled in the merge code that passes the RecordId to the Data Mapper.
- C. ☒ The Input JSON paths in the Data Mapper Load do not match the JSON sent from the Omniscript.
- D. ☐ In the Data Mapper Load, in the preview tab, the RecordId is from the wrong record type.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

35 of 60. A developer is creating an Omniscript that provisions trial orgs to their customers. The following text block in the Omniscript uses a merge code to display the ID for the new trial org:

Welcome to Salesforce!
Your ID is %Details:Customer|0:ID%

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

```
{
  "details": {
    "customer": [
      { "ID": "123456" }
    ]
  }
}
```

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ To %Details:Customer|n:ID%
- B. ☐ To %%Details:Customer|0:ID%%
- C. ☐ To \$Details:Customer|0:ID\$
- D. ☒ To %Details:Customer|1:ID%

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

34 of 60. A developer configures a Flexcard with a Data Mapper data source that uses the params.id as an input. When the developer clicks View Data on the Flexcard, valid data displays. However, when the developer previews the layout, the Flexcard does not display. What could cause this error?

8776A06867CF9D0A06ABD3C34EFC499FB

Choose 2 answers:

- A. ☒ There is no Salesforce record for the Flexcard based on the RecordId in the layout's Test Data Source Settings.
- B. ☒ The RecordId in the Test Data Source Settings is for the wrong record type.
- C. ☐ The Data Node field for the Flexcard is empty.
- D. ☐ The Attributes haven't been configured to pass the data to the fields.

8776A06867CF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

33 of 60. A developer needs to use the COUNTIF function to process data entered by the user in an Omniscript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, which element should the developer use this function in?

8776A06867CF9D0A06ABD3C34EFC499FB

- A. ☐ Set Values element
- B. ☐ Range element
- C. ☒ Formula element

8776A06867CF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

32 of 60. In an Omniscript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement checkbox.

How should the developer configure the conditional view to meet this requirement?

8776A0687EF9DD0A06ABD3C34EFC499FB

- A. ☒ Disable read only if true
- B. ☐ Set element to optional if false
- C. ☐ Set element to required if true
- D. ☐ Show element if true

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

31 of 60. A developer is troubleshooting an Integration Procedure with two elements: a Remote Action named FetchCart and a Response Action named ResponseCart.

In Preview, what JSON node shows the data sent to the Response Action?

8776A0687EF9DD0A06ABD3C34EFC499FB

- A. ☒ ResponseCartDebug
- B. ☐ FetchCart
- C. ☐ Response
- D. ☐ ResponseCart

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

30 of 60. Refer to the exhibit.

Input Data	Output Data
ProductCode (Text) 	BasePrice (#)
Search column	Search column
ACC154	10.23
CAAB76B	20.36
HRA320	12.99
HRA320B	13.99

All inputs to the Decision Matrix are set correctly.

The Decision Matrix has the following input:

```
{
  "input": {
    "ProductCode": "HRA320"
  }
}
```

What is the output?

- 8776A0887EF9D0A06ABD3C34EFC499FB
- A. ☐ 12.99,13.99
- B. ☐ null
- C. ☐ 13.99
- D. ☒ 12.99

Time Remaining

Show

29 of 60. A developer is building an Omniscript and needs to save data to Salesforce and to an AWS Order Management system.

Which Omniscript element could save all of this data?

- 8776A0887EF9D0A06ABD3C34EFC499FB
- A. ☐ Data Mapper Load Action
- B. ☒ Integration Procedure Action
- C. ☐ HTTP Action
- D. ☐ Data Mapper Post Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

28 of 60. Refer to the exhibit below. The card layout uses an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure supports this card layout and follows best practices?

Account	
Name	Acme
Phone	(212) 154-8562

Contact	
Name	Edward Stamos
Cell Phone	(212) 154-8562

Contact	
Name	Howard Jones
Cell Phone	(650) 156-1102

8776A0887EF9D0A06ABD3C34EFC499FB

A.

```
[
  {
    "ContactCellPhone": "(212) 154-8562",
    "ContactName": "Edward Stamos",
    "AccountPhone": "(212) 154-8562",
    "AccountName": "Acme"
  },
  {
    "ContactCellPhone": "(650) 156-1102",
    "ContactName": "Howard Jones",
    "AccountPhone": "(212) 154-8562",
    "AccountName": "Acme"
  }
]
```

B.

```
{
  "Contact": [
    {
      "CellPhone": "(212) 154-8562",
      "Name": "Edward Stamos"
    },
    {
      "CellPhone": "(650) 156-1102",
      "Name": "Howard Jones"
    }
  ]
}
```

Salesforce Certified OmniStudio Developer

Time Remaining

Show

27 of 60. A developer needs to configure an expression set to calculate the sum of the entire BasePrice.

What is the most efficient way for the developer to meet this requirement?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Add a Calculation Step as SUM(BasePrice).
 B. ☒ Add an Aggregation Step as SUM(BasePrice).
 C. ☐ Add a Sub Expression step as SUM(BasePrice).

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

26 of 60. Which two fields in an Integration Procedure or Data Mapper can execute a function like CONCAT or DATEDIFF?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☒ In a Set Values Action in a Value field.
- B. ☐ In a Data Mapper in an Output Tab Output JSON Path.
- C. ☒ In a Remote Action in an Additional Output value field.
- D. ☐ In a Data Mapper Action in an Input Parameters value field.

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

25 of 60. A developer needs to configure a Calculation Procedure to calculate a subtotal using two different formulas depending on whether the input Boolean variable isCustomer is set to true or false.

How should a developer configure the Calculation Procedure to conditionally execute the correct formula?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Use two separate Calculation Steps with the Conditional Step property selected; use the ISTRUE(isCustomer) and NOT(ISTRUE(isCustomer)) functions in the Condition syntax.
- B. ☐ Use two separate Calculation Steps with the Conditional Step property selected; reference just the isCustomer variable in the Condition syntax (no comparison necessary).
- C. ☐ Use a single Calculation Step with an IF statement directly in the formula definition to reference the isCustomer variable and conditionally perform the appropriate calculation.
- D. ☒ Use two separate Calculation Steps with the Conditional Step property selected; compare the isCustomer variable directly to the literal true and false values in the Condition syntax.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

24 of 60.

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy via their Community portal. The developer on the project decides to use an Omniscript.

How should the developer configure the Omniscript to provide this functionality?

8776A0887EF9D0A06A8D3C34EFC499FB

- A. ☒ Use an Edit Block element configured with SOQL statements.
- B. ☐ Use an Input Block element and a Data Mapper Post Action element.
- C. ☐ Use a Text Block element and a Remote Action element.
- D. ☐ Use an Edit Block element configured with Remote Actions.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

23 of 60. A developer needs to transform contact data into a JSON array.

Input JSON

```
{
  "Contact": {
    "Name": "John Doe",
    "Phone": "12324456457",
    "Birthdate": "1978-11-12"
  }
}
```

Output JSON

```
{
  "contact": [
    {
      "Name": "John Doe",
      "Phone": "12324456457",
      "Birthdate": "1978-11-12"
    }
  ]
}
```

Given the Input JSON shown above, what are two ways a developer can configure a Data Mapper Transform to achieve the expected Output JSON?

8776A0887EF9D0A06A8D3C34EFC499FB

Choose 2 answers

- A. ☐ Use a formula `LIST(Contact)`, and add the output of the formula as the input in the Transform tab.
- B. ☒ Set the Input JSON Path as `Contact`, the Output JSON Path as `Contact`, and Output Data Type as `List`.
- C. ☐ Set the Input JSON Path as `LIST(Contact)` and the Output JSON Path as `Contact`.
- D. ☒ Set the Input JSON Path as `Contact` and the Output JSON Path as `LIST(Contact)`.

8776A0887EF9D0A06A8D3C34EFC499FB

- 87776A0887EF9D0A06ABD3C34EFC499FB
- A.

```
"step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890"
  },
  "Block2": {
    "Checkbox1": false,
    "Block3": {
      "Multi-select1": "Value A;Value B"
    }
  }
}
```
- B.

```
"step1": {
  "Block1": {
    "Text1": "Text",
    "Block2": {
      "Telephone1": "1234567890",
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}
```
- C.

```
"step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890",
    "Block2": {
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}
```
- D.

```
"step1": {
  "Block1": {
    "Text1": "Text"
  }
}
```
- Time Remaining 3:00

22 of 60. Refer to the exhibit below.

Which JSON code correctly represents the step in the Omniscrypt Structure panel shown?

The screenshot shows the Omniscrypt Structure panel for 'Step 1'. It contains three expandable blocks:

- Block1**: Contains 'Text1' (a text input field) and 'Telephone1' (a text input field).
- Block2**: Contains 'Checkbox1' (an unchecked checkbox).
- Block3**: Contains 'Multi-select1' (a multi-select dropdown menu with two options: 'Value A' and 'Value B', both of which are unchecked).

- 87776A0887EF9D0A06ABD3C34EFC499FB
- A.

```
"step1": {
  "Block1": {
    "Text1": "Text"
  }
}
```


Time Remaining

Show

21 of 60. A developer creates a Data Mapper Extract to retrieve data to pass to an external service. The external service expects the field value to be an integer. However, the Data Mapper is sending it as a string.

Which action can the developer take to fix this?

8776A0887EF9D0A08ABD3C34EFC499FB

- A. ☐ In the Data Mapper Formula tab, define a formula using the function TOINTEGER and use the formula as output.
- B. ☐ In the Data Mapper Output tab, enter the default value as 0 on the field.
- C. ☐ In the Data Mapper Extract tab, set the Input Data Type field to Integer.
- D. ☒ In the Data Mapper Output tab, select the Output Data Type of that field to Integer.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

20 of 60. A communications provider wants to enable their customers to troubleshoot mobile devices using a self-service portal. The developer builds an Omniscrypt to meet this requirement.

The Omniscrypt must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two Omniscrypt elements should the developer use to configure this functionality?

8776A0887EF9D0A08ABD3C34EFC499FB

Choose 2 answers

- A. ☐ SOQL Action
- B. ☐ REST API Action
- C. ☒ HTTP Action
- D. ☒ Data Mapper Extract Action
- E. ☐ Navigate Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

19 of 60. Which two advantages does a Data Mapper Turbo Extract have over a standard Data Mapper Extract?

8776A0887EF9D0A06A8D3C34EFC499FB

Choose 2 answers

- A. ☐ It populates data in PDF and DocuSign format.
- B. ☒ It is easier to configure.
- C. ☒ It has better performance at runtime.
- D. ☐ It supports complex field mappings.

8776A0887EF9D0A06A8D3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

18 of 60.

A developer needs to retrieve data from an external system that stores policy data. The external system supports REST APIs to access and update the policies. Due to the volume of the policy data and peak hours of business, calls to the REST APIs sometimes take longer than expected to respond.

The developer creates an Integration Procedure to retrieve the policy data for use in an Omniscript.

Given the external system's known performance issues, which two configurations should be used to implement the call to the external system?

8776A0887EF9D0A06A8D3C34EFC499FB

Choose 2 answers

- A. ☒ Set the Timeout property on the HTTP Action in the Integration Procedure
- B. ☐ Check the Chain On Step checkbox on the HTTP Action in the Integration Procedure
- C. ☒ Configure a Remote action with timeout settings of 120000
- D. ☐ Check the Chainable checkbox on the Integration Procedure Action in the Omniscript

8776A0887EF9D0A06A8D3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

17 of 60. A developer creates a Flexcard that displays a contact's mailing address and passes the contact's postal code to a child Flexcard.

When configuring text elements in the child Flexcard, which syntax should a developer use to refer to the contact's postal code?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ {postalcode}
- B. ☐ {Records.postalcode}
- C. ☒ {Parent.postalcode}
- D. ☐ {Params.postalcode}

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

16 of 60. Refer to the exhibit below.

Which JSON from the DRGetAccountDetails action would display all six values correctly in the Omniscript structure shown? BlkContacts is a Repeat Block.

The screenshot shows an Omniscript interface with a form titled "Account & Contact Information". The form has the following fields:

- Account Name (text input)
- Account Phone (text input)
- Contacts (Repeat Block):
 - Contact Name (text input)
 - Contact Phone (text input)

Below the form, there are three actions:

- DRGetAccountDetails (DataRaptor Extract Action)
- DRSaveAccountDetails (DataRaptor Extract Action)
- NavigateAction1 (Navigate Action)

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ {


```

      "BlkContacts": [
        {
          "contactPhone": "(212) 189-3475",
          "contactName": "Edward Stamos"
        },
        {
          "contactPhone": "(212) 189-8979",
          "contactName": "Leanne Toslin"
        }
      ],
      "AccountPhone": "222154645@",
      "AccountName": "Acme"
      }
```
- ☒ B. ☐ {


```

      "BlkContacts": [
        {
          "contactPhone": "(212) 189-3475",
          "contactName": "Edward Stamos"
        },
        {
          "contactPhone": "(212) 189-8979",
          "contactName": "Leanne Toslin"
        }
      ],
      "AccountPhone": "222154645@",
      "AccountName": "Acme"
      }
```

1

Time Remaining

Show

15 of 60. An Integration Procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields as input: AccountId and ProductId. The Integration Procedure data JSON contains the following nodes:

```
{
  "AccountId": "0029976",
  "Details": {
    "ProductId": "30MT400"
  }
}
```

How should the Remote Action element be configured to pass the data correctly to the method?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Check the Data Mapper Transform checkbox, and add the following Key/Value pairs to Output JSON Path:
- AccountId: %AccountId%
 - ProductId: %Details:ProductId%
- B. ☐ Set Return Only Additional Output to true, and add the following Key/Value pairs to Additional Input:
- AccountId: %AccountId%
 - ProductId: %Details:ProductId%
- C. ☐ Add the following to Send JSON Path: AccountId: %AccountId%, ProductId: %Details:ProductId%
- D. ☒ Check the Send Only Additional Input checkbox, and add the following Key/Value pairs to Additional Input:
- AccountId: %AccountId%
 - ProductId: %Details:ProductId%

8776A0887EF9D0A06ABD3C34EFC499FB

Time Remaining

Show

14 of 60. A developer is building an Omniscrypt and needs to retrieve data from Salesforce and from an on-premises billing database.

Which two Omniscrypt elements could retrieve this data?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☐ Navigate Action
- B. ☒ Response Action
- C. ☒ Data Mapper Extract Action
- D. ☐ HTTP Action

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

13 of 60. A developer is configuring the API URL in an HTTP Action element within an Integration Procedure.

What is the merge code syntax for passing a Date node from an element named SetValues in the URL?

- 8776A0887EF9D0A06ABD3C34EFC499FB
- A. ☐ [!SetValue!][!Date!]
 - B. ☐ {SetValue!Date!}
 - C. ☒ {SetValue!Date!}
 - D. ☐ {{SetValue!Date!}}

☐ Mark this item for later review.

< Back

Next >


Review All

Submit Exam

Time Remaining

Show

12 of 60. Refer to the exhibit below. In this Integration Procedure structure, which Send JSON Path should be used to send the output of the Action1 element to a Remote Action?

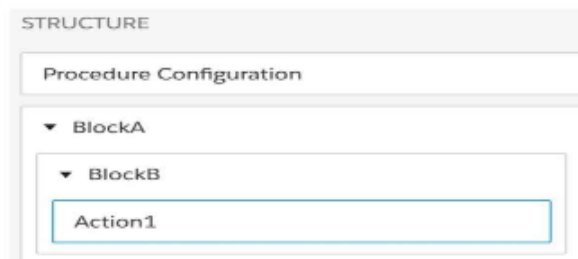

- 8776A0887EF9D0A06ABD3C34EFC499FB
- A. ☒ BlockA:BlockB:Action1
 - B. ☐ Action1:BlockB:BlockA
 - C. ☐ Action1.BlockB.BlockA
 - D. ☐ BlockA.BlockB.Action1

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

11 of 60. A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC Omniscript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC Omniscript Designer?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Add a Navigate Action outside each step and set the Element Name to "Cancel".
- B. ☐ Add a Navigate Action inside each step and set the Element Name to "Cancel".
- C. ☒ Check the Enable Cancel checkbox in the Setup tab under Cancel Options.
- D. ☐ Add a Navigate Action Inside each step and set the Component Name to "Cancel".

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

10 of 60. When launching an Omniscript from an action on a Flexcard, the Omniscript displays, but no Salesforce data is populated.

Which two errors could cause this behavior?

8776A0887EF9D0A06ABD3C34EFC499FB

Choose 2 answers

- A. ☒ The Id Field for Actions in the Flexcard is blank.
- B. ☒ In the Data Mapper Extract Action, the Input Parameters Filter Value is misspelled.
- C. ☐ There is no active version of the Data Mapper Extract.
- D. ☐ There is no active version of the Omniscript.

8776A0887EF9D0A06ABD3C34EFC499FB

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

9 of 60. A developer needs to create a list of cases for an account in a single Databble in a Flexcard, like the one shown below.

Origin	Type	Subject	Status	Created	CaseNumber	Priority
Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001026	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:28:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:28:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

How can the developer configure the Flexcard to display the case records in this way?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Enable the Repeat Records feature on the Flexcard setup tab
- B. ☐ Select the Repeatable Mode property on the data table elements
- C. ☐ Enable the Record Looping feature on the data table elements
- D. ☒ Disable the Repeat Records feature on the Flexcard setup tab

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

8 of 60. A developer is configuring an Integration Procedure Action in an Omniscript. The Omniscript needs a JSON response from the Integration Procedure but does not need to wait for the response for the user to proceed.

Which feature should the developer enable?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐ Use Future
- B. ☐ Invoke Mode Fire and Forget
- C. ☒ Invoke Mode Non-Blocking
- D. ☐ Toast Completion

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

7 of 60. A developer needs to build a Data Mapper Transform to send current weather to both an Omniscrypt and Card Layout.

Which sample is valid for the Expected Output JSON?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☐

```
<root>
  <Current>
    <TempF>53.1</TempF>
    <CityState>Baltimore, MD</CityState>
    <TempC>14.6</TempC>
  </Current>
</root>
```
- B. ☐

```
{
  "Current:TempF": 53.1,
  "Current:CityState": "Baltimore, MD",
  "Current:TempF": 14.6
}
```
- C. ☐

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempF": 15.3
  }
}
```
- D. ☒

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

by DRAKE INTERNATIONAL

Time Remaining

Show

6 of 60. In an expression set, what is required for the output of a calculation step to be used in an aggregation step?

8776A0887EF9D0A06ABD3C34EFC499FB

- A. ☒ It must be included in the output.
- B. ☐ It must be a calculation step.
- C. ☐ It must be included in constants.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

5 of 60. What should a developer's first step be when troubleshooting whether a Data Mapper Extract is retrieving data?

8775A0687EF9D0A06A8D3C34EFC499FB

- A. ☐ Deactivate the card and layout, and go to the Preview tab for the card to test.
- B. ☐ Go to the Lightning Console and reload the page to test.
- C. ☒ Add a key/value pair in the Data Mapper to test it.
- D. ☐ Go to the Preview tab in Omniscript to test.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

4 of 60. Which two of these options can a developer use to retrieve data from a Salesforce object?

8775A0687EF9D0A06A8D3C34EFC499FB

Choose 2 answers

- A. ☐ Data Mapper Load Action
- B. ☒ Data Mapper Extract Action
- C. ☒ Lookup Input Element
- D. ☐ Data Mapper Post Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

3 of 60. A developer needs to limit the output of a Data Mapper Extract to a maximum of one result.

How should the developer configure this?

- 8776A08876F9D0A06ABD3C34EFC499F8
- A. ☐ Set the Limit property on the action that calls the Data Mapper Extract.
 - B. ☒ Use the LIMIT filter on the Extract definition.
 - C. ☐ Define a formula with the Filter function.
 - D. ☐ Use a Custom Output Type when creating the Data Mapper.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

2 of 60. Refer to the exhibit below. A developer has configured an Integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Alternatively, how could the developer configure Additional Input to send exactly the same data? Assume that the developer checked Send Only Additional Input.

▼ SEND/RESPONSE TRANSFORMATIONS

Send JSON Path ⓘ

DRExtractAction:Account

Send JSON Node ⓘ

SecondaryAccount

Response JSON Path ⓘ

Response JSON Node ⓘ

- 8776A08876F9D0A06ABD3C34EFC499F8
- | | | |
|-------------------------------------|---------------------------------------|---|
| A. ☐ | Key
DRExtractAction:Account | Value
SecondaryAccount |
| B. ☐ | Key
DRExtractAction:Account | Value
SecondaryAccount |
| C. ☒ | Key
SecondaryAccount | Value
DRExtractAction:Account |
| D. ☐ | Key
SecondaryAccount | Value
DRExtractAction:Account |

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

1 of 60. An Omniscript displays data from an API using an Integration Procedure, but some of the data is missing.

Which two configuration errors could cause this?

8776A0857EP9D0A06A8D3C34EFC499F8

Choose 2 answers

- A. ☒ The element name for the missing data does not match the JSON node key in the Integration Procedure Response.
- B. ☐ The JSON sent from the Integration Procedure Action does not match any of the Original Input for the Integration Procedure.
- C. ☐ The Integration Procedure Preview Input Parameters do not match the JSON sent from the Omniscript.
- D. ☒ The missing data is trimmed in the Integration Procedure Action Response JSON Path.

☐ Mark this item for later review.

Next >

Review All

Submit Exam