

Result: Pass

Topic	Percentage Correct
Flex Cards	100%
OmniScripts	83%
Integration Procedures	70%
Data Raptors	91%
Calculation Procedures & Matrices	80%
Integrated Troubleshooting and Deployment	75%

Congratulations! You have successfully completed the certification exam to become a Salesforce Certified OmniStudio Developer.

Exit Test

Salesforce Certified OmniStudio Developer

Time Remaining: 01:24:02 [Hide](#)

1 of 60. A company wants to allow agents to send customers a quote for signature. The quote is a document created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.

How should a developer configure this functionality in an OmniScript?

- A. ☒ DocuSign Envelope Action
- B. ☐ DocuSign Signature Action
- C. ☐ Email Action
- D. ☐ PDF Action

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:36 [Hide](#)

2 of 60. A developer is configuring an Integration Procedure Action in an OmniScript. The OmniScript needs a JSON response from the Integration Procedure but does not need to wait for the response for the user to proceed.

Which feature should the developer enable?

- A. ☒ Invoke Mode Non-Blocking
- B. ☐ Toast Completion
- C. ☐ Use Future
- D. ☐ Invoke Mode Fire and Forget

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:31 [Hide](#)

3 of 60. A developer needs to create a DataRaptor to retrieve the name of an account for a contact.

Following best practices, how should a developer configure the extraction steps?

- A. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact.Account.Name
- B. ☐ Define an extraction step for the Account object, and set the Extract JSON Path to Account:Contact.Name
- C. ☒ Define an extraction step for the Contact object and set the Extract JSON Path to Contact:Account.Name
- D. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Account.Name

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:24 Hide

4 of 60. A developer is building an OmniScript and needs to save data to Salesforce and to an AWS Order Management system.

Which OmniScript element could save all of this data?

19FB

- A. ☒ Integration Procedure Action
- B. ☐ HTTP Action
- C. ☐ DataRaptor Load Action
- D. ☐ DataRaptor Post Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:19 Hide

5 of 60. An OmniScript displays data from an API using an Integration Procedure, but some of the data is missing.

Which two configuration errors could cause this?

3FB

Choose 2 answers

- A. ☒ The Integration Procedure Preview Input Parameters do not match the JSON sent from the OmniScript.
- B. ☐ The element name for the missing data does not match the JSON node key in the Integration Procedure Response.
- C. ☐ The missing data is trimmed in the Integration Procedure Action Response JSON Path.
- D. ☒ The JSON sent from the Integration Procedure Action does not match any of the Original Input for the Integration Procedure.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:13 Hide

6 of 60. A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be an integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

- 499FB
- A. ☐ In the DataRaptor Extract tab, set the Input Data Type field to Integer.
 - B. ☐ In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.
 - C. ☐ In the DataRaptor Output tab, enter the default value as 0 on the field.
 - D. ☒ In the DataRaptor Output tab, select the Output Data Type of that field to Integer.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:08 Hide

7 of 60. A developer is building an OmniScript and needs to retrieve data from Salesforce and from an on-premises billing database.

Which two OmniScript elements could retrieve this data?

499FB

Choose 2 answers

- A. ☒ HTTP Action
- B. ☐ Navigate Action
- C. ☐ Response Action
- D. ☒ DataRaptor Extract Action

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:23:04 Hide

8 of 60. When launching an OmniScript from an action on a FlexCard, the OmniScript displays, but no Salesforce data is populated.

Which two errors could cause this behavior?

499FB

Choose 2 answers

- A. ☐ There is no active version of the OmniScript.
- B. ☒ The Id Field for Actions in the FlexCard is blank.
- C. ☐ There is no active version of the DataRaptor Extract.
- D. ☒ In the DataRaptor Extract Action, the Input Parameters Filter Value is misspelled.

Mark this item for later review.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:57 Hide

9 of 60. A developer is configuring a DataRaptor Load to save contact data. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the DataRaptor Load?

499FB

Choose 2 answers

- A. ☒ Select RecordType in the Lookup Object list, DeveloperName in the Lookup Field list, and ID in the Lookup Requested Field list.
- B. ☐ Add Link to RecordType object in the Contact Object with the Id field of RecordType object.
- C. ☐ Select RecordType in the Lookup Object list, ID in the Lookup Field list, and DeveloperName in the Lookup Requested Field list.
- D. ☒ Check Is Lookup property when mapping the fields.

Mark this item for later review.

☐ Mark this item for later review.

10 of 60. Refer to the following row-versioned decision matrix.

Version 1

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980

Version 2

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Dec311980

Version 3

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Jan311980
CA	San Carlos	CA-SC	Jul011980	Dec311980

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

CA	San Carlos	CA-SC	Jul011980	Dec311980
----	------------	-------	-----------	-----------

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

If the developer deletes that row in Version 3, what is the result?

- 99FB
- ☐ The row is deleted in Version 3 and Version 1.
 - ☐ The row is deleted in all versions.
 - ☒ The row is deleted only in Version 3.
 - ☐ The row is deleted in Versions 2 and 3 but will remain in Version 1.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:35 [Hide](#)

11 of 60. Which two fields in an Integration Procedure or DataRaptor can execute a function like CONCAT or DATEDIFF?

99FB

Choose 2 answers

- A. ☐ In a DataRaptor In an Output Tab Output JSON Path.
- B. ☒ In a Remote Action in an Additional Output value field.
- C. ☐ In a DataRaptor Action In an Input Parameters value field.
- D. ☒ In a Set Values Action in a Value field.

☐ Mark this item for later review.

Time Remaining: 01:22:35 [Hide](#)

12 of 60.

A developer needs to retrieve data from an external system that stores policy data. The external system supports REST APIs to access and update the policies. Due to the volume of the policy data and peak hours of business, calls to the REST APIs sometimes take longer than expected to respond.

The developer creates an Integration Procedure to retrieve the policy data for use in an OmniScript.

Given the external system's known performance issues, which two configurations should be used to implement the call to the external system?

99FB

Choose 2 answers

- A. ☒ Set the Timeout property on the HTTP Action in the Integration Procedure
- B. ☐ Check the Chainable checkbox on the Integration Procedure Action in the OmniScript
- C. ☐ Check the Chain On Step checkbox on the HTTP Action in the Integration Procedure
- D. ☒ Configure a Remote action with timeout settings of 120000

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:23 [Hide](#)

13 of 60. A developer needs to configure an expression set to calculate the sum of the entire BasePrice.

What is the most efficient way for the developer to meet this requirement?

199FB

- A. ☐ Add a Sub Expression step as SUM(BasePrice).
- B. ☐ Add a Calculation Step as SUM(BasePrice).
- C. ☒ Add an Aggregation Step as SUM(BasePrice).

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:20 [Hide](#)

14 of 60. A developer needs to limit the output of a DataRaptor Extract to a maximum of one result.

How should the developer configure this?

99FB

- A. ☒ Use the LIMIT filter on the Extract definition
- B. ☐ Set the Limit property on the action that calls the DataRaptor Extract
- C. ☐ Use a Custom Output Type when creating the DataRaptor
- D. ☐ Define a formula with the Filter function

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:16 [Hide](#)

15 of 60. A developer has a requirement to create a child FlexCard that contains all of its parent FlexCard's records in a Datatable.

How should the developer configure the parent FlexCard's Data Node?

- A. ☒ {records}
- B. ☐ {records[0]}
- C. ☐ {recordId}
- D. ☐ {Params.records}

:499FB

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:11 [Hide](#)

16 of 60. A developer creates a FlexCard with five state elements. Four of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

- A. ☒ The first state with true conditions sequenced closest to the top of the FlexCard canvas will display.
- B. ☐ The state sequenced first in the FlexCard canvas will display.
- C. ☐ The first state with a true nested condition, regardless of sequence in the FlexCard canvas, will display.
- D. ☐ The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

:499FB

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:04 Hide

17 of 60. Which two of these options can a developer use to retrieve data from a Salesforce object?

499FB

Choose 2 answers

- A. ☒ A Lookup Input Element
- B. ☐ A DataRaptor Post Action
- C. ☐ A DataRaptor Load Action
- D. ☒ A DataRaptor Extract Action

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining: 01:22:00 Hide

18 of 60. A developer writes an OmniScript that includes a DataRaptor that updates the Account status based on information provided from the OmniScript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?

499FB

- A. ☐ Populate the Lookup Object and Lookup Fields
- B. ☒ Check the Upsert Key and Is Required for Upsert checkboxes on the Account Id field
- C. ☐ Check the Upsert Key checkbox on the Account Status field
- D. ☐ Check Overwrite Target For All Null Inputs checkbox on the Account Id field

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:53 Hide

19 of 60. A developer needs to use the COUNTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

- ☐ A. A Set Values element
- ☒ B. A Formula element
- ☐ C. A Range element

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:45 Hide

20 of 60. An Integration Procedure uses an HTTP action to make a REST API call. The response from the REST API must be converted into a specific XML structure before sending it as an input to another external web service.

How should the developer configure the Integration Procedure to meet this requirement?

- ☐ A. Use a Remote Action that calls the XMLStreamWriter class
- ☒ B. Use a DataRaptor Transform to convert JSON to XML
- ☐ C. Use a DataRaptor Extract and check the XML checkbox on the Output JSON Path
- ☐ D. Use a Remote Action that calls the XMLStreamReader class

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:35 Hide

21 of 60. A developer needs to create a list of cases for an account in a single Datatable in a FlexCard, like the one shown below.

Origin	Type	Subject	Status	Created	CaseNumber	Priority
Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:38:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:38:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:38:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:38:20.000Z	00001018	Medium

How can the developer configure the FlexCard to display the case

Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:38:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:38:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:38:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:38:20.000Z	00001018	Medium

How can the developer configure the FlexCard to display the case records in this way?

- 2499FB
- A. ☒ Disable the Repeat Records feature on the FlexCard setup tab
 - B. ☐ Enable the Repeat Records feature on the FlexCard setup tab
 - C. ☐ Select the Repeatable Mode property on the data table elements
 - D. ☐ Enable the Record Looping feature on the data table elements

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:24 [Hide](#)

22 of 60. A communications provider wants to enable their customers to troubleshoot mobile devices using a self-service portal. The developer builds an OmniScript to meet this requirement.

The OmniScript must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two OmniScript elements should the developer use to configure this functionality?

Choose 2 answers

- A. ☐ REST API Action
- B. ☒ DataRaptor Extract Action
- C. ☐ Navigate Action
- D. ☐ SOQL Action
- E. ☒ HTTP Action

Time Remaining: 01:21:11 [Hide](#)

23 of 60. An Integration Procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields as input: AccountId and ProductId. The Integration Procedure data JSON contains the following nodes:

```
{
  "AccountId": "023476",
  "Details": {
    "ProductId": "3EU4X9"
  }
}
```

How should the Remote Action element be configured to pass the data correctly to the method?

- A. ☐ Check the DataRaptor Transform checkbox, and add the following Key/Value pairs to Output JSON Path:
 - AccountId: %AccountId%
 - ProductId: %Details:ProductId%

- AccountId: %AccountId%
- ProductId: %Details:ProductId%

- C. ☒ Check the Send Only Additional Input checkbox, and add the following Key/Value pairs to Additional Input:
- AccountId: %AccountId%
 - ProductId: %Details:ProductId%
- D. ☐ Add the following to Send JSON Path: AccountId: %AccountId%, ProductId: %Details:ProductId%

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

2024 KRYTERION, Inc. and KRYTERION

Salesforce Certified OmniStudio Developer

Time Remaining: 01:21:02 [Hide](#)

24 of 60. A developer is creating a FlexCard and needs to display additional information using a Flyout.

Which two types of components can the developer embed in the flyout?

499FB

Choose 2 answers

- A. ☐ A DataRaptor
- B. ☐ An Integration Procedure
- C. ☒ An OmniScript
- D. ☒ A child FlexCard

☐ Mark this item for later review.

25 of 60. A developer creates an OmniScript to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The DataRaptor used in the Type Ahead has been tested and fetches the correct data.

When previewing the OmniScript, the developer enters a name in the Type Ahead and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

The screenshot displays the configuration for a Type Ahead Block named 'TAContact'. In the 'Script Configuration' pane, 'Step1' is expanded, showing the 'TAContact' block with a 'GetContact' action. Below this, the 'FirstName' and 'LastName' fields are listed. The 'TAContact' block properties on the right show 'Element Name' as 'TAContact', 'Field Label' as 'TypeAhead1', and 'Required' as unchecked. A 'Label Outside Of Field' section shows 'FirstName' in a text field. The 'Use Data JSON' checkbox is not visible.

What is the reason that the fields fail to display the fetched data?

- 499FB
- A. ☐ Lookup Mode is not selected in the properties of the Type Ahead Block.
 - B. ☒ FirstName, LastName, and BirthDate are not placed Inside the Type Ahead Block.
 - C. ☐ The Typeahead Key is not in the correct format.
 - D. ☐ Use Data JSON Is not selected in the properties of the Type Ahead Block.

☐ Mark this Item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:20:39 [Hide](#)

26 of 60. Refer to the exhibit below. What JSON from the DRGetAccountDetails action would display all six values correctly in the OmniScript structure shown? BlkContacts is a Repeat Block.

DRGetAccountDetails
DataRaptor Extract Action

StepAccount
Step

Account & Contact Information

Account Name

Account Phone

Contacts

Contact Name

Add

☒ D.

```
{
  "BlkContacts": [{
    "ContactPhone": "(212) 169-1475",
    "ContactName": "Edward Stamos"
  }, {
    "ContactPhone": "(212) 189-8979",
    "ContactName": "Leanne Tomlin"
  }],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

27 of 60. Refer to the exhibit below. A developer has configured an Integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Alternatively, how could the developer configure Additional Input to send exactly the same data? Assume that the developer checked Send Only Additional Input.

▼ SEND/RESPONSE TRANSFORMATIONS

Send JSON Path ⓘ

DRExtractAction:Account

Response JSON Path ⓘ

Send JSON Node ⓘ

SecondaryAccount

Response JSON Node ⓘ

A. ☐ **Key**
DRExtractAction:Account

B. ☐ **Key**

Response JSON Path ⓘ

99FB

Value

SecondaryAccount

Value

Response JSON Node ⓘ

A. ☐ **Key**
DRExtractAction:Account

B. ☐ **Key**
%DRExtractAction:Account%

C. ☐ **Key**
SecondaryAccount

D. ☒ **Key**
SecondaryAccount

99FB

Value

SecondaryAccount

Value

SecondaryAccount

Value

DRExtractAction:Account

Value

%DRExtractAction:Account%

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:20:11 [Hide](#)

28 of 60. A developer has an existing DataRaptor Load that inserts Contact records with inputs as lastName and firstName. The DataRaptor works as expected when previewed.

The developer creates an Integration Procedure to test the DataRaptor and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The DataRaptor and Integration Procedure are set up as shown in the exhibits below.

The screenshot shows the Salesforce DataRaptor configuration interface for a bundle named 'VELOCITY DATARAPTOR BUNDLE' and a specific DataRaptor named 'drLoadContactData'. The interface has tabs for 'OBJECTS', 'FORMULAS', 'FIELDS', 'OPTIONS', and 'PREVIEW', with 'FIELDS' currently selected. Under the 'FIELDS' tab, there is a section for '1 - Contact' with a dropdown menu set to 'All'. Below this, there are two input fields: 'INPUT JSON PATH' and 'DOMAIN OBJECT FIELD', both with search icons. The 'INPUT JSON PATH' field is currently empty, and the 'DOMAIN OBJECT FIELD' field is also empty.

How should the developer address this issue?

99FB

- A. ☐ The DataRaptor Post Action in the Integration Procedure should have been executed before the Set Values Action
- B. ☐ The Set Values Action keys should include the DataRaptor Post Action element name path, e.g. LoadContactDetails:lastname
- C. ☒ SetValuesContactDetails should have been added to Additional Input of DataRaptor Post Action in Integration Procedure
- D. ☐ The valid field names should be added in the Domain Object Field in the DataRaptor

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining: 01:19:59 [Hide](#)

29 of 60. A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC OmniScript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC OmniScript Designer?

99FB

- A. ☒ Check the Enable Cancel checkbox in the Setup tab under Cancel Options.
- B. ☐ Add a Navigate Action inside each step and set the Element Name to "Cancel".
- C. ☐ Add a Navigate Action inside each step and set the Component Name to "Cancel".
- D. ☐ Add a Navigate Action outside each step and set the Element Name to "Cancel".

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:19:54 [Hide](#)

30 of 60.

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy via their Community portal. The developer on the project decides to use an OmniScript.

How should the developer configure the OmniScript to provide this functionality?

C499FB

- A. ☐ Use an Input Block element and a DataRaptor Post Action element.
- B. ☒ Use an Edit Block element configured with Remote Actions.
- C. ☐ Use an Edit Block element configured with SOQL statements.
- D. ☐ Use a Text Block element and a Remote Action element.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:19:45 [Hide](#)

31 of 60. A developer is configuring the API URL in an HTTP Action element within an Integration Procedure.

What is the merge code syntax for passing a Date node from an element named SetValues in the URL?

- ☐ A. `{{SetValues.Date}}`
- ☐ B. `%SetValues.Date%`
- ☒ C. `%SetValues:Date%`
- ☐ D. `['SetValues']['Date']`

1499FB

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:19:38 [Hide](#)

32 of 60. A customer sets up two LWC OmniScripts, one embedded into another. AccountId is set in a Set Values element in the parent OmniScript. The AccountId set in the parent OmniScript is used to set another Set Values element ContextAccountId in the embedded OmniScript. The embedded OmniScript is activated.

While previewing the OmniScript flow from the parent, it is found that AccountId is set correctly in the parent OmniScript. However, ContextAccountId in the embedded OmniScript is not set with the AccountId from parent OmniScript. On previewing the embedded OmniScript individually, it is found that ContextAccountId is set correctly.

What is the reason for this? Refer to the exhibits below.

199FB

- A. ☐ A developer failed to include a Navigate Action Element to pass data from the parent OmniScript.
- B. ☐ The flag passDataJSON in the parent OmniScript is not configured correctly.
- C. ☒ The LWC PubSub Message flag in the Set Values action of the parent OmniScript has not been set.
- D. ☐ Both parent and embedded OmniScripts have the same element name for the Set Values element.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

2024 KRYTERION, Inc. and KRYTERI

33 of 60. Refer to the exhibit below. The card layout uses an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure supports this card layout and follows best practices?

Account	Contact	Contact
Name	Name	Name
Acme	Edward Stamos	Howard Jones
Phone	Cell Phone	Cell Phone
(222) 154-6450	(212) 154-8562	(650) 156-1102

A. ☒

```
[
  {
    "ContactCellPhone": "(212) 154-8562",
    "ContactName": "Edward Stamos",
    "AccountPhone": "2221546450",
    "AccountName": "Acme"
  },
  {
    "ContactCellPhone": "(650) 156-1102",
    "ContactName": "Howard Jones",
    "AccountPhone": "2221546450",
    "AccountName": "Acme"
  }
]
```

Salesforce Certified OmniStudio Developer

Time Remaining: 01:19:00 [Hide](#)

34 of 60. A developer needs to display the following information together on one FlexCard:

- account name, address, phone number, website
- primary contact first name, contact last name, address, phone number, email

The account information must always be visible, and the contact information should only be visible as needed by the user.

What approach should the developer use to display the contact information on the card?

- 199FB
- A. ☐ Use a conditional FlexCard State
 - B. ☐ Set the class="collapsible" on the block element
 - C. ☒ Set the collapsible property on the block element
 - D. ☐ Use a Datatable element

Salesforce Certified OmniStudio Developer

Time Remaining: 01:18:51 [Hide](#)

35 of 60. A developer needs to transform contact data into a JSON array.

Input JSON

```
{
  "Contact": {
    "Name": "John Doe",
    "Phone": "12324456457",
    "Birthdate": "1970-11-12"
  }
}
```

Output JSON

```
{
  "Contact": [
    {
      "Name": "John Doe",
      "Phone": "12324456457",
      "Birthdate": "1970-11-12"
    }
  ]
}
```

Choose 2 answers

- A. ☒ Set the Input JSON Path as Contact and the Output JSON Path as LIST(Contact).
- B. ☒ Set the Input JSON Path as Contact, the Output JSON Path as Contact, and Output Data Type as List.
- C. ☐ Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.
- D. ☐ Set the Input JSON Path as LIST(Contact) and the Output JSON Path as Contact.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:18:42 [Hide](#)

36 of 60. A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the OmniScript to a production org?

199FB

- A. ☐ Add a Show/Hide condition on the Set Values element.
- B. ☒ Delete or deactivate the Set Values element.
- C. ☐ Deactivate the ContextId key/value pair.
- D. ☐ Update the ContextId value to specify an id from the production org.

☐ Mark this item for later review.

37 of 60. Refer to the exhibit.

Input Data	Output Data
ProductCode (Text) 	BasePrice (#)
Search column	Search column
ACC154	10.23
CAA876B	20.36
HRA320	12.99
HRA320B	13.99

All inputs to the Decision Matrix are set correctly.

The Decision Matrix has the following input:

```
{
  "input": {
    "ProductCode": "HRA320"
  }
}
```

What is the output?

- A. ☒ 12.99
B. ☐ 13.99

499FB



Salesforce Certified OmniStudio Developer

Time Remaining: 01:18:20 [Hide](#)

38 of 60. A developer needs to build a DataRaptor Transform to send current weather to both an OmniScript and Card Layout. Which of these samples would be valid for the Expected Output JSON?

- A.** ☒

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```
- B.** ☐

```
{
  "Current:TempF": 53.1,
  "Current:CityState": "Baltimore, MD",
  "Current:TempC": 14.6
}
```
- C.** ☐

```
<root>
```

Salesforce Certified OmniStudio Developer

Time Remaining: 01:18:15 [Hide](#)

39 of 60. A developer is troubleshooting an Integration Procedure with two elements: a Remote Action named FetchCart and a Response Action named ResponseCart.

In Preview, what JSON node shows the data sent to the Response Action?

- ☐ A. Response
- ☒ B. ResponseCartDebug
- ☐ C. FetchCart
- ☐ D. ResponseCart

☐ Mark this item for later review.

40 of 60. A developer is creating an OmniScript that provisions trial orgs to their customers. The following text block in the OmniScript uses a merge code to display the ID for the new trial org:

Welcome to Salesforce!

Your ID is %Details:Customer|0:ID%

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

```
{
  "Details": {
    "Customer": [
      {"ID": "123456"}
    ]
  }
}
```

- ☐ A. To %%Details:Customer|0:ID%%
- ☐ B. To \$Details:Customer|0:ID\$
- ☐ C. To %Details:Customer|n:ID%
- ☒ D. To %Details:Customer|1:ID%

9FB

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:53 [Hide](#)

41 of 60. A developer creates an Integration Procedure with a Set Values and a DataRaptor Extract Action that requires AccountId as a key. When the developer previews the Integration Procedure, the developer enters the AccountId correctly and executes the preview. The developer sees the data extracted by the DataRaptor in the Debug Log, but the response is empty.

What is the likely cause of this issue?

- A. ☐ A Response Action was not added and DR output was not mapped to the Send JSON path
- B. ☐ The DataRaptor Action did not have the Add Response To Response JSON property set to true.
- C. ☒ A Response Action was not added to the Integration Procedure.
- D. ☐ The AccountId used for the preview is invalid.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:44 [Hide](#)

42 of 60. A developer needs to configure a DataRaptor to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of DataRaptor should the developer use?

- A. ☒ DataRaptor Turbo Extract
- B. ☐ DataRaptor Transform
- C. ☐ DataRaptor Load
- D. ☐ DataRaptor Extract

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:37 [Hide](#)

43 of 60. A developer needs to change some field labels on a FlexCard. The FlexCard is currently deployed to production. The developer decides that the best course of action is to version the FlexCard rather than cloning it.

Which factor would lead the developer to this decision?

3499FB

- A. ☐ The new version of the FlexCard will be used in a new Console, and the current version of the FlexCard should remain active.
- B. ☐ The new and current versions will be displayed together on the same target.
- C. ☐ All instances of the FlexCard must be updated with the changes.
- D. ☒ Another team member is developing new actions, fields and styling for the current version of the FlexCard.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:31 [Hide](#)

44 of 60. An OmniScript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A DataRaptor Load saves the data. What error could cause this behavior?

3FB

Choose 2 answers

- A. ☐ In the DataRaptor Load, in the preview tab, the RecordId is from the wrong record type.
- B. ☐ ContextId is misspelled in the merge code that passes the RecordId to the DataRaptor.
- C. ☒ The fields that are not updated are read only in Salesforce.
- D. ☒ The Input JSON paths in the DataRaptor Load do not match the JSON sent from the OmniScript.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:25 [Hide](#)

45 of 60. What should a developer's first step be when troubleshooting whether a DataRaptor Extract is retrieving data?

- JFB
- A. ☐ Deactivate the card and layout, and go to the PREVIEW tab for the card to test.
 - B. ☒ Add a key/value pair in the DataRaptor to test it.
 - C. ☐ Go to the Lightning Console and reload the page to test.
 - D. ☐ Go to the PREVIEW tab in OmniScript to test.

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:21 [Hide](#)

46 of 60. A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions.

What should the developer use to configure the action that invokes the OmniScript?

- C499FB
- A. ☐ Custom Action
 - B. ☐ Lightning Action
 - C. ☒ OmniScript Action

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:16 [Hide](#)

47 of 60. A developer examines data received from an external data source. The data is nested two levels down in the JSON structure.

Which OmniStudio tool could the developer use to simplify this data?

2499FB

- A. ☐ A guided workflow
- B. ☒ A DataRaptor Transform
- C. ☐ An HTTP Action Element
- D. ☐ An Integration Procedure

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:12 [Hide](#)

48 of 60. Why would a developer clone an Integration Procedure instead of versioning it?

499FB

- A. ☐ The new Integration Procedure is replacing stub data.
- B. ☐ The new Integration Procedure is Chainable.
- C. ☐ The new Integration Procedure uses a Cache Block.
- D. ☒ The new Integration Procedure will be used independently.

☐ Mark this item for later review.

[< Back](#)

[Next >](#)

[Review All](#)

[Submit Exam](#)

49 of 60. A developer needs to configure a calculation procedure to calculate a subtotal using two different formulas depending on whether the input Boolean variable `isCustomer` is set to true or false.

How should a developer configure the calculation procedure to conditionally execute the correct formula?

- 499FB
- A. ☒ Use two separate Calculation Steps with the Conditional Step property selected; compare the `isCustomer` variable directly to the literal true and false values in the Condition syntax.
 - B. ☐ Use two separate Calculation Steps with the Conditional Step property selected; use the `ISTRUE(isCustomer)` and `NOT(ISTRUE(isCustomer))` functions in the Condition syntax.
 - C. ☐ Use two separate Calculation Steps with the Conditional Step property selected; reference just the `isCustomer` variable in the Condition syntax (no comparison necessary).
 - D. ☐ Use a single Calculation Step with an IF statement directly in the formula definition to reference the `isCustomer` variable and conditionally perform the appropriate calculation.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:17:01 [Hide](#)

50 of 60. In an expression set, what is required for the output of a calculation step to be used in an aggregation step?

- C499FB
- A. ☐ It must be included in constants.
 - B. ☐ It must be a calculation step.
 - C. ☒ It must be included in the output.

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Ex](#)

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:57 [Hide](#)

51 of 60. A developer creates a FlexCard that displays a contact's mailing address and passes the contact's postal code to a child FlexCard.

When configuring text elements in the child FlexCard, what syntax should a developer use to refer to the contact's postal code?

99FB

- A. ☒ {Parent.postalcode}
- B. ☐ {postalcode}
- C. ☐ {Records.postalcode}
- D. ☐ {Params.postalcode}

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:52 [Hide](#)

52 of 60. A developer is creating a FlexCard for a new Community page. The FlexCard will display case information along with actions to close the case and update the case, and it will be styled using the Community's theme.

What must the developer do to configure the FlexCard for deployment in a Community?

19FB

- A. ☐ Add the FlexCard's API name to the FlexCard Player component
- B. ☐ Configure the Component Visibility in the Custom Component
- C. ☒ Set the Target property in Publish Options to "CommunityPage"
- D. ☐ Set the Deployment property in Card Configuration to "Community"

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:47 [Hide](#)

53 of 60. Users receive an `APEX CPU Limit Exceeded` error when running an OmniScript in a Salesforce Community. The OmniScript includes an Integration Procedure that contains two DataRaptors.

Which two locations should the developer check to troubleshoot the issue?

Choose 2 answers

- A. ☐ Script Configuration
- B. ☐ Community logs
- C. ☒ Action Debugger
- D. ☒ DataRaptor configuration

☐ Mark this Item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:40 [Hide](#)

54 of 60. A developer needs to display read-only contact information in an OmniScript. The developer will format the information as a table, using merge codes to dynamically include first name, last name, street address, state, postal code, and country from the data JSON.

Which OmniScript element should the developer use to meet this requirement?

- A. ☒ Text Block
- B. ☐ Rich Text Area
- C. ☐ Text Area
- D. ☐ Edit Block

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:35 [Hide](#)

55 of 60. Refer to the exhibit below. What is the merge code needed for this Integration Procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP Path URL?

STRUCTURE

Procedure Configuration

DRReadCase

ResponseAction

- A. ☐ %DRReadCase:CaseNumber%
- B. ☐ {{DRReadCase.CaseNumber}}
- C. ☐ {{CaseNumber}}
- D. ☒ %HTTPGetCaseDetails:CaseNumber%

☐ Mark this Item for later review.

< Back

Next >


Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:28 Hide

56 of 60. Refer to the exhibit below. What JSON code correctly represents the step in the OmniScript Structure panel shown?

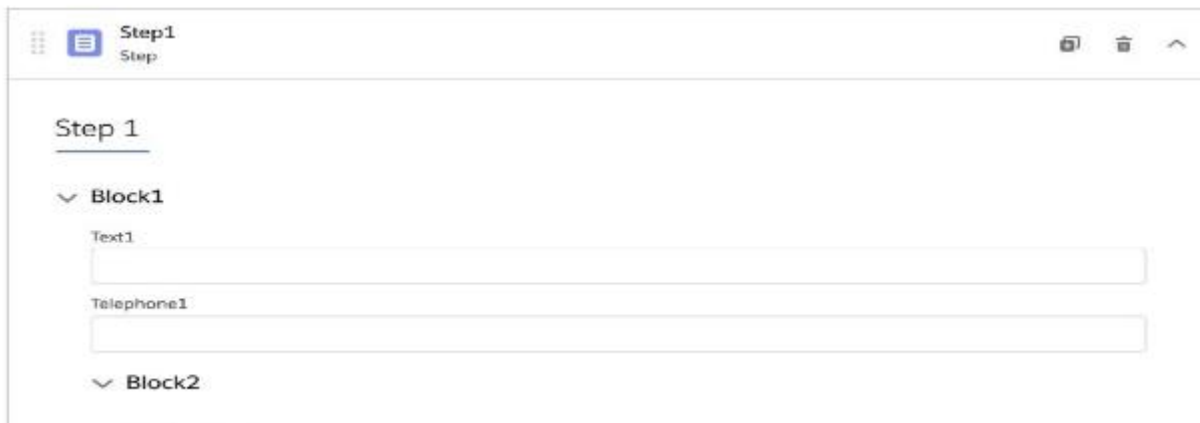

The screenshot shows the OmniScript Structure panel for 'Step1'. It contains two blocks: 'Block1' and 'Block2'. 'Block1' has two input fields: 'Text1' and 'Telephone1'. 'Block2' is currently collapsed.

```

{
  "Step1": {
    "Block1": {
      "Text1": "Text",
      "Telephone1": "1234567890"
    },
    "Block2": {
      "Checkbox1": false,
      "Block3": {
        "Multi-select1": "Value A;Value B"
      }
    }
  }
}

```

B. ☒ `"Step1": {
 "Block1": {
 "Text1": "Text",
 "Telephone1": "1234567890"
 },
 "Block2": {
 "Checkbox1": false,
 "Block3": {
 "Multi-select1": "Value A;Value B"
 }
 }
}`

C. ☐ `"Step1": {
 "Block1": {
 "Text1": "Text",
 "Telephone1": "1234567890",
 "Block2": {
 "Checkbox1": false
 }
 }
}`

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:16 [Hide](#)

57 of 60. What two advantages does a DataRaptor Turbo Extract have over a standard DataRaptor Extract?

FB

Choose 2 answers


- A. ☒ It is easier to configure
- B. ☒ It has better performance at runtime
- C. ☐ It populates data in PDF and DocuSign format
- D. ☐ It supports complex field mappings

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:12 [Hide](#)

58 of 60. Refer to the exhibit below. In this Integration Procedure structure, what Send JSON Path would be used to send the output of the Action1 element to a Remote Action?

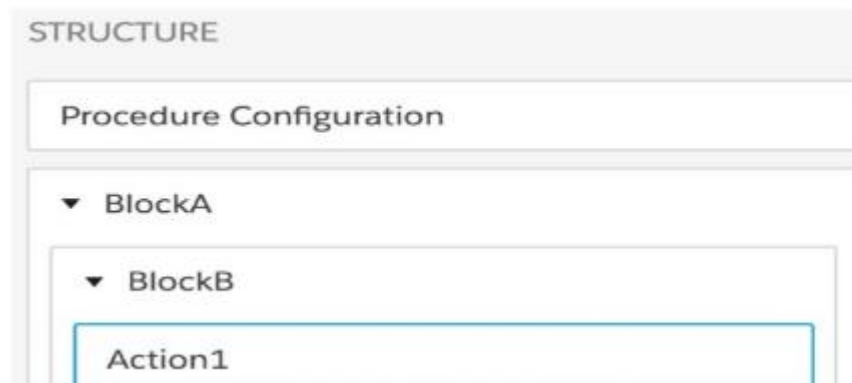

Action1

9FB

- A. ☐ Action1:BlockB:BlockA
- B. ☒ BlockA:BlockB:Action1
- C. ☐ BlockA.BlockB.Action1
- D. ☐ Action1.BlockB.BlockA

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Ex

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:05 [Hide](#)

59 of 60. A developer configures a FlexCard with a DataRaptor data source that uses the params.Id as an input. When the developer clicks View Data on the FlexCard, valid data displays. However, when the developer previews the layout, the FlexCard does not display. What could cause this error?

Choose 2 answers

- A. ☒ The RecordId in the Test Data Source Settings is for the wrong record type.
- B. ☐ The Attributes haven't been configured to pass the data to the fields.
- C. ☐ The Data Node field for the FlexCard is empty.
- D. ☒ There is no Salesforce record for the FlexCard based on the RecordId in the layout's Test Data Source Settings.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining: 01:16:00 [Hide](#)

60 of 60. In an OmniScript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement checkbox.

How should the developer configure the conditional view to meet this requirement?

- A. ☐ Set element to optional if false
- B. ☐ Show element if true
- C. ☐ Set element to required if true
- D. ☒ Disable read only if true

☐ Mark this item for later review.

Answers

1. A

5. DA

9. DA

13. C

17. DA

21. A

25. B

29. A

33. A

37. A

41. C

45. B

49. A

53. DC

57. AB

2. A

6. D

10. C

14. A

18. B

22. BE

26. D

30. B

34. C

38. A

42. A

46. C

50. C

54. A

58. B

3. C

7. AD

11. BD

15. A

19. B

23. C

27. D

31. C

35. BA

39. B

43. D

47. B

51. A

55. D

59. AD

4. A

8. BD

12. DA

16. A

20. B

24. CD

28. C

32. C

36. B

40. D

44. CD

48. D

52. C

56. B

60. D

Submit Ex