

Salesforce Certified OmniStudio Developer

Time Remaining

Show

1 of 60. On a Flexcard canvas, several fields display with Salesforce data, but one of the fields shows only the label. What could cause this?

- A. ☐ In the Setup Panel, {recordId} is misspelled in the Data Source Input Map.
- B. ☐ In the Flexcard state, the Field type for the field does not match the type in the Salesforce record.
- C. ☒ The Field name in the Flexcard state does not match the Data Mapper Extract's Output JSON Path name.
- D. ☐ There are No Test Data Test Parameters configured.

☐ Mark this item for later review.

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

2 of 60. Why would a developer version an Integration Procedure instead of cloning it?

- A. ☐ The new Integration Procedure is Chainable.
- B. ☐ The new Integration Procedure will replace the existing one.
- C. ☐ The new Integration Procedure uses a Cache Block.
- D. ☒ The new Integration Procedure will be used independently.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

3 of 60. A developer needs to display read-only contact information in an Omniscript. The developer will format the information as a table, using merge codes to dynamically include first name, last name, street address, state, postal code, and country from the data JSON.

Which Omniscript element should the developer use to meet this requirement?

- A. ☐ Rich Text Area
- B. ☐ Text Area
- C. ☐ Edit Block
- D. ☒ Text Block

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

4 of 60. A developer is troubleshooting an Integration Procedure with two elements: a Remote Action named FetchCart and a Response Action named ResponseCart.

In Preview, what JSON node shows the data sent to the Remote Action?

- A. ☐ FetchCart
- B. ☒ ResponseCartDebug
- C. ☐ ResponseCart
- D. ☐ FetchCartDebug

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

5 of 60. Which Omnistudio tool pre-populates the data in a PDF used by an Omniscript?

- A. ☐ Data Mapper Load
- B. ☐ Data Mapper Extract
- C. ☐ SOQL Query
- D. ☒ Data Mapper Transform

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

6 of 60. A developer is building an Omniscript and needs to retrieve data from many fields in a Salesforce record.

Which Omniscript element does this?

- A. ☒ Data Mapper Extract Action
- B. ☐ Lookup
- C. ☐ HTTP Action
- D. ☐ Select

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining

Show

7 of 60. A developer is building a Data Mapper Load for an Integration Procedure used in an Omniscript.

What is the most efficient way for the developer to configure the Data Mapper Input JSON?

- A. ☒ Copy the Input JSON from the Omniscript Data JSON.
- B. ☐ Build the Input JSON node by node in an editor.
- C. ☐ Build the Input JSON node by node in the Data Mapper Designer.
- D. ☐ Copy the Input JSON from the Data Mapper Action Debug node.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

8 of 60. A developer needs to configure a Calculation Procedure to calculate a subtotal using two different formulas depending on whether the input Boolean variable isCustomer is set to true or false.

How should a developer configure the Calculation Procedure to conditionally execute the correct formula?

- A. ☐ Use two separate Calculation Steps with the Conditional Step property selected; use the ISTRUE(isCustomer) and NOT(ISTRUE(isCustomer)) functions in the Condition syntax.
- B. ☒ Use two separate Calculation Steps with the Conditional Step property selected; compare the isCustomer variable directly to the literal true and false values in the Condition syntax.
- C. ☐ Use two separate Calculation Steps with the Conditional Step property selected; reference just the isCustomer variable in the Condition syntax (no comparison necessary).
- D. ☐ Use a single Calculation Step with an IF statement directly in the formula definition to reference the isCustomer variable and conditionally perform the appropriate calculation.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

9 of 60. A developer creates an Omniscript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions.

What should the developer use to configure the action that invokes the Omniscript?

- A. ☐ Lightning Action
- B. ☒ Omniscript Action
- C. ☐ Custom Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining [Show](#)

10 of 60. Refer to the exhibit below. What is the merge code needed for this Integration Procedure structure to pass a CaseData node from the HTTP Action's output to the Data Mapper Transform Action?

STRUCTURE

Procedure Configuration

DRReadCase

DRXformCaseData

ResponseAction

- A. ☐ \$DRXformCaseData:CaseData\$
B. ☒ \$HTTPGetCaseDetails:CaseData\$
C. ☐ {{HTTPGetCaseDetails:CaseData\$}}
D. ☐ {{CaseData\$}}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining [Show](#)

11 of 60. A communications provider wants to enable their customers to troubleshoot mobile devices using a self-service portal. The developer builds an Omniscrypt to meet this requirement.

The Omniscrypt must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two Omniscrypt elements should the developer use to configure this functionality?

Choose 2 answers

- A. ☐ REST API Action
B. ☒ Data Mapper Extract Action
C. ☐ Navigate Action
D. ☒ HTTP Action
E. ☐ SOQL Action

Translation Value: You must select exactly responses.

Time Remaining [Show](#)

12 of 60. Refer to the exhibit below. A developer has configured an Integration Procedure element with Additional Input.

Alternatively, how could the developer configure SEND/RESPONSE TRANSFORMATIONS to send exactly the same data? Assume the developer has unchecked Send Only Additional Input.

Additional Input

SecondaryAccount	fx %DRExtractAction:Account%
------------------	--

- | | |
|---|---|
| A. ☐ Send JSON Path
DRExtractAction:Account | Send JSON Node
%SecondaryAccount% |
| B. ☐ Send JSON Path
%SecondaryAccount% | Send JSON Node
DRExtractAction:Account |
| C. ☒ Send JSON Path
DRExtractAction:Account | Send JSON Node
SecondaryAccount |
| D. ☐ Send JSON Path
SecondaryAccount | Send JSON Node
DRExtractAction:Account |

Press the "Prnt Scrn" on your key
screenshot

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

13 of 60. In an Omniscript, a developer needs to configure a Disclosure element to require user input only if the user already checked a Non-Disclosure Agreement checkbox.

How should the developer configure the conditional view to meet this requirement?

- A. ☐ Set element to optional if false
B. ☐ Show element if true
C. ☒ Disable read only if true
D. ☐ Set element to required if true

☐ Mark this item for later review.

[Back](#) [Next](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

14 of 60. A developer writes an Omniscript that includes a Data Mapper that updates the Account status based on information provided from the Omniscript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?


- A. ☐ Populate the Lookup Object and Lookup Fields.
B. ☐ Check the Upsert Key checkbox on the Account Status field.
C. ☐ Check Overwrite Target For All Null Inputs checkbox on the Account ID field.
D. ☒ Check the Upsert Key and Is Required for Upsert checkboxes on the Account ID field.

☐ Mark this item for later review.

[Back](#) [Next](#) [Review All](#) [Submit Exam](#)

Time Remaining [Show](#)

15 of 60. Refer to the exhibit below. In this Integration Procedure structure, what Send JSON Path would you use to send the output of the ActionZ element to a Response Action?

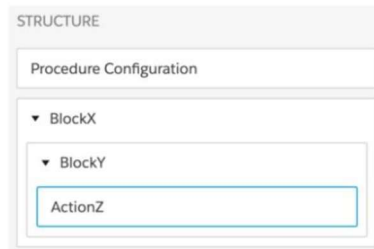

- A. ☒ BlockX:BlockY:ActionZ
- B. ☐ ActionZ:BlockY:BlockX
- C. ☐ BlockX:BlockY:ActionZ
- D. ☐ ActionZ:BlockY:BlockX

Time Remaining [Show](#)

16 of 60. An Integration Procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields as input: AccountId and ProductId. The Integration Procedure data JSON contains the following nodes:

```
{
  "AccountId": "023476",
  "Details": {
    "ProductId": "3EU4X9"
  }
}
```

How should the Remote Action element be configured to pass the data correctly to the method?

- A. Check the Send Only Additional Input checkbox, and add the following Key/Value pairs to Additional Input:
 - ☒ AccountId: `#{AccountId}`
 - ☐ ProductId: `#{Details:ProductId}`
- B. Check the Data Mapper Transform checkbox, and add the following Key/Value pairs to Output JSON Path:
 - ☐ AccountId: `#{AccountId}`
 - ☐ ProductId: `#{Details:ProductId}`

Time Remaining [Show](#)

17 of 60. A developer creates an Omniscrit to display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The Data Mapper used in the Type Ahead Block has been tested and fetches the correct data.

When previewing the Omniscrit, the developer enters a name in the Type Ahead Block and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

Refer to the exhibit below.

The screenshot shows two configuration panels. The left panel, 'Script Configuration', shows 'Step1' with a 'TACContact' block selected, and its 'GetContact' method. Below are input fields for 'FirstName', 'LastName', and 'BirthDate'. The right panel, 'TACContact Type Ahead Block', shows 'Element Name' as 'TACContact', 'Field Label' as 'TypeAhead1', and checkboxes for 'Required', 'Label Outside Of Field', and 'Help Text Active?'. A 'Minimum Length' field is also present.

LastName

BirthDate

First Name

Label Outside Of Field

Help Text Active?

Minimum Length

Typeahead Key

What is the reason that the fields fail to display the fetched data?

- A. ☐ The Typeahead Key is not in the correct format.
- B. ☐ Lookup Mode is not selected in the properties of the Type Ahead Block.
- C. ☐ Use Data JSON is not selected in the properties of the Type Ahead Block.
- D. ☒ FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

18 of 60. Refer to the exhibit below.

Which JSON code correctly represents the step in the Omniscript Structure panel shown?

Step 1

Block1

Text1

Telephone1

Block2

Checkbox1

C. "Step1": {
 "Block1": {
 "Text1": "Text",
 "Telephone1": "1234567890"
 },
 "Block2": {
 "Checkbox1": false,
 "Block3": {
 "Multi-select1": "Value A;Value B"
 }
 }
}

D. "Step1": {
 "Block1": {
 "Text1": "Text"
 },
 "Block2": {
 "Telephone1": "1234567890",
 "Checkbox1": false,
 "Block3": {
 "Multi-select1": "Value A;Value B"
 }
 }
}

☐ Mark this item for later review.

Time Remaining

Show

19 of 60. A developer creates a Data Mapper Extract to retrieve data to pass to an external service. The external service expects the field value to be an integer. However, the Data Mapper is sending it as a string.

Which action can the developer take to fix this?

- A. ☐ In the Data Mapper Extract tab, set the Input Data Type field to Integer.
- B. ☐ In the Data Mapper Output tab, enter the default value as 0 on the field.
- C. ☐ In the Data Mapper Formula tab, define a formula using the function TOINTEGER and use the formula as output.
- D. ☒ In the Data Mapper Output tab, select the Output Data Type of that field to Integer.

☐ Mark this item for later review.

< Back

Next >

Review All


Submit Exam

Time Remaining

Show

20 of 60. Refer to the exhibit below.

Which JSON from the DRGetContactDetails action would display all six values correctly in the Omniscript structure shown? BlkCases is a Repeat Block, and the names of the elements are the same as the label names without spaces.

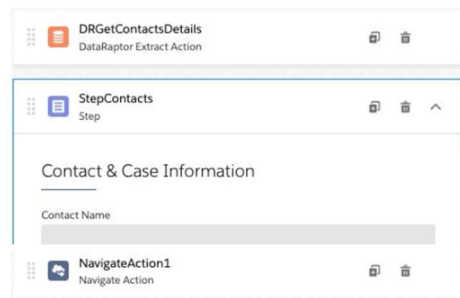

- A. ☐

```
{
  "BlkCases": [
    {
      "CasesSubject": "Cannot track our order.",
      "CaseNumber": "00001002"
    },
    {
      "CasesSubject": "Billing status",
      "CaseNumber": "00001004"
    }
  ],
  "ContactPhone": "(212) 189-8979",
  "ContactName": "Leanne Tomlin"
}
```
- B. ☒

```
{
  "Cases": [
    {
      "CasesSubject": "Cannot track our order.",
      "CaseNumber": "00001002"
    },
    {
      "CasesSubject": "Billing status",
      "CaseNumber": "00001004"
    }
  ],
  "ContactPhone": "(212) 189-8979",
  "ContactName": "Leanne Tomlin"
}
```
- C. ☐

```
{
```


Time Remaining

Show

21 of 60. A developer needs to create a Data Mapper to retrieve the name of an account for a contact.

Following best practices, how should a developer configure the extraction steps?

- A. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact.Account.Name
- B. ☒ Define an extraction step for the Contact object and set the Extract JSON Path to Contact:Account.Name
- C. ☐ Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Account.Name
- D. ☐ Define an extraction step for the Account object, and set the Extract JSON Path to Account:Contact.Name

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

22 of 60. A developer is creating an Omniscript that provisions trial orgs to their customers. The following text block in the Omniscript uses a merge code to display the ID for the new trial org:

Welcome to Salesforce!

Your ID is %Details:Customer|0:ID%

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

```
{
  "Details": {
    "Customer": [
      { "ID": "123456" }
    ]
  }
}
```

During testing, the developer notices that the ID does not display. The data JSON is structured as shown below.

How should the developer correct the merge code in order for the ID to display?

```
{
  "Details": {
    "Customer": [
      { "ID": "123456" }
    ]
  }
}
```

- A. ☒ To %Details:Customer|1:ID%
- B. ☐ To %Details:Customer|n:ID%
- C. ☐ To \$Details:Customer|0:ID\$
- D. ☐ To %%Details:Customer|0:ID%%

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

23 of 60. An Integration Procedure uses an HTTP action to make a REST API call. The response from the REST API must be converted into a specific XML structure before sending it as an input to another external web service.

How should the developer configure the Integration Procedure to meet this requirement?

- A. ☐ Use a Remote Action that calls the XMLStreamWriter class.
- B. ☒ Use a Data Mapper Transform to convert JSON to XML.
- C. ☐ Use a Remote Action that calls the XMLStreamReader class.
- D. ☐ Use a Data Mapper Extract and check the XML checkbox on the Output JSON Path.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

24 of 60. A developer is configuring a Data Mapper Load to save contact data. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the Data Mapper Load?

Choose 2 answers

- A. ☐ Add Link to RecordType object in the Contact Object with the ID field of RecordType object.
- B. ☐ Select RecordType in the Lookup Object list, ID in the Lookup Field list, and DeveloperName in the Lookup Requested Field list.
- C. ☒ Select RecordType in the Lookup Object list, DeveloperName in the Lookup Field list, and ID in the Lookup Requested Field list.
- D. ☒ Check Is Lookup property when mapping the fields.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining

Show

25 of 60. A developer is creating a Flexcard for a new Community page. The Flexcard will display case information along with actions to close the case and update the case, and it will be styled using the Community's theme.

What must the developer do to configure the Flexcard for deployment in a Community?

- A. ☐ Configure the Component Visibility in the Custom Component
- B. ☒ Set the Target property in Publish Options to "CommunityPage"
- C. ☐ Set the Deployment property in Card Configuration to "Community"
- D. ☐ Add the Flexcard's API name to the Flexcard Player component

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

26 of 60. Refer to the following row-versioned Decision Matrix.

Version 1

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980

Version 2

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Dec311980

Version 3

Input	Input	Output	RowStartDate	RowEndDate
State	County	Code		
CA	San Francisco	CA-SF	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	San Mateo	CA-SM	Jan011980	Jun301980
CA	Mountain View	CA-MV	Jul011980	Jan311980
CA	San Carlos	CA-SC	Jul011980	Dec311980

Color Yellow - represents the rows that are shared across versions.

The developer needs to delete the row that contains the Code CA-SF.

If the developer deletes that row in Version 3, what is the result?

- ☐ A. The row is deleted in all versions.
☒ B. The row is deleted only in Version 3.
☐ C. The row is deleted in Versions 2 and 3 but will remain in Version 1.
☐ D. The row is deleted in Version 3 and Version 1.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

27 of 60. A developer needs to display the following information together on one Flexcard:

- account name, address, phone number, website
- primary contact first name, contact last name, address, phone number, email

The account information must always be visible, and the contact information should only be visible as needed by the user.

Which approach should the developer use to display the contact information on the card?

- ☒ A. Set the collapsible property on the block element
☐ B. Use a conditional Flexcard State
☐ C. Set the class="collapsible" on the block element
☐ D. Use a Datatable element

☐ Mark this item for later review.

Time Remaining

Show

28 of 60. A developer needs to transform contact data into a JSON array.

Input JSON

```
{
  "Contact": {
    "Name": "John Doe",
    "Phone": "12324456457",
    "Birthdate": "1978-11-12"
  }
}
```

Output JSON

```
{
  "Contact": [
    {
      "Name": "John Doe",
      "Phone": "12324456457",
      "Birthdate": "1978-11-12"
    }
  ]
}
```

Given the Input JSON shown above, what are two ways a developer can configure a Data Mapper Transform to achieve the expected Output JSON?

Given the Input JSON shown above, what are two ways a developer can configure a Data Mapper Transform to achieve the expected Output JSON?

Choose 2 answers

- A. ☐ Set the Input JSON Path as LIST(Contact) and the Output JSON Path as Contact.
- B. ☒ Set the Input JSON Path as Contact, the Output JSON Path as Contact, and Output Data Type as List.
- C. ☒ Set the Input JSON Path as Contact and the Output JSON Path as LIST(Contact).
- D. ☐ Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

29 of 60. A developer is building an Omniscript and needs to retrieve data from a single field in a Salesforce record.

Which Omniscript element does this?

- A. ☐ Select
- B. ☐ Data Mapper Post Action
- C. ☐ HTTP Action
- D. ☒ Lookup

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining [Show](#)

30 of 60. A developer needs to configure a Data Mapper to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of Data Mapper should the developer use?

- A. ☐ Data Mapper Load
- B. ☒ Data Mapper Turbo Extract
- C. ☐ Data Mapper Extract
- D. ☐ Data Mapper Transform

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)Time Remaining [Show](#)

31 of 60. A developer is creating a Flexcard and needs to display additional information using a flyout.

Which two types of components can the developer embed in the flyout?

Choose 2 answers

- A. ☒ An Omniscript
- B. ☐ An Integration Procedure
- C. ☐ A Data Mapper
- D. ☒ A child Flexcard

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Time Remaining [Show](#)

32 of 60.

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy via their Community portal. The developer on the project decides to use an Omniscript.

How should the developer configure the Omniscript to provide this functionality?

- A. ☐ Use a Text Block element and a Remote Action element.
- B. ☐ Use an Input Block element and a Data Mapper Post Action element.
- C. ☐ Use an Edit Block element configured with SOQL statements.
- D. ☒ Use an Edit Block element configured with Remote Actions.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

33 of 60. A developer needs to configure an expression set to calculate the sum of the entire BasePrice.

What is the most efficient way for the developer to meet this requirement?

- A. ☐ Add a Calculation Step as SUM(BasePrice).
- B. ☒ Add an Aggregation Step as SUM(BasePrice).
- C. ☐ Add a Sub Expression step as SUM(BasePrice).

☐ Mark this item for later review.

[< Back](#)[Next >](#)[Review All](#)[Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

34 of 60. In an Integration Procedure, a developer needs to perform a multi-step calculation on every element of an array.

Based on best practices, which two actions are recommended?

Choose 2 answers

- A. ☒ Use an Expression Set Action to call an Expression Set.
- B. ☐ Use a List Action to merge the array elements together.
- C. ☐ Use a Set Values Element inside a Loop Block.
- D. ☒ Use a Decision Matrix Action to call a Decision Matrix.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

35 of 60. Users receive an APEX CPU Limit Exceeded error when running an Omniscript in a Salesforce Community. The Omniscript includes an Integration Procedure that contains two Data Mappers.

Which two locations should the developer check to troubleshoot the issue?

Choose 2 answers

- A. ☒ Data Mapper configuration
- B. ☐ Community logs
- C. ☐ Script Configuration
- D. ☒ Action Debugger

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Time Remaining

36 of 60. A developer creates a Flexcard with five state elements. Four of the states have a condition. To test the Flexcard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

- A. ☒ The first state with true conditions sequenced closest to the top of the Flexcard canvas will display.
- B. ☐ The first state with a true AND condition, regardless of sequence in the Flexcard canvas, will display.
- C. ☐ The state sequenced first in the Flexcard canvas will display.
- D. ☐ The first state with a true nested condition, regardless of sequence in the Flexcard canvas, will display.

☐ Mark this item for later review.

[< Back](#)
[Next >](#)
[Review All](#)
[Submit Exam](#)

Time Remaining

37 of 60. Which two fields in an Integration Procedure can use a function like CONCAT or DATEDIFF?

Choose 2 answers

- A. ☐ In a Remote Action, in a Remote Options value field.
- B. ☒ In a Remote Action, in an Additional Output value field.
- C. ☐ In Procedure Configuration, in a Tracking Custom Data value field.
- D. ☒ In a Response Action, in an Additional Input value field.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

[< Back](#)
[Next >](#)
[Review All](#)
[Submit Exam](#)

Time Remaining

38 of 60. Refer to the exhibit.

Input Data	Output Data
ProductCode (Text) 	BasePrice (#)
Search column	Search column
ACC154	10.23
CAA8768	20.36
HRA320	12.99
HRA320B	13.99

All inputs to the Decision Matrix are set correctly.

The Decision Matrix has the following input:

```
{
  "input": {
    "ProductCode": "HRA320"
  }
}
```

What is the output?

- A. ☐ null
- B. ☒ 12.99
- C. ☐ 12.99,13.99
- D. ☐ 13.99

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

39 of 60. Which two of these options can a developer use to retrieve data from a Salesforce object?

Choose 2 answers

- A. ☒ Data Mapper Extract Action
- B. ☐ Data Mapper Post Action
- C. ☒ Lookup Input Element
- D. ☐ Data Mapper Load Action

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining

Show

40 of 60. Which Calculation Procedure version in the list executes on 2/15/2020 at 12:00 PM?

- A. ☐ Version Number 1
- B. ☐ Version Number 2
- C. ☒ Version Number 4
- D. ☐ Version Number 3

☐ Mark this item for later review.

Time Remaining Show

40 of 60. Which Calculation Procedure version in the list executes on 2/15/2020 at 12:00 PM?

Velocity Calculation Procedures > bundlePriceQuote

Velocity Calculation Procedure Versions

4 items • Sorted by Version Number • Updated a few seconds ago

	Calculation Procedure Version Name	Version Number	Enabled	Start Date Time	End Date Time	Priority
1	bundlePriceQuote v1	1	☒	1/1/2020, 12:00 AM	4/1/2020, 12:00 AM	1
2	bundlePriceQuote v2	2	☒	2/1/2020, 12:00 AM	3/1/2020, 12:00 AM	2
3	bundlePriceQuote v3	3	☒	3/1/2020, 12:00 AM	4/1/2020, 12:00 AM	4
4	bundlePriceQuote v4	4	☐	1/1/2020, 12:00 AM	3/1/2020, 12:00 AM	3

- A. ☐ Version Number 1
B. ☐ Version Number 2
C. ☒ Version Number 4
D. ☐ Version Number 3

☐ Mark this item for later review.

Time Remaining Show

41 of 60. A company wants to allow agents to send customers a quote for signature. The quote is a document created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.

How should a developer configure this functionality in an Omniscrypt?

- A. ☐ DocuSign Signature Action
B. ☒ DocuSign Envelope Action
C. ☐ Email Action
D. ☐ PDF Action

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining Show

42 of 60. When launching an Omniscrypt from an action on a Flexcard, the Omniscrypt displays, but no Salesforce data is populated.

Which two errors could cause this behavior?

Choose 2 answers

- A. ☐ There is no active version of the Omniscrypt.
B. ☐ There is no active version of the Data Mapper Extract.
C. ☒ In the Data Mapper Extract Action, the Input Parameters Filter Value is misspelled.
D. ☒ The Id Field for Actions in the Flexcard is blank.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Time Remaining [Show](#)

43 of 60. A developer has an existing Data Mapper Load that inserts Contact records with inputs as lastName and firstName. The Data Mapper works as expected when previewed.

The developer creates an Integration Procedure to test the Data Mapper and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The Data Mapper and Integration Procedure are set up as shown in the exhibits below.

When the developer executes the Integration Procedure in Preview, the following error message displays: "Required fields are missing: [Last Name]".

How should the developer address this issue?

- ☐ A. The Data Mapper Post Action in the Integration Procedure should have been executed before the Set Values Action
- ☐ B. The valid field names should be added in the Domain Object Field in the Data Mapper
- ☒ C. SetValuesContactDetails should have been added to Additional Input of Data Mapper Post Action in Integration Procedure
- ☐ D. The Set Values Action keys should include the Data Mapper Post Action element name path, e.g. LoadContactDetails:lastName

Time Remaining [Show](#)

43 of 60. A developer has an existing Data Mapper Load that inserts Contact records with inputs as lastName and firstName. The Data Mapper works as expected when previewed.

The developer creates an Integration Procedure to test the Data Mapper and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The Data Mapper and Integration Procedure are set up as shown in the exhibits below.

The first screenshot shows the 'drLoadContactData' Data Mapper configuration. It is set to 'Load' interface type, 'JSON' input type, and 'SOObject' output type. The 'FIELDS' tab is active, showing 'firstName' mapped to 'FirstName'. The 'SetValuesContactDetails' element is configured with 'lastName' and 'firstName' mapped to 'Doe' and 'John' respectively. The 'RESPONSE TRANSFORMATIONS' section is empty.

The second screenshot shows the 'LoadContactDetails' Integration Procedure configuration. It is set to 'DataMapper Post Action' and is active. The 'STRUCTURE' tab is active, showing 'SetValuesContactDetails' and 'LoadContactDetails' in the procedure flow. The 'PROPERTIES' tab is active, showing the 'LoadContactDetails' element with 'DataMapper Interface' set to 'drLoadContactData'. The 'SEND/RESPONSE TRANSFORMATIONS' section is empty.

When the developer executes the Integration Procedure in Preview, the following error message displays: "Required fields are missing: [Last Name] ".

How should the developer address this issue?

- ☐ A. The Data Mapper Post Action in the Integration Procedure should have been executed before the Set Values Action
- ☐ B. The valid field names should be added in the Domain Object Field in the Data Mapper
- ☒ C. SetValuesContactDetails should have been added to Additional Input of Data Mapper Post Action in Integration Procedure
- ☐ D. The Set Values Action keys should include the Data Mapper Post Action element name path, e.g. LoadContactDetails:lastname

Time Remaining

Show

44 of 60. A developer creates a new Flexcard to display customer data and actions, such as updating billing information and changing the primary contact for the customer account. The Flexcard contains 10 fields and 5 actions.

During testing, several fields display with the correct data, but one of the fields shows only the label.

What could cause this?

- ☐ A. {recordId} is misspelled in the Data Source Input Map.
- ☐ B. The field is null in the Salesforce record.
- ☐ C. There are no test parameters configured.
- ☒ D. The fields have exceeded the maximum number allowed on the card.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

45 of 60. A customer sets up two LWC Omniscripts, one embedded into another. AccountId is set in a Set Values element in the parent Omniscript. The AccountId set in the parent Omniscript is used to set another Set Values element ContextAccountId in the embedded Omniscript. The embedded Omniscript is activated.

While previewing the Omniscript flow from the parent, it is found that AccountId is set correctly in the parent Omniscript. However, ContextAccountId in the embedded Omniscript is not set with the AccountId from parent Omniscript. On previewing the embedded Omniscript individually, it is found that ContextAccountId is set correctly.

What is the reason for this? Refer to the exhibits below.

Parent Omniscript :

Embedded Omniscrypt :

The screenshot shows the 'Set Values' action configuration in the Salesforce OmniScript editor. The 'ContextId' key is highlighted in the 'Set Values' table. The 'ContextId' value is set to 'ContextId'.

- ☐ A. The LWC PubSub Message flag in the Set Values action of the parent Omniscrypt has not been set.
- ☐ B. A developer failed to include a Navigate Action Element to pass data from the parent Omniscrypt.
- ☐ C. Both parent and embedded Omniscrypts have the same element name for the Set Values element.
- ☐ D. The flag passDataJSON in the parent Omniscrypt is not configured correctly.

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining

Show

46 of 60.

A developer needs to retrieve data from an external system that stores policy data. The external system supports REST APIs to access and update the policies. Due to the volume of the policy data and peak hours of business, calls to the REST APIs sometimes take longer than expected to respond.

The developer creates an Integration Procedure to retrieve the policy data for use in an Omniscrypt.

Given the external system's known performance issues, which two configurations should be used to implement the call to the external system?

Choose 2 answers

- ☒ A. Set the Timeout property on the HTTP Action in the Integration Procedure
- ☐ B. Check the Chain On Step checkbox on the HTTP Action in the Integration Procedure
- ☒ C. Configure a Remote action with timeout settings of 120000
- ☐ D. Check the Chainable checkbox on the Integration Procedure Action in the Omniscrypt

Translation Value: You must select exactly responses.

Salesforce Certified OmniStudio Developer

Time Remaining

Show

47 of 60. A developer builds a new Omniscrypt. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the Omniscrypt to a production org?

- ☐ A. Deactivate the ContextId key/value pair.
- ☒ B. Delete or deactivate the Set Values element.
- ☐ C. Add a Show/Hide condition on the Set Values element.
- ☐ D. Update the ContextId value to specify an id from the production org.

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

48 of 60. A customer has a new Engagement Manager who is going to be the new Primary Contact for the Account.

Which type of mapping does a Data Mapper Load use to create the new contact and then add it as the new Primary Contact?

- A. ☐ Lookup Mapping
- B. ☐ Lookup Key
- C. ☒ Linked Mapping
- D. ☐ Relationship Query

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

49 of 60. What should a developer's first step be when troubleshooting whether a Data Mapper Extract is retrieving data?

- A. ☐ Go to the Lightning Console and reload the page to test.
- B. ☒ Add a key/value pair in the Data Mapper to test it.
- C. ☐ Deactivate the card and layout, and go to the Preview tab for the card to test.
- D. ☐ Go to the Preview tab in Omniscript to test.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

50 of 60. A developer needs to limit the output of a Data Mapper Extract to a maximum of one result.

How should the developer configure this?

- A. ☒ Use the LIMIT filter on the Extract definition.
- B. ☐ Define a formula with the Filter function.
- C. ☐ Set the Limit property on the action that calls the Data Mapper Extract.
- D. ☐ Use a Custom Output Type when creating the Data Mapper.

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Salesforce Certified OmniStudio Developer

Time Remaining Show

51 of 60. A developer is building an Omniscript and needs to retrieve data from Salesforce and from an AWS Order Management system.

Which two Omniscript elements could retrieve this data?

Choose 2 answers

- A. ☒ Data Mapper Extract Action
- B. ☐ Navigate Action
- C. ☒ Response Action
- D. ☐ Remote Action

Translation Value: You must select exactly responses.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining Show

52 of 60. A developer needs to create a list of cases for an account in a single Datable in a Flexcard, like the one shown below.

How can the developer configure the Flexcard to display the case records in this way?

- A. ☒ Disable the Repeat Records feature on the Flexcard setup tab
- B. ☐ Select the Repeatable Mode property on the data table elements
- C. ☐ Enable the Record Looping feature on the data table elements
- D. ☐ Enable the Repeat Records feature on the Flexcard setup tab

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining Show

52 of 60. A developer needs to create a list of cases for an account in a single Datable in a Flexcard, like the one shown below.

Vlocity Flex Card AccountCases						
Design New Version Clone Activate Help						
Author company.org	Current Version 1	Status Inactive	Parent -	Is Child Card	Last Modified 8/14/2020, 1:28 PM	Theme Lightning
Desktop Add Test Params						
Origin	Type	Subject	Status	Created	CaseNumber	Priority
Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:28:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:28:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

How can the developer configure the Flexcard to display the case records in this way?

- A. ☒ Disable the Repeat Records feature on the Flexcard setup tab
- B. ☐ Select the Repeatable Mode property on the data table elements
- C. ☐ Enable the Record Looping feature on the data table elements
- D. ☐ Enable the Repeat Records feature on the Flexcard setup tab

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)



[Test Aids](#) [Support](#) [Exit Exam](#)

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

53 of 60. A developer needs to change some field labels on a Flexcard. The Flexcard is currently deployed to production. The developer decides that the best course of action is to version the Flexcard rather than cloning it.

Which factor would lead the developer to this decision?

- A. ☐ The new version of the Flexcard will be used in a new Console, and the current version of the Flexcard should remain active.
- B. ☐ All instances of the Flexcard must be updated with the changes.
- C. ☒ Another team member is developing new actions, fields and styling for the current version of the Flexcard.
- D. ☐ The new and current versions will be displayed together on the same target.

☐ Mark this item for later review.

Salesforce Certified OmniStudio Developer

Time Remaining [Show](#)

54 of 60. Refer to the exhibit below. The card layout has an Integration Procedure as a data source. The cards use the layout data source.

Which JSON data structure below supports this card layout and uses best practices?

Contact	Case	Case
Name: Leanne Tomlin	Number: 00001002	Number: 00001004
Cell Phone: (212) 177-6630	Subject: Cannot track our order.	Subject: Billing status

A.

```
{
  "Contact": {
    "Name": "Leanne Tomlin",
    "CellPhone": "(212) 177-6630"
  },
  "CaseSubject": "Cannot track our order.",
  "CaseNumber": "00001002"
}
```


B.

```
{
  "Case": [
    {
      "Number": "00001002"
      "Subject": "Cannot track our order."
    },
    {
      "Number": "00001004"
      "Subject": "Billing status"
    }
  ],
  "ContactName": "Leanne Tomlin",
  "ContactCellPhone": "(212) 177-6630"
}
```

C.

```
[
  {
    "CaseSubject": "Cannot track our order.",
    "CaseNumber": "00001002",
    "ContactName": "Leanne Tomlin",
    "ContactCellPhone": "(212) 177-6630"
  },
  {
    "CaseSubject": "Billing status",
    "CaseNumber": "00001004",
    "ContactName": "Leanne Tomlin",
    "ContactCellPhone": "(212) 177-6630"
  }
]
```

Time Remaining [Show](#)

55 of 60. A developer creates a Flexcard that displays a contact's mailing address and passes the contact's postal code to a child Flexcard.

When configuring text elements in the child Flexcard, which syntax should a developer use to refer to the contact's postal code?

- A. ☐ {postalcode}
- B. ☒ {Parent.postalcode}
- C. ☐ {Params.postalcode}
- D. ☐ {Records.postalcode}

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Press the "Prnt Scrn" on vo

Time Remaining [Show](#)

56 of 60. A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC Omniscript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC Omniscript Designer?

- A. ☐ Add a Navigate Action outside each step and set the Element Name to "Cancel".
- B. ☐ Add a Navigate Action inside each step and set the Element Name to "Cancel".
- C. ☐ Add a Navigate Action inside each step and set the Component Name to "Cancel".
- D. ☒ Check the Enable Cancel checkbox in the Setup tab under Cancel Options.

☐ Mark this item for later review.

[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Press the "Prnt Scrn" on vo

Time Remaining [Show](#)

57 of 60. An Omniscript displays data from an API using an Integration Procedure, but all of the data is missing. What two errors could cause this?

Choose 2 answers

- A. ☐ The Omniscript has no active version.
- B. ☒ The JSON sent from the Integration Procedure Action does not match any of the Original Input for the Integration Procedure.
- C. ☐ The API url is not allowlisted in Salesforce.
- D. ☒ The Integration Procedure Preview Input Parameters do not match the JSON sent from the Omniscript.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)Time Remaining [Show](#)

58 of 60. A developer creates an Integration Procedure with a Set Values and a Data Mapper Extract Action that requires AccountId as a key. When the developer previews the Integration Procedure, the developer enters the AccountId correctly and executes the preview. The developer sees the data extracted by the Data Mapper in the Debug Log, but the response is empty.

What is the likely cause of this issue?

- A. ☒ A Response Action was not added to the Integration Procedure.
- B. ☐ The Data Mapper Action did not have the Add Response To Response JSON property set to true.
- C. ☐ A Response Action was not added and DR output was not mapped to the Send JSON path
- D. ☐ The AccountId used for the preview is invalid.

☐ Mark this item for later review.[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)Time Remaining [Show](#)

59 of 60. Which two advantages does a Data Mapper Turbo Extract have over a standard Data Mapper Extract?

Choose 2 answers

- A. ☐ It populates data in PDF and DocuSign format.
- B. ☒ It has better performance at runtime.
- C. ☐ It supports complex field mappings.
- D. ☒ It is easier to configure.

Translation Value: You must select exactly responses.

☐ Mark this item for later review.[< Back](#) [Next >](#) [Review All](#) [Submit Exam](#)

Time Remaining

Show

60 of 60. A developer has a requirement to create a child Flexcard that contains all of its parent Flexcard's records in a Datatable.

How should the developer configure the parent Flexcard's Data Node?

- A. ☐ {recordId}
B. ☐ {records[0]}
C. ☒ {records}
D. ☐ {Params.records}

☐ Mark this item for later review.

< Back

Next >

Review All

Submit Exam

Time Remaining

Show

Your assessment responses are listed below. Asterisks(*) next to the item number indicate you have marked that item for review. Click on the item number to return to the desired item. When you are ready to submit your assessment, click the 'Submit Exam' button below to submit your responses and end the assessment.

Assessment Summary**Number of Items Answered:****Number of Items Unanswered:****Number of Items Marked for Review:****Answers**

1.	2.	3.	4.
5.	6.	7.	8.
9.	10.	11. D	12.
13.	14.	15.	16.
17.	18.	19.	20.
21.	22.	23.	24.
25.	26.	27.	28.
29.	30.	31.	32.
33.	34.	35.	36.
37.	38.	39.	40. C