




FLUTTER -03

LAB ASSIGNMENTS

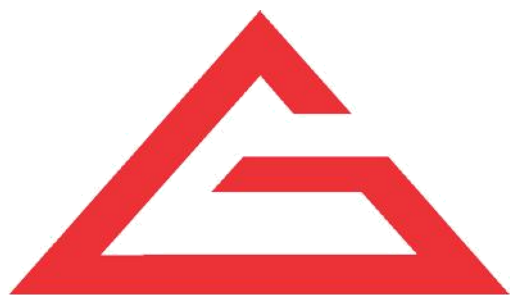

G-TEC EDUCATION

— G-TEC Group of Institutions —

www.gteceducation.com

Admin Office House of G-TEC, Calicut-02., India. | Corp. Office Peace Centre, Singapore – 228149

Add a New Page

Remember the Placeholder widget we used instead of the **Favorites** page? It's time to fix this.

If you feel adventurous, try to do this step by yourself. Your goal is to show the list of favorites in a new stateless widget, `FavoritesPage`, and then show that widget instead of the Placeholder.

Here are a few pointers:

- When you want a Column that scrolls, use the `ListView` widget.
- Remember, access the `MyAppState` instance from any widget using `context.watch<MyAppState>()`.
- If you also want to try a new widget, `ListTile` has properties like `title` (generally for text), `leading` (for icons or avatars) and `onTap` (for interactions). However, you can achieve similar effects with the widgets you already know.
- Dart allows using for loops inside collection literals. For example, if `messages` contains a list of strings, you can have code like the following:

```
var messages = ['Hello', 'Ahoj', 'こんにちは'];

return Column(
  children: [
    Text('Messages:'),
    for (var msg in messages)
      Text(msg),
  ],
); // Column
```

On the other hand, if you're more familiar with functional programming, Dart also lets you write code like `messages.map((m) => Text(m)).toList()`. And, of course, you can always create a list of widgets and imperatively add to it inside the build method.

The advantage of adding the **Favorites** page yourself is that you learn more by making your own decisions. The disadvantage is that you might run into trouble that you aren't yet able to solve by yourself. Remember: failing is okay, and is one of the most important elements of learning. Nobody expects you to nail Flutter development in your first hour, and neither should you.

↓ SPOILERS AHEAD ↓

What follows is just *one* way to implement the favorites page. How it's implemented will(hopefully) inspire you to play with the code—improve the UI and make it your own.

Here's the new FavoritesPage class:

[lib/main.dart](#)

```
// ...
```

```
class FavoritesPage extends StatelessWidget {  
  @override  
  Widget build(BuildContext context) {  
    var appState = context.watch<MyAppState>();  
  
    if (appState.favorites.isEmpty)  
      {return Center(  
        child: Text('No favorites yet.'),  
      );  
    }  
  
    return  
    ListView(  
      children: [  
        Padding(  
          padding: const  
            EdgeInsets.all(20),child:  
            Text('You have '  
              '${appState.favorites.length} favorites:'),  
        ),  
        for (var pair in
```

```
        leading:  
        Icon(Icons.favorite),title:  
        Text(pair.asLowerCase),  
    ),  
    ],  
    );  
}  
}
```

Here's what the widget does:

- It gets the current state of the app.
- If the list of favourites is empty, it shows a centered message: **No favorites yet*.***
- Otherwise, it shows a (scrollable) list.
- The list starts with a summary (for example, ***You have 5 favorites*.****).
- The code then iterates through all the favourites, and constructs a ListTile widget for each one.

All that remains now is to replace the Placeholder widget with a Favorites Page. You can get the final code of this app in the [code lab repo](#) on GitHub.