
Figma mcp server setup


This technical guide explains how to set up a connection between the remote Figma MCP server and VS Code, enabling Copilot to read Figma files and generate UI components. Afterwards, you can continue working on the changes in any other IDE.

1. Open Figma, and switch to Dev Mode.

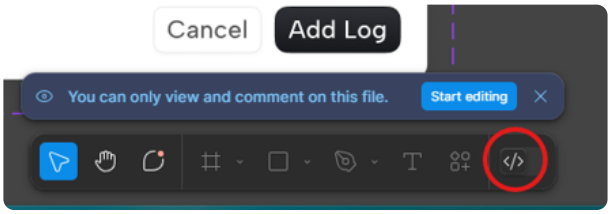


2. Open your project in VS Code. Press **Ctrl+Shift+P** and type: mcp.
   - Select “Add MCP server”
   - Choose the HTTP option
   - Paste in **https://mcp.figma.com/mcp**
   - Name it ‘figma-mcp-remote’ (or any name you prefer)
   - Select “Global” workspace


This should open the mcp.json file with your server added and running. (Notice the control options—highlighted.)

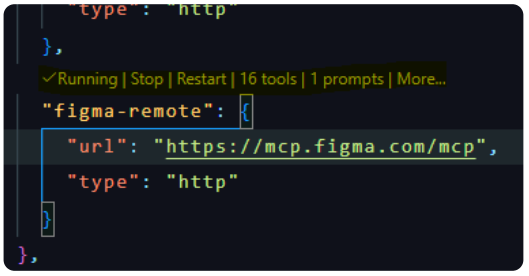

3. Return to Figma and select any design frame. A prompt with the URL for this frame will appear in the MCP tab—copy it.

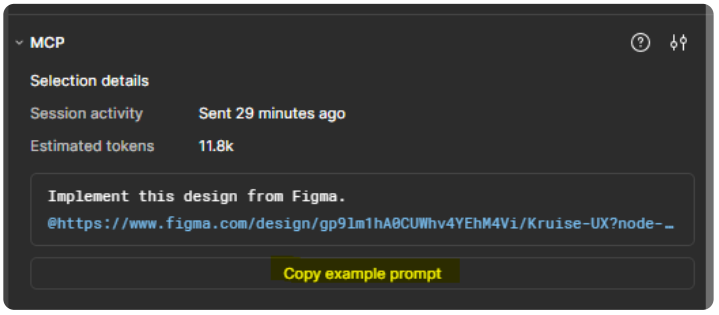

4. In VS Code, open your Copilot chat window and select your model. Preferably, use the 'Claude' option at the bottom.

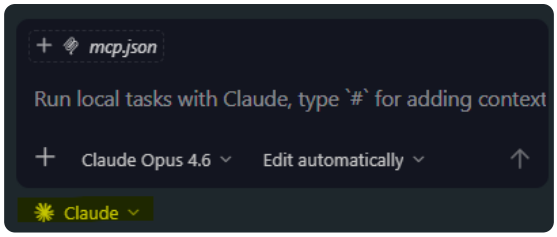

5. Paste in the prompt from Figma and change it to: “Can you see this design from Figma?” (Keep the URL.)
   Allow it to connect with the MCP tool, and Claude should confirm all the details of the design.
   Give it clear instructions on how and where to implement the component. Preferably, use an ‘agent instructions’ file that details your preferences, and tell Claude to follow it when developing.
6. Next, open the same project in your IntelliJ IDE, and you’ll see the changes made by Claude in VS Code in the IntelliJ change list. From here, you continue your regular development practice, hopefully with some extra time on your hands.