

Day 20_Top 20 Useful HTML Tags & Features -Part-2

5. tag

The `<img>` tag is an HTML element used to display an image on a webpage. It loads the image from a given source URL.

```

```




 Tag in Security : XSS via onerror

If an image fails to load, the browser fires the `onerror` event. If user input is reflected into HTML without sanitization, JavaScript may execute.

```

```

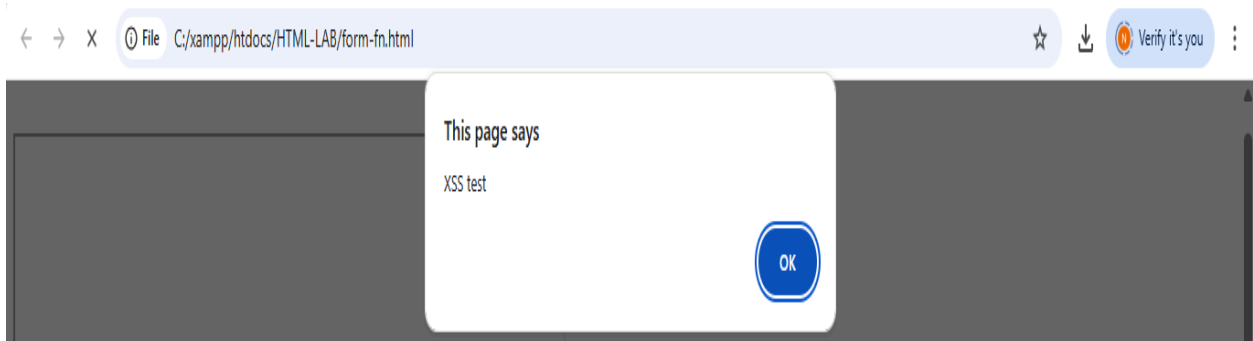

6. <iframe>

The <iframe> tag is an HTML element used to embed another webpage or document inside the current webpage within a rectangular frame.



Content Injection via <iframe>

When a website loads iframe content from a user-controlled or untrusted source, attackers can display malicious pages inside a trusted site.

Example :

```
<iframe src="http://untrusted-site.com/login.html"
        width="400" height="250">
</iframe>
```

Output : The trusted website shows a login page inside the iframe.

Users believe it belongs to the main site and enter usernames and passwords.

Security Impact

- Credentials are sent to the attacker's server
- Phishing occurs inside a legitimate website
- User trust is abused

Why It Works

The browser does not warn users that iframe content comes from another domain.

7. <link> Tag

The <link> tag is an HTML element used to connect external resources, most commonly CSS stylesheets, to an HTML webpage.


```
<link rel="stylesheet" href="style.css">
```

CSS Injection

If the stylesheet URL is controlled by user input or not properly validated, an attacker can inject malicious CSS.

```
<link rel="stylesheet" href="style.css">

```

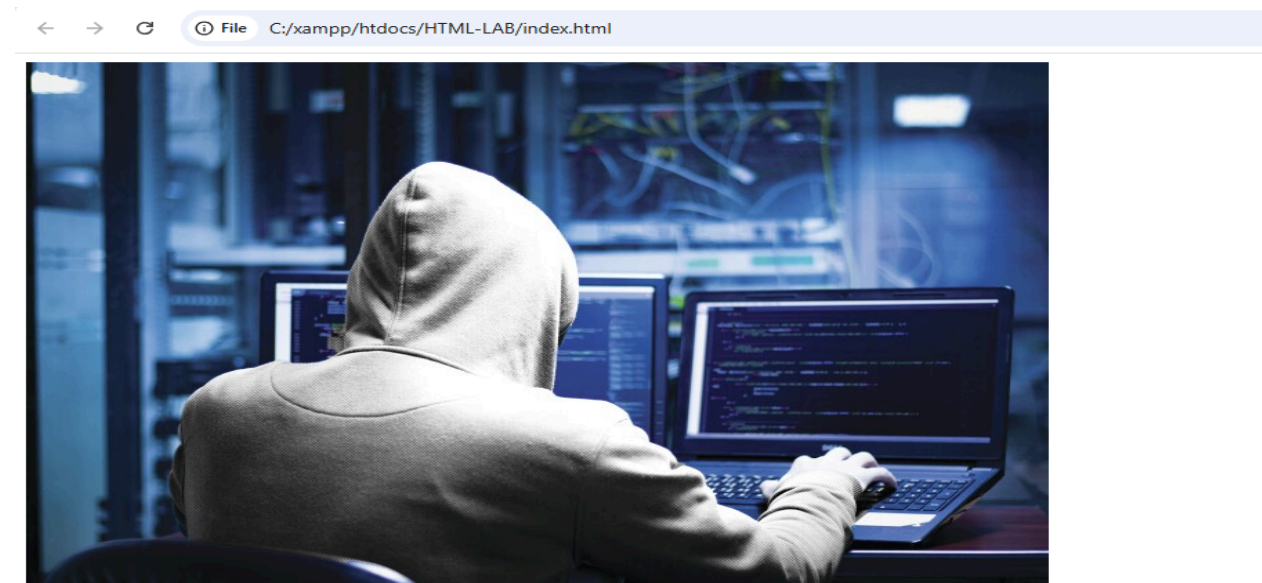

Impact:

Injected CSS can:

- Hide security warnings
- Overlay fake buttons
- Modify page content visually

Result:

Users are tricked into clicking malicious elements.

8. <select> Tag

The **<select>** tag is an HTML element used to create a dropdown list, allowing users to choose one option from multiple predefined values in a form.

```
<form action="/submit" method="POST">

  <input type="text" name="user" placeholder="Enter name"><br><br>

  <input type="password" name="password" placeholder="Enter
password"><br><br>

  <select name="role">

    <option value="user">User</option>


    <option value="admin">Admin</option>

  </select>

  <button>Submit</button>

</form>


```

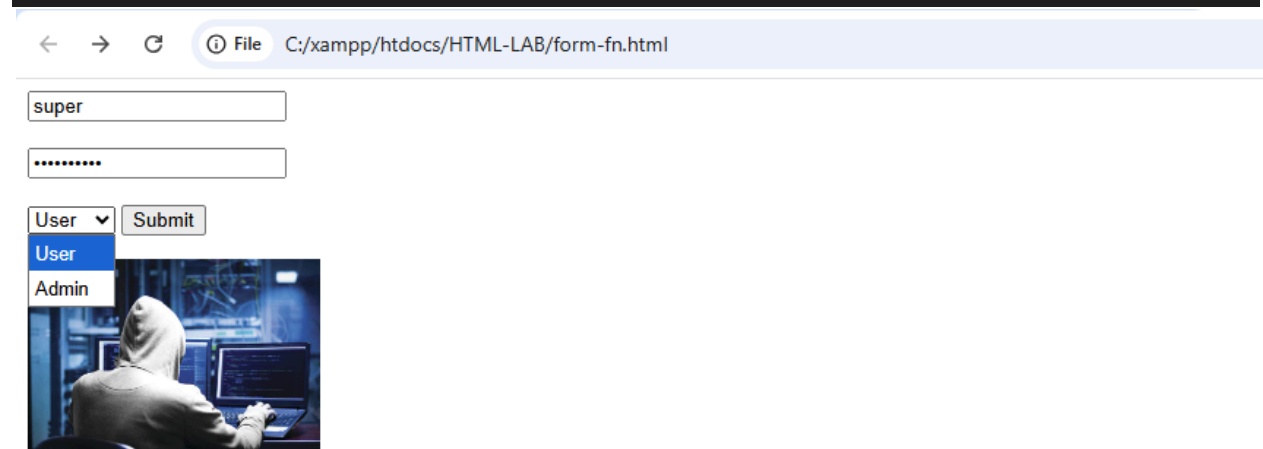

Output

A dropdown appears with **User** and **Admin** options.

The selected value is sent to the server when the form is submitted.