# ENUMERATION

## 1)FTP Port(21):

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script ftp-proftpd-backdoor
.nse
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:16 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00053s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
1099/tcp open  rmiregistry
1524/tcp open  ingreslock
```

```
└─# nmap 192.168.29.80 --script ftp-vsftpd-backdoor.
nse

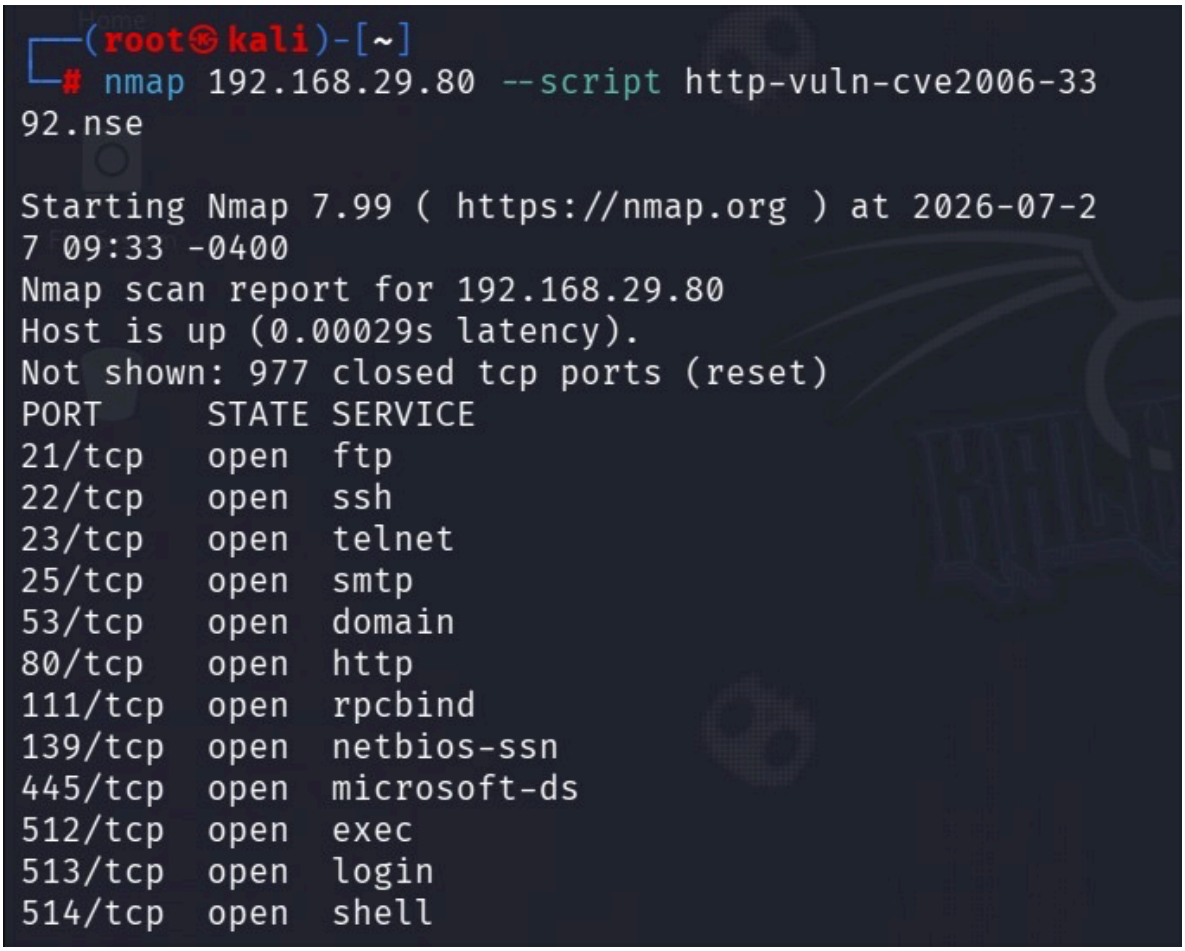
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:16 -0400
Nmap scan report for 192.168.29.80
Host is up (0.0016s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
| ftp-vsftpd-backdoor:
|   VULNERABLE:
|   vsFTPd version 2.3.4 backdoor
|     State: VULNERABLE (Exploitable)
|     IDs:  CVE:CVE-2011-2523  BID:48539
|       vsFTPd version 2.3.4 backdoor, this was repo
rted on 2011-07-04.
|     Disclosure date: 2011-07-03
|     Exploit results:
|       Shell command: id
|       Results: uid=0(root) gid=0(root)
|     References:
|       https://www.securityfocus.com/bid/48539
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script ftp-vuln-cve2010-422
1.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:17 -0400
Nmap scan report for 192.168.29.80
Host is up (0.0010s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
```

**OPEN PORT FTP(21)**

## 2)HTTP PORT(80):



```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2009-3960.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-27 09:35 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00035s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2011-3192.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-27 09:36 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00032s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2009-39
60.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 09:35 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00035s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
1099/tcp open  rmiregistry
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2014-88
77.nse

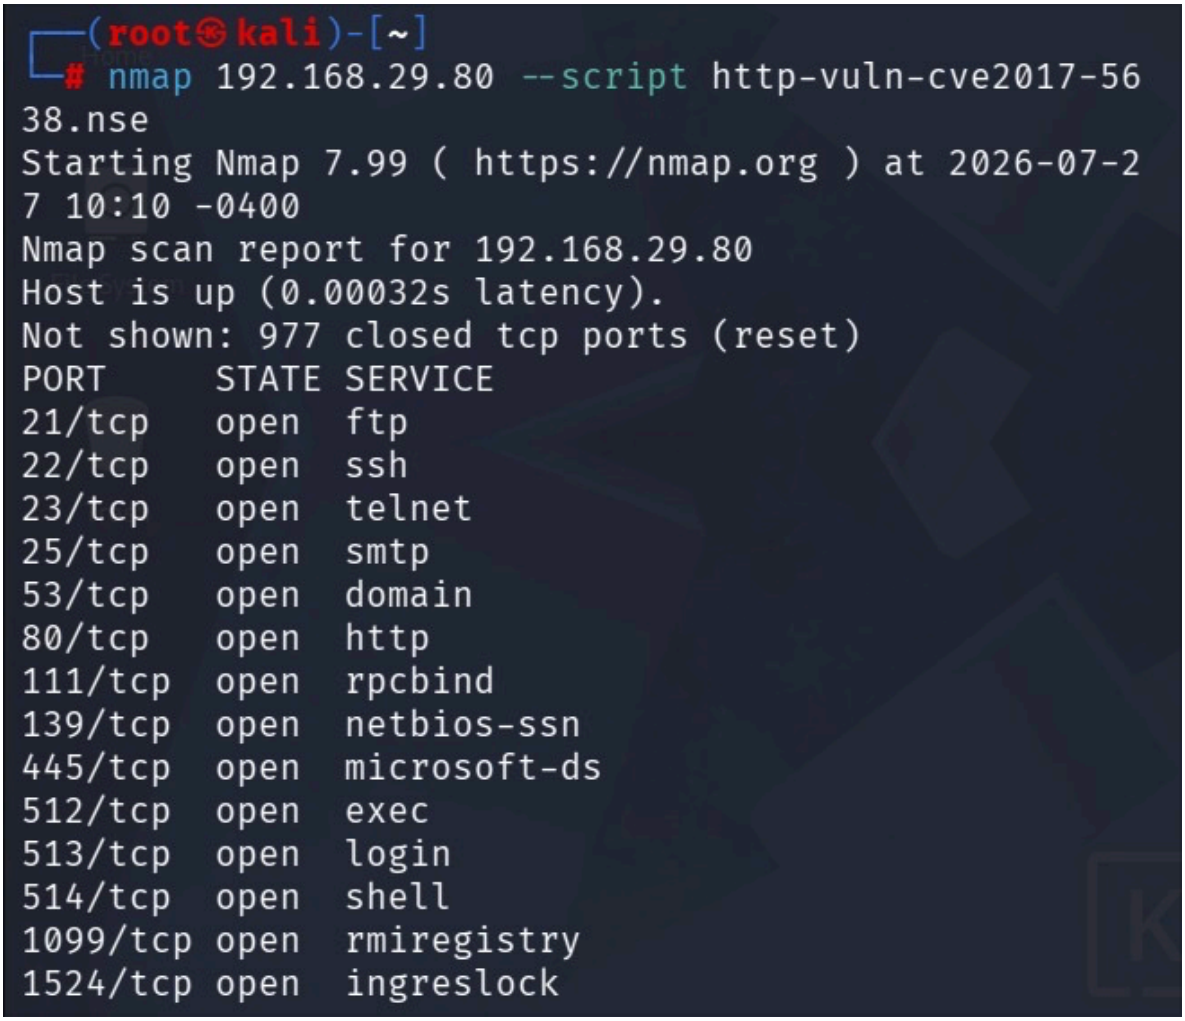
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:08 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00093s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
1099/tcp open  rmiregistry
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2015-14
27.nse

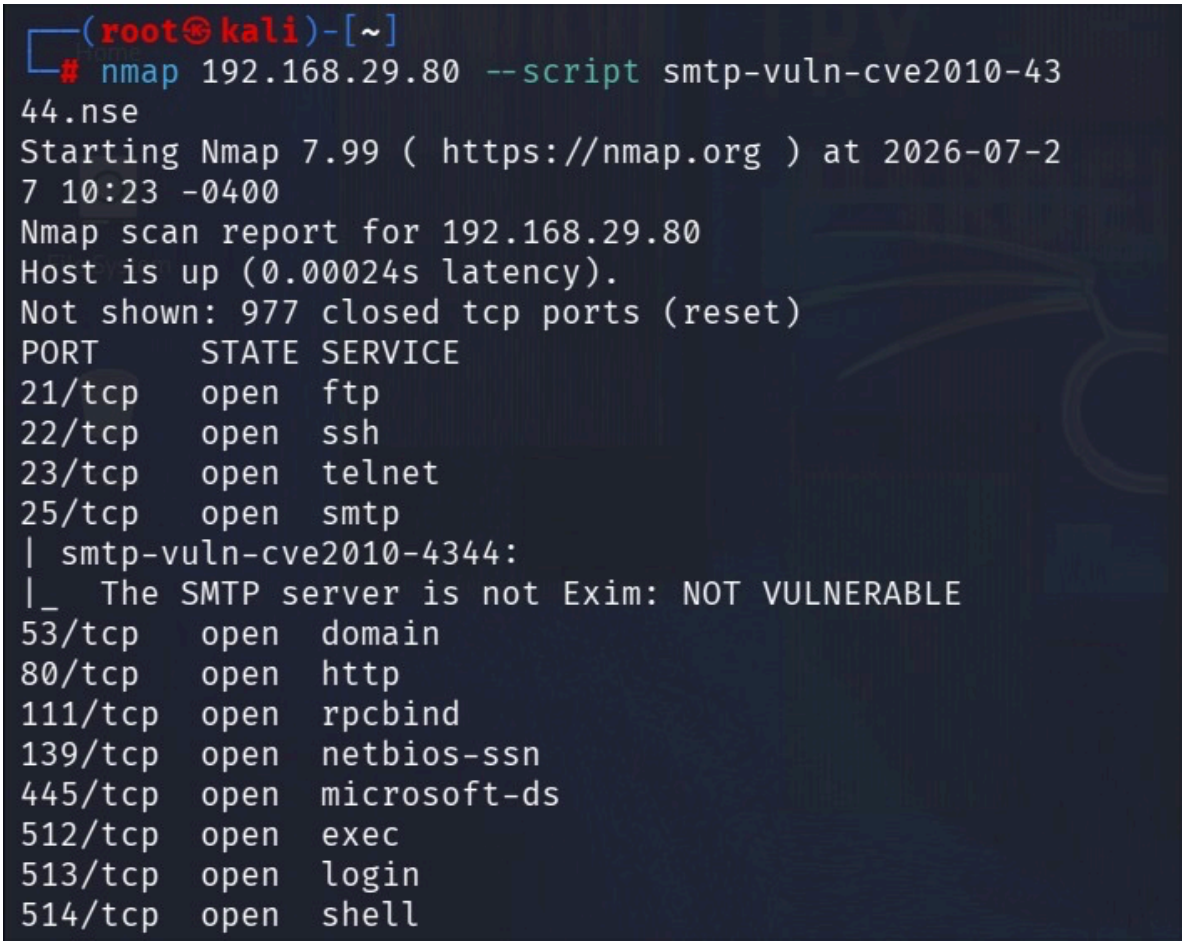
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:09 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00033s latency).
Not shown: 977 closed tcp ports (reset)
PORT    STATE SERVICE
21/tcp  open  ftp
22/tcp  open  ssh
23/tcp  open  telnet
25/tcp  open  smtp
53/tcp  open  domain
80/tcp  open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
```

```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2017-10
01000.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:09 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00036s latency).
Not shown: 977 closed tcp ports (reset)
PORT    STATE SERVICE
21/tcp  open  ftp
22/tcp  open  ssh
23/tcp  open  telnet
25/tcp  open  smtp
53/tcp  open  domain
80/tcp  open  http
|_http-vuln-cve2017-1001000: ERROR: Script execution
 failed (use -d to debug)
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
```


┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script http-vuln-cve2017-5638.nse
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-27 10:10 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00032s latency).
Not shown: 977 closed tcp ports (reset)
PORT STATE SERVICE
21/tcp open ftp
22/tcp open ssh
23/tcp open telnet
25/tcp open smtp
53/tcp open domain
80/tcp open http
111/tcp open rpcbind
139/tcp open netbios-ssn
445/tcp open microsoft-ds
512/tcp open exec
513/tcp open login
514/tcp open shell
1099/tcp open rmiregistry
1524/tcp open ingreslock

## 3)SMTP PORT(25):



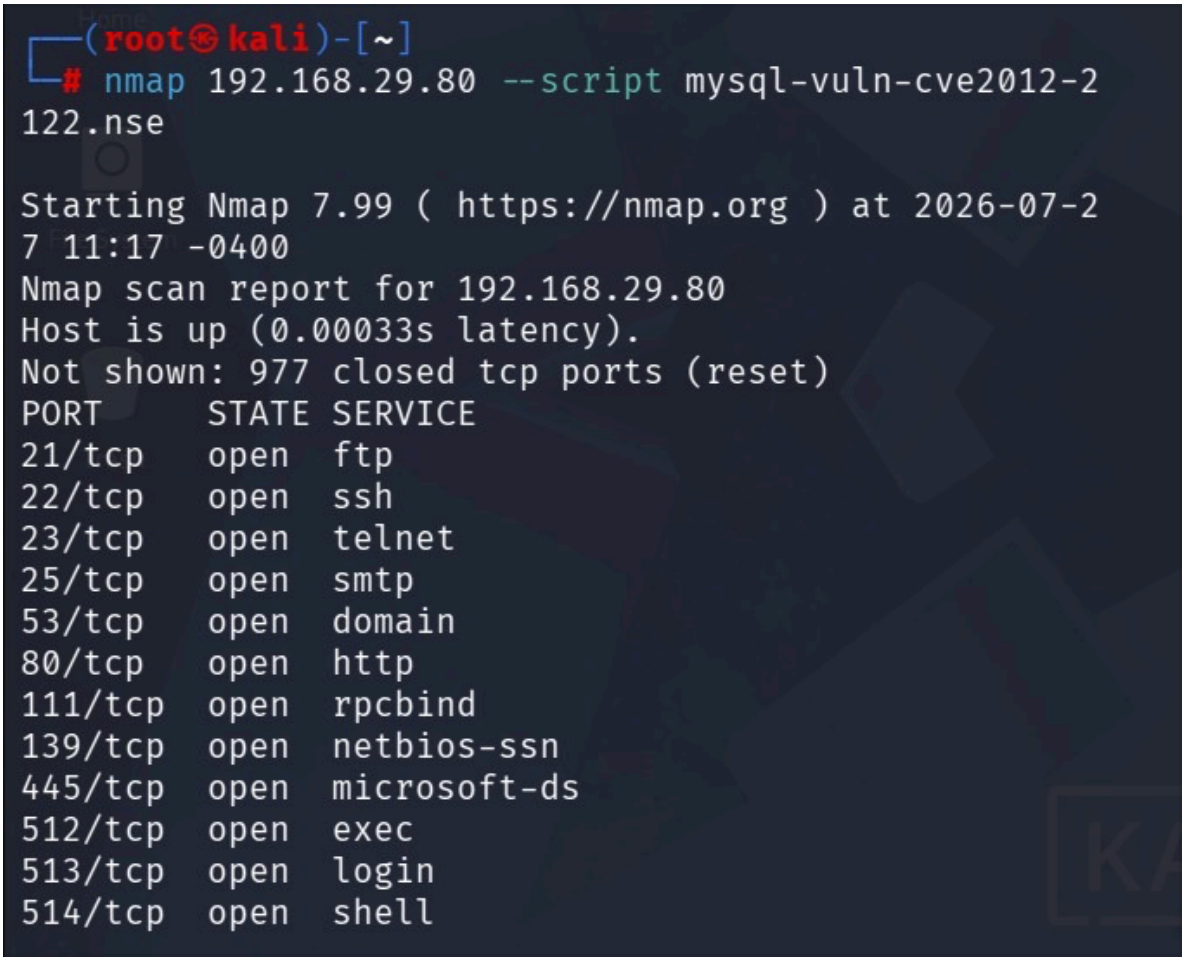
```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script smtp-vuln-cve2011-17
20.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:23 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00028s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
```

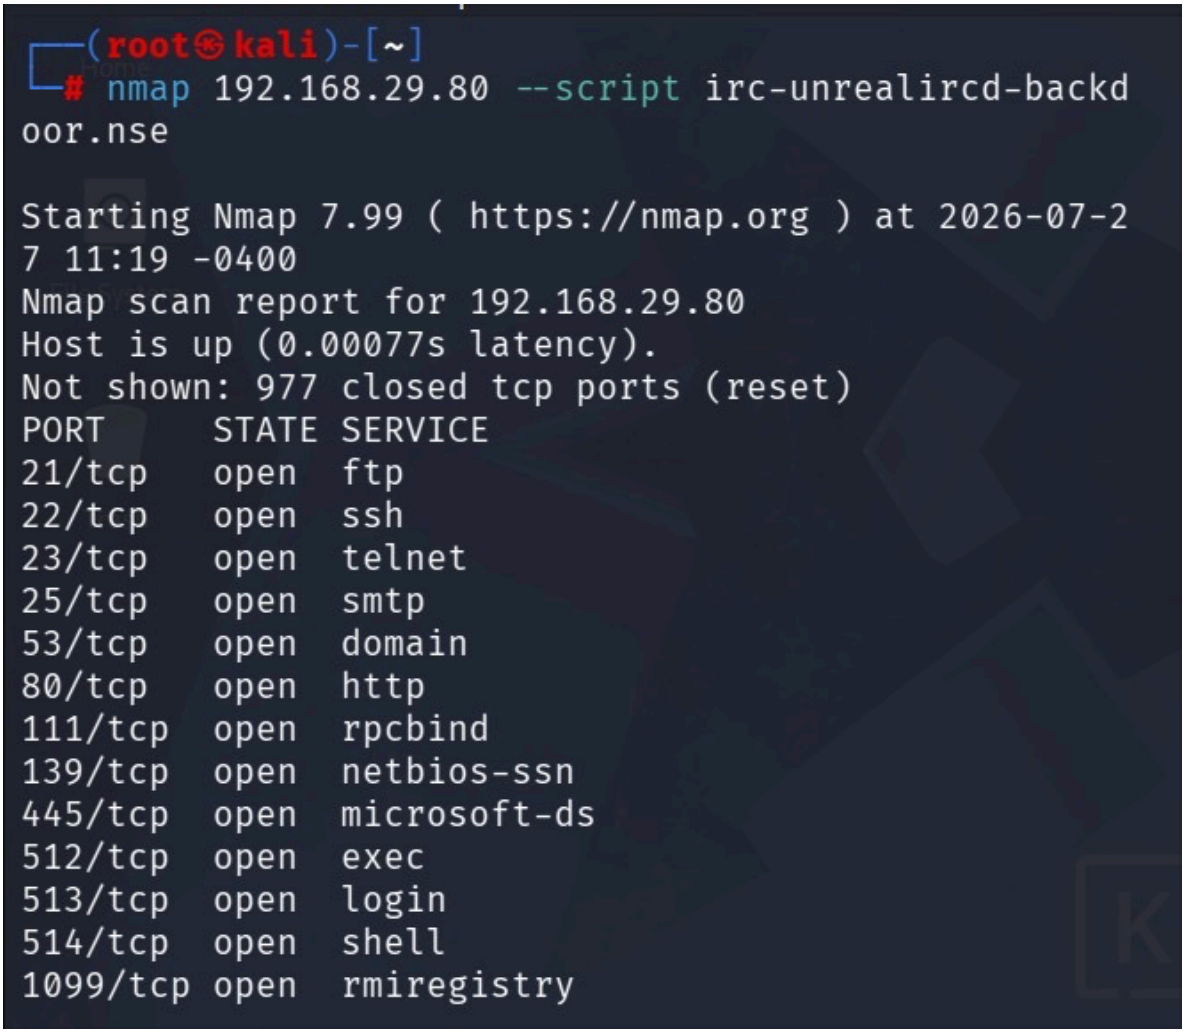
```
┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script smtp-vuln-cve2011-17
64.nse

Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-2
7 10:23 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00033s latency).
Not shown: 977 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
23/tcp   open  telnet
25/tcp   open  smtp
53/tcp   open  domain
80/tcp   open  http
111/tcp  open  rpcbind
139/tcp  open  netbios-ssn
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
```

## 4)MYSQL PORT:


┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script mysql-vuln-cve2012-2122.nse
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-27 11:17 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00033s latency).
Not shown: 977 closed tcp ports (reset)
PORT STATE SERVICE
21/tcp open ftp
22/tcp open ssh
23/tcp open telnet
25/tcp open smtp
53/tcp open domain
80/tcp open http
111/tcp open rpcbind
139/tcp open netbios-ssn
445/tcp open microsoft-ds
512/tcp open exec
513/tcp open login
514/tcp open shell

## 5)IRC PORT:


┌──(root㉿kali)-[~]
└─# nmap 192.168.29.80 --script irc-unrealircd-backdoor.nse
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-27 11:19 -0400
Nmap scan report for 192.168.29.80
Host is up (0.00077s latency).
Not shown: 977 closed tcp ports (reset)
PORT STATE SERVICE
21/tcp open ftp
22/tcp open ssh
23/tcp open telnet
25/tcp open smtp
53/tcp open domain
80/tcp open http
111/tcp open rpcbind
139/tcp open netbios-ssn
445/tcp open microsoft-ds
512/tcp open exec
513/tcp open login
514/tcp open shell
1099/tcp open rmiregistry