


A memory engine inside Locus

Locus handles the conversation. The standalone package handles durable memory, review, retrieval and local persistence.

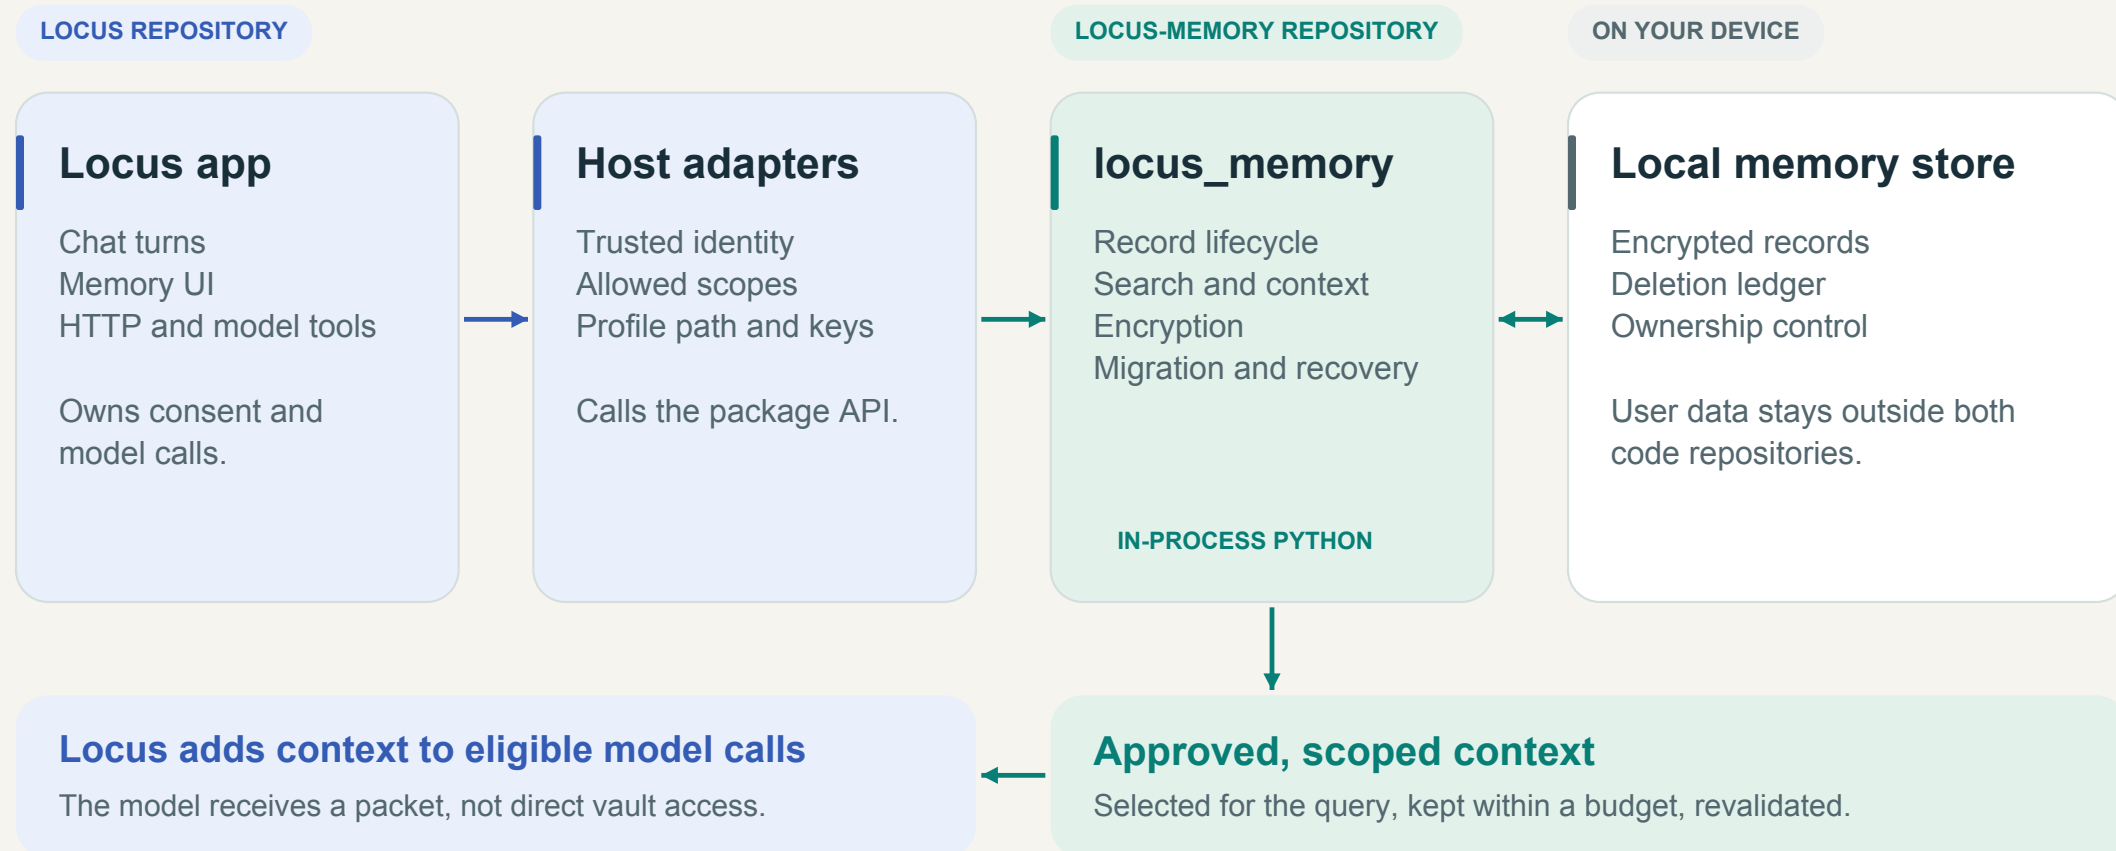


One local runtime. The app imports its bundled engine directly. Memory needs no separate server, cloud account or GitHub connection at launch.

Only reviewed memories enter recall


Agent suggestions wait for user approval. Later, the engine selects only the memories allowed for the current request.

SAVE AND REVIEW

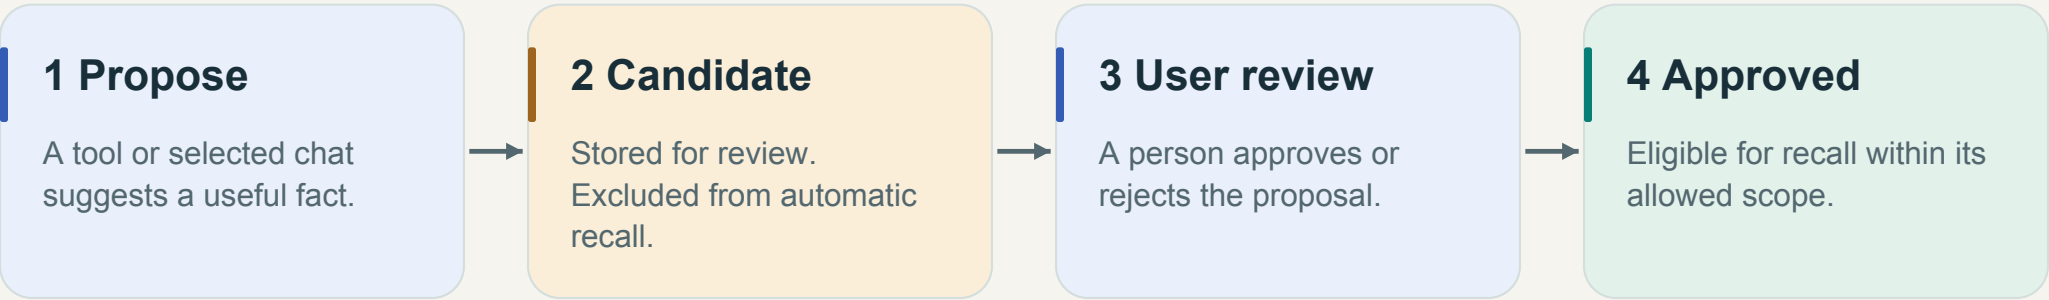

Authorized user-created memories can also be saved directly as approved.

RECALL FOR AN ELIGIBLE CHAT TURN

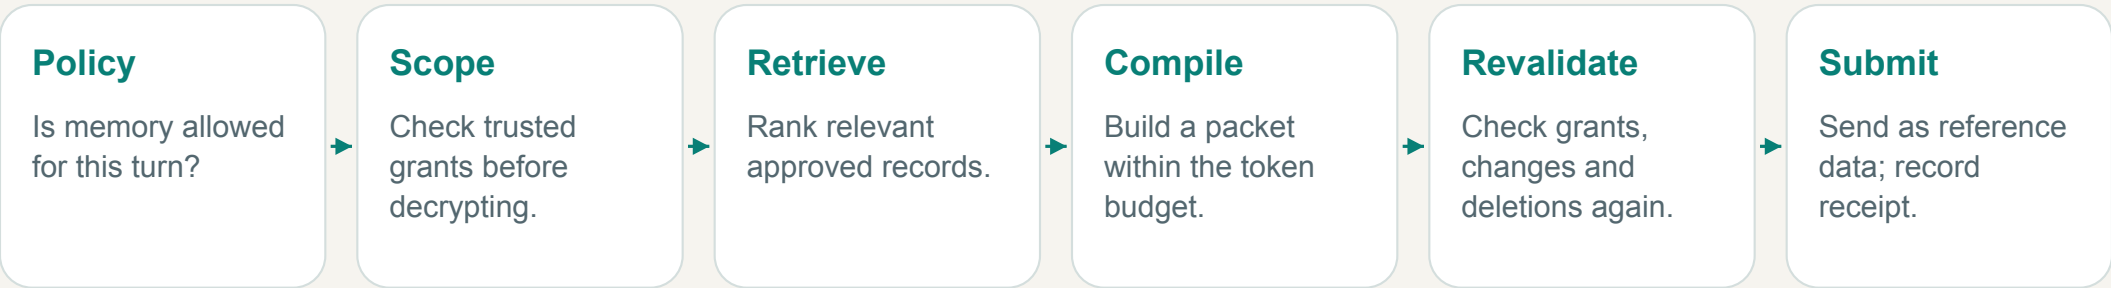

CORRECT OR FORGET

Corrections create revisions. Forgetting records deletion and removes affected data; both invalidate affected context. Text already sent to a provider cannot be recalled.

Eight parts, one reusable package

The package owns memory behavior. Locus supplies application capabilities through explicit adapters and callbacks.

1

Memory API

Create, search, approve, correct, forget and exchange records.

`engine.py` + `compat/`

2

Recall runtime

Coordinate recall, shadow comparison, revalidation and maintenance.

`runtime.py`

3

Retrieval + context

Rank approved records and compile a bounded context packet.

`retrieval/` + `context/`

4

Encrypted storage

Seal payloads, separate partitions and track durable deletion.

`storage/` + `crypto.py`

5

Policy + access

Define recall budgets, scope grants and permitted operations.

`policies.py` + `models.py`

6

Candidate learning

Review selected-chat suggestions; support richer learning APIs.

`learning/`

7

Continuity + history

Compose task context, index saved chats and optionally archive history.

`context/` + `history/`

8

Setup + migration

Initialize fresh stores; snapshot, validate, cut over and roll back.

`bootstrap.py` + `migrations/`

STAYS IN LOCUS

UI and tool routes, user consent, trusted identity, keys, paths, sessions, scheduling and model calls.

0.3.0 source integrates episodes, procedure review, inspector and local embeddings. Tests and release remain deferred.

Where the data lives - and who controls it

Paths shown use the standard Locus profile. Scope checks, host consent and provider policy determine what can be read or sent.

NATIVE ENGINE STORE

`~/.ollama-code/memory-engine/`

Encrypted payloads: records, native history and vectors use AES-256-GCM. Search projections are held in memory.

Ownership control and some metadata remain visible. Locus supplies the key provider; the host key stays in `memory/master.key`.

COMPATIBILITY + HOST FILES

`memory/memory.sqlite3`

Legacy encrypted continuity and observation families; also retained for memory rollback.

`transcript-index.sqlite3`

0.3.0 encrypts the saved-chat cache; FTS stays in RAM. Raw session files remain outside this change.

User

Can approve, correct or forget through authorized Locus routes.

Agent tools

Can read permitted memory and propose candidates. Cannot approve.

Trusted host

Supplies the partition, identity, personal/workspace/agent grants and keys.

THE MODEL BOUNDARY

Memory is lower-priority reference data. Native Codex is opt-in per agent. Provider copies cannot be retracted; macOS Keychain checkpoints detect restored deletion history.

Install once. Move ownership safely.


The released app bundles 0.2.1. The 0.3.0 wheel and app update wait for acceptance checks; completed cutover is preserved.

AUTOMATIC DELIVERY



No setup commands or launch-time code download. Existing stores are never overwritten by fresh initialization. Legacy rollout: shadow compares recall; enabled serves engine context. Neither flag transfers storage ownership.

EXISTING LEGACY PROFILE

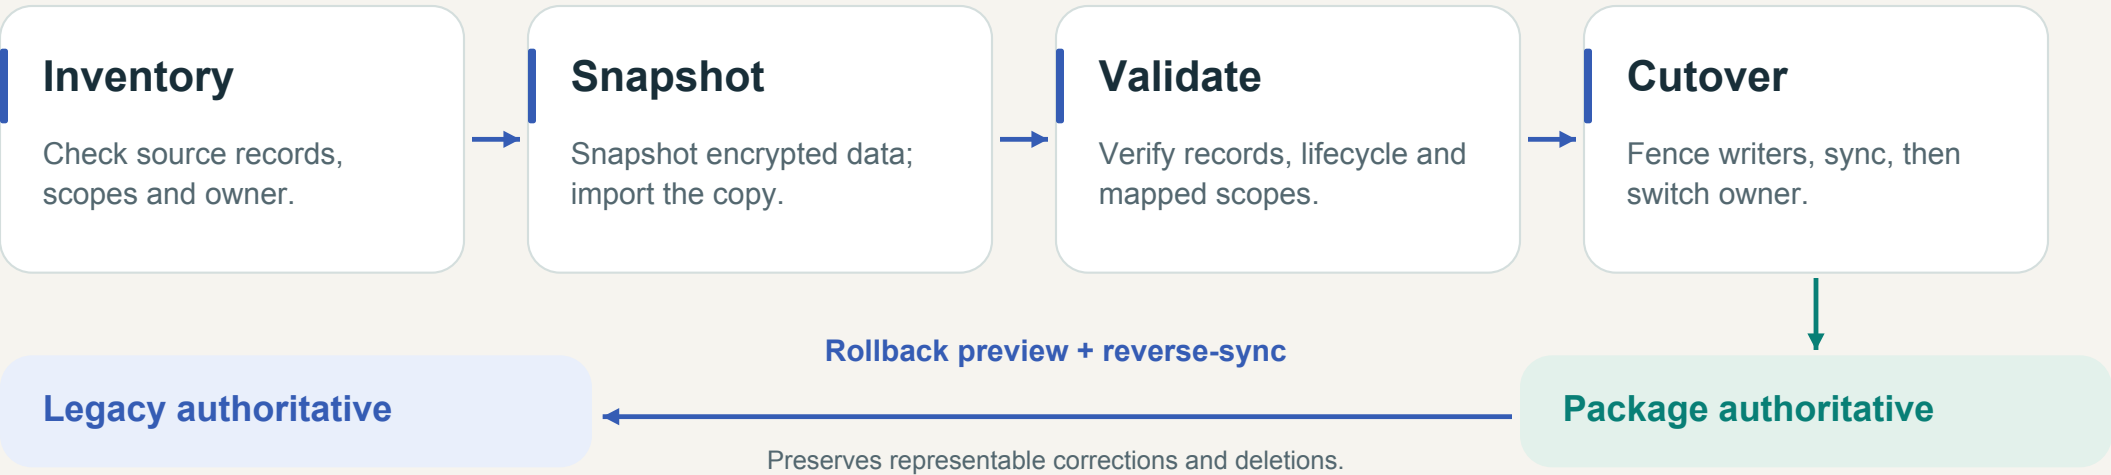

Ownership persists. A rollout flag cannot undo cutover. Legacy continuity families keep their existing format; encrypted transcript archival remains opt-in.

0.2.1 is published. The 0.3.0 update awaits acceptance and the normal Locus application release.

Inspect evidence. Verify before reuse.

Source implementation for 0.3.0. Remaining tests, evaluation reruns and signed-app release are deferred at the user's request.

