Browser worker: paired distances + dictionary contour signatures

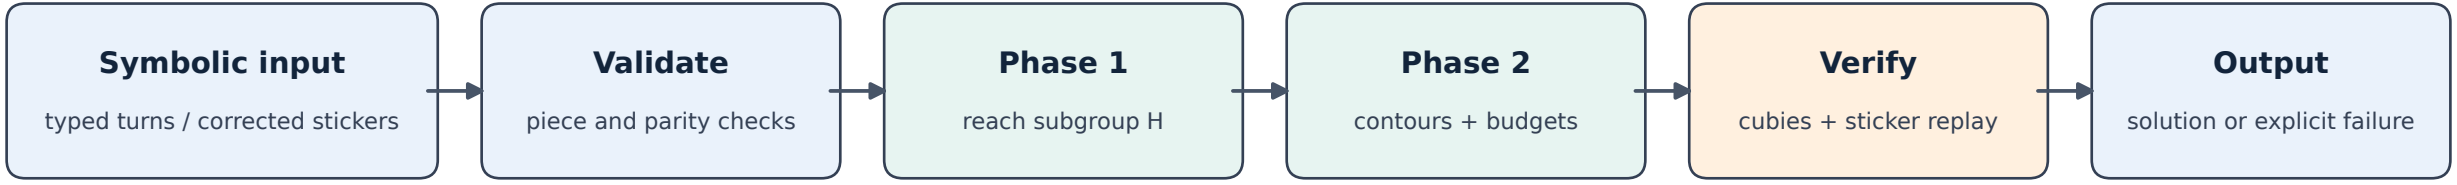

First response uses scalar tables; compilation follows in the worker. Later solves use selective generation.