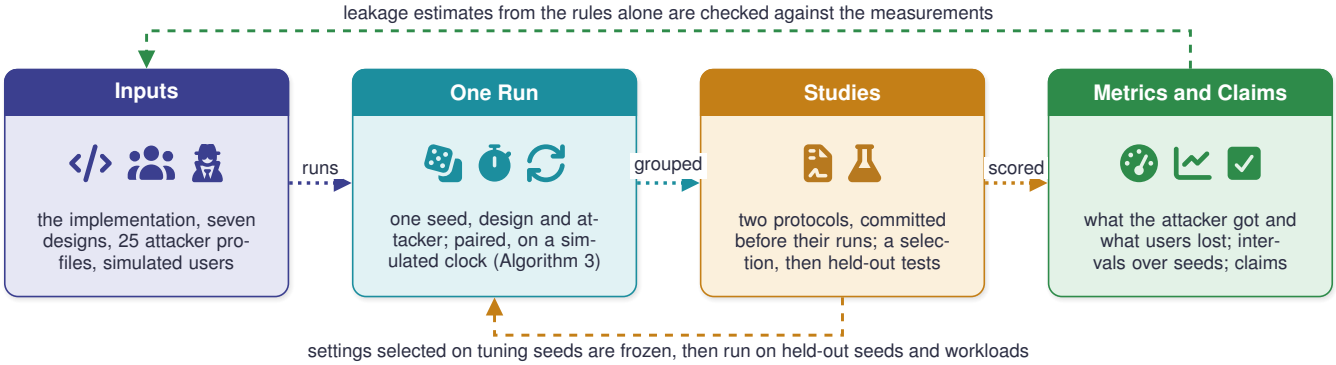
leakage estimates from the rules alone are checked against the measurements
Inputs
the implementation, seven designs, 25 attacker profiles, simulated users
runs
One Run
one seed, design and attacker; paired, on a simulated clock (Algorithm 3)
grouped
Studies
two protocols, committed before their runs; a selection, then held-out tests
scored
Metrics and Claims
what the attacker got and what users lost; intervals over seeds; claims
settings selected on tuning seeds are frozen, then run on held-out seeds and workloads