



BRAND STANDARDS · V1



A calm, structured system built on Cloud Dancer.

Inspired by Cloud Dancer, the color of the year — a soft off-white ground that keeps the app quiet. Regatta carries every primary action; a warm pink flags urgency. A handful of supporting hues handle priority, due dates, and categories. Layout follows a flat, flush-left, zero-radius grid — nothing floats, nothing is decorated.

1 · Color

Core roles first, then the functional colors the todo UI needs — priority, due-date and category signaling.

Core roles

				
Cloud Dancer	Ink	Regatta	Paradise Pink	Surface
#F1EFE8	#201E1D	#4E76AC	#E14459	#F8F6F1
Page background	Primary text	Primary accent — CTAs, links, focus	High priority, destructive	Cards, inputs, panels

Functional roles (todo-specific)

				
Marigold	Kiwi (700)	Alaskan Blue	Iris Orchid	Rinsing Rivulet
#F5820A	#748F2B	#5C93C9	#9C5C90	#3B9C93
Medium priority, due today	Completed, success	Category — Work	Category — Personal	Category — Health

Tonal ramps

Regatta (accent)



Paradise Pink (accent-2)



Neutral (Cloud Dancer based)



100 → 900. Use 100–300 for tinted fills/borders, 500 as base, 700–900 for text on tinted fills.

2 · Typography

One family, Archivo, weight does the work. Headings 800, body 400. Flush left always — never centered.

H1 · 42px · 800

Get things done.

H2 · 32px · 800

Today’s tasks

H3 · 25px · 800

Q3 planning

H4 · 20px · 800

New task

Body · 15px · 400


Renew passport before the trip.

Caption · 12px · 600

DUE TODAY

3 · Spacing & Grid

8px base scale. Radius is 0px everywhere — no rounded corners. Structure comes from 2px rules, not shadows.

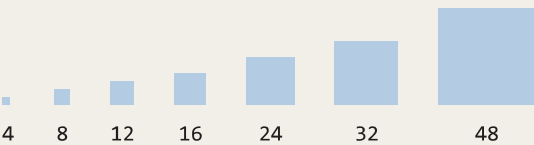

2px rule — section dividers




0px radius — every surface


4 · Components

Standard system components, retoned to your palette. Button labels stay flush left.

Buttons

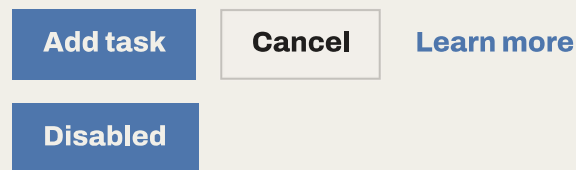


Tags



Form field

Task title

Card

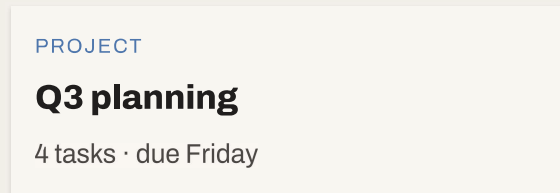

5 · Todo-specific patterns


Priority



Due-date state



Category tags



Checkbox states



6 · Dark mode

Same structure, inverted ground. Accent shifts one ramp step lighter (Regatta 400) to hold contrast on dark.

Today

☐ Ship weekly report Today

7 · Applied — screen mockups

Login

☐ Todo

Log in

Email

you@work.com

Password

.....

Log in

[Forgot password?](#)

☐ Todo

Tasks Projects Settings

CATEGORIES

- Work
- Personal
- Health

Today

+ New task

- ☐ Ship weekly report Today Work
 - ☐ Book dentist appointment Upcoming Personal
 - ☐ Renew gym membership Overdue Health
 - ☐ Review pull request #482 Today Work

8 · Angular setup

Nothing above needs a framework — it's CSS custom properties and plain classes. To wire it into your Angular app:

1. Load Archivo once, globally, in `index.html` : `<link href="https://fonts.googleapis.com/css2?family=Archivo:wght@400;600;800&display=swap" rel="stylesheet">`
2. Paste the token block below into `src/styles.scss` under `:root` — every component can then read `var(--color-accent)` etc. with zero imports. These are your own hex values — free to use, no licensing needed.
3. Copy the component classes from the design system's `styles.css` (buttons, tags, cards, forms, nav) into the same global stylesheet — they're plain CSS, no JS bundle required in production.
4. For dark mode, toggle a `data-theme="dark"` attribute on `<html>` from a small ThemeService and repeat the dark override block scoped to that selector.
5. Keep radius at 0 and use the 2px divider rule for section boundaries in every new Angular component's template — that's what reads as "on-brand" here.

```
:root {
  --color-bg: #F1EFE8;
  --color-surface: #F8F6F1;
  --color-text: #201E1D;
  --color-accent: #4E76AC; /* primary actions, links, focus */
  --color-accent-2: #E14459; /* high priority, destructive */
  --tf-warning: #F5820A; /* due today */
  --tf-success: #748F2B; /* darkened — completed */
  --tf-info: #5C93C9; /* category: Work */
  --tf-purple: #9C5C90; /* category: Personal */
  --tf-teal: #3B9C93; /* category: Health */
  --tf-citron: #B9924A; /* upcoming due date */
  --font-heading: "Archivo", system-ui, sans-serif;
  --font-body: "Archivo", system-ui, sans-serif;
}
```