

DEEP METRIC LEARNING USING TRIPLET NETWORK

Elad Hoffer

Department of Electrical Engineering
 Technion Israel Institute of Technology
`ehoffer@tx.technion.ac.il`

Nir Ailon

Department of Computer Science
 Technion Israel Institute of Technology
`nailon@cs.technion.ac.il`

ABSTRACT

Deep learning has proven itself as a successful set of models for learning useful semantic representations of data. These, however, are mostly implicitly learned as part of a classification task. In this paper we propose the *Triplet network* model, which aims to learn useful representations by distance comparisons. A similar model was defined by Wang et al. (2014), taylored made for learning a ranking for image information retrieval. Here we show that our model learns a better representation than that of its immediate competitor, the Siamese network. We show demonstrate this on various datasets. We also discuss future possible usages as a framework for unsupervised learning.

1 INTRODUCTION

For the past few years, deep learning models have been used extensively to solve various machine learning tasks. One of the underlying assumptions is that deep, hierarchical models such as convolutional networks create useful representation of data (Bengio (2009); Hinton (2007)), which can then be used to distinguish between available classes. This quality is in contrast with traditional approaches requiring engineered features extracted from data and then used in separate learning schemes. Features extracted by deep networks were also shown to provide useful representation (Zeiler & Fergus (2013a); Sermanet et al. (2013)) which can be, in turn, successfully used for other tasks (Razavian et al. (2014)).

Despite their importance, these representations and their corresponding induced metrics are often treated as side effects of the classification task, rather than being explicitly sought. There are also many interesting open question regarding the intermediate representations and their role in disentangling and explaining the data (Bengio (2013)). Notable exceptions where explicit metric learning is preformed are the *Siamese Network* variants (Bromley et al. (1993); Chopra et al. (2005); Hadsell et al. (2006)), in which a contrastive loss over the metric induced by the representation is used to train the network to distinguish between similar and dissimilar *pairs* of examples. A contrastive loss favors a small distance between pairs of examples labeled as similar, and large distances for pairs labeled dissimilar. However, the representations learned by these models provide sub-par results when used as features for classification, compared with other deep learning models including ours. Siamese networks are also sensitive to calibration in the sense that the notion of similarity vs dissimilarity requires context. For example, a person might be similar to another person when a dataset of random objects is provided, but might need to be deemed as a dissimilar object when we wish to distinguish between two individuals in a set of individuals only. In our model, such a calibration is not required. In fact, in our experiments here, we have experienced hands on the difficulty in using Siamese networks, compared to the approach which we present shortly.

We follow a similar task to that of Chechik et al. (2010). For a set of samples \mathbb{P} and a chosen rough similarity measure $r(x, x')$ given through a training oracle (e.g how close are two images of objects semantically) we wish to learn a similarity function $S(x, x')$ induced by a normed metric. Unlike

Chechik et al. (2010)'s work, our labels are of the form $r(x, x_1) > r(x, x_2)$ for triplets x, x_1, x_2 of objects. Accordingly, we try to fit a metric embedding and a corresponding similarity function satisfying:

$$S(x, x_1) > S(x, x_2), \quad \forall x, x_1, x_2 \in \mathbb{P} \text{ for which } r(x, x_1) > r(x, x_2).$$

In our experiment, we try to find a metric embedding of a multi-class labeled dataset. We will always take x_1 to be of the same class as x and x_2 of a different class, although in general more complicated choices could be made. Accordingly, we will use the notation x^+ and x^- instead of x_1, x_2 . We focus on finding an L_2 embedding, by learning a function $F(x)$ for which $S(x, x') = \|F(x) - F(x')\|_2$. Inspired from the recent success of deep learning, we will use a deep network as our embedding function $F(x)$.

We call our approach a *triplet network*. A similar approach was proposed in Wang et al. (2014) for the purpose of learning a ranking function for image retrieval. Compared with the single application proposed in Wang et al. (2014), we make a comprehensive study of the triplet architecture which is, as we shall argue below, interesting in and of itself. In fact, we shall demonstrate below that the triplet approach is a strong competitor to the Siamese approach, its most obvious competitor.

2 THE TRIPLET NETWORK

A *Triplet network* (inspired by "Siamese network") is comprised of 3 instances of the same feed-forward network (with shared parameters). When fed with 3 samples, the network outputs 2 intermediate values - the L_2 distances between the embedded representation of two of its inputs from the representation of the third. If we will denote the 3 inputs as x, x^+ and x^- , and the embedded representation of the network as $Net(x)$, the one-before last layer will be the vector:

$$TripletNet(x, x^-, x^+) = \begin{bmatrix} \|Net(x) - Net(x^-)\|_2 \\ \|Net(x) - Net(x^+)\|_2 \end{bmatrix} \in \mathbb{R}_+^2.$$

In words, this encodes the pair of distances between each of x^+ and x^- against the *reference* x .

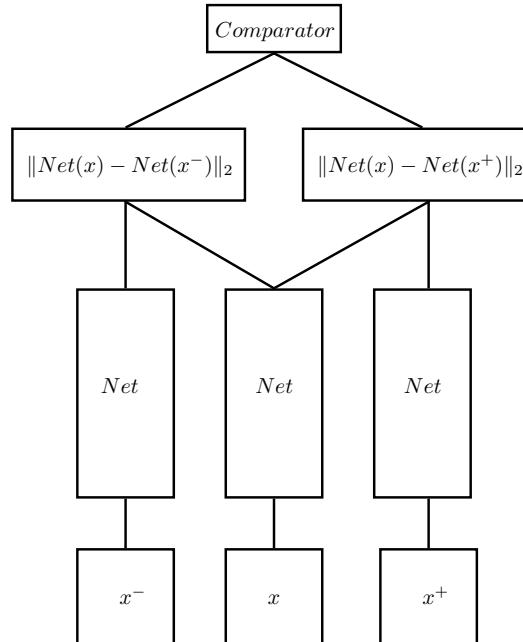


Figure 1: Triplet network structure

2.1 TRAINING

Training is performed by feeding the network with samples where, as explained above, x and x^+ are of the same class, and x^- is of different class. The network architecture allows the task to be expressed as a 2-class classification problem, where the objective is to correctly classify which of x^+ and x^- is of the same class as x . We stress that in a more general setting, where the objective might be to learn a metric embedding, the label determines which example is *closer* to x . Here we simply interpret “closeness” as “sharing the same label”. In order to output a comparison operator from the model, a SoftMax function is applied on both outputs - effectively creating a ratio measure. Similarly to traditional convolutional-networks, training is done by simple SGD on a negative-log-likelihood loss with regard to the 2-class problem. By using the same shared parameters network, we allow the back-propagation algorithm to update the model with regard to all three samples simultaneously.

3 TESTS AND RESULTS

The Triplet network was implemented and trained using the Torch7 environment (Collobert et al. (2011)).

3.1 DATASETS

The Triplet Network was trained on 4 datasets. The first is *Cifar10* (Krizhevsky & Hinton (2009)), consisting of 60000 32x32 color images of 10 classes (of which 50000 are used for training only, and 10000 for test only). The second dataset is the original *MNIST* (LeCun et al. (1998)) consisting of 60000 28x28 gray-scale images of handwritten digits 0-9, and a corresponding set of 10000 test images. Unfortunately we could not use the dataset of the first (as far as we know) work to use an architecture similar to our triplet network, namely that of Wang et al. (2014). We also used the *Street-View-House-Numbers (SVHN)* Netzer et al. which consists of 600,000 32x32 color images of house-number digits 0-9. The fourth dataset is *STL10* Coates et al. (2011) which is similar to Cifar10 and consists of 10 object classes, only with 5000 training images (instead of 50,000 in Cifar) and a bigger 96x96 image size.

No data augmentation or whitening was applied, and the only preprocessing was a global normalization to zero mean and unit variance. Each training instance is a uniformly sampled set of 3 images, 2 of which are of the same class (x and x^+), and the third (x^-) is of a different class. Each training epoch consists of 640,000 such instances (randomly chosen each epoch), and a fixed set of 64,000 instances used for test. We emphasize that each test instance involves 3 images from the set of test images which was excluded from training.

3.2 EMBEDDING NET

The embedding net used is a convolutional network, consisting of 3 convolutional and 2x2 max-pooling layers, followed by a fourth convolutional layer. A *ReLU* non-linearity is applied between two consecutive layers. Network configuration (ordered from input to output) consists of filter sizes {5,3,3,2}, and feature map dimensions {3,64,128,256,128} where a 128 vector is the final embedded representation of the network. Usually in convolutional networks, a subsequent fully-connected layer is used for classification. In our net this layer is removed, as we are interested in a feature embedding only.

This network was used for Cifar and SVHN datasets. The STL 10 network is identical, only with stride=3 for the first layer, to allow the bigger input size. The network used for MNIST was a smaller version consisting of smaller feature map sizes {1,32,64,128}.

3.3 RESULTS

Training is done by SGD, with initial learning-rate of 0.1 that is manually reduced when test accuracy saturates. We used a momentum value of 0.9. We also used the Dropout regularization technique to avoid over-fitting. After training for 30 epochs, the network reached a fixed error of 6% (error is over triplet comparisons). We then used the embedding network to extract features from the full dataset. By using a simple 1-layer network model with these representations, an accuracy of

87.1% on the test set was achieved for the full 10-class classification task. We note that similar results are achieved when classified using a linear SVM model or KNN classification with up to 0.5% deviance from the results in 2. This result is comparable to state-of-the-art results with deep learning models, without using any artificial data augmentation (Zeiler & Fergus (2013b); Goodfellow et al. (2013); Lin et al. (2013)). We conjecture that data augmentation techniques (such as translations, mirroring and noising) may provide similar benefits to those described in previous works. Another side-affect noticed, is that the representation seems to be sparse - about 25% non-zero values. This is very helpful when used later as features for classification both computationally and with respect to accuracy, as each class is characterised by only a few non zero elements.

Dataset	TripletNet	SiameseNet	Best known result (with no data augmentation)
Mnist	99.54%	-	99.61% Mairal et al. (2014); Lee et al. (2014)
Cifar10	87.1%	-	90.22% Lee et al. (2014)
SVHN	95.37%	-	98.18% Lee et al. (2014)
STL10	70.67%	-	67.9% Lin & Kung (2014)

Figure 2: Results on various datasets (no data augmentation)

3.4 2D VISUALIZATION OF FEATURES

In order to examine our main premise, which is that the network embeds the images into a representation with meaningful properties, we use PCA to project the embedding into 2d euclidean space which can be easily visualized (figure 3). We can see a significant clustering by semantic meaning, confirming that the network is useful in embedding images into the euclidean space according to their content. Similarity between objects can be easily found by measuring the distance between their embedding and, as shown in the results, can reach high classification accuracy using a simple subsequent linear classifier.

3.5 COMPARISON WITH PERFORMANCE OF THE SIAMESE NETWORK

The Siamese network is the most obvious competitor for our approach. Our implementation of the Siamese network was as following for MNIST: ??????????????????????. The results were ????????????????????

We have tried a similar comparison for CIFAR10, but unfortunately could not obtain any meaningful result using a Siamese network. We conjecture that this might be related to the problem of context described above, and leave the resolution of this conjecture to future work.

4 FUTURE WORK

As the Triplet net model allows learning by comparisons of samples instead of direct data labels, usage as an unsupervised learning model is possible. Future investigations can be performed in several scenarios:

- **Using spatial information.** Objects and image patches that are spatially near are also expected to be similar from a semantic perspective. Therefore, we could use geometric distance between patches of the same image as a rough similarity oracle $r(x, x')$, in an unsupervised setting.
- **Using temporal information.** The same is applicable to time domain, where two consecutive video frames are expected to describe the same object, while a frame taken 10 minutes later is less likely to do so. Our Triplet net may provide a better embedding and improve on past attempts in solving classification tasks in an unsupervised environment, such as that of (Mobahi et al. (2009)).

It is also well known that humans tend to be better at accurately providing comparative labels. Our framework can be used in a crowd sourcing learning environment. This can be compared with Tamuz et al. (2011), who used a different approach. Furthermore, it may be easier to collect data

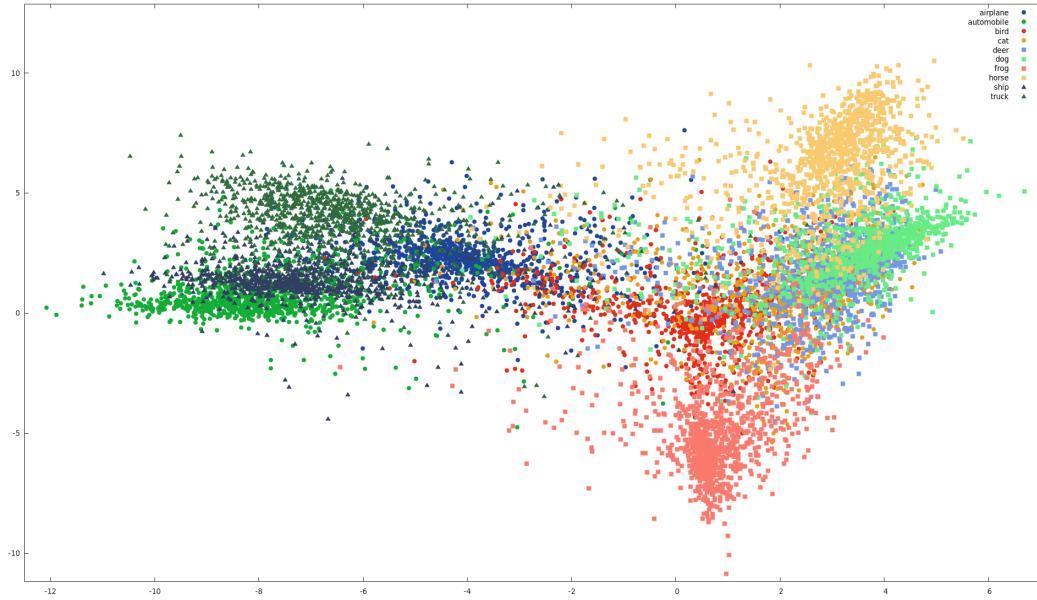


Figure 3: Euclidean 2d representation of embedded test data for CIFAR10

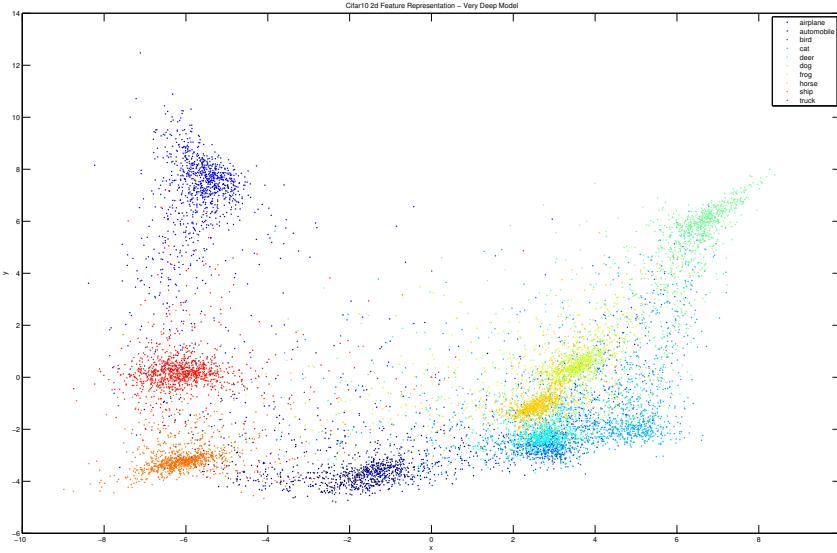


Figure 4: Euclidean 2d representation of embedded test data for CIFAR10

trainable on a Triplet network, as comparisons over similarity measures are much easier to attain (pictures taken at the same location, shared annotations, etc).

5 CONCLUSIONS

In this work we introduced the *Triplet network* model, a tool that uses a deep network to learn useful representations explicitly. The results shown on Cifar10 provide evidence that the representations that were learned are useful to classification in a way that is comparable with a network that was trained

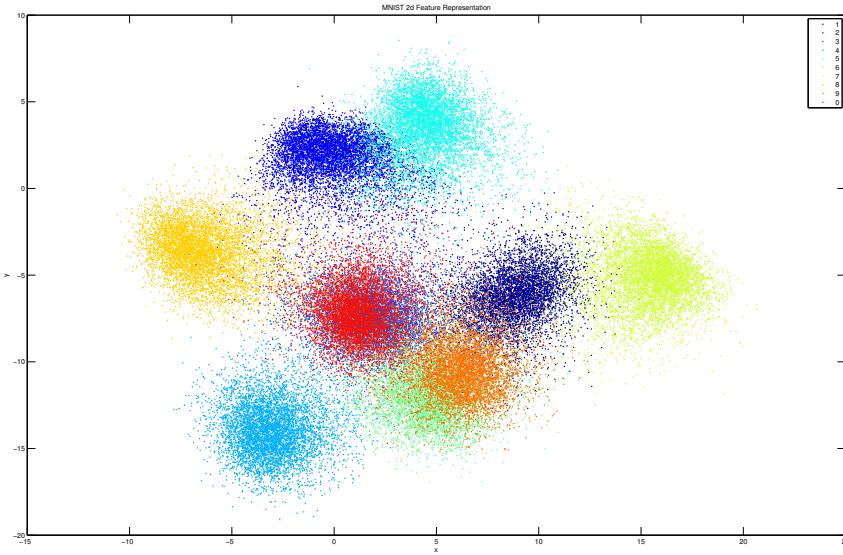


Figure 5: Euclidean 2d representation of embedded test data for MNIST

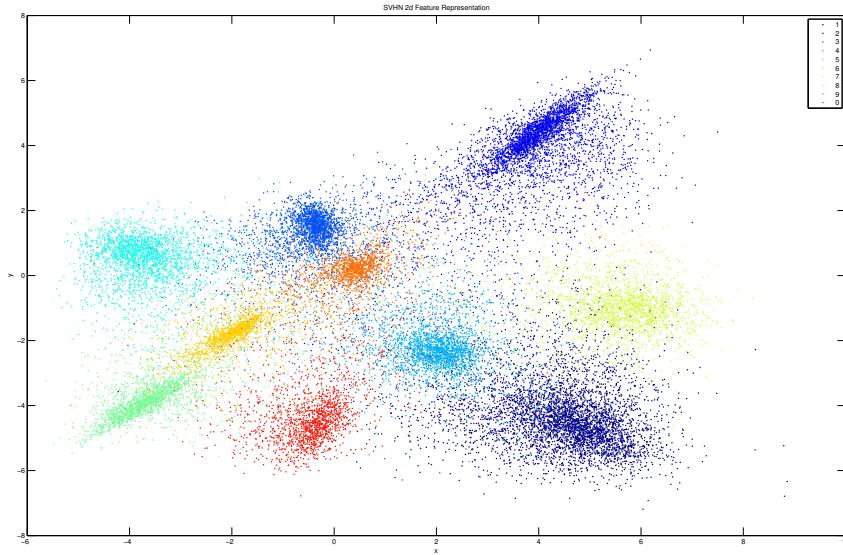


Figure 6: Euclidean 2d representation of embedded test data for SVHN

explicitly to classify samples. We believe that enhancement to the embedding network such as Network-in-Network model (Lin et al. (2013)), Inception models (Szegedy et al. (2014)) and others can benefit the Triplet net similarly to the way they benefited other classification tasks. Considering the fact that this method requires to know only that two out of three images are sampled from the same class, rather than knowing what that class is, we think this should be inquired further, and may provide us insights to the way deep networks learn in general. We have also shown how this model learns using only comparative measures instead of labels, which we can use in the future to leverage

new data sources for which clear out labels are not known or do not make sense (e.g hierarchical labels).

ACKNOWLEDGMENTS

We gratefully acknowledge the support of NVIDIA Corporation with the donation of the Titan-Z GPU used for this research.

REFERENCES

- Bengio, Yoshua. Learning Deep Architectures for AI, 2009. ISSN 1935-8237.
- Bengio, Yoshua. Deep learning of representations: Looking forward. In *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, volume 7978 LNAI, pp. 1–37, 2013. ISBN 9783642395925. doi: 10.1007/978-3-642-39593-2_1.
- Bromley, Jane, Bentz, James W, Bottou, Léon, Guyon, Isabelle, LeCun, Yann, Moore, Cliff, Säckinger, Eduard, and Shah, Roopak. Signature verification using a siamese time delay neural network. *International Journal of Pattern Recognition and Artificial Intelligence*, 7(04):669–688, 1993.
- Chechik, Gal, Sharma, Varun, Shalit, Uri, and Bengio, Samy. Large scale online learning of image similarity through ranking. *The Journal of Machine Learning Research*, 11:1109–1135, 2010.
- Chopra, Sumit, Hadsell, Raia, and LeCun, Yann. Learning a similarity metric discriminatively, with application to face verification. In *Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, volume 1, pp. 539–546, 2005. ISBN 0769523722. doi: 10.1109/CVPR.2005.202.
- Coates, Adam, Ng, Andrew Y, and Lee, Honglak. An analysis of single-layer networks in unsupervised feature learning. In *International Conference on Artificial Intelligence and Statistics*, pp. 215–223, 2011.
- Collobert, Ronan, Kavukcuoglu, Koray, and Farabet, Clément. Torch7: A matlab-like environment for machine learning. In *BigLearn, NIPS Workshop*, number EPFL-CONF-192376, 2011.
- Goodfellow, Ian J, Warde-Farley, David, Mirza, Mehdi, Courville, Aaron, and Bengio, Yoshua. Maxout networks. *arXiv preprint arXiv:1302.4389*, 2013.
- Hadsell, Raia, Chopra, Sumit, and LeCun, Yann. Dimensionality reduction by learning an invariant mapping. In *Computer vision and pattern recognition, 2006 IEEE computer society conference on*, volume 2, pp. 1735–1742. IEEE, 2006.
- Hinton, Geoffrey E. Learning multiple layers of representation, 2007. ISSN 13646613.
- Krizhevsky, Alex and Hinton, Geoffrey. Learning multiple layers of features from tiny images. *Computer Science Department, University of Toronto, Tech. Rep*, 2009.
- LeCun, Yann, Bottou, Léon, Bengio, Yoshua, and Haffner, Patrick. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- Lee, Chen-Yu, Xie, Saining, Gallagher, Patrick, Zhang, Zhengyou, and Tu, Zhuowen. Deeply-supervised nets. *arXiv preprint arXiv:1409.5185*, 2014.
- Lin, Min, Chen, Qiang, and Yan, Shuicheng. Network in network. *CoRR*, abs/1312.4400, 2013. URL <http://arxiv.org/abs/1312.4400>.
- Lin, Tsung-Han and Kung, HT. Stable and efficient representation learning with nonnegativity constraints. In *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, pp. 1323–1331, 2014.
- Mairal, Julien, Koniusz, Piotr, Harchaoui, Zaid, and Schmid, Cordelia. Convolutional kernel networks. In *Advances in Neural Information Processing Systems*, pp. 2627–2635, 2014.

- Mobahi, Hossein, Collobert, Ronan, and Weston, Jason. Deep learning from temporal coherence in video. In *Proceedings of the 26th Annual International Conference on Machine Learning*, pp. 737–744. ACM, 2009.
- Netzer, Yuval, Wang, Tao, Coates, Adam, Bissacco, Alessandro, Wu, Bo, and Ng, Andrew Y. Reading digits in natural images with unsupervised feature learning.
- Razavian, Ali Sharif, Azizpour, Hossein, Sullivan, Josephine, and Carlsson, Stefan. CNN Features off-the-shelf: an Astounding Baseline for Recognition. *Arxiv*, 2014. URL <http://arxiv.org/abs/1403.6382>.
- Sermanet, Pierre, Eigen, David, Zhang, Xiang, Mathieu, Michael, Fergus, Rob, and LeCun, Yann. OverFeat : Integrated Recognition , Localization and Detection using Convolutional Networks. *arXiv preprint arXiv:1312.6229*, pp. 1–15, 2013. URL <http://arxiv.org/abs/1312.6229>.
- Szegedy, Christian, Liu, Wei, Jia, Yangqing, Sermanet, Pierre, Reed, Scott, Anguelov, Dragomir, Erhan, Dumitru, Vanhoucke, Vincent, and Rabinovich, Andrew. Going deeper with convolutions. *CoRR*, abs/1409.4842, 2014. URL <http://arxiv.org/abs/1409.4842>.
- Tamuz, Omer, Liu, Ce, Belongie, Serge, Shamir, Ohad, and Kalai, Adam. Adaptively learning the crowd kernel. In Getoor, Lise and Scheffer, Tobias (eds.), *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, ICML ’11, pp. 673–680, New York, NY, USA, June 2011. ACM. ISBN 978-1-4503-0619-5.
- Wang, Jiang, Song, Yang, Leung, Thomas, Rosenberg, Chuck, Wang, Jingbin, Philbin, James, Chen, Bo, and Wu, Ying. Learning fine-grained image similarity with deep ranking. In *CVPR*, 2014.
- Zeiler, Matthew D and Fergus, Rob. Visualizing and Understanding Convolutional Networks. *arXiv preprint arXiv:1311.2901*, 2013a. URL <http://arxiv.org/abs/1311.2901>.
- Zeiler, Matthew D and Fergus, Rob. Stochastic pooling for regularization of deep convolutional neural networks. *arXiv preprint arXiv:1301.3557*, 2013b.