

A Handwriting Analysis and Feedback Platform

Computer Science NEA

Name: Nathan Sconcia
Candidate Number: 7336

Centre Name: Barton Peveril College
Centre Number: 58231

Contents

1	Analysis	4
1.1	Statement of Problem	4
1.2	Background	4
1.3	End User	4
1.4	Initial Research	5
1.4.1	Existing Programs	5
1.4.2	Potential Algorithms	9
1.4.3	First Interview	11
1.4.4	Key Requirements	14
1.5	Further Research	16
1.5.1	Prototype	16
1.5.2	Second Interview	17
1.6	Objectives	19
1.6.1	Core Objectives	19
1.6.2	Extension Objectives	21
1.7	Modelling	22
1.7.1	Class Diagrams	22
1.7.2	Flowcharts	23
1.7.3	Entity-Relationship Diagram	25
1.7.4	Neural Network	26
1.7.5	Client-Server Connection	29
1.7.6	Player Ranking	29
2	Design	31
2.1	High-level Overview	31
2.2	Choice of Language and Libraries	32
	Server Design	
2.3	Neural Network	33
2.3.1	Forward Propagation	33
2.3.2	Data Structures	35
2.3.3	Backpropagation	36
2.3.4	Image Preprocessing	39
2.3.5	Training	40
2.3.6	File Organisation	40
2.3.7	UML Diagrams	41
2.4	Games	41
2.4.1	Queueing	42
2.4.2	Game Logic	43
2.4.3	Data structures	46
2.4.4	Object-Oriented Design	47
2.5	Database	48
2.5.1	Database Design	49
2.5.2	UML Diagram	49
2.5.3	SQL Queries	50
2.5.4	Security of Data	51
2.6	Client-Server Connection	51
2.6.1	Server Configuration	52
2.6.2	UML Diagrams	52
2.7	Object-Oriented Design	53
2.7.1	Class Diagram	54

Client Design	
2.8 Client Menus	55
2.8.1 Accounts	55
2.8.2 User Information	57
2.8.3 Profiles	57
2.8.4 UML Diagrams	58
2.9 Games	59
2.9.1 Queueing	60
2.9.2 Game Logic	60
2.9.3 UML Diagrams	63
2.10 UI Design	63
2.10.1 Accounts Page	64
2.10.2 Home Page	65
2.10.3 Profile	67
2.10.4 Games	68
2.11 Object-Oriented Design	70
2.11.1 Class Diagrams	70
2.12 Client-Server Connection	71
2.12.1 Creating a Connection	72
2.12.2 Connection Handlers	72
2.12.3 Starting a Connection	72
2.12.4 Handling Connection Loss	72
3 Testing	73
3.1 Testing	73
3.1.1 Accounts	73
3.1.2 Games	74
3.1.3 Neural Network	78
3.1.4 Social	81
3.1.5 Client-Server Connection	83
3.2 Analysis of Testing	84
4 Evaluation	86
4.1 Overall Effectiveness of the System	86
4.2 Evaluation of Objectives	86
4.2.1 Core Objectives	86
4.2.2 Extension Objectives	88
4.3 End User Feedback	89
4.3.1 Feedback	89
4.3.2 Analysis	89
4.4 System Improvements	90
4.4.1 Client-Server Connection	90
4.4.2 User Interface	90
4.4.3 Database Design	91
4.4.4 Spaced Repetition	92
5 Technical Solution	95
5.1 Contents	95
5.2 Code	97
5.2.1 Server	97
5.2.2 Client	146
5.3 References	223

1 Analysis

1.1 Statement of Problem

Since the beginning of the Internet, people all over the world have become more connected to one another; now more than ever. The dominant factor limiting this change has always been the language barriers. Many people have chosen to adopt English as a second language, however the resources available for learning English can be deprived in some areas. While being fluent in conversation is essential, being able to write in the Latin script can be considered just as important. Professions such as Air Traffic Control (ATC) often use English as a universal language. Especially in the case of ATC, an ability to write in English is mandatory, hence the need for an enjoyable and simple way to learn.

1.2 Background

The English language uses the Latin script, common throughout many European languages. However there are over 200 writing scripts across the globe, such as Hiragana (Japanese) and Arabic (Persian, Urdu). People whose first language uses these scripts can have difficulty learning the Latin script, and the opposite also applies: Europeans can have difficulty learning Kanji.

Learning a new script is not as simple as memorising the characters—it requires hours of practice to build muscle memory. Therefore a way to consistently practise the Latin script in an enjoyable way is essential for anyone learning English.

Muscle memory is defined as “the ability to reproduce a particular movement without conscious thought, acquired as a result of frequent repetition of that movement”. Source: Oxford Languages

1.3 End User

This program is being developed for people at various stages of learning to write in English. It will allow beginners to build the necessary muscle memory for writing, and help those more familiar with the Latin script to improve their fluency.

The end user I have selected is a student web developer from India who goes by “Koko”. I have contact with them through Discord and they are frequently available, hence suitable as an end user for this project. As their first language was Hindi, learning to write in English is something they have experienced first-hand. Therefore they can provide me with information on how learning to write in the Latin script can be made easier.

1.4 Initial Research

1.4.1 Existing Programs

Duolingo

One application which attempts to solve this issue is the well-known mobile app, Duolingo. Duolingo covers all aspects of language learning, offering free lessons for over 40 languages. In particular, their writing activities are of interest as my solution aims to utilise a similar method to solve the problem outlined in Objective 1.1.

In Japanese, Duolingo has three different ways of teaching users how to write the Hiragana characters. These become progressively more challenging and require more muscle memory for the harder types. Shown in Figure 1 is an example of the first type: the user is given an outline of the character and follows the arrows to write the character. The line drawn will snap to the outline to make it easier for the user.

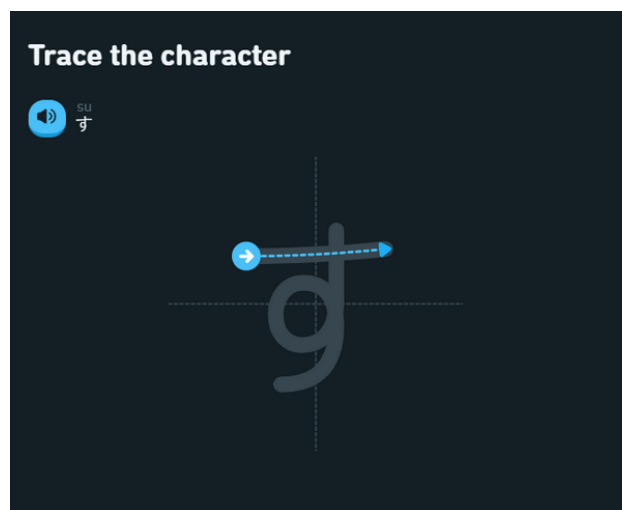


Figure 1: Duolingo's first type of writing exercise

The second type is similar to the first, except the snapping feature is disabled so the task is now freehand. Figure 2 is an example of how this freehand can present some issues in how an algorithm will evaluate the accuracy of the submission.

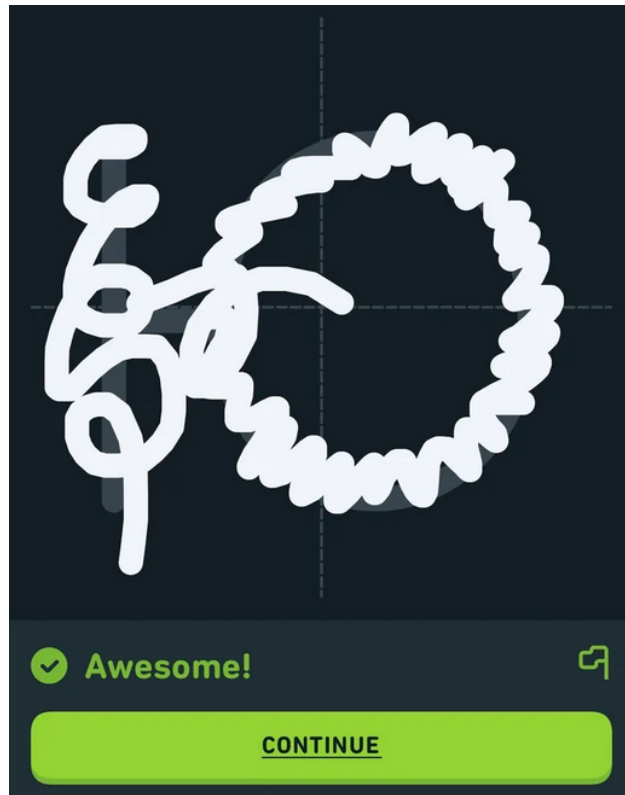


Figure 2: User is given a false positive

The third type has no outline and is completely freehand. Sometimes, Duolingo will give the user a ‘Hard’ task, in which they will not be given any reference of the character and instead hear it as an outputted sound.

The system is very intuitive, and I had very little trouble using it. Occasionally the snapping present in the first type of exercise would cause some issues with the pen following my touch. In addition, the algorithm to evaluate the user’s submission is too lenient in some cases. However the app encouraged me to practice daily by sending notifications, so a user could definitely learn something in a short amount of time. The application also had a dedicated writing section for the Japanese language, which showed the user their progression in learning all the Hiragana characters.

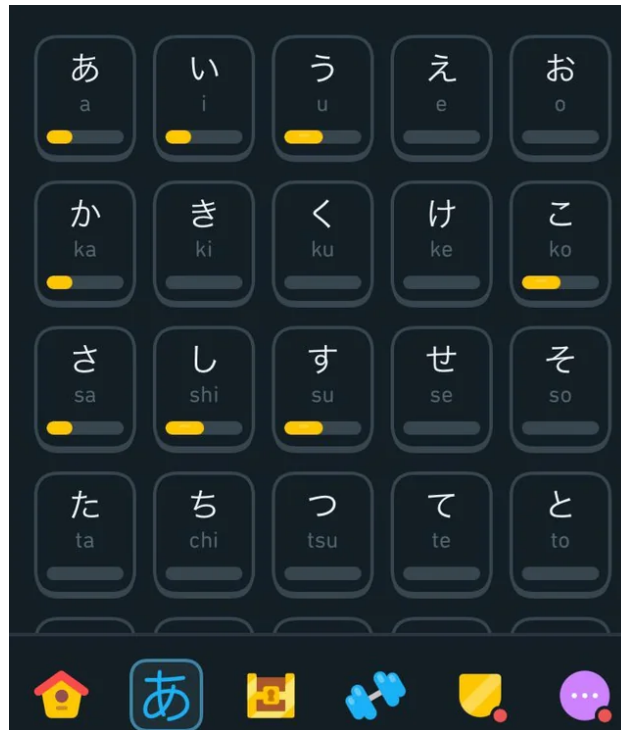


Figure 3: Progress for the Hiragana characters

Write It!

Another app which is used to teach users how to write a foreign script is Write It! This app is more dedicated to writing the actual script used by the language, rather than covering all aspects of the language like Duolingo does.

As shown in Figure 3, the app splits characters up into different sections, so the user can focus on one set at a time. This means the user has a clear indication of their progress throughout using the app. A practice section is also available in the second tab where the user can choose a specific character to focus on.

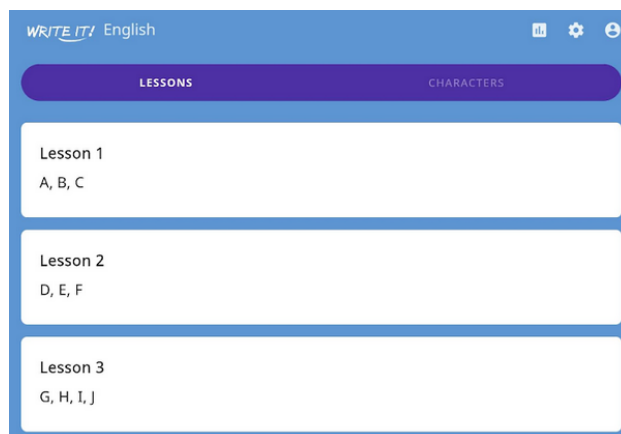


Figure 4: Some of the available lessons in Write It!

The app presents two different ways of teaching the characters, similar to Duolingo. The first way is through

tracing an outline of the character as seen in Figure 4. The difference between this and Duolingo is that the tracing is always freehand. However once the user has completed a stroke it automatically snaps to where it should be.

The second type of activity is where you cannot see the outline of the character. You are still given its shape at the top, but must draw it without the outline guide. Snapping is still enabled once the stroke has been completed.



Figure 5: Example of a writing task on Write It!

A major issue with this app is that it requires a particular stroke order for letters, some of which are unintuitive. This means the user must memorise the app’s chosen stroke order, which is not something required to write some scripts. On the contrary, it is a simple app which anyone could figure out how to use with ease.

As a test for its effectiveness in learning, I downloaded the Japanese version of the app and spent a week using it. Quite quickly I noticed that it was being far too lenient with the accuracy of my strokes, similar to Duolingo. I ended up developing incorrect muscle memory because the app would correct any minor mistakes instead of marking them as wrong. In addition, I didn’t find it to be helping with fluent writing, and only aided in memorising the general strokes. This may have been due to the device I was using it on: a 12.5-inch tablet. This meant I was writing the characters much larger than normal handwriting. Of course a mobile phone would provide a better scaling, but many phones do not have a touch pen, so users must use their fingers. This of course does not help in developing muscle memory when using a physical pen. However after a week I did find it had been rather effective: I was able to write every character in the Hiragana script from the sound input alone. Considering this, it would suggest the app is more useful in teaching the users the characters. Building fluency and consistency appears to not be a goal; it is instead left to the user to achieve through their own practice.

Both of these apps have clear indications of the user’s progress, so it is important in the solution to store detailed information for each user. Furthermore both apps have a “practice mode” for studying, clearly making it a necessary feature to implement. Duolingo allows users to view the learning progress of their friends, which could improve a user’s motivation to use the application. Furthermore the user interface is

easy and intuitive to use, with different features of the app clearly separated into different sections. Write It! is a much simpler application with only a few features to offer. Each ‘lesson’ is immediately presented to the user when the app is opened, so navigation is elementary. A straight forward user interface design is therefore something that should be considered for the objectives.

Similarly, there is clearly an issue which the final solution should aim to not have: the leniency in evaluating the user’s input. The user should not gain bad writing habits from the app, so it is important to make these mistakes clear for the user. Both applications also have many features which users would benefit from behind a paywall, which is obviously something this project will avoid.

In particular, the way these applications present a user’s progress in learning can be subjective. Duolingo has a section of the app in the Japanese language where each of the characters in the scripts appear with a progress bar beneath them. This does demonstrate the user’s confidence with the characters, however fails to tell the user if they lose fluency—perhaps after taking a significant break from using the application. This is because the user does not receive feedback after each individual task in the lessons, so their only guide is their average progress. Therefore it is important for the user to receive immediate feedback in the technical solution.

1.4.2 Potential Algorithms

As the problem requires an accurate evaluation of an image, a multi-layered neural network is essential in the technical solution. Hence an algorithm to train this network will also be required. In this case where the network is classification based, the backpropagation algorithm will be most suitable. However many algorithms besides backpropagation exist, and researching these would be beneficial.

A database may also be necessary to store information about the user, such as username and average accuracy. This is a suitable choice as SQL queries can be used to retrieve and update data quickly. The database may also need to store a password for users, which should be hashed for security.

Furthermore, SignalR could be used to host a server which users can connect to. This allows for multiplayer gamemodes, and reduces processing client-side. A client would need to login with their credentials, so the database must be stored on the server for security. This also allows the neural network to be stored server-side, alleviating the client of extra processing and thereby reducing lag for lower-end devices. I have chosen to use SignalR as it can easily be used to invoke methods on both the client and server, and does not require any input from the user in order to connect.

If I was to implement a client-server network, object-oriented programming would be a highly suitable solution for implementing the current active games. The games could be stored in a list of their classes, providing an easy way to queue a user into a game.

Matrices

Since this project requires a neural network, matrices must be implemented to execute the mathematics required by a neural network. Matrices are represented as a 2D array of numbers. They can have basic operations applied to them such as addition and multiplication, though the processes behind these operations differ from standard mathematics. Show below is an example of matrix addition and multiplication—the two operations required for a neural network:

$$\begin{bmatrix} a_1 & b_1 \\ c_1 & d_1 \end{bmatrix} + \begin{bmatrix} a_2 & b_2 \\ c_2 & d_2 \end{bmatrix} = \begin{bmatrix} a_1 + a_2 & b_1 + b_2 \\ c_1 + c_2 & d_1 + d_2 \end{bmatrix}$$

Matrix addition is element-wise, so only works if the matrices have the same dimensions. In this case the matrices have dimensions 2×2 , and add together to create a matrix of dimensions 2×2 . Multiplication is not element-wise and instead sums the product of columns against rows. If a matrix A has dimensions $a \times b$ and matrix B has dimensions $c \times d$, only the condition $b = c$ is sufficient for AB to be evaluated. The

resulting matrix will have dimensions $a \times d$.

$$\begin{bmatrix} a_1 & b_1 \\ c_1 & d_1 \end{bmatrix} \cdot \begin{bmatrix} a_2 & b_2 \\ c_2 & d_2 \end{bmatrix} = \begin{bmatrix} a_1 \cdot a_2 + b_1 \cdot c_2 & a_1 \cdot b_2 + b_1 \cdot d_2 \\ c_1 \cdot a_2 + d_1 \cdot c_2 & c_1 \cdot b_2 + d_1 \cdot d_2 \end{bmatrix}$$

Neural Network

A neural network can be abstractly represented as a series of complete weighted bipartite graphs. This allows for a network to be represented a set of adjacency matrices. These are 2-way tables which store the weights between two nodes. Although these adjacency matrices are weighted, having the ability to store the absence of a connection between neurons is unnecessary since the graphs are complete.

The training data could be sourced from the EMNIST database: a collection of 28×28 images featuring upper and lower case Latin characters. There are over 200,000 images and labels in this dataset, therefore being highly suitable for training the network. These can be stored using 2D arrays which will be converted to a 1D array to input into the network.

As for the forward pass in the network, it is likely that I will choose to use a library for matrix multiplication. While it is possible to build a multiplier myself, it is useful for the forward pass to be as efficient as possible, in order to reduce the time a user spends waiting for their results. Hence I plan to use the MathNet.Numerics library. The activation function I plan to use in the hidden layers is the sigmoid function, rather than Rectified Linear Unit (ReLU). Since this is a classification network, it can be useful to retain any negative neuron values.

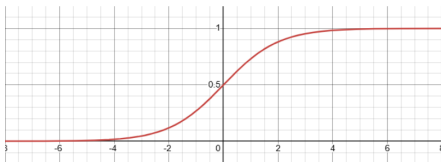
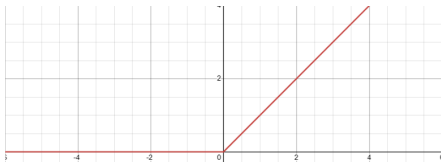
Sigmoid	ReLU
	

Table 1: Comparison of activation functions

For the output layer I have chosen to use the softmax function rather than the sigmoid function. Softmax takes the neuron values and converts them into probabilities, such that all activated outputs sum to 1. This is far more useful in a classification network, and makes some equations faster to compute, since the derivative of the softmax function cancels out.

The algorithm used to train the network consists of adjusting the values of the weights and biases to reduce a “cost” function. Each neuron is given an error term, depending on how close its value is to what was expected. This allows for the weights and biases to be adjusted in such a way that the cost function is reduced.

The backpropagation algorithm uses calculus to minimise the cost function through gradient descent. Each parameter of the network can be represented as a dimension, such that partial derivatives can be used to minimise within the multi-dimensional space these parameters create. The network can have thousands of these ‘dimensions’ which is not something we can visualise. However this does not affect the mathematics behind minimising the cost function; partial derivatives are not limited to any number of dimensions.

Other algorithms include Contrastive Divergence which is commonly used in Boltzmann Machines. This is generally used to train energy-based models without direct backpropagation through the whole network. Instead of computing exact gradients, it defines a probability distribution over data with an energy function.

The weights are adjusted such that the model assigns high probability to training data. This method of training is more useful in correlation based problems, but is approximated so can be inaccurate for classification networks.

1.4.3 First Interview

End User

Before the interview began I introduced the end user to the general concept of the solution. I informed them of how it would consist of a handwriting task which is evaluated by the app, with the aim of teaching users how to write in the English script.

1. When you were learning to write in English, do you think an app to provide instant feedback would have aided you?

Yes it would have help me finding correct pronunciation & meaning of word. most of the time you waste so much time energy in googling things.

(a) By this I mean writing in the script that English uses. Your native language uses different characters from English, so how did you learn how to write the ones used in English?

so basically as you now I am from india and english is my second language but let me you fact about indian that we type hindi using english letters we do that by similar sound of character For example :-

English :- what are you doing ?

Hindi (using english letters) :- aap kya kar rhe hoo?

(b) So how did you learn how to write those messages with a pen and paper? Was it taught at school for example?

nope ! it just because of evolution of tech industries in india (early 2000) becuae english is standard global language that time mostly tech (laptop , phone) they use english keyboard only we kinda developed this ability.

that grated goes to our kindergander teacher they hold our hand write english charactor on paper while speaking it. many practice again & again we use to have a book which english alphabet in dot pattern & we have to use pencil and connect all dots.

2. What statistics do you think should be measured for the user? For example, the accuracy of a submission or the time it took?

Accuracy is matter more cause there is no point if you are giving wrong answer. people can buildup speed after practicing & once they are getting right answer they will hit dopamine and it motivate them to learn english more often.

(a) So what else should be measured other than accuracy?

You can measure ! How many times he try to practice his mistake and How frequently he play Quiz & for how long

3. Do you think a multiplayer gamemode would increase how much people enjoy playing, and therefore learn faster?

Yess I believe that it will help people learning fast because today generation is competitive about games they don't like to loose cause of that they will think harder & faster.

(a) To avoid people of different fluencies being matched in an online game, do you think there should be a ranking system?

Yes ranking system should be mandatory cause otherwise different fluencies will be get matched they will suffer lose in games & some might Quite app for not being fair to them.

4. Would a “Study Mode” be beneficial to the app, which removes all competitive features and rankings—allowing users to improve at their own pace?

noo I don't think so you can create different page for private space learning & searching word and playing Quiz with engine.

- (a) **Just to clarify, is a private learning space a good idea?**
Yess
5. **For more advanced users who are using the program to improve their speed, how could it be made more difficult to keep up their motivation?**
By teaching them new thing about their interest which don't know about it. This will tell them that they don't know everything and there is still room for learning.
6. **Do you think implementing localisation for common languages would benefit those less familiar with English?**
I feel best & right way to learn english is that you should learn english language only because it will develop thought process in user to think in english more fast & they will not feel english as rocket science.
- (a) **By localisation, I mean should a user be able to switch the text in the app to French if they are learning French instead of English? They both use the same alphabet.**
app function can be in english but Quiz type or learning should be in french then. It depends on what is their first language so we can understand. In which language he will understand app function?
- (b) **Since they are not learning English, they will only understand French and their first language.**
then it should be in french
7. **Would you like to see how you are improving over time, perhaps in the form of a timeline/graph of your rank?**
Noo I rather like to see my mistake only cause it will make me only focus on my mistake which I need to work on it.
- (a) **Do you think being able to view other user's graphs would aid in motivation as it adds competition between peers?**
Nope I believe that mine growth matter more than other person & somehow I feel comparison is always wrong it makes people demotivated.
8. **Would a gamemode where the user does not get visual feedback on their drawing be helpful? This would mean the character has to be drawn completely from muscle memory.**
I am not sure about this one it depends person to person so I can't say anything about this.
9. **Would it help motivation if there was a leaderboard system in place to encourage practice?**
A notification reminder of doing practice will be more help than leader board system. Mostly people forget they haven't practice single time in a day & I feel combativeness is good thing but leader board system will be too much distracting for users.
- (a) **If the app were to have a 'friends' system implemented, would a leaderboard dedicated to showing only your friends' ranking be useful to have and why?**
I am against to leader board system but friends system can help user to open app more often so friend system is good idea.
- (b) **How else could a user be motivated to consistently use the app?**
Consistency is key Success what I mean to say is that you can show them they are practice daily which make them feel proud and they will more motivated.

Overall I felt that this interview with my end user was satisfactory. They were able to identify and suggest key features for the solution, and express concerns for elements I had at first considered suitable. While their answers could be unclear at times due to their limited fluency in English, I still believe the solution has benefited from this interview.

For future interviews, I will have to consider the complexity of the language which I use. There are a few questions in which the response suggested they did not fully understand the question, such as question 6. In those cases, I reiterated the questions which I deemed were misinterpreted using simpler language.

1. This question showed me how schools teach the writing aspect to the English language. They use a dot-to-dot method to allow students to gain muscle memory, repeating many times for fluency. However they said that a teacher often guides their hand, which implies teaching a whole class can take a long time. It also revealed how prevalent the English language is within modern society, such that phones use English keyboards instead of Hindi. This shows how important it is for people to be fluent in writing in English.
2. They clearly point out a key detail here that I missed: a user can submit anything quickly to have a very low average time. I will need to find a way to counteract this based on the accuracy of a submission.
The suggestions for measuring frequency of each character is also a good idea, and I will consider implementing this in the database.
3. Question 3 outlines the importance of multiplayer as a way to motivate users. Many people enjoy playing these types of competitive games, so would encourage them to learn English more often as they have stated in their response
 - (a) They consider the possibility that without a ranking system, users could feel that it is unfair, potentially leading to them not using the app any more. This is definitely something that should be implemented in the solution.
4. They express the significance of having an offline mode where users can practise without any competitive stress.
5. The answer suggests they do not fully understand the aim of the solution. It could also be that they could not think of a good answer, as I could not think of anything myself either.
6. This question makes it clear that localisation is something I will need to consider for the solution. The Latin script is used for many European languages, so the app could be used by people learning any of these languages.
7. Another instance of a misunderstanding, however it is vaguely clear what they are intending to express. They recognise that focusing on their mistakes will help them improve faster, and hence express a desire to view their mistakes. This is not applicable to a timeline of a statistic, but does suggest a need to provide separate accuracies for the letters. This allows for displaying to the user which characters they are less confident in, allowing them to focus on these in particular.
 - (a) They express concerns over demotivation from seeing the statistics of others who are more fluent. I will take this opinion into consideration, along with the insight of a frequent user of Duolingo.
8. Not a useful answer, but possibly could have been too confusing of a question.
9. In this question they consider how a leaderboard could be ineffective for motivation. They state how a daily notification or reminder could encourage users to practise daily, so this is something that could be present in the solution.
 - (a) This question makes it clear how peer pressure could be used passively to motivate users to practice their writing skills. If a user were to see their friends doing better than them, it could encourage them to try and improve themselves.
 - (b) They suggest implementing something which tracks how many days in a row someone has used the app. This is a feature present in Duolingo known as a 'Daily Streak'. It acts as motivation since users will try to not 'lose' their streak. However this is also utilised in many free mobile games with malevolent intention—more time spent using the game will increase revenue for the developers. In some cases their 'encouragement' for a user to play everyday can turn into an

addiction, which is something I intend to avoid. Hence I will not be implementing a Daily Streak into the final solution.

Duolingo User

I have also chosen to interview a frequent user of Duolingo, as referenced in Objective 1.4.1. Duolingo has been active for over 10 years and has over 500 million downloads, so it would be beneficial to understand what makes this app effective.

1. **Considering you are an active user of Duolingo, what features encourage you to commit to learning a new language, and why?**

The idea of having a streak, meaning you would be very sad if you lost it. Having friends as well, with friend streaks, so there actually is something to lose if you don't do your duolingo. The app also has a very nice UI that is really intuitive and appeals to me, with great haptic feedback too. The way you learn is also great, with duolingo sometimes revisiting past topics for memory recall. Lastly, the idea of having levels so you can enumerate where you are in terms of progress.

2. **How important is it for the user to have a clear indication of their progress?**

Very important. Like I said before, having a way to check your progress means you are less likely to get lost and just give up. It is also fun to see the change in progress over time.

3. **Would you say Duolingo's UI is relatively easy to navigate? How important is this for a language learning app?**

It is easy to navigate. It looks beautiful, clean and simple, with vibrant colours that appeal to most young people like me. Of course this is important: If it was convoluted or hard to use or not enticing, you risk driving away a lot of users who may care about it like me.

4. **If Duolingo had online multiplayer where you could learn with your friends, would this compel you to use the app more frequently?**

Yes. Duolingo already has the idea of friend streaks, and a graph that shows how much XP you have gained over the week vs how much the other person has upon clicking on their profile. This is a great feature to have to enable especially competitive people to make lots of progress together.

From this response it's clear that Duolingo utilises many ways to keep its users engaged and active with learning. The interviewee expresses how the friends system can be motivating, implying that it compels them to consistently use the app. Adding a daily streak which records how many consecutive days you have opened the app, and a levelling system appears to be something I should take into consideration. It is clear that a way to store statistics about a user's performance is necessary in the solution. I should also consider the UI design, as the app language will be in the language that the user is learning. It is therefore important to utilise icons as well as text to convey what each element of the application does.

1.4.4 Key Requirements

After completing my research and interviews I have determined that one of the key requirements is an SQL database to store statistics regarding a user's progress. Detailed information on a user's progress for different characters is something that must be present in the final solution.

Furthermore a client-server network is essential in securely storing a user's data, since accounts are also a necessary requirement for this project. A multi-layered classification neural network is also a key requirement as the program must be able to evaluate an image. Linking to this, a way of the user to input this drawing in an intuitive and easy manner is also vital.

Concerning features of the app rather than core functionality, a way to rank users based on their skill is also very important. The app should also encourage users to use it consistently, since developing muscle memory requires persistent effort from those learning. However this should not be done in a way that could

be stressful to the user due to them potentially missing out or losing something. The motivation should be completely passive and not impact the user negatively in any way.

1.5 Further Research

1.5.1 Prototype

Regarding the prototype, I decided to create the neural network and the user input. These make up the core requirement for my program, and are essential for the final solution. I anticipated that the neural network was likely to be the most time-consuming part of the project, so prototyping it first was a suitable choice. While I had some experience with neural networks, I had only ever programmed an image classification for digits 0 – 9. Expanding this to have more than double the output neurons required several iterations of testing, since it was unclear what an optimal structure for the network would be.

While programming the network, I kept in mind how the solution would use Object-Oriented Programming. It was important to use classes appropriately to allow me to seamlessly integrate it into the technical solution. After programming a beta for the network, I sourced the training data and attempted to train the network. There were several bugs at first where I had implemented the equations incorrectly.

After patching all of the bugs, I began to train the network but noted it was rather slow. Looking into the process, I noted that the network parameters were reloaded from their files for each iteration. This is inefficient since the parameters will only be updated after every batch of 50 images. I had originally coded the class that performs the forward pass to load the parameters every time, since this would be optimal while evaluating real data. However in training, the parameters only need to be reloaded every 50 images, so I added a second constructor which takes in the weights and biases as parameters. This dramatically sped up the training process, allowing me to identify if it was working much faster.

Initially I attempted to train the network with a $784 - 192 - 144 - 52 - 26$ structure, however it quickly became apparent that the weight gradients started to vanish or explode after enough training data. This is where the weight values tend to either zero or infinity, which leads to the model under/overfitting. After some research into layers, I deduced that the network should have at most 4 layers to prevent these issues. Eventually I settled on a $784 - 144 - 72 - 26$ structure, which achieved 94% accuracy with the training data.

Execution

Upon running the prototype, the user is presented with a Windows Form containing a read-only textbox and a panel for input. They are given 10 successive characters in the textbox and are tasked with writing them in the panel using mouse input.

The user can then click “done” once they have finished writing, and the image is evaluated by the neural network which returns the letter written by the user.



Figure 6: The user is able to draw on the panel

Function

The panel uses the `System.Drawing.Pen` class in order to draw on the panel. The input contains a method `enablePanel()` which attaches event handlers to mouse movements and clicks. When the mouse is moved, the `mouseMoved()` event handler is called, which will draw a line connecting the last mouse position to the new mouse position if the left mouse button is pressed. The last mouse position is then updated for the next mouse move event, regardless of whether the left mouse button was pressed.

When the user clicks “done”, the event handlers for drawing on the panel are removed, and the image drawn on the panel is saved as a `Bitmap` type. This bitmap is then downsampled to 28×28 in size to match the input layer of the neural network. Each pixel has a red, green, and blue value. The image is converted into greyscale using the formula for luminance:

$$L = 0.299R + 0.587G + 0.114B$$

While the original image is only white and black, the downsampled `Bitmap` will introduce grey tones, which are represented in `RGB` format. The formula allows the program to convert these `RGB` values into a greyscale brightness with a value ranging from 0 to 255. Each of these values is then divided by 255 to obtain a value representing the brightness from 0 to 1. These values are then assigned into a 784 length array and fed into the input layer of the neural network. The output activation values are then calculated as described in Objective 1.4.2.1. The result is then outputted to the user for them to judge their accuracy.

Analysis

I noted during testing that the input had to be centred and the right size for an accurate evaluation. This suggests that the images need to be preprocessed in order for the neural network to function properly. I also found that the size of the pen had a significant effect—it is likely the optimal pen size is one that most closely matches the training data.

UI design is an aspect which was not considered when creating the prototype, as the goal of it was to see if the algorithms chosen were a viable option for the final solution. Since the neural network has been successfully implemented, it is appropriate to implement the prototype into the technical solution. The prototype has shown that the solution is feasible in the time given.

1.5.2 Second Interview

1. After familiarising yourself with the draft objectives, are there any features missing that you expected to be present?

If there is a password system, perhaps add a way for the user to change the password.

If there is a friends system, it might be useful for there to be an invite system.

2. Regarding the prototype, would you say the program is accurately evaluating your input?

Fairly accurate, but it requires the letter to be written in a very specific way towards the centre of the box, which is fairly annoying. Some letters seem more accurate than others.

3. Would you say the input method is easy to use?

Yes. Drawing seems very responsive, although drawing with a mouse is quite different to drawing with a pen, and it feels a little less controlled.

4. In what ways would you like the UI to be improved in the final solution?

Make the written letter disappear before the next one can be written.

Make the UI scale when the window size is changed.

Add undo or clear buttons.

Overall this interview didn't provide me with significant information I was unaware of, but there are some key points worth highlighting. The majority of the comments were issues I had found myself while using the

prototype, such as the drawing panel not being cleared.

However the interviewee also suggested implementing a ‘clear’ button for the panel, something I will consider for the technical solution as it improves user experience. Furthermore they identified some missing objectives which may be useful in the project, such as a system to add other users as a friend. It is also clear from the response that I will need to implement preprocessing for the images, since the neural network can only evaluated images drawn to a similar scale and size as the EMNIST dataset. I will also investigate why some letters are more accurate than others but I suspect this is due to certain Latin characters being similar shapes.

The issue of mouse input is not something I can easily fix, and does rely on a user having a drawing tablet if they wish to gain correct muscle memory. While I was testing the prototype myself I noticed that it did not encourage memorisation in its current state and purely focused on muscle memory. This is due to the character being on display at all times while the user is submitting their drawing. It may be suitable to add options to the technical solution which only show the character for a few seconds. However this raises some issues if the user were to miss its appearance, so perhaps focusing on elementary writing skills is a better option. Even a user passively copying what they see on screen will eventually develop their muscle memory to a sufficient state.

1.6 Objectives

The objective of this program is to allow users to practice writing the Latin script. The user has the option from three different gamemodes, and they have statistics detailing their progression in learning each of the Latin characters. The user interacts with the project through the client application, which establishes a connection to the server application. The server manages the progression of the different gamemodes, and stores a user's account data and statistics.

1.6.1 Core Objectives

1. Accounts

- (a) The user will be able to enter their account credentials and login.
 - i. If the entered username does not exist, or the password is incorrect then access will be denied.
 - ii. Otherwise the login screen will close and the main app will open.
- (b) The user will be able to request an account creation.
 - i. If any fields are left blank, or the passwords do not match then the account creation request is not sent.
 - ii. If the entered username is already in use then the account cannot be created.
 - iii. Otherwise a new account will be created in the database and the main app will open.
- (c) There will be a button to cycle through languages on the login screen, which will affect the language associated with the account upon account creation.

2. Games

- (a) A game will start when it has the maximum number of users queued for it.
- (b) The user will be presented with successive, randomly generated Latin characters.
- (c) The user will be able to use mouse input to write the character in a blank panel.
 - i. The user will be able to clear the panel of any drawings.
- (d) The user will then receive feedback on the accuracy and time of their submission.
- (e) i. The accuracy and elapsed time will contribute to the averages stored in the database.
- (f) A list of all of the users in a game will be displayed to the users, and is updated when a user joins or leaves.
- (g) An overview of the statistics for the previous rounds will be displayed.
- (h) The next round of each game will start when all of the users are ready.
- (i) There will be three different types of games to choose from:
 - i. **An offline game for practising**
 - A. The game will consist of 10 rounds, each with a randomly generated Latin character.
 - B. After each round the user will be given their time and accuracy, and their statistics for the completed rounds will be shown during the game.
 - ii. **A Versus game**
 - A. The user's performance will affect their rank, which is recalculated after the end of every game.
 - B. After each round, the user with the fastest time will win the round. If one player is incorrect then the other player will be given the win. If both players are incorrect then neither of them win.
 - C. After each round the users will be given their time and accuracy, and the user who won the round will be displayed.
 - iii. **An elimination game of 12 users**

- A. After each round the users who are incorrect will be eliminated and given the option to return to home. If all of the submissions are correct then the user with the longest time will be eliminated instead. If none are correct then no user will be eliminated.
- B. After each round the users will be given their time and accuracy, and the list of alive and eliminated users will be updated.
- C. The last user remaining is the winner and the game will end when this occurs.
- D. The next round of the game will start when all of the alive users are ready, and will ignore any eliminated users.

3. Statistics

- (a) There will be a ‘profile’ page which displays detailed information about a user.
 - i. The statistics for each letter will be displayed, which includes the average accuracy, average time, and total attempts.
- (b) The statistics for each user will be separated by letter in the database,
- (c) A user’s rank will have a rank to quantify their confidence writing the Latin characters.
 - i. The rank will be recalculated following a ‘Versus’ game using the Elo formulae.
- (d) A user can view the profile page of any other user through an exact-match search tool.

4. Social

- (a) There will be an option to add/remove friends on their profile page.
 - i. An invitation will be forwarded to a user if they are online, otherwise it will be stored in a database.
- (b) A user’s friends will be listed in the main menu.
 - i. They will be separated into ‘online’ and ‘offline’.
 - ii. A user can open their friend’s profile page from this menu.
- (c) A user can choose from various language which use the Latin script for the client application to use.
 - i. The language chosen by the user is saved in the database.
 - ii. The user can update the language of the application.

5. Server

- (a) A user will be able to connect to the server from any device running the client application.
- (b) The server should manage the progression of currently active games.
 - i. The server should initiate each phase of the game when the conditions for it are met, and start and end each game as required.
 - ii. When a user queues for a game, the server should appropriately assign the user to a game.
- (c) The server will utilise a multilayered neural network to evaluate the accuracy of a submission.
 - i. A user’s submission will be preprocessed to match the formatting of the training data.
 - ii. The network will accurately classify a user’s submission into one of the 26 Latin characters.
 - iii. The user will be able to draw their submission to any size and scale.
 - iv. User-defined matrix and vector data structures will be defined, which can have arithmetic operations performed on them.
 - v. The backpropagation algorithm will be applied to sufficiently train the neural network.
- (d) The server will store a database containing data for each registered user.
 - i. For each user, the database will store their password, account details, and statistics.
 - ii. Passwords in the database will be hashed.

1.6.2 Extension Objectives

1. If a friend is online, the user can invite them to a Versus game.
2. A user can create a private game which requires invites to join.
3. The user's rank over the last 90 days will be stored to allow a timeline graph to be produced.
4. There will be an option to disable visual feedback for the input.

1.7 Modelling

1.7.1 Class Diagrams

I will be using Object-Oriented Programming (OOP) in this project, so class diagrams are an essential part of the modelling phase. I have produced class diagrams for the both the client-side and server-side projects to assist with coding the technical solution. These are not final, and will likely be changed during Design.

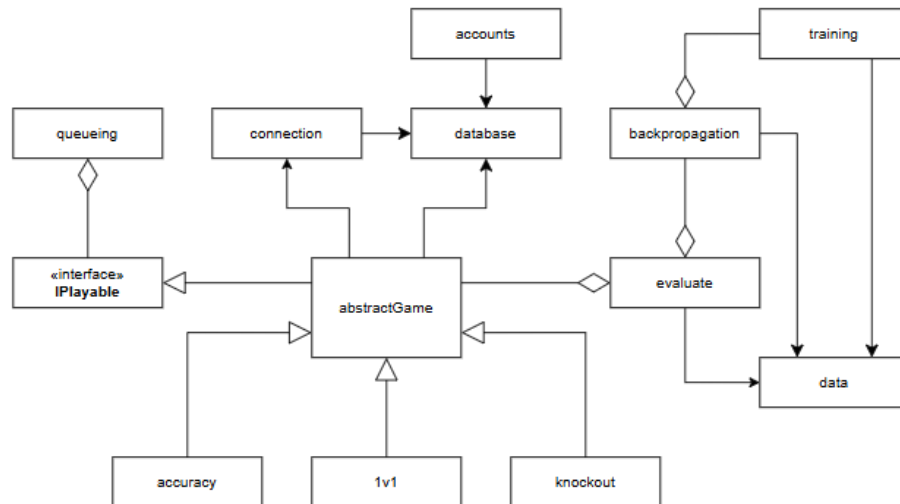


Figure 7: Server class diagram

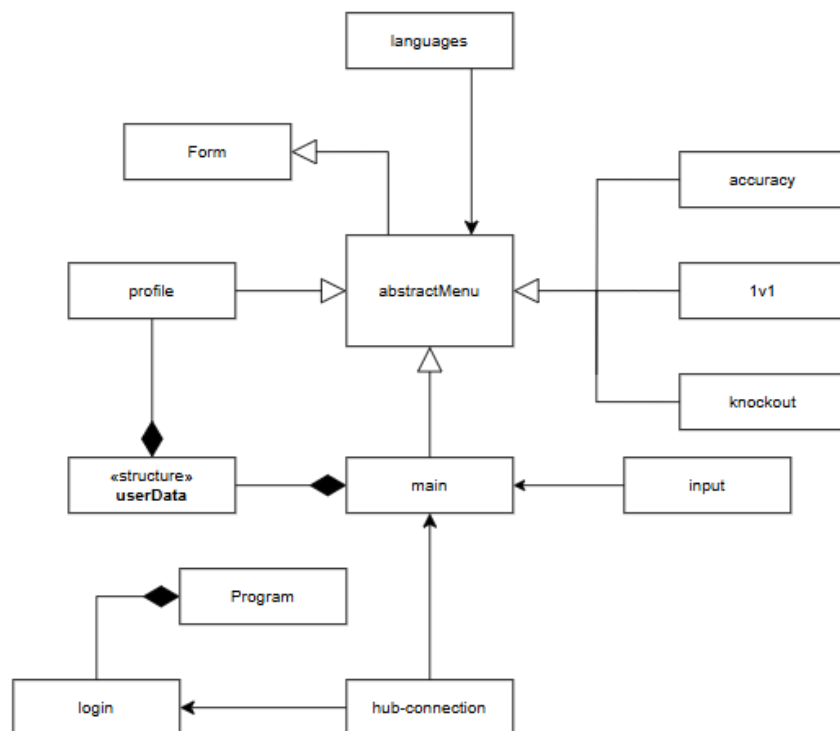


Figure 8: Client class diagram

1.7.2 Flowcharts

The below flowchart describes the abstracted login/account creation process for a client. The user is presented with the option of creating an account or logging into an existing one. In each case, several checks are done using the database before loading the main application. For logging in, the server must first ensure that the account exists, and then checks if the passwords match. For creating an account, the server must check if the username entered is already in use. If the entered information is valid, the client is sent their user data and any pending invites.

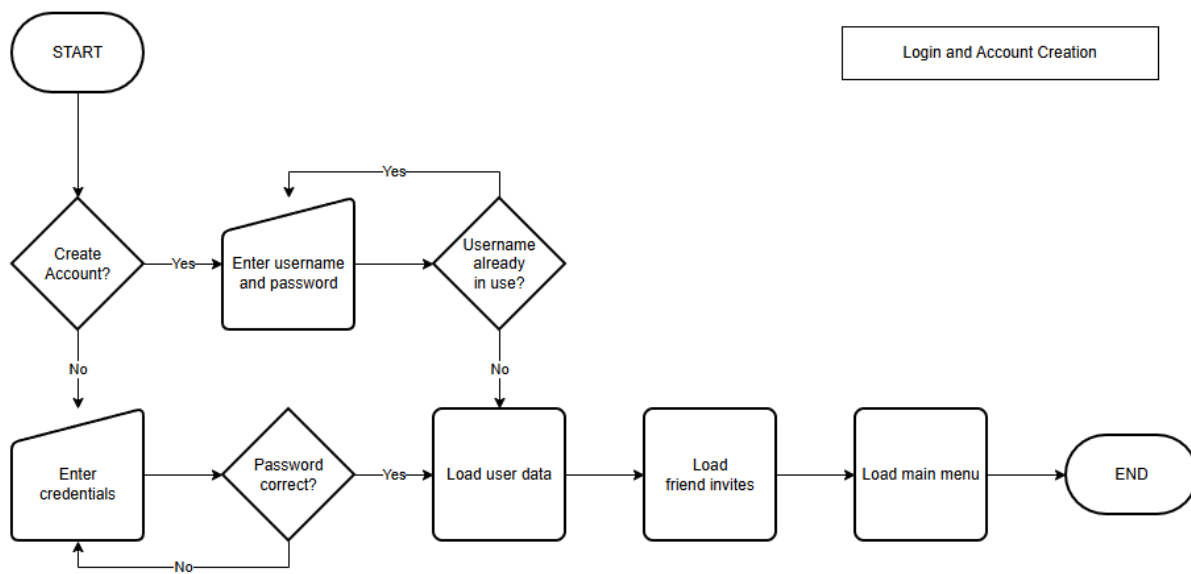


Figure 9: Account flowchart

The following flowcharts provide an abstract representation of how each game type will operate. The details of each game type can be found in Objective 1.6. When a user queues a certain game, the server checks if there is space for the user to join. If the lobby then becomes full, the game starts.

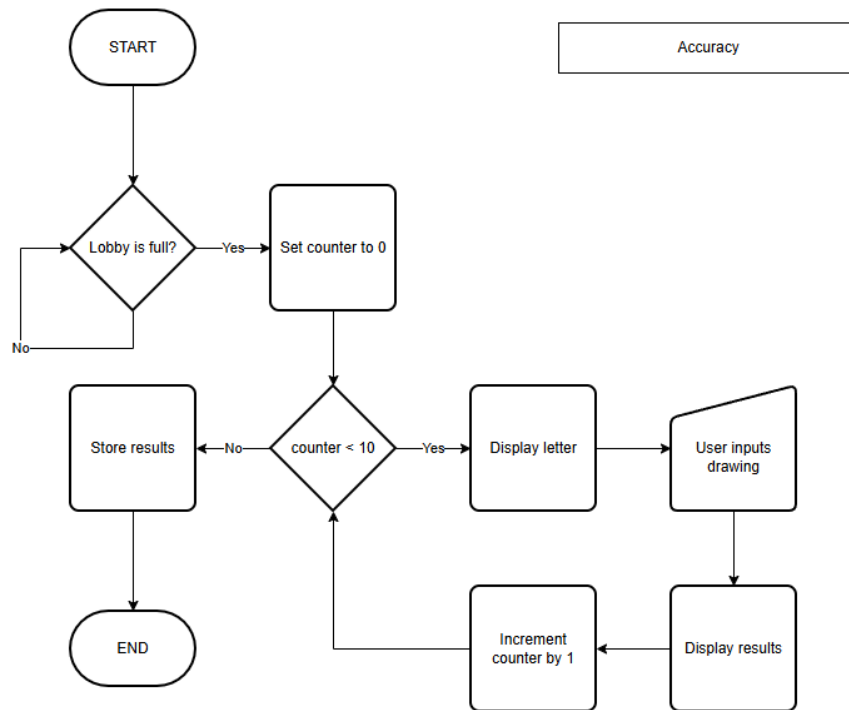


Figure 10: Accuracy flowchart

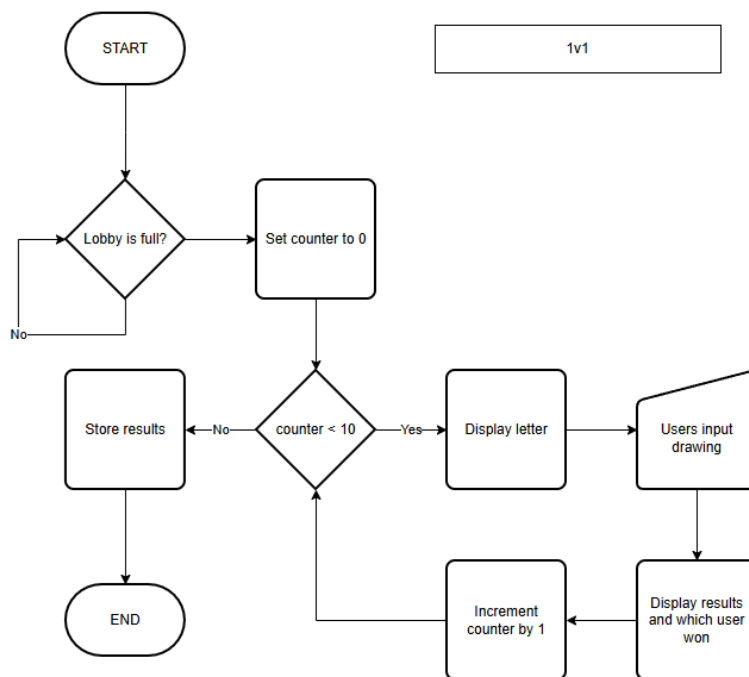


Figure 11: Versus flowchart

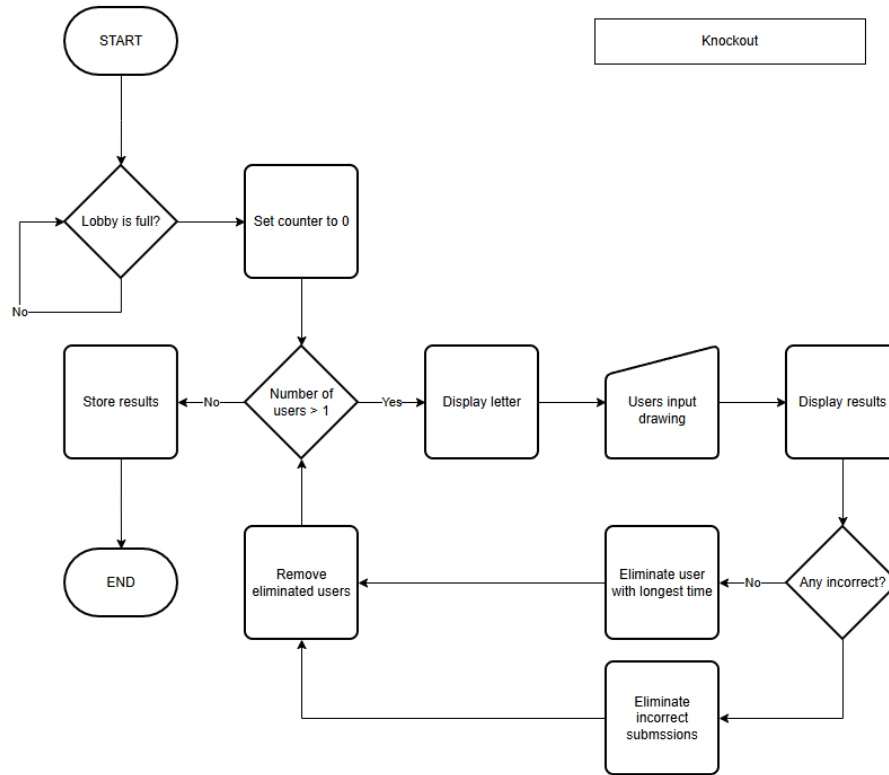


Figure 12: Knockout flowchart

1.7.3 Entity-Relationship Diagram

The following is an entity-relationship diagram. The *userData* table holds information regarding each user with an account. Each user has a unique identifier which is stored in *userID*, along with a password for their account. The table also stores a user's rank, and their preferred language. I have also added an 'about me', where users can write something about themselves if they wish. This table is linked to the *statistics* table which contains a user's progress for each Latin character.

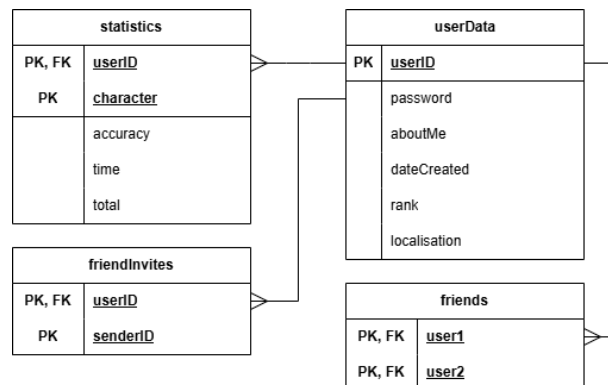


Figure 13: Entity-Relationship diagram

The *statistics* table details their average accuracy and average time, along with the total number of times the user has completed the character. This allows the averages to be updated by using the following formula:

$$A_{new} = \frac{A_{current} \cdot \text{total} + \text{accuracy}}{\text{total} + 1}$$

Since friend invites can be sent while the receiving user is not online, it is necessary to cache the invite for when the user next logs on. This is done using the *friendInvites* table. Friendships exist using the *friends* table—only one link exists for each friendship.

1.7.4 Neural Network

A neural network consists of several complete weighted bipartite graphs. The first layer is referred to as the input layer, and the final layer is referred to as the output layer. The layers in between are referred to as the hidden layers, as shown in the figure below.

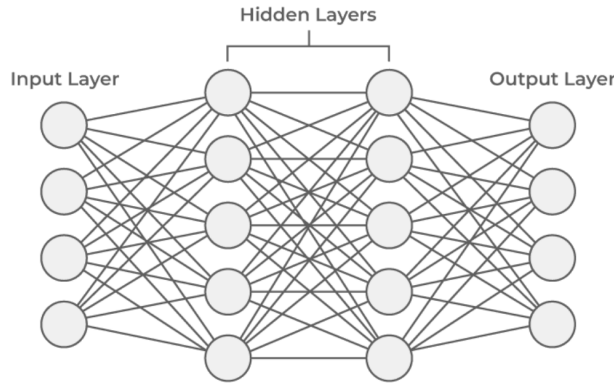


Figure 14: Simplified version of a neural network

Each layer consists of a set number of ‘neurons’ which each hold a decimal value. The arcs connecting a neuron to all the neurons in the next layer also hold a decimal value, referred to as a ‘weight’. All the neurons, except those in the input layer also have a fixed ‘bias’. An activation function is also used to normalise the neuron values. As outlined in Objective 1.4.2.1 this will be the sigmoid function for the hidden layers, and the softmax function for the output layer.

The notations used to denote neural networks is outlined below:

- $z_i^{(L)}$ $\longrightarrow$ the value stored in the i^{th} neuron in the L^{th} layer
- $a_i^{(L)}$ $\longrightarrow$ the activated value stored in the i^{th} neuron in the L^{th} layer
- $w_{i,j}^{(L)}$ $\longrightarrow$ the weight on the arc from the i^{th} neuron in layer L to the j^{th} neuron in layer $L + 1$
- $b_i^{(L)}$ $\longrightarrow$ the bias of the i^{th} neuron in the L^{th} layer
- $\delta_i^{(L)}$ $\longrightarrow$ the error value of the i^{th} neuron in the L^{th} layer

Forward Propagation

Forward propagation is the process by which values are placed into the input layer of the network, and a set of values is produced in the output layer. Each neuron in a layer is calculated using the values stored in the previous layer’s neurons, using the following formula, where $n(L)$ is the number of neurons in the L^{th} layer:

$$z_j^{(L+1)} = \sum_{i=1}^{n(L)} \left(w_{i,j}^{(L)} \cdot a_i^{(L)} \right) + b_j^{(L)}$$

For each neuron in the previous layer which connects to the neuron being calculated, its activated value is multiplied by the weight connecting them. These values are then summed, and a bias is added to this result. The formula can be represented as a series of matrix operations when considering the entire layer:

$$\begin{bmatrix} w_{1,1}^{(L)} & w_{1,2}^{(L)} & w_{1,3}^{(L)} & \cdots & w_{1,n(L+1)}^{(L)} \\ w_{2,1}^{(L)} & w_{2,2}^{(L)} & w_{2,3}^{(L)} & \cdots & w_{2,n(L+1)}^{(L)} \\ w_{3,1}^{(L)} & w_{3,2}^{(L)} & w_{3,3}^{(L)} & \cdots & w_{3,n(L+1)}^{(L)} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ w_{n(L),1}^{(L)} & w_{n(L),2}^{(L)} & w_{n(L),3}^{(L)} & \cdots & w_{n(L),n(L+1)}^{(L)} \end{bmatrix} \cdot \begin{bmatrix} a_1^{(L)} \\ a_2^{(L)} \\ a_3^{(L)} \\ \vdots \\ a_{n(L)}^{(L)} \end{bmatrix} + \begin{bmatrix} b_1^{(L+1)} \\ b_2^{(L+1)} \\ b_3^{(L+1)} \\ \vdots \\ b_{n(L+1)}^{(L+1)} \end{bmatrix} = \begin{bmatrix} z_1^{(L+1)} \\ z_2^{(L+1)} \\ z_3^{(L+1)} \\ \vdots \\ z_{n(L+1)}^{(L+1)} \end{bmatrix}$$

This results in a vector column representing the values stored by the neurons in the layer. The activation function is then applied to the layer, which for the hidden layers is the sigmoid function:

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

For the output layer, the softmax function is used as the activation function. The softmax function converts the neuron outputs into probabilities that sum to 1, which produces a more useful output for a classification network. The output with the highest probability is the index of the letter chosen by the network.

$$\text{softmax}(x_i) = \frac{e^{x_i}}{\sum_{j=1}^{n(L)} e^{x_j}}$$

Backpropagation

Backpropagation is the algorithm used to train a neural network. A network can be considered suitably trained when a ‘cost function’ has been minimised. The cost function is a value that represents how far off the output is from expected. For example, if the network was given an image of the letter K, then the perfect output would be 1 in the 11th neuron and 0 in all the others. If the network does not achieve this, then the cost function will measure how far off the output was from expected.

The cost function I will be using is mean squared error. This is calculated by squaring the difference between the observed output and the expected output of each neuron.

$$C_i = \left(a_i^{(L)} - y \right)^2$$

To minimise the cost function, the values of the weights and biases can be changed. Backpropagation attempts to find the optimal values for these parameters by using a process called gradient descent. In summary, gradient descent uses derivatives to find the fastest way to minimise the cost function with respect to the parameters.

The first stage of backpropagation is to calculate the neuron errors for the output layer. This is equal to the partial derivative of the cost with respect to the weights:

$$\frac{\partial C}{\partial w^{(L)}} = \frac{\partial z}{\partial w^{(L)}} \frac{\partial a}{\partial z^{(L)}} \frac{\partial C}{\partial a^{(L)}}$$

Since the softmax activation function is in use along with mean squared error, this equation simplifies down to the derivative of the cost function. The value of y takes either 1 or 0, depending on whether the current neuron’s index is equal to the expected result.

$$\delta_i^{(L)} = 2(a^{(L)} - y)$$

The second stage of backpropagation is to calculate the neuron errors for the hidden layers, using the same partial derivative as the output layer. The differential equation evaluates differently in the hidden layers: the errors for a given layer L are calculated using the errors for the $L+1$ layer, hence the name ‘backpropagation’.

$$\delta_i^{(L)} = \sigma'(z_i^{(L)}) \cdot \sum_{j=1}^{n^{(L+1)}} \left(w_{i,j}^{(L)} \cdot \delta_j^{(L+1)} \right)$$

$$\sigma'(x) = \sigma(x) \cdot (1 - \sigma(x))$$

The error term of the $L + 1$ layer is affected by the activation function used and the weights connecting it to the L layer. The equation propagates the errors of the output layer through the rest of the network, excluding the input layer.

The third stage of backpropagation is to calculate the weight gradients. These represent the optimal adjustments to the weights to minimise the cost function. They are calculated by multiplying the neuron error of the $L + 1$ layer by the activated value of the L layer. The bias gradients are equal to the neuron errors.

$$\frac{\partial C}{\partial w_{i,j}^{(L)}} = \delta_j^{(L+1)} \cdot a_i^{(L)}$$

These parameter gradients are then averaged over several training iterations. A training iteration involves giving the network an image and a label, which allows it to compute the cost function. The averaged gradients are then multiplied by the ‘learning rate’—a value usually around 0.01 which ensures the model does not learn too fast and overfit. This average gradient is then subtracted from the current parameter to give its updated value, which is saved in a file.

Training

The training data I will use is from the EMNIST database. The sample contains over 200,000 images and labels of both uppercase and lowercase Latin characters. It is stored in two GZIP files, one for the images and one for the labels. These files are formatted as byte arrays, and contain headers which are of length 16 bytes for the images and 8 bytes for the labels. The values range from 0 to 255, so they are divided by 255 before being used for training, since the neural network can only use values between 0 and 1.

Before a neural network can be trained, the parameters of the network must be initialised to a value. The biases can be set to zero, however doing this for the weights will cause the gradients to vanish. To avoid this issue, Xavier initialisation can be used, which assigns each weight a value taken from a uniform distribution between a limit and its negative value. This limit is calculated using the size of the layers which the weight connects together.

$$\text{limit} = \sqrt{\frac{6}{n(L) + n(L+1)}}$$

Image Preprocessing

A submitted image is likely to not be consistent with the EMNIST dataset, therefore preprocessing is required so an accurate evaluation can be made. This was made clear in the prototype, which does not have preprocessing. Firstly, the Region of Interest (ROI) is extracted from the drawn image, which involves cropping the image into a rectangle where there is no white space surrounding the ROI.

This rectangular crop then needs to be adjusted such that it is a square. This is done by adding white space to the shorter of the two dimensions. If the image was expanded in the Y direction, then the ROI is shifted down in order to recentre it. Similarly, if the image was expanded in the X direction then the ROI is shifted right.

The image is then scaled to 24×24 , which differs from the prototype. This is to match the dataset, which has padding on the images. The remaining pixels to create the 28×28 image are added on all sides as white space. The image is then inverted, and converted to a set of decimal values using the luminance formula, as described in 1.5.1.

1.7.5 Client-Server Connection

SignalR is a dotnet package used to establish a client-server connection between two devices. When the server is configured, the application maps endpoints to a class which inherits the **Hub** class. An endpoint takes the form of *http://86.11.15.228:5252/cs-nea/accounts*, and will forward all invocations received by the client to the designated class.

The SignalR library contains methods for invoking methods on the server, which can return a value. The client will pass the method name as a string, along with any parameters, using the HubConnection type.

```
await hubconnection.InvokeAsync("requestedMethod", parameter1, parameter2);
```

The server can invoke an action on the client using its Context.ConnectionID, a unique string which identifies a client connected to the server. This is not fixed for each IP address and is randomly generated when a connection is established. A client can set up handles to receive any packages sent by the server which are executed as an action.

```
await Clients.Client(connectionID).SendAsync("requestedAction", parameter1, parameter2);

hubconnection.On<string, int>("requestedAction", (text, num) =>
{
    Console.WriteLine("Received string: `` + text);
    total += num;
});
```

The identifier ‘requestedAction’ must be identical on both the client and server to allow the request to be received. These handles are added after a connection is established, but before it is started.

1.7.6 Player Ranking

As discussed, it would be unfair to match players against those with a significantly different skill level. Therefore it is necessary to implement a system which can abstract a user’s skill to a single number. The most commonly used rating system is the Elo rating system.

The Elo rating system is most famously used in Chess, but is also implemented for other competitive games. In pool, an Elo-based system called Fargo Rate is used to rank players in organised amateur and professional competitions. In both cases they use the Elo formulae to accurately rank a player’s skill.

For a player’s Elo to change, they must play in a multiplayer gamemode, usually against a single person. The system uses their expected ‘score’ and their actual score to accurately adjust their rating. The difference in the player’s ratings is used to calculate their expected scores for a given game. If player A has a rating of R_A and player B a rating of R_B , the formula for the expected score of player A is

$$E_A = \frac{1}{1 + 10^{(R_B - R_A) / 400}}$$

where 400 is the base rating for a player. A win is given a score of 1 and a loss is given a score of 0. Draws would be given 0.5 points which occur when all players are incorrect. The expected score for player B can be calculated as $1 - E_A$. In the case of the Versus game type, we multiply the expected score by 10 since there are 10 rounds per game.

When a user's actual score from a Versus game exceeds their expected score, the Elo system takes this as evidence that the user's rating is lower than it should be. This is done through a linear adjustment using the K-factor, which is the maximum possible adjustment per game. In this case where a player could theoretically score 10 points more than expected, the K-factor will be divided by 10 to ensure it remains the maximum possible adjustment.

$K = 32 \longrightarrow$ used for players below 2100 elo

$K = 24 \longrightarrow$ used for players between 2100 and 2400 elo

$K = 16 \longrightarrow$ used for players above 2400 elo

The player's rating can then be updated with the following formula, where player A was expected to score E_A points but actually scored S_A points:

$$R'_A = R_A + K \cdot (S_A - E_A)$$

2 Design

2.1 High-level Overview

The objective of this program is to allow users to practice writing the Latin script. The project consists of a server application and a client application, which communicate using the SignalR framework. The user has the option from three different game types, which include ‘Accuracy’, ‘Versus’, and ‘Elimination’. These games are hosted and managed by the server application, alleviating the clients of some processing and allowing for online multiplayer.

In each of these game types, the user is presented with a random Latin character and a drawing panel. By using mouse input, the user can write the given letter in the drawing panel. The accuracy of a user’s submission is evaluated on the server using a multi-layered neural network, which is returned to the user as feedback on their submission. The backpropagation algorithm and a sample of the EMNIST dataset is used to train the neural network.

An SQL database is used to store the accounts for each user, as well as their statistics for the Latin characters from A to Z. Each user’s account details their login credentials, Elo rating, and localisation choice. The user’s choice of language determines the language which the client application is rendered in, and can be changed to some of the common languages which use the Latin alphabet. Each user also has an Elo rating, which ranks their fluency in writing the Latin characters compared to others.

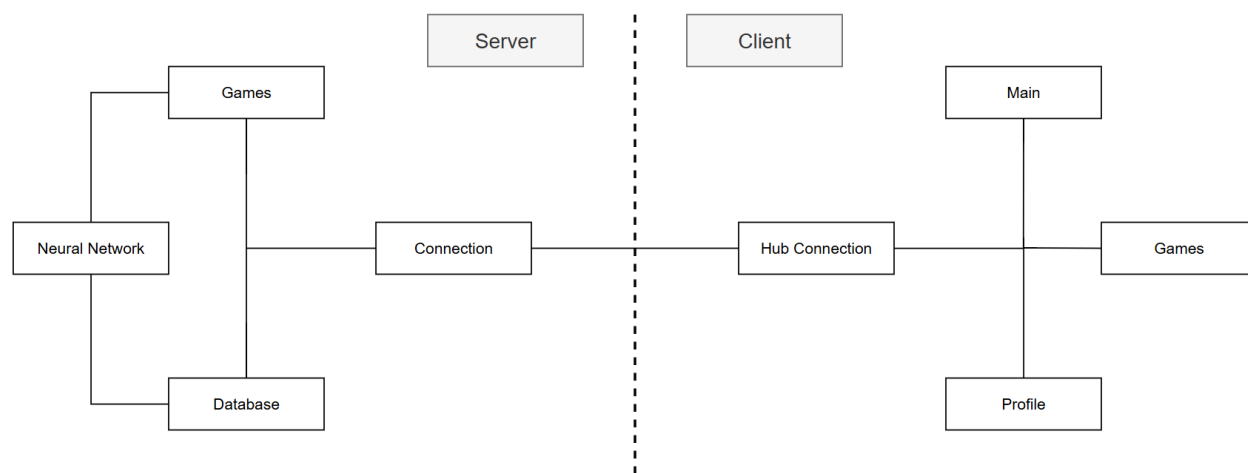


Figure 15: High-level overview of components

The diagram above outlines the key components of both the server application and the client application. The connection between these two processes is managed by the ‘Connection’ component on the server, which handles any requests made by the client through the ‘Hub Connection’ component. These communicate using the SignalR networking framework, which allows for invocations of methods on another device.

The server contains three main units which manage the progression of the games and access account data. The ‘Games’ component contains all of the active games on the server, and manages the progression of each. It facilitates users queueing and dequeuing from games, and appropriately advances the round of the games when necessary. During the games, the ‘Neural Network’ is utilised to provide an accurate evaluation of a user’s submission, making it key to the function of the server application. The ‘Database’ is used to access the account data for a given user, and allows for a user to login to the client application and synchronise

their learning progress between devices.

The client also contains three main units, each of which represents a major ‘page’ which the user can visit in the application. The ‘Main’ page is the screen which the user is first presented with upon logging into their account. From here, the user can queue for a game type of their choosing, or access their profile page to view their learning progress. The ‘Profile’ page details a user’s statistics for each letter of the Latin alphabet, including their average accuracy, average time, and the number of times which they have drawn each letter. The ‘Games’ component manages the invocations received by the server when the progression of a game is advanced, usually involving updates to the screen.

2.2 Choice of Language and Libraries

Since object-oriented programming is a necessary paradigm to use, C# will be the most suitable language for this project. This also allows for the use of Windows Forms to create the UI for the client, and SignalR to provide a client-server connection. I have significant experience in both of these software, hence why they are suitable for the technical solution. Regarding the libraries required for the server application, the SignalR library is mandatory for creating a server which clients can connect to. It provides unique identification to each connected client, with the ability to invoke a handler on the client application which can execute code. Similarly, the client can directly invoke a method on the server application and can pass parameters and receive the returned value. Furthermore, the SQLite library will be used to store and retrieve the account data and statistics for each user, and allow the C# codebase to interact with the database file.

As for the libraries required by the client application, the user interface will be created using the Windows Forms library. This is a graphical user interface library which is configured and rendered using C# code. I have also chosen to use the Guna.UI2.WinForms library, which provides an enhanced set of controls to use with Windows Forms, such as progress bars and gradient fill colours. These will help aid me in creating a user-friendly interface which requires little knowledge of the languages which the client application will be rendered in. Additionally, the client also requires the SignalR.Client library to allow it to establish a connection with the server.

It was stated in the Analysis section that I would be using an external library to perform the matrix operations required for the forward pass of the neural network. I have since decided against this, and have opted to create my own Matrix and Vector classes for this project. While these are likely less efficient than using a library, while creating the technical solution I did not notice any significant time delay while a submission was being evaluated.

Server Design

2.3 Neural Network

The neural network consists of four classes, each of which perform a core function of the network. The **Network** class performs the forward pass, which is used to evaluate a user’s submission. The **Backpropagation** class is used to train the network, and therefore will contain instances of the **Network** class. Both of these classes frequently use the static **Data** class, which contains methods for saving and loading the network parameters. It also contains any mathematical functions, such as sigmoid. The **Training** class oversees the training process, and is responsible for feeding images and labels into the **Backpropagation** class.

One of the major differences between the neural network in the prototype and the one implemented for the technical solution is the addition of the **Matrix** and **Vector** structures. The prototype used external libraries for performing matrix operations, however the final solution uses my own classes. These have been created using index overriding and operator overloading, such that the data structures resemble an in-built data type. It also makes the classes far easier to work with and easier to understand, since a single operator can be used instead of a whole function which takes in the two input values as arguments.

2.3.1 Forward Propagation

Forward propagation in the neural network is managed by the **Network** class. This class contains two constructors, depending on whether a new set of weights and biases have been passed into the network. By default, the network uses the parameters which are preloaded into the **Data** class as Matrix and Vector objects. However during backpropagation, the network parameters are updated after each iteration—it is therefore necessary to rebuild the Matrix and Vector objects, which is done through the alternative constructor of the **Network** class.

If the default constructor is used, then the network will use the Matrix and Vector objects present in the **Data** class during the forward pass. If the alternative constructor is used which passes in a new set of parameters, the ‘BuildMatrices()’ method is called to rebuild the Matrix and Vector objects.

Both constructors set the input values to the input layer of the network and call the ‘EvaluateNetwork()’ subroutine, which performs the forward pass. The program iterates through each layer excluding the input layer and creates a Vector object from the 1D array of the activated values for the previous layer. The equation outlined in 1.7.4.1 is then applied to these objects, where z , w , and b represent the neuron values, weights, and biases respectively. The Matrix and Vector objects which represent the network parameters are stored as static attributes in the **Data** class.

$$z^L = z^{(L-1)} \cdot w^L + b^L$$

It should be noted that the equations described in the Modelling section showed the weights matrix being multiplied by the vector of activated values from the previous layer. The implementation of the forward pass is slightly different in order to reduce processing time during backpropagation. The forward pass instead multiplies the activated values from the previous layer by the weights matrix—matrix multiplication is not commutative so this would result in a different matrix as the output. However, when the matrices are loaded in from the text files, they are stored as their transpose in the Matrix objects. The transpose of a matrix can be thought of as mirroring the matrix down its leading diagonal, such that the two indices of each element are effectively swapped around. This means that the order of multiplication now yields the same result as multiplying the ‘correct’ way round with the untransposed matrix. The reason for this is that the mathematical equations for backpropagation require the weights matrix to be transposed. I decided that it would be more efficient to load the matrix already transposed, and slightly adjust the equations and indices used in iteration structures to account for this change.

The activated values for the current layer are then calculated using the neuron values. If the current layer is a hidden layer, then the sigmoid function is used to normalise the values. The sigmoid function is part of the **Data** class, which is accessed by static reference and returns the activated value for a neuron. Each neuron in the current layer is passed through this subroutine, and the resulting activated values are stored in a 1D array. The 'GetArray()' method is used to directly extract the underlying array of the resulting Vector class, instead of creating a new array.

When the network reaches the output layer, the 'softmax' function is used to normalise the neuron values such that it creates a probability distribution for each of the Latin characters. The resulting character which the network determines the input values to most likely be is given by the index of the neuron with the highest probability. This is accessed by an external class using the 'GetResult()' method, which simply returns the result of the network as an integer between 0 and 25. Additionally, the 'GetAccuracy()' method can be used to extract the probability of any given letter in the neural network, which is required in-game when determining the accuracy of a user's submission.

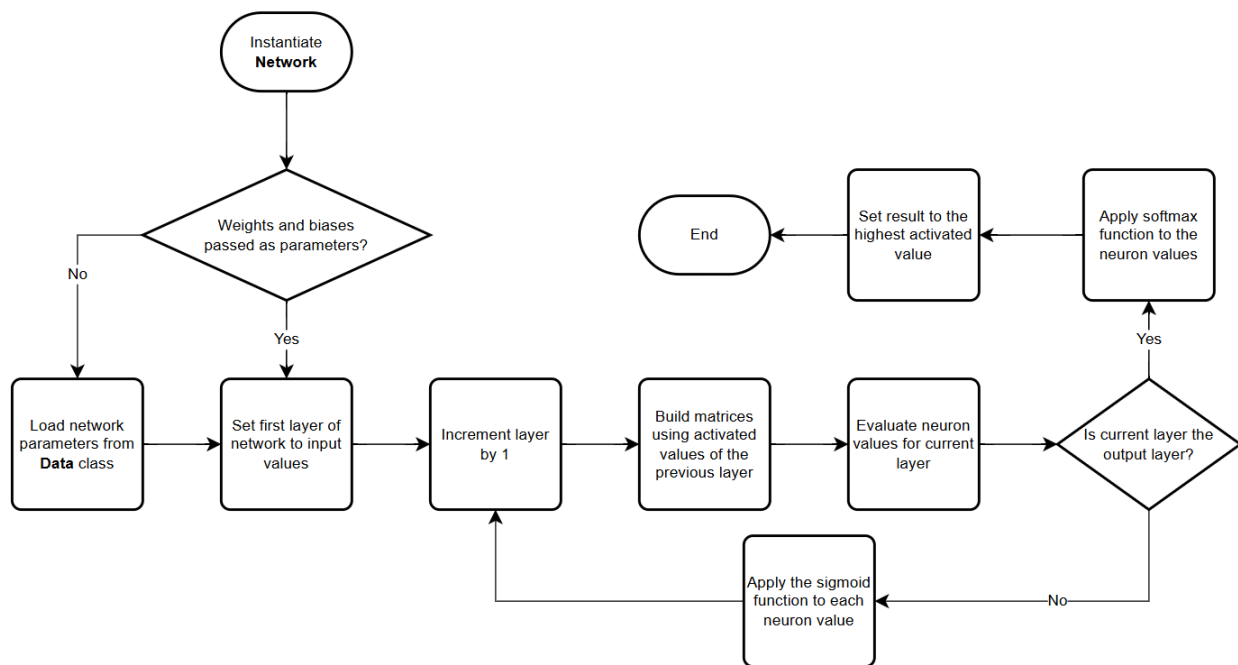


Figure 16: Flowchart detailing the forward pass of the neural network

The use of static Matrix and Vector objects in the **Data** class was not something incorporated in the prototype, even with the external library classes. Instead, the prototype created the Matrix and Vector objects from the MathNet library which were required for the current layer on each pass. This process was inefficient for the memory usage of the server—the new approach uses around 30 megabytes less memory during runtime, and uses my own Matrix and Vector classes which gives more control over how these classes function.

The pseudocode below outlines the forward pass of the network:

```

func EvaluateNetwork() {
    foreach (layer in network_layers) {
        neuronsVector = BuildMatrix(activatedValues[layer-1])
        neuronValues[layer] = (neuronsVector * weightsMatrix + biasesVector)
    }
}
  
```

```

        if (layer is output_layer) {
            activatedValues[layer] = Softmax(neuronValues[layer])
        }
        else {
            foreach (neuron in layer) {
                activatedValues[layer][neuron] = Sigmoid(neuronValues[layer][neuron])
            }
        }
    }

    maxValue, maxIndex = -1, -1
    foreach (neuron in output_layer) {
        if (activatedValues[output_layer][neuron] > maxValue) {
            maxValue, maxIndex = activatedValues[output_layer][neuron], neuron
        }
    }
    result = maxIndex
}

```

2.3.2 Data Structures

As stated in the introduction to the Design section, the server application implements its own **Matrix** and **Vector** structures for the forward pass of the neural network. By using operator overloading, methods can be created which override the functionality of arithmetic operations. This is especially useful for these structures since their operations are performed in unintuitive ways, and it improves the legibility of the code. I have implemented the operations which are specifically required by the neural network such as multiplication of a vector and a matrix. Additionally, some similar operations to the required ones were also added for completeness. The values in the **Matrix** and **Vector** structures are stored by a private array, and access to these values is controlled by an index overriding subroutine. This allows the indexing property to be directly applied to the object reference for these classes, which would mirror an array data type better than using public ‘getters’ and ‘setters’

Both of these structures implement public methods to get the dimensions of their stored data. The **Matrix** structure contains two of these methods: one for each dimension, whereas the **Vector** structure only contains one since it is one-dimensional. Additionally, both structures have a public method to extract the entire private array, which is used in obtaining the neuron values after a layer has been calculated in the forward pass of the network.

Matrices

The **Matrix** class contains two constructors. The first constructor takes in two integers as arguments and creates an empty matrix with the specified dimensions. This is used when performing an operation on two matrix/vector structures, since the result of the calculation is first initialised to an empty matrix/vector. The second constructor is used when building a matrix object from an array of values, and therefore passes in an array as the constructor argument.

The first set of operator overloads present in the **Matrix** class are the addition and subtraction of two matrices. First a check is made to ensure that the matrices have dimensions such that the addition can be performed: the matrices must have identical dimensions. A new **Matrix** structure is then instantiated with the same dimensions as the input matrices. The program iterates through each value of the resulting matrix using two embedded iteration structures, and sets the value to either the sum or the difference of the corresponding values in the input matrices.

The remaining operator overloads are used to multiply matrices and vectors together. Since only the operation of multiplying a **Vector** by a **Matrix** is required, I will only document this method. However I

have also implemented methods for multiplying the converse of this, and multiplying two matrices together for completeness. Similar to addition, the first check of the method is to ensure that multiplication can be performed on the inputs. This is done by checking if the length of the vector is equal to the number of rows in the matrix. A new **Vector** structure is then instantiated, passing in the number of columns in the matrix as the parameter since this value will be equal to the length of the resulting vector from this operation. The program then iterates through each value in this new vector object, and initialises a new ‘sum’ variable. Another iteration structure is started, which iterates through each row element of the current column in the matrix and multiplies it by equivalent value from the vector object. Each result of these multiplications is added to the ‘sum’ variable, which is set to the appropriate value of the resulting vector object. The pseudocode for this process is outlined below:

```
func operator *(Vector vector, Matrix matrix) -> Vector {
    if (vector.length != matrix.rowCount) {
        return
    }

    length = matrix.columnCount
    Vector result = new Vector(length)

    foreach (outputValue in result) {
        sum = 0
        foreach (value in vector) {
            sum += matrix[value, outputFile] * vector[outputValue]
        }
        result[outputValue] = sum
    }
}
```

Vectors

The **Vector** structure contains two constructors, similar to the **Matrix** structure. The first constructor takes in one integer as an argument and creates an empty vector with the specified dimension. As with the **Matrix** structure, this is used for the resulting vector when performing an operation on two matrices/vectors. The second constructor is used when building a vector object from an array of values, and therefore passes in an array as the constructor argument.

This structure only contains one set of operators, since the operations involving both a matrix and a vector are found within the **Matrix** structure. These operations are for the addition and subtraction of two vectors. Only the addition operation is used by the neural network, however subtraction works in almost an identical way. First, a check is made to see if the addition operation is valid for input vectors. This is done by comparing the lengths of the two vectors—if they are not equal then the calculation cannot be performed. Otherwise, a new **Vector** structure is instantiated, passing in the length of one of the input vectors as its parameter. The program then iterates through each value of the resulting vector object, and sets each value to the sum of the corresponding values from each of the input vectors.

2.3.3 Backpropagation

Backpropagation is the process by which the parameters for the network are optimised to accurately evaluate a user’s submission. The **Backpropagation** class is constructed with a batch of training data, where the size of the batch is assigned to a variable. The weights and biases for the network are then loaded using the methods in the **Data** class which return arrays of arrays. These methods differ from using the static **Matrix** and **Vector** objects, since they allow direct access to the network parameters and backpropagation does not require any matrix operations to be performed. The list below outlines the general process for performing the backpropagation algorithm.

- Perform the forward pass of the network.

- Calculate the neuron errors for the output layers.
- Calculate the neuron errors for the hidden layers.
- Calculate the weight gradients and the bias gradients.
- Update the network parameters using the average gradients.
- Save the updated network parameters to their respective files.

The program then iterates through each set of images and labels, and applies the backpropagation algorithm to these sets. A new instance of the **Network** class is instantiated, passing in the input values and network parameters. The result of the network is then accessed using the 'GetResult()' method—if the result correctly matches the label of the image, then a counter is incremented to represent the number of images the network has gotten correct for the current batch. A second counter is incremented regardless of this condition to represent the total number of images processed, in order to produce an accuracy percentage.

The neuron errors for the output layer are then calculated using the expected result of the network: the label of the image. The softmax error function is applied to each neuron in the output layer, which is equal to the derivative of the mean-squared loss function. The loss is also calculated and returned, as an indication of the rate at which the network is learning.

$$\delta_i^L = 2(a_i^L - y)$$

The neuron errors for the hidden layers are then calculated using the errors from the previous layer. The program iterates through each remaining layer, excluding the input layer and applies the sigmoid error function to each neuron. Each neuron error in the next layer is multiplied by the weight connecting it to the current neuron in the current layer. These values are summed for each neuron in the next layer which the current neuron connects to. This sum is then multiplied by the result of applying the derivative of the sigmoid function to the neuron value.

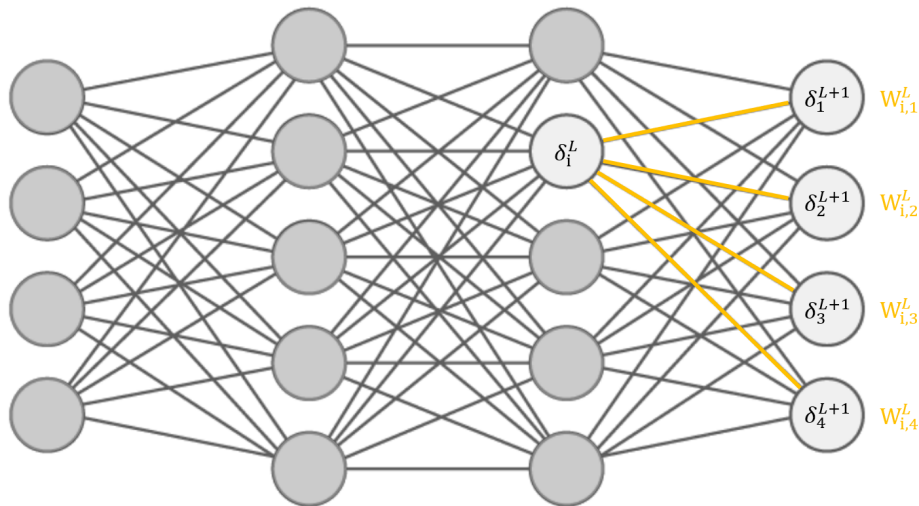


Figure 17: The product of the weights and neuron errors are summed across all connected neurons

Once all the neuron errors have been calculated, the gradients for the network parameters can be calculated. These represent the multi-dimensional 'direction' which minimises the cost function the quickest. The bias gradients are equal to the neuron errors, so no further calculations have to be made. For the weight gradients, the program iterates through each weight in the network. The gradient for a specific weight is the product of the activated value passed through it and the neuron error of the neuron it connects to. These gradients

are then returned and appended to a list of the adjustments to the network parameters for each image in the current batch.

$$\frac{\partial C}{\partial W_{i,j}^L} = \delta_j^{L+1} \cdot a_i^L$$

After the backpropagation algorithm has been applied to all of the images in the current batch, the average gradient for each network parameter is calculated from the lists of adjustments, W and B . This is done by iterating through each of the weights and biases, and summing all of the adjustments to the current parameter.

$$w'_{i,j} = w_{i,j}^L - \frac{\text{learning rate}}{\text{batch count}} \cdot \sum W_{i,j}^L$$

$$b'_i = b_i^L - \frac{\text{learning rate}}{\text{batch count}} \cdot \sum B_i^L$$

These averages are then multiplied by the learning rate, and each resulting gradient is subtracted from the current value of the parameter. The updated network parameters are then saved to the respective files using methods from the **Data** class. The average accuracy and loss for the current batch are also logged to the console.

The pseudocode below outlines the general process behind the backpropagation algorithm

```
func Backpropagation(inputImages, expectedValues) {
    batchCount = inputImages.Count

    foreach (image in inputImages) {
        weightGradients, biasGradients, loss = Backpropagate(image, expected, weights, biases)

        weightAdjustments.Add(weightGradients)
        biasAdjustments.Add(biasGradients)
        losses.Add(loss)
    }

    updatedWeights = UpdateWeights(weights, weightAdjustments)
    updatedBiases = UpdateBiases(biases, biasAdjustments)

    SaveWeights(updatedWeights)
    SaveBiases(updatedBiases)
}

func Backpropagate(input, expected, weights, biases) {
    network = new Network(input, weights, biases)

    loss = CalculateOutputErrors(network, expected)
    CalculateHiddenErrors(network, weights)

    foreach (layer in network) {
        foreach (weight in layer) {
            weightGradients[layer][weight] = neuronErrors[layer + 1][weight] *
                activatedValues[layer][weight]
        }
    }
}
```

```

        return (weightGradients, neuronErrors, loss)
    }

```

The pseudocode below details how calculating the neuron errors can be implemented. These functions are implementations of their equivalent functions in the previous pseudocode block. The implementations of ‘UpdateWeights()’ and ‘UpdateBiases()’ have not been included as pseudocode, since the processes are simply computing a mean average.

```

func CalculateOutputErrors(network, expected) {
    foreach (neuron in output_layer) {
        y = 1 if expected == neuron else 0
        loss += (activatedValues[neuron]-y)^2
        neuronErrors[output_layer][neuron] = 2 * (activatedValues[neuron]-y)
    }
    return loss
}

func CalculateHiddenErrors(network, weights) {
    foreach (layer in hidden_layer) {
        foreach (neuron in layer) {
            sum = 0
            foreach (error in neuronErrors[layer + 1]) {
                sum += weights[layer][neuron] * error
            }
            neuronErrors[layer][neuron] = sum * dx_Sigmoid(neuronValues[layer][neuron])
        }
    }
}

```

2.3.4 Image Preprocessing

The image submitted by a user may not conform to the standards of the training data. When a submission is received, it is preprocessed by the ‘PreprocessImage()’ method of the **Data** class. This performs three steps on the submitted image: cropping to the Region of Interest (ROI), extending the image dimensions, and adding padding around the ROI. The resulting 28×28 image is then converted to an array of real numbers between 0 and 1 depending on the brightness of each pixel.

The ROI is determined by pixels which are not white. A pointer is created for each axis-aligned direction which points at the furthest non-white pixel in the given direction. These are found by iterating through each pixel and updating these pointers if their position exceeds the current value of the pointer. A fail-safe also exists for an empty image which returns the original image, since the initial value of the pointers are not valid for an image. Otherwise, a new Bitmap is created with the dimensions cropped to the ROI and the same pixel format.

The dimensions of the cropped image are then adjusted such that the resulting image is a square. If the image is already a square, it is scaled down to 24×24 pixels and returned. Otherwise, the largest of the two dimensions is obtained using the ‘Math.Max()’ function, and the image offset is set to the mean of the two dimensions. The direction which the image offset is to be applied is then set to the shorter of the two dimensions. A new bitmap is then created with both dimensions equal to the largest dimension of the cropped image, and its pixels are set to white. The method then iterates through each pixel in the new image and checks the pixel is not out of bounds of the cropped image. The pixel is then new image is then set to the pixel of the cropped image with the offset applied in the correct direction. The final image is then scaled to 24×24 pixels and returned as a new Bitmap.

```

if (i < image.Width && j < image.Height) {
    if (extendDirection == 'w') {

```

```

        square.SetPixel(i + offset, j, image.GetPixel(i, j));
    }
    if (extendDirection == 'h') {
        square.SetPixel(i, j + offset, image.GetPixel(i, j));
    }
}

```

The padding is then added to the 24×24 image as 2 white pixels on all sides. This is done by creating a new Bitmap with dimensions 28×28 , which is filled with white pixels. The 24×24 image is then added to this image, offset by (2, 2) which places it in the centre.

2.3.5 Training

Training a neural network involves feeding it through thousands of existing data, consisting of the image and its associated label. These are stored in GZip files, which can be read using the **GZipStream** class. When a new **Training** class is instantiated, it first loads the images and labels from their files. The training data contains 731,668 images and labels, so I opted to use the first 500,000 which although includes lowercase letters, these are discarded when the data is filtered.

File Loading

First, a new 'FileStream' object is created which points to the required GZip file. A new 'GZipStream' can then be created using this object and setting the compression mode to decompress. The file contains metadata of length 16 bytes, so these bytes are discarded by the reader. The program then repeatedly reads exactly 784 bytes from the stream and creates a new 1D array to store these values. The values range from 0 to 255 which represents the brightness of a given pixel. These are normalised to values between 0 and 1 by dividing by 255 and assigning to a new array. The created image is then added to a list of images and the current progress of loading the images is logged to the console.

The labels are read in a similar way but have differences in the number of bytes to be read. The metadata for the labels is only 8 bytes long, so the reader discards 8 bytes instead of 16. The labels are only a byte long, so the program iterates through each label and appends each label to a byte array. These numbers range from 0 to 61, since the dataset includes digits, uppercase letters, and lowercase letters.

Filtering

Once the images and labels have been loaded, the digits and lowercase letters need to be filtered out of the set, to leave only the uppercase letters. The 'FilterImages()' method creates new lists for the filtered images and labels and iterates through each image-label pair in the full set of data. The uppercase letters have labels between 10 and 35, so if this condition is met, the current images and labels are appended to the filtered lists. The value of the label is adjusted so that they range from 1 to 26 instead of 10 to 35.

Sampling

The program then iterates over the following sequence a set number of times, which represents the number of training iterations that will be performed. I have set this to the number of images divided by the size of a batch.

First a random integer is chosen between 0 and 50 less than the number of images. A range of 50 images and labels is then extracted from the filtered dataset, starting at the index chosen by the random integer. This set of 50 images and labels is then fed into the constructor of the **Backpropagation** class, which trains the network.

2.3.6 File Organisation

In order to save and load the network parameters, I opted to store the values as plaintext. I formatted the values as separated by commas and line breaks, where each layer has its own file. For the weights, each line

represents a single neuron where each comma separated value is an arc to a neuron in the next layer. The biases are stored in a single line, with commas separating the value for each neuron.

2.3.7 UML Diagrams

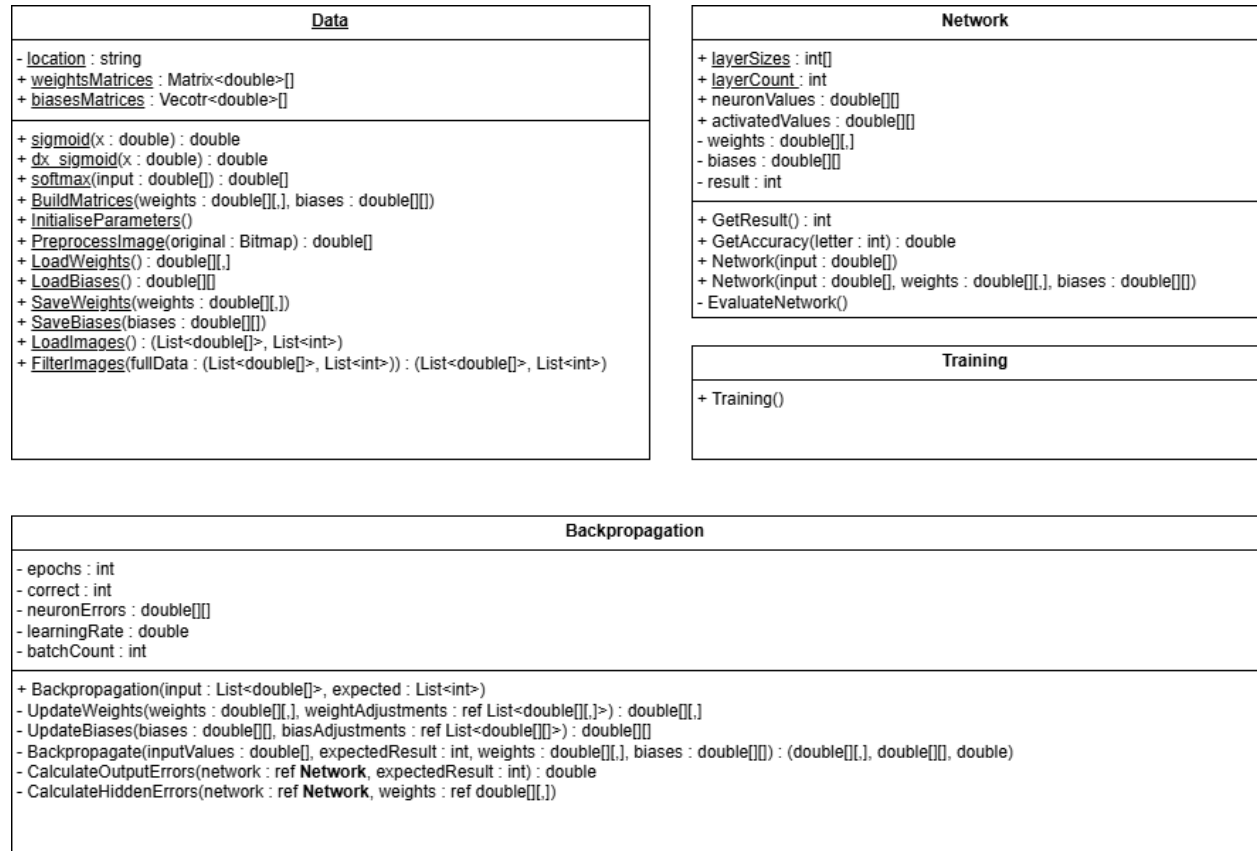


Figure 18: Class diagram for the neural network classes

2.4 Games

There are three different game types I will implement in the technical solution. Each of these will inherit a base class for an abstracted game type, and an interface identified by IPlayable. The base class will include modules which are common across all game types, and also ones which can be overridden in order to extend their functionality.

The IPlayable interface consists of subroutines which make up the core functionality of a game. This is to allow different ‘phases’ of a game to be called from outside the class, such as when a client submission is received. It also provides methods for retrieving information about the game, such as its type or the number of players currently queued into it.

```

interface IPlayable
{
    bool QueueUser(string userID);
    bool DequeueUser(string userID);
    Task UpdateUsers();
    Task StartGame();
    Task SubmissionPhase();
}
  
```

```

    void LoadResponse(string userID, byte[] input);
    void EvaluationPhase(char letter);
    Task ContinueRequest(string userID);
    void EndGame();
    Games GetGameType();
    string GetGameID();
    bool HasStarted();
    int GetPlayerCount();
    int GetMaxPlayers();
}

```

An enumerable type with the identifier ‘Games’ is used to differentiate between game types, where the abstract game class will include a protected attribute of this enumerable. This is used when queueing users into the requested game type. It should be noted that the name of each game has changed since the Modelling section of Analysis was conducted.

```

enum Games
{
    Accuracy,
    Versus,
    Elimination,
}

```

The currently active games are stored in a list of the IPlayable type in the **Queueing** class, which allows it access to the public ‘get’ methods of a game. This allows the class to appropriately queue a user when a request is made.

2.4.1 Queueing

When a user queues a game, they provide the game type as an enumerable and their userID. The **Connection** class forwards this request to the **Queueing** class and additionally provides the IHubContext of the **Connection** class, which allows for communication with the client from within the game class. By iterating through each game in the list of current games, a suitable game may be chosen if it meets the required criteria.

- The type of the game must match the requested type by the client
- The number of players in the game must be less than its maximum capacity
- The game must have not started yet

If a suitable game is found, the user is queued into the game using the methods available through the interface. This method returns the gameID as a string, which is used to uniquely identify the game when the user leaves the game, since the users in a game is not a public attribute nor available through the interface.

If no suitable game can be found, a new game of the requested type is instantiated. This is implemented by creating a new ‘IPlayable’ object, which is assigned the instance of the requested game class using a switch statement on the enumerable ‘Games’. In the unlikely event that the value of the enumerable passed by the client does not match a valid game, an exception is immediately thrown. This can only occur if the possible game types registered differs between the server and the client.

The userID and IHubContext are passed as constructor arguments, where the userID is used along with the current time to create the gameID. The new game is added to the list of active games, and the user is queued into the game using the interface method.

After a user has been successfully queued into a game, the gameID is returned to the client which then sends a confirmation to the server. When a user joins a game, the list of users for every user in the game

needs to be updated. However if this method is called when a user queues, it causes the client to try and render the list of users before it has loaded the game. The confirmation alleviates this issue by only calling 'UpdateUsers()' once the confirmation has been received.

A user can dequeue from a game either by closing the application or clicking the 'Home' button. Regardless, a request is made to the server to dequeue the user from the current game, which is provided by passing the gameID as a parameter. Once the user has been dequeued, the 'UpdateUsers()' method is called. If the user leaving the game results in the game having zero users in it, then it is disposed and removed from the list of current games. The 'Elimination' game type overrides the method to dequeue a user and additionally removed the userID from the list of alive users.

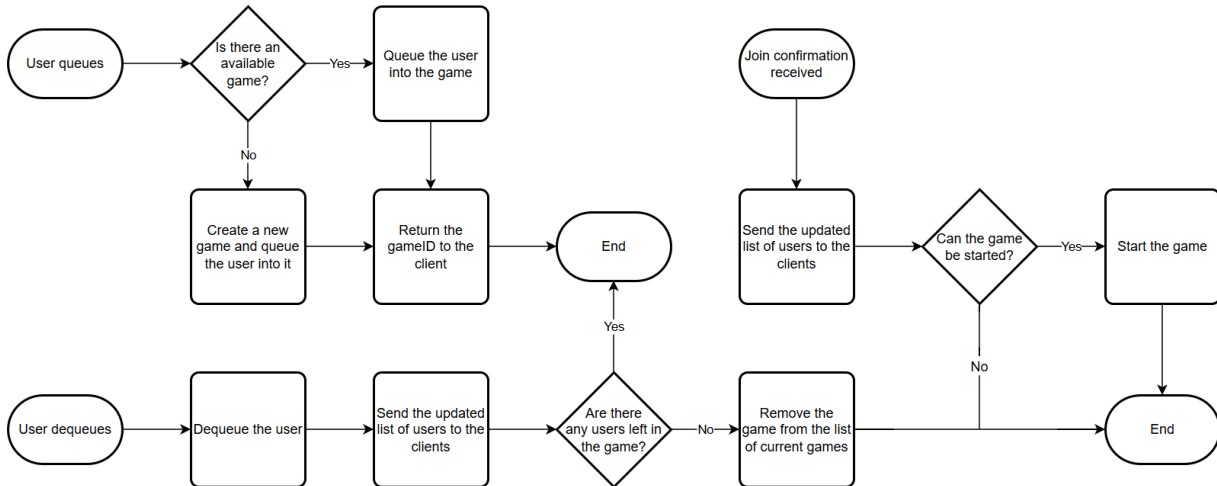


Figure 19: Logic of queueing, dequeuing, and join confirmations

2.4.2 Game Logic

The constructor for each game type has no body, and only calls the base class constructor with additional parameters to the userID and IHubContext. The game type as an enumerable is passed, along with the maximum number of players for the specific game type.

The base class then creates the gameID, and sets the appropriate protected attributes of the class to the constructor parameters. The protected instantiated attributes also have a value assigned to their allocated memory, such as the list of users and their userData, and the responses and continue requests for a round. The userDatas in a game are stored as a list of 'friendData' structures, since the game only requires the rank of a user. A boolean value is set to false which indicates if the game has started, and the number of rounds that have occurred is set to zero.

Each game contains a dictionary of a structure which stores the statistics for a single user. Each userID is mapped to their statistics for the current game, which are stored as lists of accuracies and elapsed times. The structure contains a method which updates these statistics by passing in the results for a given round.

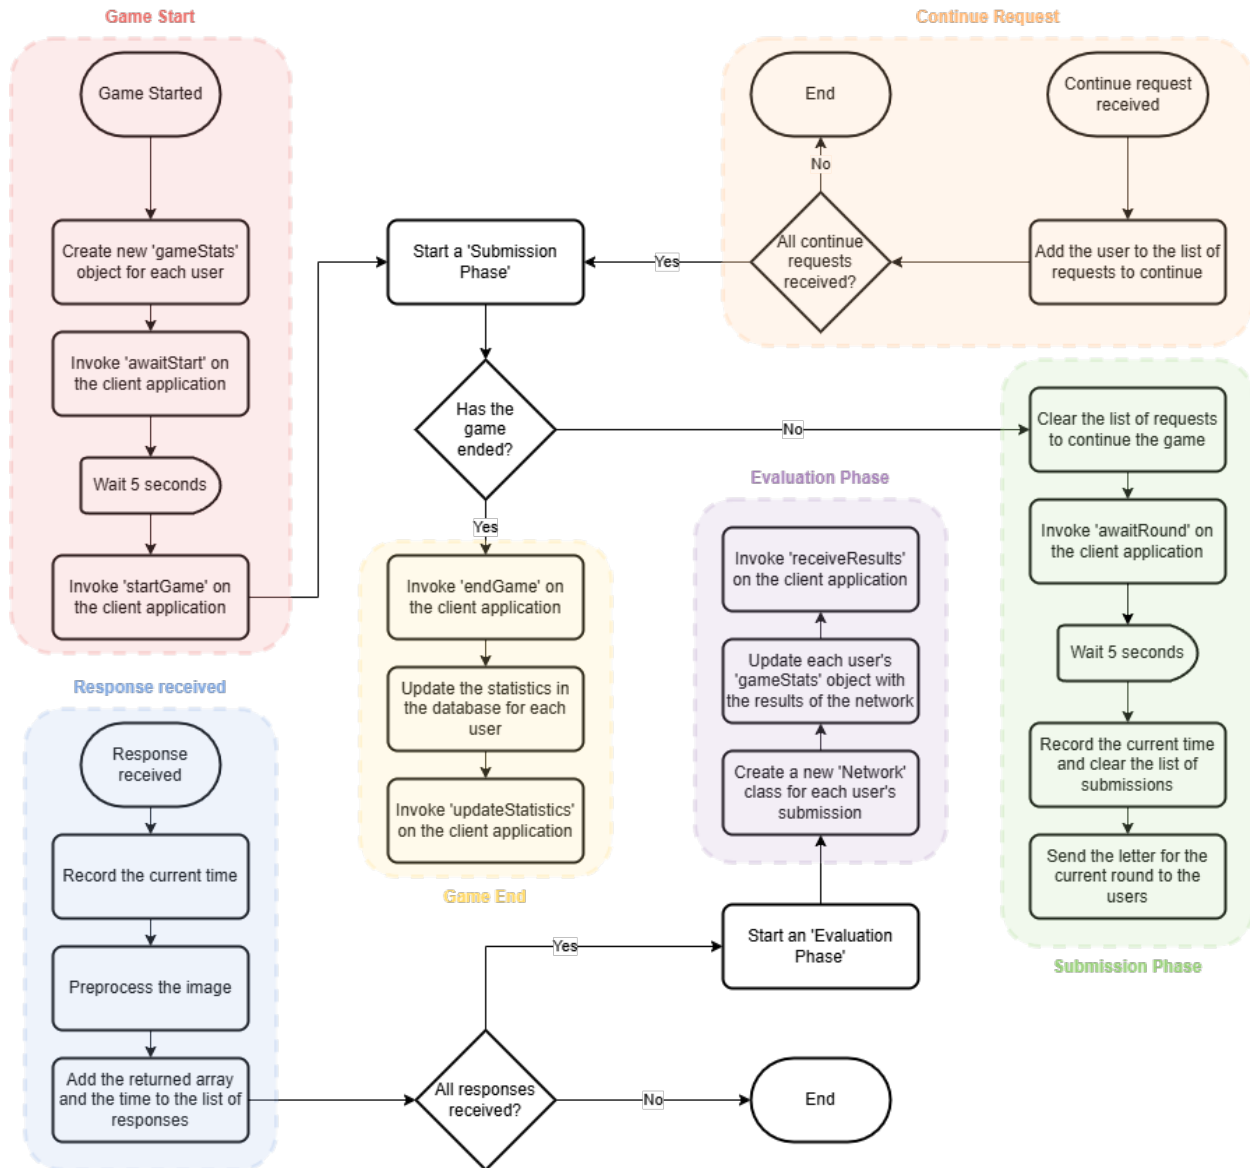


Figure 20: Logic of a generic game on the server application

Queueing

When a user is queued into a game from the **Queueing** class, the user's rank is loaded from the database using the friendData structure and added to the list of userDatas, as well as the list of users. If the database fails to retrieve the relevant information, then the method returns false. This is propagated back through the call stack, eventually sending an error message to the client.

To dequeue a user, their userData and userID are removed from the relevant lists. This method also returns false if the userData of the user cannot be found in the list, however the calling method does not handle this exception.

When the **Queueing** class queues or dequeues a user, it also accesses a method to update the users through the interface. This sends an updated list to the users already in the game which causes them to refresh the list of users on the client application.

Game Start

The method used to start a game is called from the **Queueing** class when a user join acknowledgement is received. Each game type has a unique implementation of this method, where calling the base method followed by calling the submission phase is common across all game types.

The base method sets the boolean value to represent if the game has started to true, and creates a new 'gameStats' object for each user to store the results for the current game. A message is then sent to the clients to set up the application for the first round. After five seconds, a second messages is broadcasted which signals that the game is now starting.

The 'Accuracy' game type uses the 'GenerateLetters()' method in the abstract class to randomly generate 10 letters for the game. The 'Versus' game type additionally sets the score of each user to zero, and caches the userData for both users so the Elo rating of each is updated even if they dequeue. The 'Elimination' game type does not generate any letters and instead copies the list of users into a new list which contains the alive users.

Submission Phase

Each game type has a unique implementation for the submission phase of the game, and there is no base method to override. The submission phase is where a letter is sent to the clients, and their responses are recorded.

For the 'Accuracy' and 'Versus' game types, the game is ended if the number of rounds played is equal to the set number of rounds for that game. Otherwise, the list containing the requests to continue to the next round is cleared, and the 'AwaitRound()' method is called which sends a message to the clients for a countdown to be started for the next round. After three seconds, the current time is recorded, and the list of user submissions is cleared. The 'SendLetter()' method from the base class is then called, with the users and current letter passed in.

The 'Elimination' game type additionally overrides the 'AwaitRound()' method, since only the alive users should be able to play in the current round. For its implementation of the submission phase, the condition to end the game is if the number of alive users is equal to one. The letter for the current round is also generated, and broadcasted to the clients.

When a user submission is received by the **Connection** class as a byte array, it is forwarded to the **Queueing** class to allocate it to the associate game class. The base method for 'LoadResponse()' converts the byte array to a Bitmap and preprocesses the image using the static method from the **Data** class. This returns an array which it adds to the dictionary of responses for the current round, with the userID as the key, and a tuple of the array and the current time as the value. This allows the elapsed time the user spent on their submission to be calculated.

Each game type extends the functionality of the 'LoadResponse()' method, and checks if all the expected responses have been received. This differs in the 'Elimination' game type, hence why each has their own implementation. If all the user submissions have been received, then the evaluation phase is called.

Evaluation Phase

Each game type has their own implementation of the 'EvaluationPhase()' method, with no base method to override. All of the game types use the 'EvaluateSubmission()' method in the base class, which creates a new **Network** class to evaluate the user's submission. The result of the network is compared to the current letter to determine if the user was correct, which is returned as a boolean value. The elapsed time is calculated as the difference between the time the submission was received and the start time of the current round. The accuracy is extracted from the neural network as the activated value of the appropriate neuron for the given letter. The statistics for the current round are then added to the statistics structure for the user.

The ‘Accuracy’ game type first creates an array of the **Network** class with the size equal to the number of users in the game. It then iterates through each user and evaluates their submission using the base class method, before sending the results to the client with the ‘SendResult()’ method. The number of rounds played is then incremented.

The ‘Versus’ game type applies the same process as before for evaluating the users’ submissions. However it also utilises the return value of the ‘EvaluateSubmission()’ method, and adds these users to a list of correct users. If this list has zero users in it, then the round is a draw, and each user is given a score of 0.5. Otherwise, the user with the lowest time and who is also in the correct users list is given a score of 1, and the other user is given a score of zero. The number of rounds played is incremented and the specific results for the ‘Versus’ game are also sent, which include the user who won the round.

The ‘Elimination’ game type is similar, however creates a list of incorrect users instead. If this list is empty, then the user with the longest time is added to a local list of eliminated users and removed from the list of alive users. Otherwise, if the number of incorrect users is less than then number of alive users, then these users are eliminated from the game. The specific results for the ‘Elimination’ game are then sent to the clients with a list of the alive users, which allows the client to refresh their list of users and determine if they were eliminated. This is only broadcasted to the alive users, and user who were eliminated in the current round, since users eliminated in a previous round should not receive these results.

When the client application loads the results for the current round, it loads a ‘Continue’ button. If a user presses this button it is received by the **Connection** class and forwarded to the appropriate game through the **Queueing** class. The userID is added to a list of continue requests, after checking that the user has not already clicked the button in the current round. If the size of the continue requests list is then equal to the number of users in the game then a new submission phase is started which loads the next round of the game. The ‘Elimination’ game type will check if its size is equal to the number of alive users, rather than the total number of users.

Game End

The conditions to determine if a game should end are checked in the submission phase method, which calls the ‘EndGame()’ method if the conditions are met. The ‘Versus’ game type extends the functionality of this method, in order to recalculate the users’ Elo ratings.

First, a message is sent to all the users that the game has ended, to allow the client application to load the ‘Game End’ screen. The program then iterates through each user and iterates through each round that the user completed, since this varies in the ‘Elimination’ game type. The user’s userData is loaded from the database and the ‘UpdateStatistics()’ method is called, passing in the userData, current letter and the current round index as parameters. This takes the loaded statistics from the database for the current letter, and updates them with the new results. These new values are then inserted into the database, and a message is sent to the current user containing a ‘statistics’ structure of the current letter.

The ‘Versus’ game type updates each user’s Elo rating before calling the base method. The program iterates through each user and calculates their expected score, and thereby their updated rank using the appropriate K-factor. The current rating for the user is obtained from the cached userData from when the game was started. The database is then updated with this new rating, which is also sent to the user by invoking the ‘receiveVersusResult’ handler on the client application.

2.4.3 Data structures

Each game class instance contains a list of the users who are queued into the game, as well as an integer for the maximum number of users that can join the game. A game also contains a unique ID which allows user submissions to be sent to the correct class instance.

In each game there is a dictionary which stores the statistics for every user. The key is a string value representing the userID, and the value is a structure. This contains a set of values for each letter completed: whether the user was correct, their accuracy, and the time it took them. The structure also contains a subroutine to update these values during the evaluation phase.

```
public struct gameStats
{
    public List<bool> correct;
    public List<double> accuracy;
    public List<TimeSpan> time;

    public void update(double accuracy, TimeSpan time, bool correct)
}
```

For every round, there exists a Dictionary ‘currentResponses’ which stores the users’ submissions during the submission phase. The key is set to the userID of the submission, and the value is a tuple containing both the time of submission and an array containing the image data.

2.4.4 Object-Oriented Design

Each game type inherits methods and properties from the **Game** class, and implements the **IPlayable** interface. The **Game** class contains generic methods that each game utilises, and also implements some of the methods from the **IPlayable** interface. A number of its methods are virtual, which allows the specialised games to extend their base functionality. Each game contains a ‘gameStats’ structure for each user, and the games are owned by the **Queueing** class. The associations between the classes has not been shown in the below figure, due to the complexity of the diagrams, and is instead shown in section 2.7.

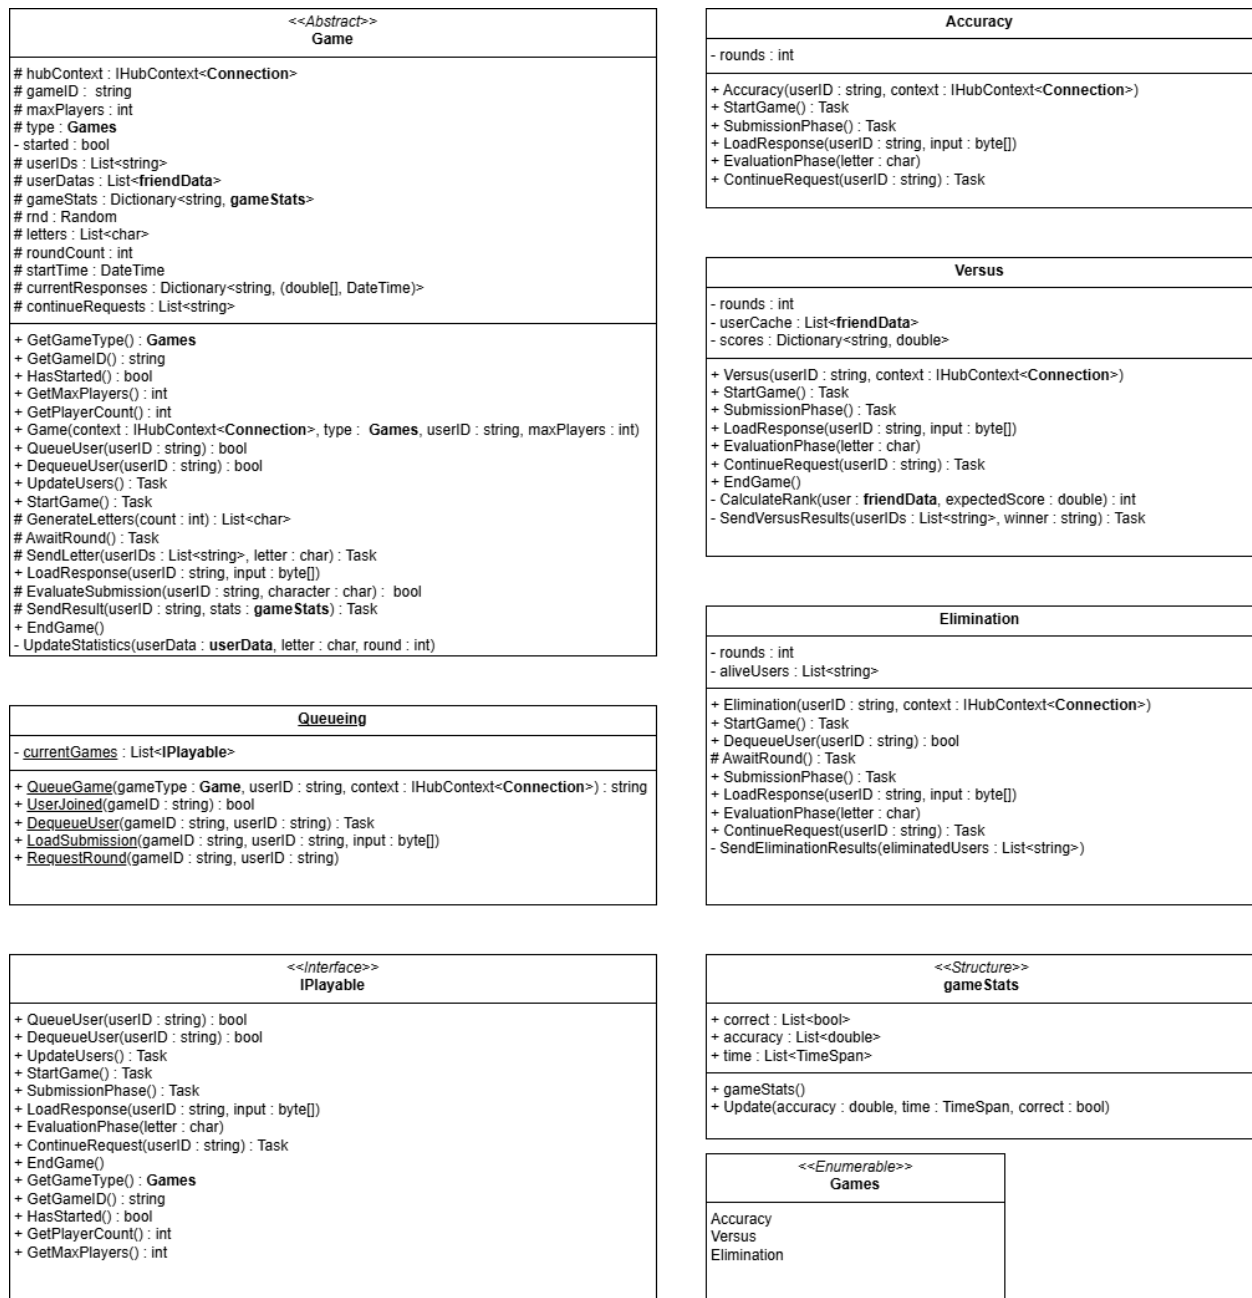


Figure 21: UML diagrams for the Game classes

2.5 Database

The SQL database is used to store user accounts, their details, and relationships with other accounts. There are four tables: ‘userData’, ‘statistics’, ‘friends’, and ‘friend invites’. The ‘userData’ table is used to store the account details of a user, which includes their login credentials, Elo rating, and localisation. Each user has 26 records detailing their statistics for each letter. As this is a one-to-many relationship, the ‘statistics’ table stores these values, using the letter and userID as a primary key. The userID is also a foreign key, which links the statistics records to the account in the ‘userData’ table.

The ‘friends’ table creates a link between two userIDs, which represents that they have added each other

as friends. Only one link exists per friendship which means extra logic is required to return the friends of a given user, since the user could be the first or the second user in the record. The ‘friend invites’ table is used when a user sends a friend request but the receiving user is not online. The request is instead stored in this table, and sent to the receiving user when they next come online.

2.5.1 Database Design

Since each user has 26 statistics, the ‘userData’ table exists in a one-to-many relationship with the ‘statistics’ table.

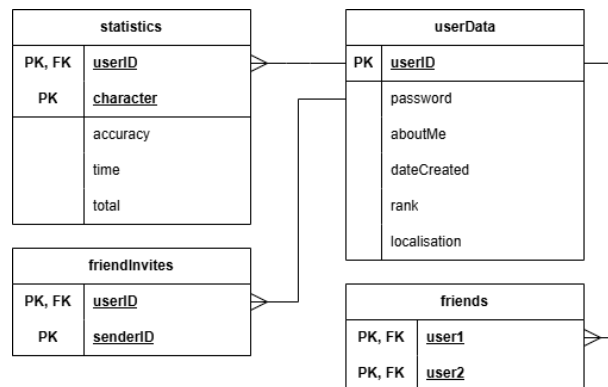


Figure 22: ER diagram for the SQL database

2.5.2 UML Diagram

Access to the SQL database is controlled and managed by the static **Database** class, which contains the ‘SqlConnection’ object used to link the C# class to the database file.

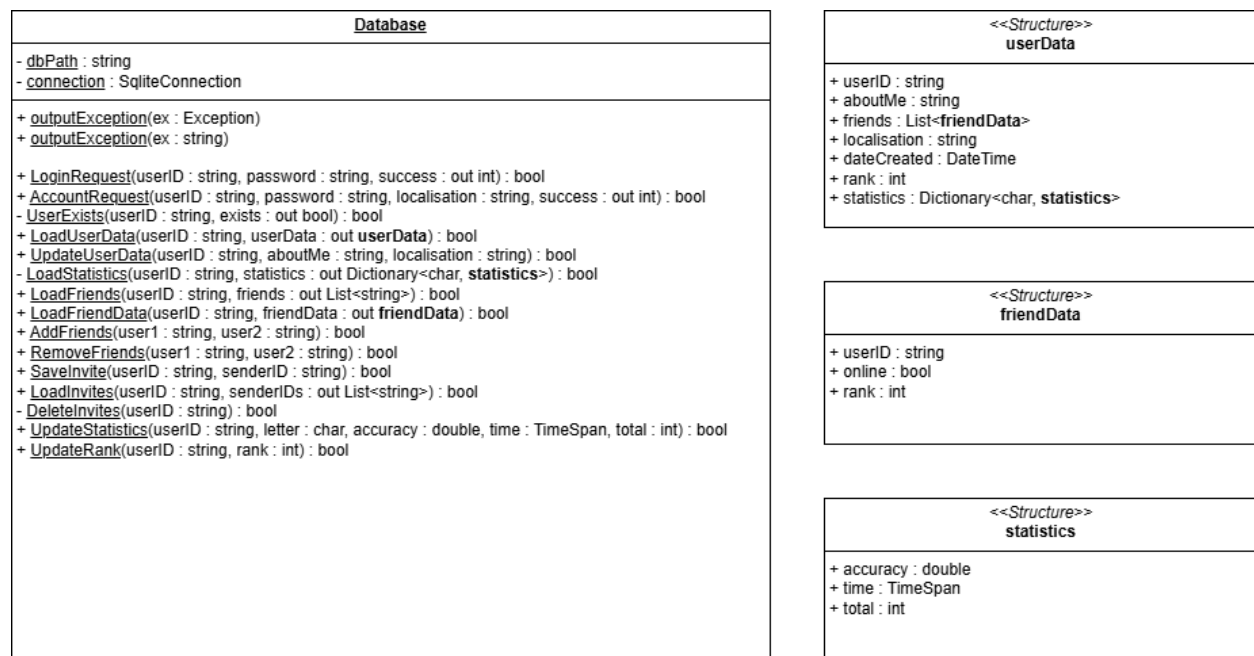


Figure 23: UML diagrams for the Database classes

2.5.3 SQL Queries

The **Database** class uses parameter queries to prevent SQL injections to the database. The parameters are recognised by the '@' symbol before the value, which are safely replaced by the requested data before each query is made.

Each method in the **Database** class returns a boolean value to represent if the query was successfully executed. If the method is requesting data from the database, then this is accessed by the calling method using the 'out' keyword. When a method from the **Database** class is called, the SQL query for the method is allocated to a string value. The values which are to be replaced by parameters passed in the method are prefixed with the '@'. The connection to the database is then opened and a new 'SqlCommand' object is instantiated with the query and 'SqlConnection' object as parameters. The arguments for the query are then injected into this object and the query is executed in the database. For an SQL command that writes to the database, the 'ExecuteNonQuery()' method is used which does not return a value. For a command that reads from the database, the 'ExecuteReader()' method is used which returns an 'SqlDataReader' object and is assigned to the 'reader' variable. If an exception occurs then the exception is logged to the console and the method returns false.

The 'LoginRequest()' method gets the password for a user and compares it against the password passed as a parameter. The 'success' of the login is initially set to 2 which represents a userID not existing in the database. The 'reader' is then read in a while loop and will therefore not run if no rows are returned. If a row exists, the returned password stored in the database is compared to the one passed as a parameter and 'success' is updated to 1 or 0 depending on if the strings match. The password in the database is hashed, so the inputted password is hashed prior before it is passed into the 'LoginRequest()' method.

```
SELECT userData.password
FROM userData
WHERE userData.userID = @userID
```

The 'AccountRequest()' method attempts to create a new user account in the database along with empty statistics records for each letter. The method first employs the 'UserExists()' subroutine to determine if the requested userID is already in use. The boolean representing this condition is an 'out' parameter of the subroutine and is assigned to the 'exists' variable. If the returned boolean of the subroutine is false, then an exception was thrown during the 'UserExists()' method and this is propagated back by immediately setting 'success' to -1 and returning false. Otherwise, the 'exists' value is checked and 'success' is set to 0 if the requested userID is present in the database, followed by returning true.

If the requested userID does not exist then a new account is created in the database with the values set to the passed parameters or their default values. The method then iterates from 0 through 25 in order to create new statistics records for the new user account. The letter stored in each record is given by adding 65 to the current iteration value and converting to a character type.

```
INSERT INTO userData
VALUES (@userID, @password, @aboutMe, @dateCreated, @rank, @localisation)

INSERT INTO statistics
VALUES(@userID, @letter, @accuracy, @time, @total)

SELECT userID
FROM userData
WHERE userID = @userID
```

The 'LoadUserData()' method is used to load the account details of a user from the database and returns a 'userData' structure. The 'out' parameter storing the userData is instantiated and the 'UserExists()' method is called. If an exception is thrown in this method then it will return false and this is propagated back by immediately returning false with the empty userData. If the user does not exist then an empty userData is still outputted but the method returns true.

Otherwise, the account details are loaded from the 'userData' table and allocated to the attributes in the 'userData' structure. The 'LoadStatistics()' and 'LoadFriends()' methods are then called, which similarly propagate any thrown exceptions. A list of the 'friendData' structure is then created, and the list of friendIDs is iterated through with the 'LoadFriendData()' method called for each. This gets the Elo rating of the users, since their online status is determined otherwise.

```
SELECT aboutMe, dateCreated, rank, localisation
FROM userData
WHERE userData.userID = @userID

SELECT letter, accuracy, time, total
FROM statistics
WHERE userID = @userID

SELECT user1, user2
FROM friends
WHERE user1 = @userID OR user2 = @userID

SELECT rank
FROM userData
WHERE userID = @userID
```

The 'LoadInvites()' method is used to get all the friend invites for a user when they log into the application. A list is first created before the SQL query is executed. Each senderID in the returned rows is added to the list of invites. The invites are then deleted from the table since the user has now received them, using the 'DeleteInvites()' method.

```
SELECT senderID
FROM friendInvites
WHERE userID = @userID

DELETE FROM friendInvites
WHERE userID = @userID
```

2.5.4 Security of Data

In order to prevent database leaks exposing the passwords of users, a hashing algorithm is implemented. Instead of storing the password as plaintext, the hashed password is stored and this value is compared against when a user logs in. The hashing algorithm I chose to implement is SHA512 from the System.Cryptography library.

2.6 Client-Server Connection

For this project there are two classes which inherit the **Hub** class: **Accounts** and **Connection**. The **Accounts** class is only used to connect users in order to login or create an account. This separates the functionality of a user who is logged in into a different class, enabling a Dictionary to be kept in the **Connection** class which maps a userID to their Context.ConnectionID. The ConnectionIDs are used by SignalR to manage the address of each client and thereby communicate with them.

The **Games** class also requires communication with the clients but does not inherit the **Hub** class. Instead, dependency injection is used to provide the class with the IHubContext of the **Connection** class. This value is passed as a parameter into the constructor when a game is created.

2.6.1 Server Configuration

For the server to be able to communicate with a client, the server must have an open port where the ‘SignalR’ package can listen to incoming requests. Due to previous experience with networking, the appropriate firewall controls already exist on the server machine for port 5252. NGINX is then used to examine the endpoint of the request and reassign its port number using reverse proxying. For this server application, I arbitrarily chose to use port 3900 as the port which ‘SignalR’ listens to. The configuration of NGINX is shown below, which is adapted from the example given in the [documentation](#).

```
listen 5252;

location /cs-nea {
    proxy_pass http://localhost:3900;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection $connection_upgrade;
}
```

To configure the server, an ‘IHostBuilder’ object is created using the ‘CreateDefaultBuilder()’ method of the SignalR library and ‘SignalR’ is added as a service to the host configuration. The configuration is set to use routing and the ‘IHubContext’ of the **Connection** class is attributed to a public member in the class. This allows other classes to access the communication methods which the SignalR library provides. The two endpoints are then mapped to their respective classes, such that any requests to the given endpoints will be received by the appropriate methods within that class.

CORS could also be set up to allow any origin to attempt a connection, which would allow devices outside the server’s LAN to communicate with the server. However this isn’t very secure without proper implementation, and would need to be thoroughly researched. As a test, I did briefly start the server application with CORS enabled, however due to the setup of my home network this did not permit connections from outside the LAN. This issue is further detailed in section 4.4.1, as I was not able to resolve it.

```
host-config {
    services {
        AddSignalR()
    }
    setup {
        UseRouting()
        hubContext = GetIHubContext<Connection>()
        endpoints {
            Connection => ("/cs-nea/connections")
            Accounts => ("/cs-nea/accounts")
        }
    }
    Logging = None
    UseUrls("http://localhost:3900")
}
```

The usage of NGINX allows the server application to bind to *localhost* only. This is because the reverse proxying forwards any requests on port 5252 with the /cs-nea endpoint to the server, so it only needs to listen for the output of NGINX which is running on the same machine. This also means the server application is not directly exposed to the internet which improves security.

2.6.2 UML Diagrams

For the ‘Accounts’ and ‘Connection’ classes, they contain methods which have zero references in the server application and are only invoked by the client. These have been shown by using camelCase rather than PascalCase as a naming convention.

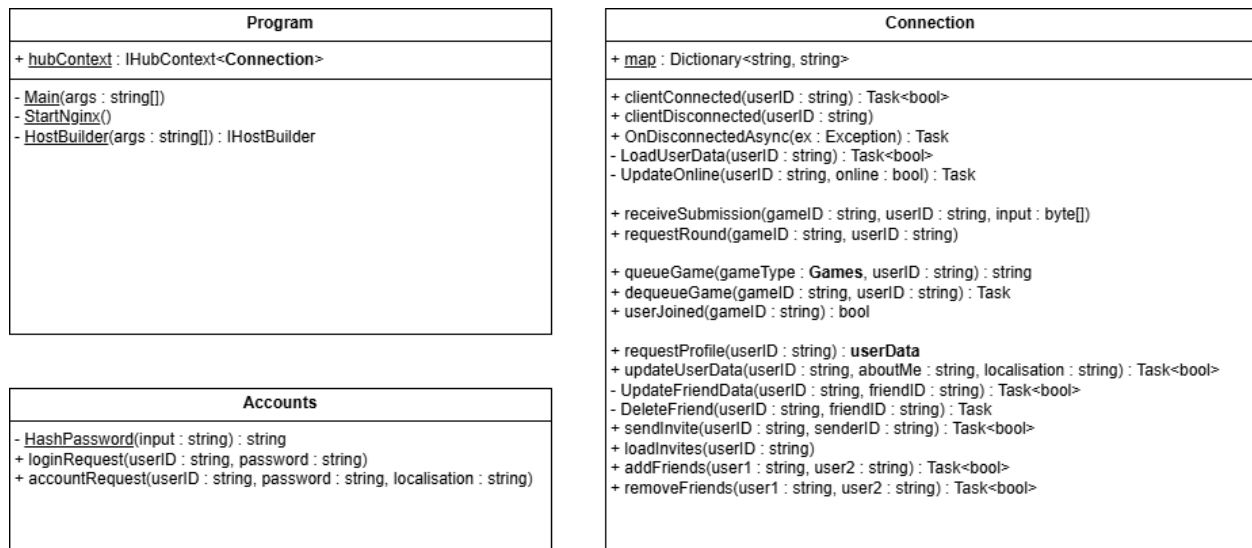


Figure 24: UML diagrams for the Connection classes

2.7 Object-Oriented Design

The diagram below illustrates the relationships between all of the classes in the server application. I have also included the associations between the classes as dotted arrows. These represent if a class uses the subclass in a local method, such as when the ‘Game’ class uses the ‘Network’ class to evaluate a user’s submission. Static classes are denoted by underlining the identifier. I have also chosen to include the **Hub** class—while this is not directly accessed by any of the classes, it is important to show which classes are assigned to an endpoint of the client-server connection.

Regarding the methods used in the server application, I implemented a specific naming system for the identifiers to remove any uncertainty in the necessity of methods. The majority of the methods will have an uppercase letter as their first character. However if the class is only invoked by the client application, it is given a lowercase letter instead. This allowed me to easily identify which classes were being used by the client application, since the IDE used (Visual Studio 2022) tagged these methods as having zero references. Usually this would imply that the method is unnecessary as it is not used, but by using this naming system it made it clearer to see that this was not the case.

The one exception to this rule is the ‘OnDisconnectedAsync()’ method of the **Connection** class. This is overridden from the base class, therefore I do not have control over the naming scheme used by it.

2.7.1 Class Diagram

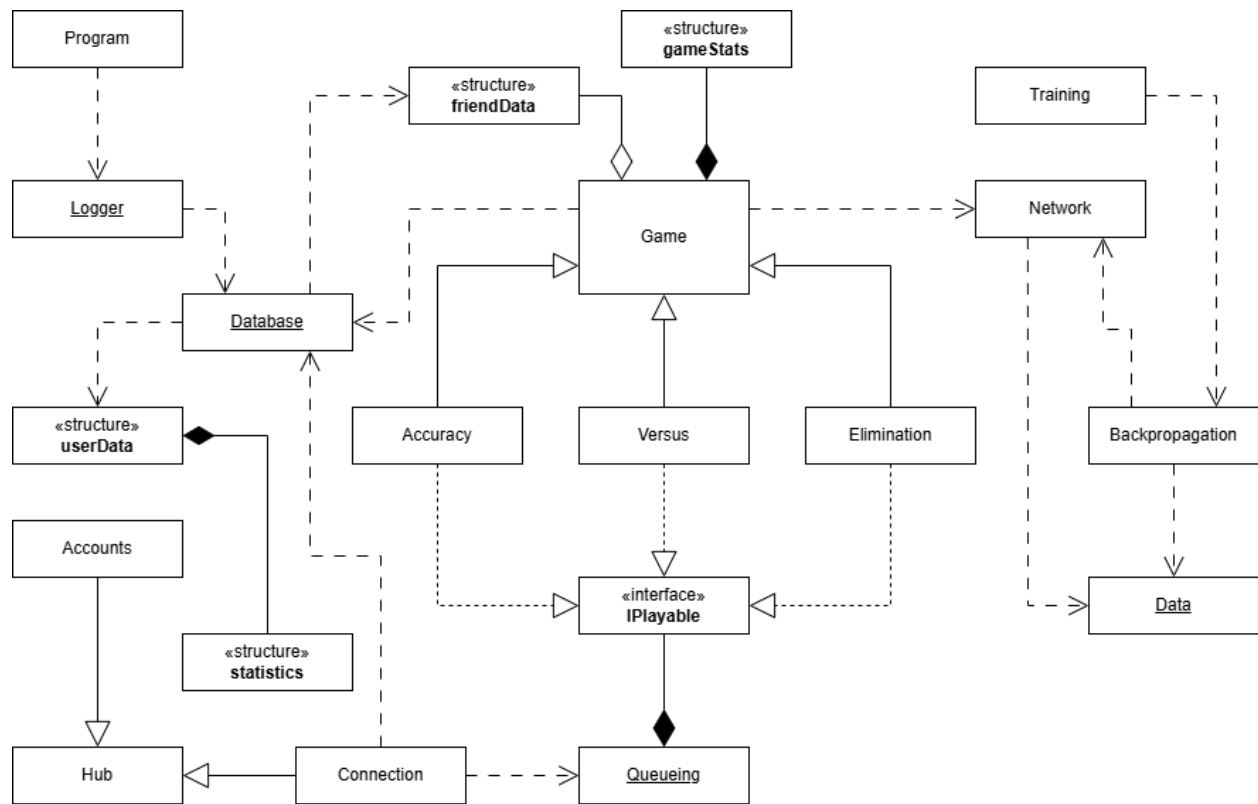


Figure 25: Relationships between the server classes

Client Design

2.8 Client Menus

The **Main** form class is instantiated by the **Login** form class when a successful login occurs. The constructor passes the userID of the account that has been logged into, and the language used by the **Login** form. The 'localisation' field of the 'userData' is then set to this language, since this field cannot be null while rendering the form. If the user's account language differs then the text is immediately updated once the userData has been loaded. The instance of the **Main** class is then injected into the **hub_connection** class, which allows methods to be called from a server invocation.

The static 'InitialiseComponent()' method of the **UXelements** class is then called, which configures the basic layout of the form—consistent across all sub-menus. The 'InitialiseConnection()' method is then called which creates a new 'HubConnection' object, independent of the connection established by the **Login** class. The connection handles are then added to the object and the connection is started. The asynchronous 'ConnectionClosed()' method is attached to the event handler of the 'HubConnection' object for the connection to the server being unexpectedly closed. The client then invokes the 'clientConnected()' method on the server, passing the userID as a parameter.

2.8.1 Accounts

The client application creates a new **Login** form class on start, after loading the languages into a dictionary. The form is created and the elements are configured and displayed to the user. The input text boxes then have event handler assigned to them which resets the information label when their contents are edited. The text of the 'language' button is then set to the current active language, using the supported languages list in the **Languages** class.

The instance of the **Login** form class is then injected into the static **hub_connection** class, which it uses to call the appropriate subroutines of the class when a connection handler is invoked by the server. The 'InitialiseConnection()' method is then called.

This subroutine configures a connection of the 'HubConnection' type, then attaches the required handlers and attempts to start the connection—this process is detailed later in section 2.12. The asynchronous 'ConnectionClosed' method is attached to the event handler of the 'HubConnection' object for the connection to the server being unexpectedly closed. This starts an attempt to reconnect, which updates the connection status label on the form to alert the user of the loss of connection.

When a successful login or account creation is made, the 'LoadMainApplication()' method is called, passing the userID as a parameter. This hides the 'Login' page, and creates a new instance of the **Main** form class, passing the userID and current language as parameters, which is allocated to the 'main' attribute of the 'menus' structure. After the **Main** class has been constructed, the 'ShowDialog()' method is then called to render the form to the screen. This method blocks the current thread while the main application is running, so the 'LoadMainApplication()' only continues once the user has closed the main application. When this occurs, the 'Dispose()' method is called on the **Main** class to free up resources, and the 'Show()' method is called on the **Login** form class. The 'InjectForm()' method of the **hub_connection** class is then called again to reassign the **Login** form class instance, since the **Main** class injects itself when it is constructed which sets the 'loginForm' attribute of the **hub_connection** class to null. By reinjecting the class instance, the server invocations will be forwarded to the **Login** form class.

Login

When the user clicks the 'Login' button, the event handler for this button is called. This extracts the text

stored in the username and password text boxes, and then resets the password text box. The credentials are then checked if they are empty or white space, terminating the subroutine if this is the case. Otherwise, the 'loginRequest()' method is invoked on the server to send the login request.

If the request is successfully handled, a response is received into the 'loginSuccess' connection handler. A switch statement is then performed with the returned success code with the following possibilities:

- VALID = 1
- INCORRECT_PASSWORD = 0
- USER_DOES_NOT_EXIST = 2
- USER_LOGGED_IN_ON_OTHER_DEVICE = 3
- ERROR_OCCURRED = -1

If the returned success code is 1 indicating the login was successful, the main application is launched by calling the 'LoadMainApplication()' method. The userID and language used in the login form is passed as a parameter, to allow the client to request the user's account data.

Account Creation

If the user clicks the 'Create Account' button, the 'Login' button is moved down and the text is replaced with 'Create Account'. A second password box is added which must have a matching password for the account to be successfully created.

When the user clicks the new 'Create Account' button, the event handler for this button is called. This extracts the text stored in the username and password text boxes, and then resets the password text boxes. If the passwords do not match, the user is informed of this through a message and the account request is not sent. Similar to the 'Login' button, a check is performed to ensure the username or password boxes are not empty or white space. The client then invokes the 'accountRequest()' method on the server, passing the username, password, and the current language.

If the request is successfully handled, a response is received into the 'accountSuccess' connection handler. A switch statement is then performed with the returned success code with the following possibilities:

- VALID = 1
- USERID_TAKEN = 0
- ERROR_OCCURED = -1

If the returned success code is 1 indicating the account creation was successful, the main application is launched by calling the 'LoadMainApplication()' method. The userID and language used in the login form is passed as a parameter, to retain the language used by the **Login** form class in the main application.

Localisation

The language of the client application can be changed by clicking the 'Language' button on the **Login** form class. The click event handler allows the user to cycle through the supported language of the client application. The method first increments the 'languageIndex' by one, wrapping around to zero if the index is equal to the number of supported languages. Any text boxes are then refreshed to reflect the new selected language, including the text of the 'Language' button.

2.8.2 User Information

When the client invokes the ‘clientConnected()’ method on the server, the `userData` for the requested user is sent to the client which invokes the ‘ClientConnected()’ method on the client. This passes the `userData` as a parameter, which is set to the static ‘`userData`’ object in the **Main** class. The ‘InitialiseComponent()’ method of the **Main** class is then called which loads the main menu onto the empty layout. The ‘loadInvites()’ method of the server is then invoked to retrieve any pending friend requests for the user.

The `userData` for the current user can be updated, which is received by a connection handler and forwarded to the ‘UpdateUserData()’ method. This passes the `userID`, about me, and localisation. If the `userID` matches the `userID` associate with the current client application, then the about me and localisation in the ‘`userData`’ structure are updated. If the user is currently in-game then no changes are made, and if they are on the main menu a full refresh is performed by calling the click event handler for the ‘Home’ button. If the ‘Profile’ object in the ‘menus’ structure is not null, then the refresh has to be performed manually. The page text is reset, which indicates which sub-menu the user is currently in. The ‘ConfigFriendsPanel()’ and ‘ConfigUserDataPanel()’ methods are then called to refresh the left and right panels with the new language. If the user is viewing their own profile, then the profile page is also refreshed.

Friends

The ‘UpdateFriendData()’ method is invoked by the server when a friend of the user updates their account data, or the user has added a friend. The method passes a ‘friendData’ structure as a parameter, and iterates through each friend of the user. If one of these friends matches the `userID` in the friendData parameter, then the current friend is updated with the new structure. Otherwise, the friend must be a new friend, so the structure is added to the list of friends. The friends panel is then refreshed if the user is not in-game.

If a friendship has been removed, the server first handles the change in friendship, and then invokes the ‘removeFriends’ connection handler on the client application. This calls the ‘RemoveFriend()’ method of the **Main** class, which iterates through each friend of the user, and removes the appropriate friendData, breaking the loop after doing so. The friends panel is then refreshed if the user is not in-game.

When a user opens or closes the client application, as part of the ‘clientConnected()’ server method, the ‘UpdateOnline()’ method on the client application is also invoked for each of the user’s friends who are online. This method has a `userID` and a boolean value representing if the user is now online or not as parameters. By iterating through each friendData, the ‘online’ attribute of the appropriate friend can be updated. If the user is not currently in-game, the left panel is refreshed to display these changes.

Social

A user can add and remove a friend through the ‘Profile’ page of the user. When a user clicks the ‘Add Friend’ button, the ‘sendInvite()’ method is invoked on the server which passes the `userID` and the `senderID`, returning a boolean value representing if the request was successful. The button is then disabled since a friend invite cannot be sent twice. If a user clicks the ‘Remove Friend’ button, the button is disabled and the ‘removeFriends()’ method is invoked on the server, which also returns a boolean value representing if the request was successful. Upon an unsuccessful request, a new **AlertForm** is created to inform the user of the failure.

The invites for a user are forwarded when the user logs into their account. The server passes a list of `userIDs` by invoking the ‘receiveInvites’ connection handler. The client creates a new **ConfirmForm** dialog box for each invite, and invokes the ‘addFriends()’ method on the server if the user clicks ‘Accept’.

2.8.3 Profiles

The **Profile** form class manages the profile page and is constructed with the instance of the **Main** class and a ‘`userData`’ structure. The ‘InitialiseComponent()’ method is then called which configures the main panel to display the profile page. This includes the `userID` and an overview of their statistics. A panel is then

configured which contains the user’s average accuracy, time, and total for each letter.

The buttons to add and remove a user as a friend are managed in the private ‘SetupButtons()’ method. This method first checks if the user is viewing their own profile, in which case both buttons are hidden. If the user is not viewing their own profile, the friends list is iterated through to determine if the user is already a friend. If they are, then the ‘Add Friend’ button is disabled—otherwise, the ‘Remove Friend’ button is hidden.

Searching

When the user clicks the ‘Search’ button, the click event handler first extracts the text in the input text box. If the extracted string is not empty or whitespace, the textbox is reset and the ‘RequestProfile()’ method is called. This method invokes the ‘requestProfile()’ method on the server, which returns a ‘userData’ structure. If the userID of this returned structure does not match the requested userID, then a message is shown to the user that the requested user does not exist. Otherwise, the page text is set to “Profile”, and a new instance of the **Profile** class is created in the ‘menu’ structure. The instance of the **Main** class is passed as a parameter, as well as the returned ‘userData’ structure.

Algorithms

Each user has an overview of their statistics which can be viewed both on the home page and in the profile page. This includes the total number of rounds they have played, their Elo rating, and their average overall accuracy. The Elo rating is obtained from the ‘userData’ structure, so no calculations are required. By iterating through each letter, the total rounds played can be summed. The average accuracy is calculated by summing the accuracies for each letter, and dividing by the number of letters. This is then multiplied by 100 to convert it to a percentage, and rounded to two decimal places.

```
int totalLetters = 0;
double meanAccuracy = 0;
foreach (var letter in statistics)
{
    totalLetters += letter.total;
    meanAccuracy += letter.accuracy;
}

meanAccuracy /= statistics.Count
meanAccuracy = round(100 * meanAccuracy, 2)
```

2.8.4 UML Diagrams

As with the diagrams for the server application, the associations between the classes has not be shown in the figure below, due to the complexity of the diagrams, and is instead shown in section 2.11.

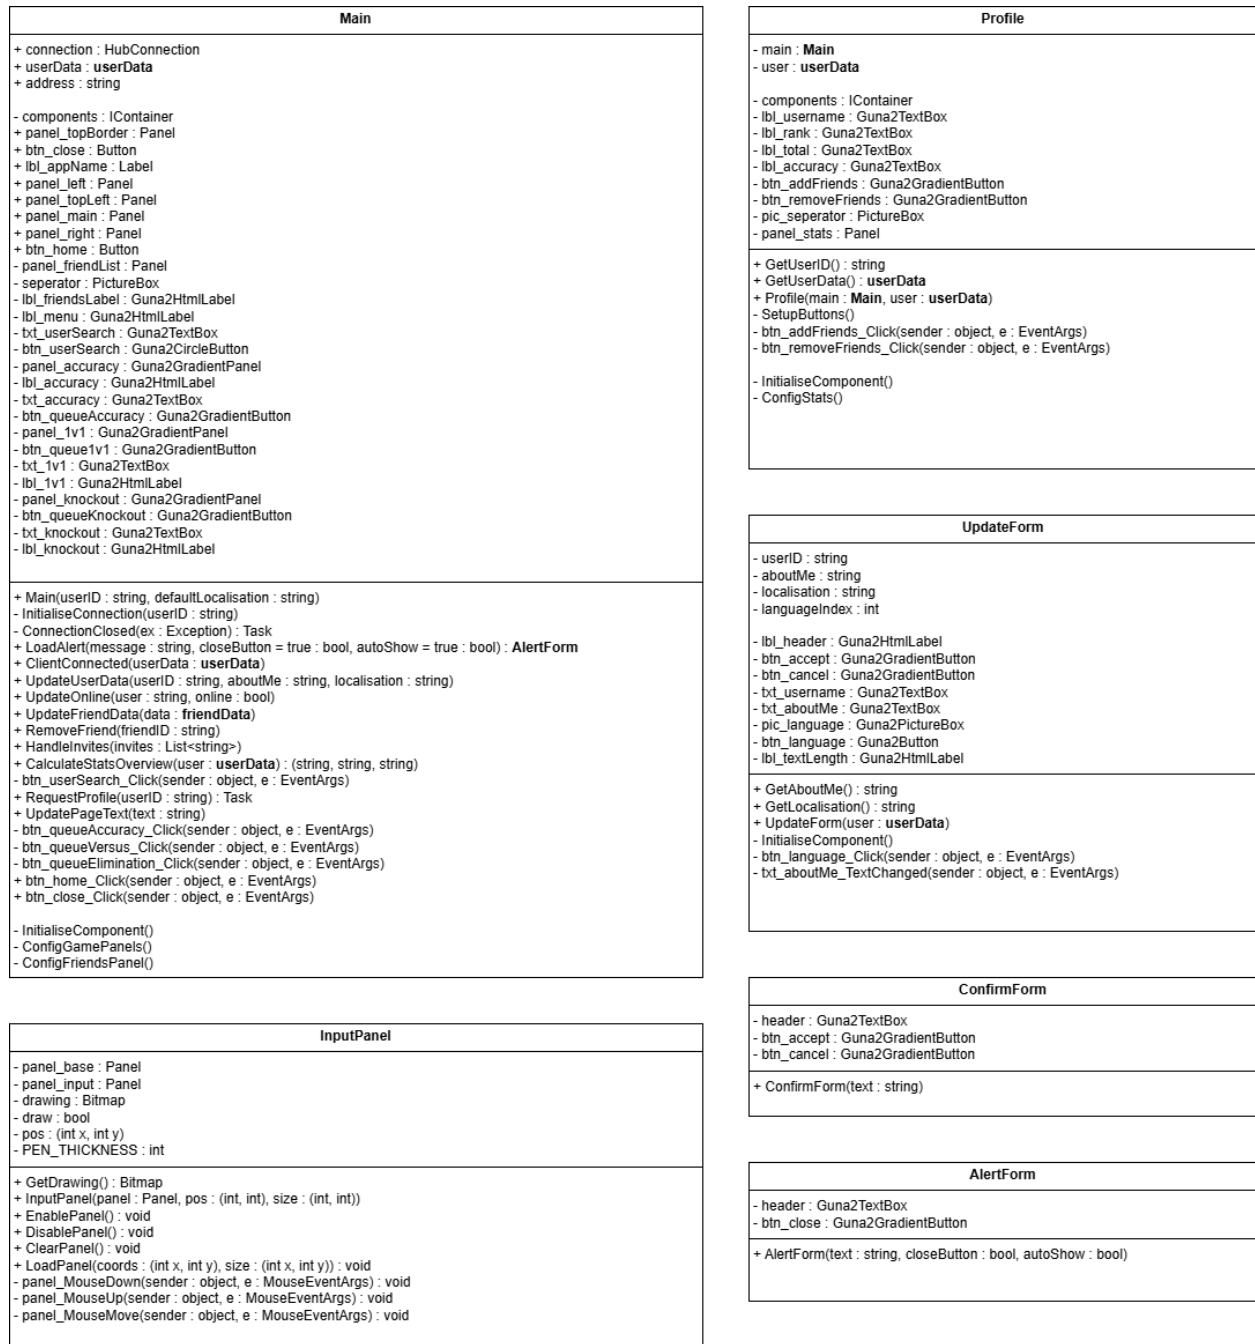


Figure 26: UML diagrams for the Menu and Dialogue classes

2.9 Games

As with the server application, the client application implements three different games types. These also inherit a base class for an abstracted game type, and an interface identified by `IPlayable`. The base class includes modules which are common across all game types, and also ones which can be overridden in order to extend their functionality.

The `IPlayable` interface consists of subroutines which make up the core functionality of a game. This is to allow different ‘phases’ of a game to be called from outside the class, such as when a game to queue into

is found. It also provides methods for retrieving information about the game, such as its type or the gameID.

```
interface IPlayable
{
    void QueueGame();
    Task JoinGameLobby();
    void AwaitStart();
    void StartGame();
    void AwaitRound();
    void SubmissionPhase(char letter);
    void EvaluationPhase(bool correct, double accuracy, TimeSpan time);
    void EndGame();
    void UpdateUsers(List<friendData> users);
    Games GetGameType();
    string GetGameID();
}
```

An enumerable type with the identifier ‘Games’ is used to differentiate between game types, where the abstract game class will include a private attribute of this enumerable.

```
enum Games
{
    Accuracy,
    Versus,
    Elimination,
}
```

The current game is stored in the ‘menu’ structure, which contains the instances for the **Main** class, the **Profile** form, and the **IPlayable** interface.

2.9.1 Queueing

When a user clicks on the ‘Queue’ button on the home screen, a new game for the specified type is instantiated. The constructor for the ‘Elimination’ game type sets a boolean value to false representing if the user has been eliminated, and initialises the list of alive users. The remaining game types have empty bodies, and only call the base constructor. The instance of the **Main** form is passed as a parameter, to allow the game class to manipulate the Form controls. The base constructor is called with this instance, the game type as an enumerable, and the maximum number of players for the game type.

The ‘QueueGame()’ method is then called, which first invokes the ‘queueGame()’ method on the server and returns the gameID if the user was successfully queued. If the returned value is empty, then the user failed to be allocated to a game. Otherwise, the ‘JoinGameLobby()’ method is called, which invokes the ‘userJoined()’ method on the server, returning a boolean value representing if the user was successfully queued.

This also causes the server to invoke the ‘UpdateUsers()’ method on the client, which updates the list of users. If the game has not started, then the lobby screen is configured and shown the user. Regardless of this, the left panel is updated with the new list of users. The ‘Elimination’ game type overrides this method as it additionally separates the users on whether they have been eliminated. Since this is only the case during the game, the ‘HasStarted()’ method is used to determine if the game has started and will instead call the base method if it returns false.

2.9.2 Game Logic

The general process by which a game runs is by repeating two key phases until the condition for the game to be ended is met. When the game is started, the first ‘Submission’ phase is started which is where the clients

receive a Latin character and the users submit a drawing to the server. Once all of the expected submissions have been received, the ‘Evaluation’ phase is started where the server uses the neural network to evaluate each of the users’ submissions. The results are then received by the client application, and the users can then request for the next round to start. Once the server has received this request from all of the expected users, it then begins the next ‘Submission’ phase.

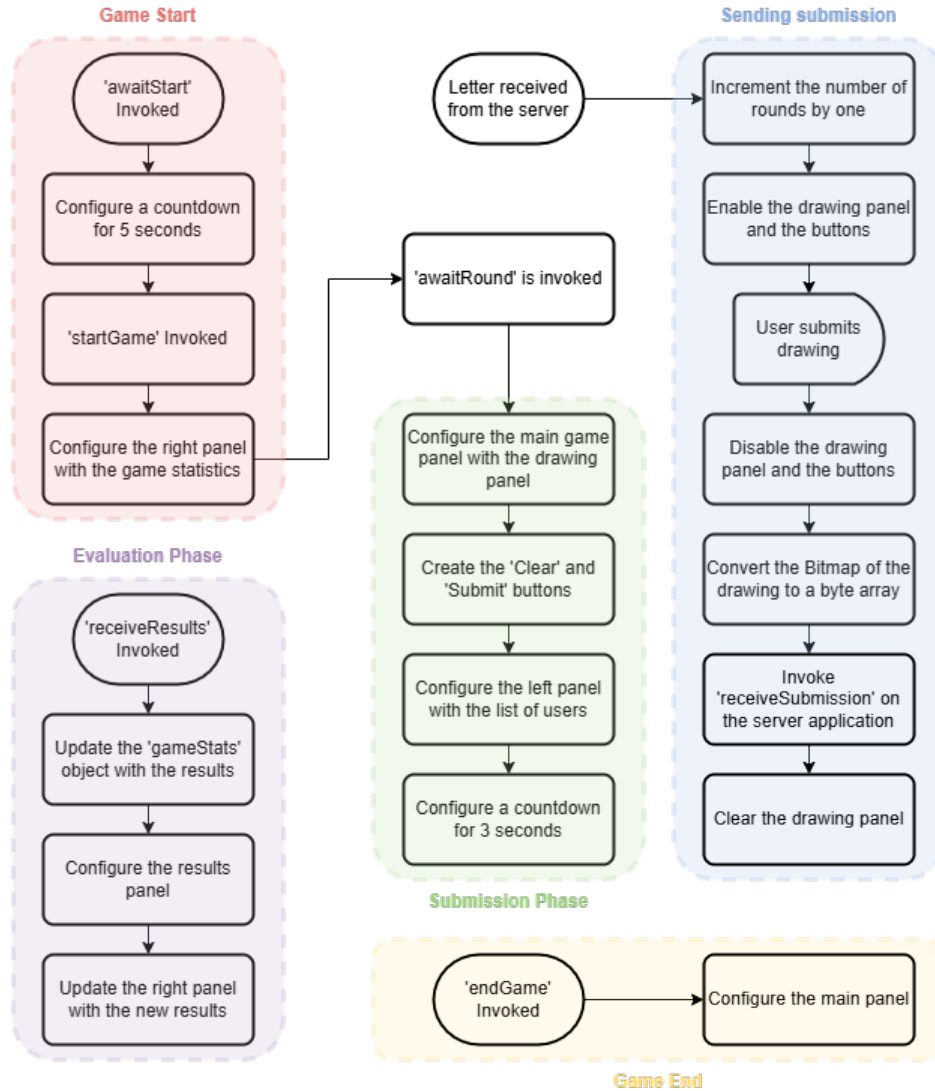


Figure 27: Logic of a generic game on the client application

Game Start

When the server invokes the ‘awaitStart’ handler, the boolean value representing if the game has started is set to true. For the ‘Elimination’ game type, each user is also added to the list of alive users. A countdown is then configured to display to the user. Once the game has been started, the right panel is configured to display the round results.

When the server invokes the ‘awaitRound’ handler, the main panel is configured and the drawing panel object is returned from the ‘ConfigGamePanel’ method. The ‘clear’ and ‘submit’ buttons are then assigned click event handlers, and a second countdown is configured.

Submission Phase

The submission phase is invoked after the client receives a letter. The number of rounds played is incremented, and the new letter is added to the list of letters. The drawing panel is then enabled using the `EnablePanel()` method, and the `submit` and `clear` buttons are enabled.

The `clear` button is allocated the `ClearPanel()` method of the drawing panel. The `submit` button disables itself and the `clear` button. It then calls the `DisablePanel()` method of the drawing panel and gets the drawing from the panel as a `Bitmap`. This `Bitmap` is then converted to a byte array and the `receiveSubmission()` subroutine is invoked on the server, passing the byte array as parameter with the `userID` and the `gameID`. The drawing panel is then cleared.

Evaluation Phase

The evaluation phase is invoked by the server and passes the accuracy and elapsed time for the current letter, as well as if the user was correct. This is then updated in the `gameStats` structure using its `UpdateStats()` method, and the right panel is updated with these new results. The results screen is then displayed to the user, which contains the `continue` button. The click event handler for this button invokes the `requestRound()` method on the server application.

The `Versus` game type receives the `userID` of the user who won the round, which is displayed by adding a label to the results panel. The `Elimination` game type receives a list of alive users, which allows the client to display on the results screen if the user was eliminated. The reason for the user being eliminated is also displayed which is determined by the `correct` attribute of the user's results. If they were correct, then the user must have been eliminated as they had the longest elapsed time. Otherwise, the user was eliminated since they were incorrect. The `UpdateUsers()` method is also called, to reflect the change in the alive users.

Game End

When the game ends, the server invokes the appropriate method on the client, which configures the main panel to display the results of all the rounds. The `Elimination` game type will additionally display if the user won the game or not using the `ConfigEliminationEndgame()` method. This is not sent as a parameter, but can be determined by checking if the user is in the list of alive users. The `Versus` game type will display the new Elo rating of the user, and the difference from their previous rating. This cannot be inferred from existing data like the `Elimination` game type, so the server sends this value which is passed into the `UpdateRank()` method. This updates the user's Elo rating in the `userData` structure, and calculates the difference from their previous rating. The `ConfigVersusEndgame()` method of the **UXelements** class is then called to display this information on the results panel.

2.9.3 UML Diagrams

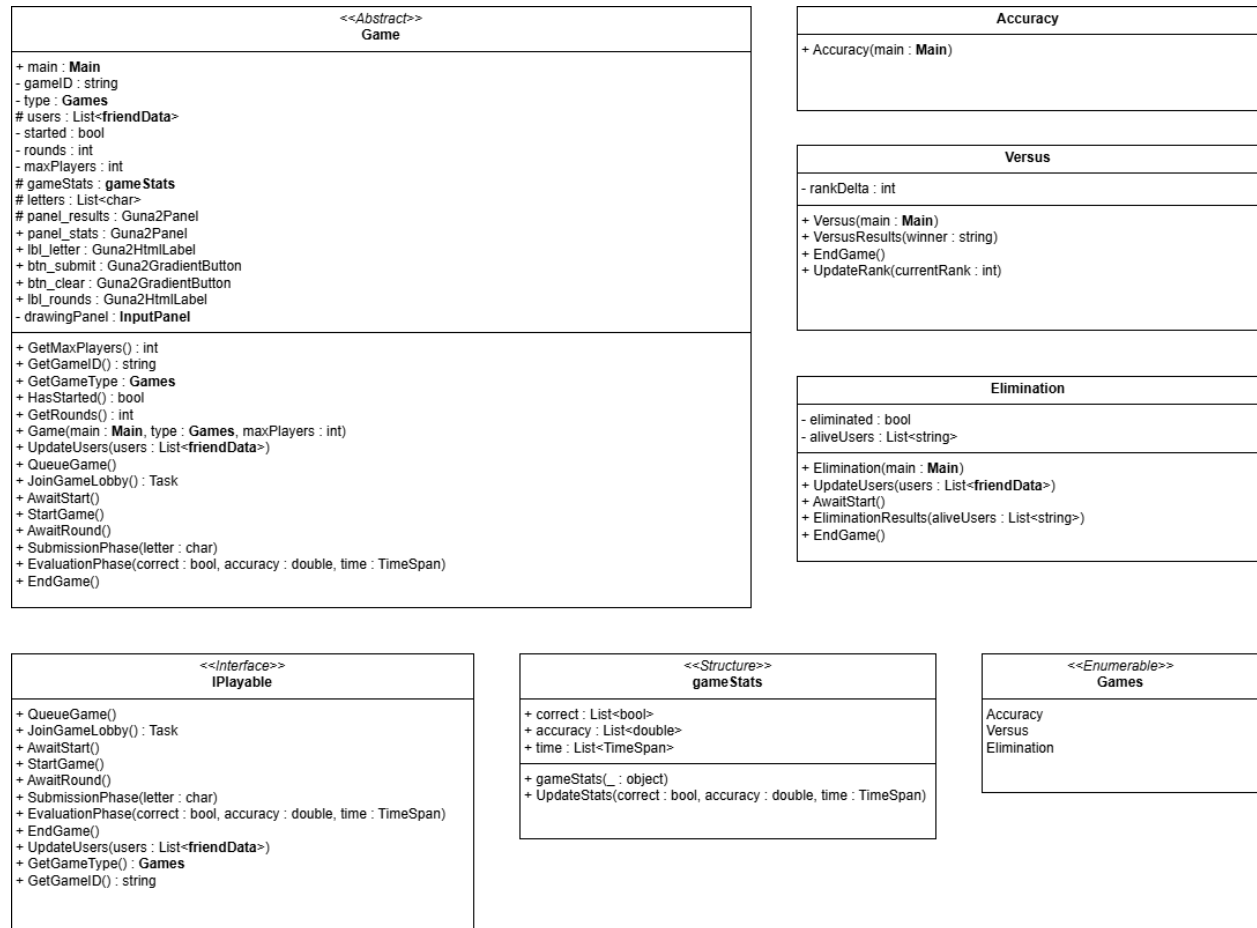


Figure 28: UML diagrams for the Game classes

2.10 UI Design

Each sub-menu within the client application draws its form controls onto a base layout which is configured in the constructor for the **Main** class. The majority of user interface updates are processed by the static **UXelements** class. The main menu, profile page, and game screens all draw their controls onto the form created by the **Main** class by passing the class instance as a parameter in the class constructors.

The 'InitialiseComponent()' method of the **UXelements** class configures the base layout for the application. This includes the main panels which divide up the form, along with the 'Close' and 'Home' buttons. The form border style is set to 'none', since a custom title bar is implemented instead which also prevents the user from dragging and resizing the window. Windows Forms has a tendency to break its controls on window resize events.



Figure 29: Layout for the base user interface

The main panels consist of a left, centre, and right panel. The left panel is divided into a smaller top panel and main bottom panel, which contains the ‘Home’ button. The title bar sits above these panels and contains the ‘Close’ button.

The click event handler for the ‘Home’ button is attached in the ‘ResetLayout()’ method. This button causes the page text to be updated to “Home” and the ‘dequeueGame()’ method to be invoked on the server if the user is in-game. The ‘profile’ and ‘game’ attributes of the ‘menu’ structure are then disposed, and the ‘InitialiseComponent()’ method is called. The click event handler for the ‘Close’ button is attached as part of configuring the base layout. This hides the form and invokes the ‘dequeueGame()’ method on the server if the user is in-game. The ‘clientDisconnected()’ method is then invoked, before closing the form.

2.10.1 Accounts Page

The accounts page is the first menu which the user is presented with when the application starts. The ‘username’ and ‘password’ text boxes can be edited, which the user can use to enter their login credentials. They can also create an account by clicking the ‘Create Account’ button. The language button in the bottom left of the form cycles through the available languages when it is clicked. The text in the form controls is immediately updated to reflect the new language selected.

A status indicator in the top left of the form informs the user of the state of the connection to the server. When the client successfully connects to the server, the loading animation stops and the label is set to ‘Connected’. If the connection fails, then the client will attempt to reconnect up to three times before disconnecting.

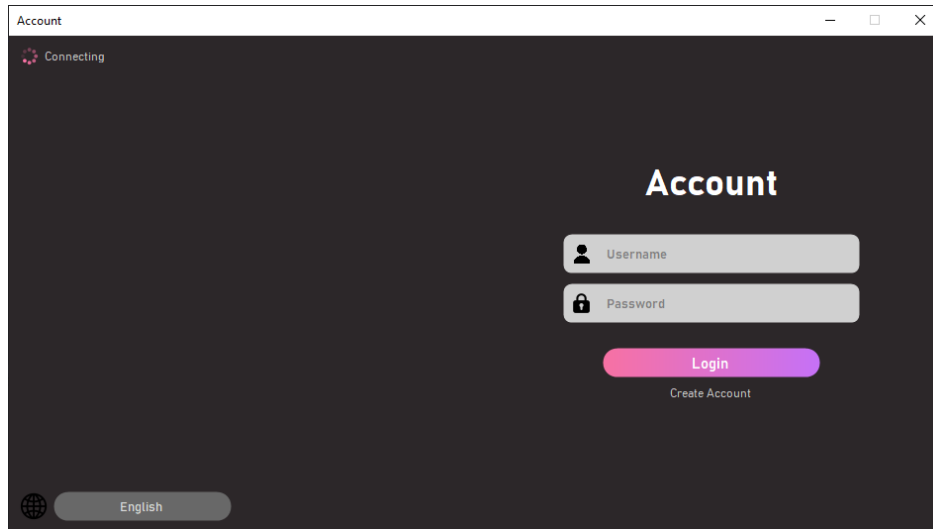


Figure 30: Design for the Accounts form

If the user chooses to create an account, a ‘confirm password’ text box is added where the user must enter their desired password twice in order to create an account. The ‘Login’ button is replaced with the ‘Create Account’ button, and the other controls are shifted around to accommodate the extra text box.

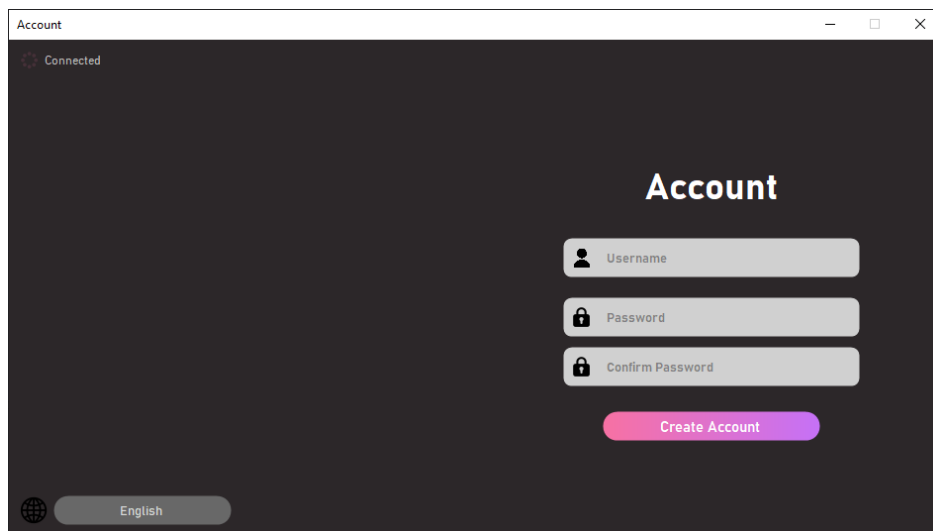


Figure 31: Design for the Accounts form

2.10.2 Home Page

The main panel on the home page lists the three available game to the user with a brief description and the ability to queue for each game. The left panel contains a list of the user’s friends, separated into whether they are online or offline. The right panel contains an overview of the user’s statistics, as well as the ‘Profile’ and ‘Edit’ buttons.

The ‘Profile’ button is used to access the profile page of the user. The click event handler for the button updates the page text to “Profile”, and creates a new instance of the **Profile** class, passing the instance of the **Main** class and the ‘userData’ structure as parameters. The ‘Edit’ button creates a new **UpdateForm** dialogue box which allows the user to customise their ‘about me’ and localisation. If the user confirms their

changes, the ‘updateUserData()’ method is invoked on the server, passing the userID, updated ‘about me’, and localisation as parameters. These updated values are accessed using the appropriate methods of the form class. The invocation returns a boolean value which indicates if the update was successful—if the update failed, the user is informed of the error that has occurred.

Each game type is presented in a panel with a description and a ‘Queue’ button. The click event handler for each button instantiates the appropriate game type class, passing the instance of the **Main** class as a parameter. The ‘QueueGame()’ method is then called to begin the queueing process, since the constructor only creates the game class on the client application. The ‘QueueGame()’ method handles the server invocation to queue the user for a game and thereby create a new game on the server. The click event handler also updates the ‘page text’ to reflect the game type the user is queueing for.

Profile Updates

The **UpdateForm** class is a dialogue box which contains text boxes for the ‘about me’ and localisation. The current values for these fields are set in the constructor using the ‘userData’ structure passed as a parameter. The ‘InitialiseComponent()’ method is then called to configure the form controls. Once the controls have been created, the text boxes are assigned the current values from the ‘userData’ structure. The label for the length of the ‘about me’ text box is also updated to reflect the current length of the text. The click event handlers for the ‘Confirm’ and ‘Cancel’ buttons are also assigned. The ‘Confirm’ button assigns the updated values to private attributes of the class, and sets the ‘DialogResult’ property to ‘DialogResult.OK’. The ‘Cancel’ button sets the ‘DialogResult’ property to ‘DialogResult.Cancel’.

The button to cycle through the different languages the client application supports is identical to the one used in the accounts page. Each time the button is clicked, the next language in the supported languages list is set as the active language, and the text of the button is updated to reflect this. An event handler for when the text in the ‘about me’ text box is changed is also assigned. This updates the length label to the current length of the text.

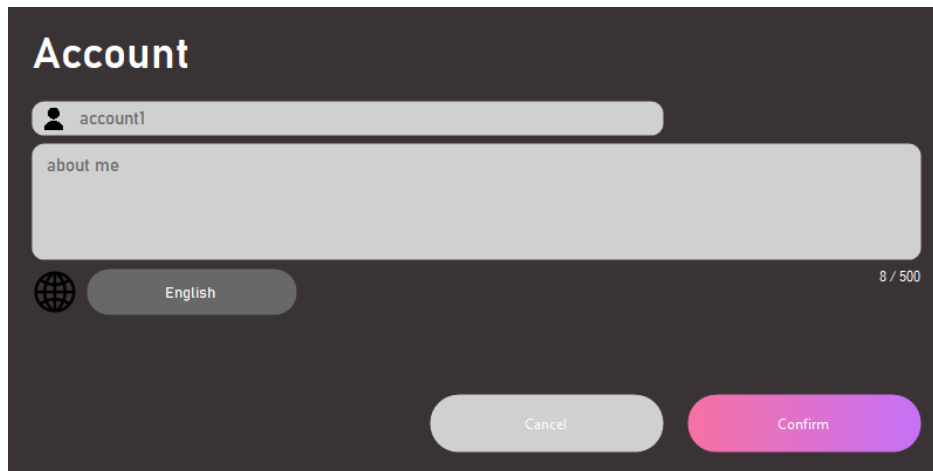
The image shows a dark-themed user interface for an 'Account' page. At the top, the word 'Account' is displayed in a large, white, sans-serif font. Below it is a horizontal input field with a user icon on the left and the text 'account1'. Underneath this is a larger text area with the placeholder text 'about me'. To the left of the text area is a globe icon, and to its right is a button labeled 'English'. Further right, the text '8 / 500' indicates the character count. At the bottom of the form are two buttons: a light gray 'Cancel' button and a pink 'Confirm' button.

Figure 32: Design for the Edit Profile form

Menu Label

The ‘page text’ is a label in the top section of the left panel. It displays to the user what menu they are currently in, and is updated using the ‘UpdatePageText()’ method which takes in a string as a parameter. This clears the panel and creates a new label, which it applies the passed string to its ‘text’ property after translating it.

Friends

The friends panel is added to the left panel and lists the user's friends separated into online and offline. The 'ConfigFriendsPanel()' method of the **Main** class separates the user's friends into two lists based on whether they are online or offline. The 'Online' label is created, with the length of its respective list added to its right. The online users are then listed using a loop which increments the Y-position of the next label each iteration. The name of each button is mapped to the userID of the friend. This allows the click event handler to use the button's name to call the asynchronous 'RequestProfile()' method, passing the userID of the friend as a parameter. This is then repeated for the offline users, with the Y-position incremented such that the offline users are placed below all the online users.

The 'RequestProfile()' method invokes the 'requestProfile()' method on the server, passing the requested userID as a parameter. The server then returns a 'userData' structure for the requested user, which is used to create a new instance of the **Profile** class. The instance of the **Main** class and the returned 'userData' structure are passed as parameters. The page text is also updated to "Profile". If the userID of the returned structure does not match the requested userID, then a message is shown to the user that the requested user does not exist.

Statistics

The right panel contains an overview of the user's account details, along with the options to view their profile and customise their 'about me' and localisation. The summary of the statistics is created as a separate panel which is then placed onto the right panel by the 'ConfigStatsPanel()' method of the static **UXelements** class. First, the values for the rank, total, and average accuracy are obtained from the static 'CalculateStatsOverview()' method from the **Main** class. To create the controls for the statistics panel, local methods are used to reduce the volume of repeated code. Many of the controls are identical but with varying positions, hence these methods typically take arguments of position and size.

2.10.3 Profile

The **Profile** form class is instantiated to display the statistics of a user for each letter. It contains private attributes of the 'userData' structure for the requested user, and the instance of the **Main** class. The constructor for the class assigns values to these attributes and configures the form controls. A new panel is created to store each of the letters in, and the 'ConfigStats()' method iterates through each letter and creates the appropriate controls.

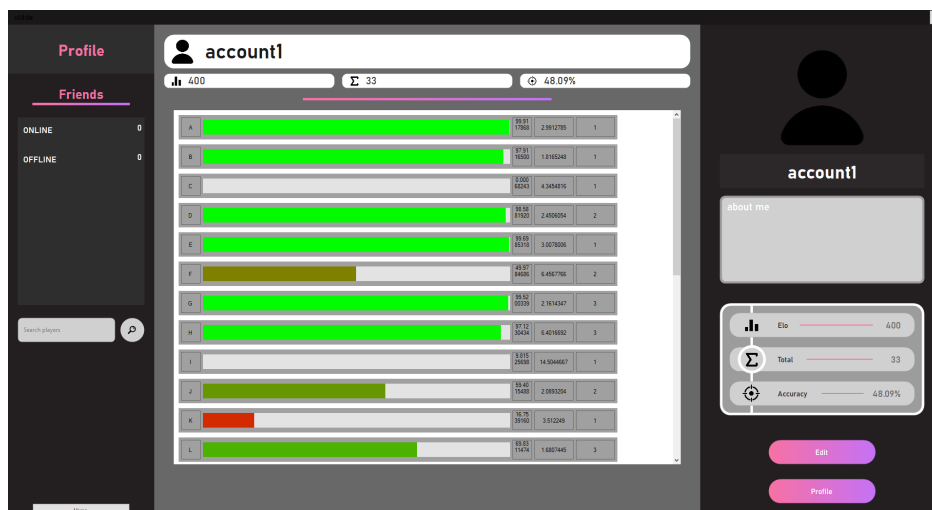


Figure 33: Design for the Profile page

As with the statistics overview on the ‘Home’ page, the overview of statistics is calculated using the static ‘CalculateStatsOverview()’ method. A panel is created as a parent to the 26 child panels that will be added to it which represent the user’s progress in learning each of the Latin characters. For each of the letters, the colour of the progress bar is first calculated by scaling the red and green values with the average accuracy for the current letter.

$$R = 255 \cdot (1 - \text{accuracy}) \quad G = 255 \cdot \text{accuracy} \quad B = 0$$

The relevant controls are then created, including a panel to represent the base colour of a progress bar, and a panel for the percentage value of the progress bar. The colour of the latter panel is assigned to the RGB values calculated before, and its size in the X direction is set to the product of the average accuracy and the width of the base panel.

2.10.4 Games

Drawing Panel

The drawing panel is contained within a separate class **InputPanel** which is initialised by the ‘ConfigGamePanel()’ method of the **UXelements** class, and returned to the abstract **Game** class in the ‘AwaitRound()’ method. The constructor for the **InputPanel** class takes as parameters the panel which the drawing panel is to be added to, and its position and size. The ‘LoadPanel()’ and ‘ClearPanel()’ methods are then called.

The ‘LoadPanel()’ method creates a new Panel object and adds it to the controls of the base panel. A Bitmap object with identifier ‘drawing’ is created by using the ‘CreateGraphics()’ method of the Panel class. The ‘ClearPanel()’ method uses the ‘Graphics’ class to set all the pixels of the ‘drawing’ Bitmap to white. This is then updated to the panel using the ‘DrawImageUnscaled()’ method.

The class also contains event handlers for the state of the left mouse button and the movement of the mouse cursor in the panel. The mouse down event handler sets the boolean value ‘draw’ to true and sets the position of the pen to the mouse position. The mouse up event handler sets the boolean value ‘draw’ to false.

The mouse move event handler sets the position of the pen to the position of the mouse cursor. If the boolean value ‘draw’ is true, then a new ‘Graphics’ object is created from the ‘drawing’ Bitmap. A new ‘Pen’ object is created with the set pen thickness and colour, and the ‘DrawLine()’ of the Panel class draws a line using the ‘Pen’ object from the previous position of the mouse to its current position. This is then rendered onto the Panel using the ‘DrawImageUnscaled()’ method.

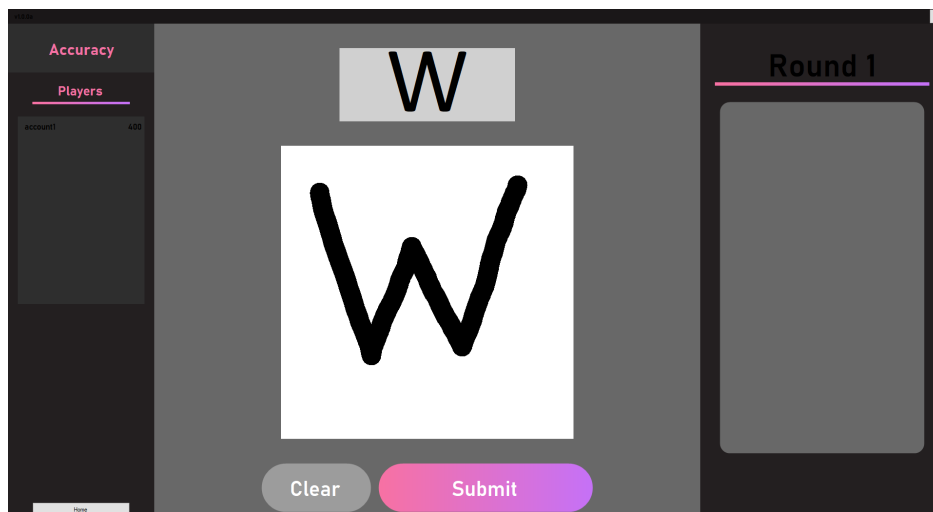


Figure 34: Design for the drawing panel

Results

The results panel is configured by the ‘ConfigResultsPanel()’ method of the **UXelements** class which returns the created panel. This allows for the ‘Versus’ and ‘Elimination’ game types to access the panel and add the controls for the extra information regarding these gamemodes to the panel once the server has sent the data.

The panel contains the letter of the current round as well as the user’s results for their submission: accuracy, time, and if it was correct. ‘Deltas’ are also presented to the user, which represent the difference between their submission and their average for that letter. These are calculated by subtracting the accuracy and time of the submission from the values stored in the ‘statistics’ attribute of the userData. The colour of the accuracy ‘delta’ is set to red if the accuracy of the submission is less than the average for the letter, and green otherwise. The colour of the time ‘delta’ is set to green if the time of the submission is less than their average for the letter, and red otherwise.

This does result in ‘fake’ deltas being calculated if it is the first time which the user has been given the current letter, since the values in their userData will be zero. While this isn’t a common issue, it could be something that confuses some users.

A progress bar is also created for the accuracy, where the bar is appropriately set to fill the same percentage of space as the accuracy of the submission. The accuracy value is also displayed on the right side of the bar. The time elapsed for the submission is placed inside a similar progress bar, however its value is always set to 0%, since the time cannot be objectively placed somewhere on a scale.

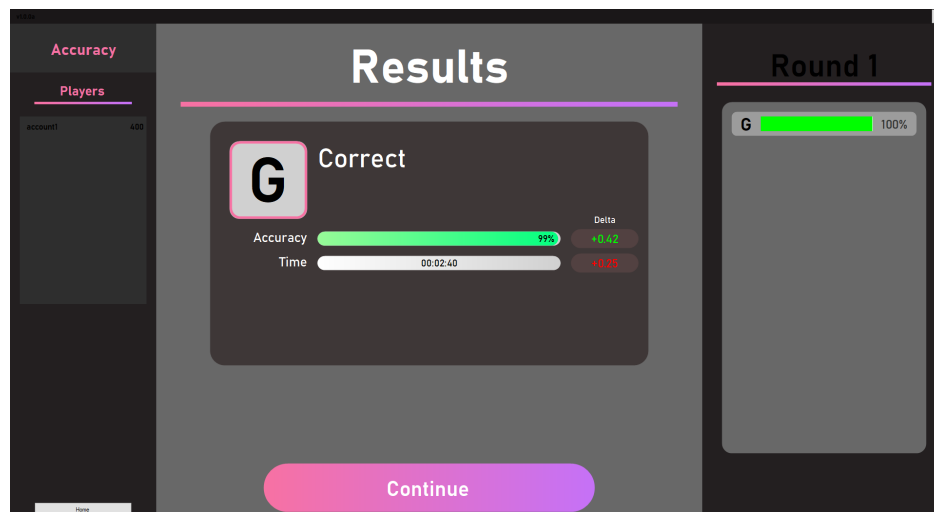


Figure 35: Design for the results panel in the ‘Accuracy’ game type

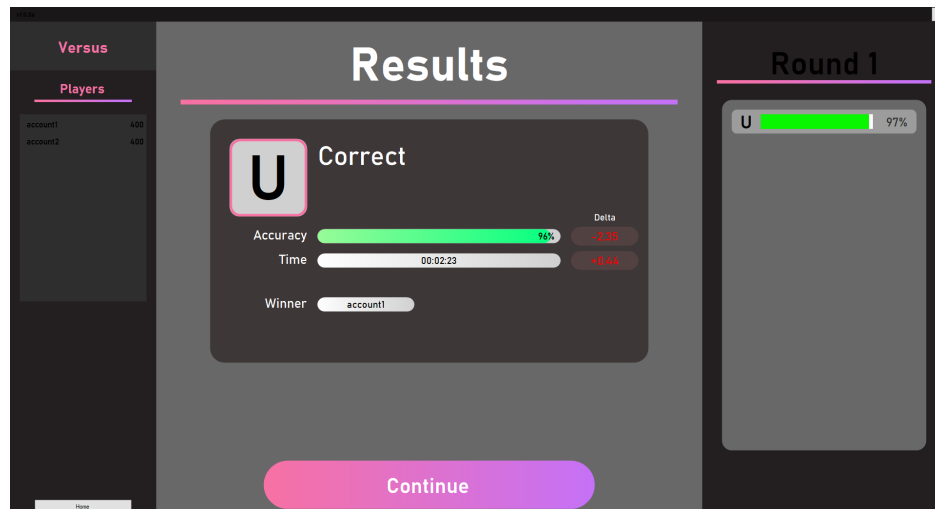


Figure 36: Design for the results panel in the 'Versus' game type


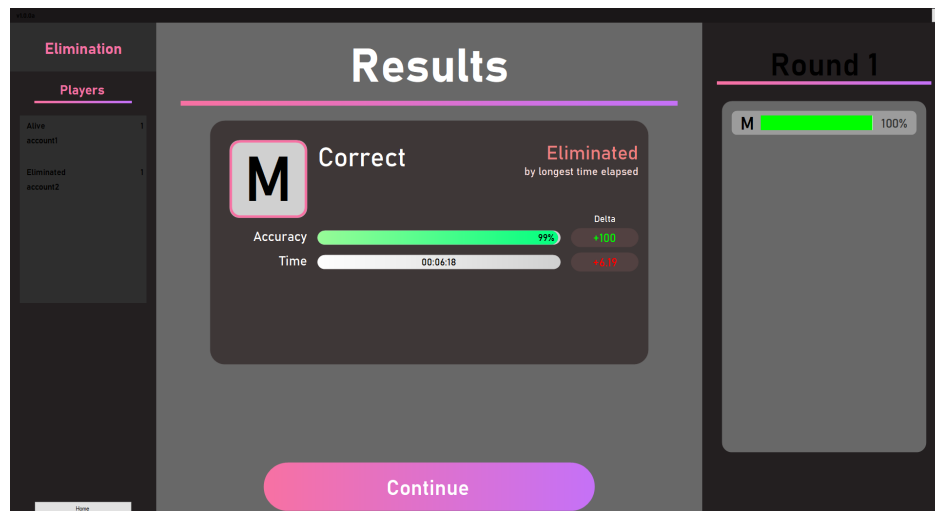


Figure 37: Design for the results panel in the 'Elimination' game type

2.11 Object-Oriented Design

2.11.1 Class Diagrams

The dependencies between classes have not been shown in the diagram below as it severely impacts the legibility. Static classes have been denoted by underlining the class identifier. While the **Form** class is not accessed by any classes directly, I chose to include it in order to show which classes derive and use Windows Forms controls.



The client handles its connection to the server using a ‘HubConnection’ object, which can invoke methods on the server and set up handlers to manage incoming invocations. Both the **Login** class and the **Main** class contain their own ‘HubConnection’ object, to separate the handlers for a user who is logged in and a

user who is not.

2.12.1 Creating a Connection

The **hub.connection** class contains the `ConfigConnection()` method which creates a new `HubConnection` object. The method initialises a new `HubConnectionBuilder`, which the address of the server is attached to. The `Build()` method of this object is then called which returns a `HubConnection` object.

2.12.2 Connection Handlers

The connection handlers are added by the `AddHandles()` method for the **Main** class, and the `AddLoginHandles()` for the **Login** class. Since these are called asynchronously, the majority of the handles execute by invoking the instance of the **Main** class. This is a method of the **Form** class which allows controls to be accessed from a thread which they were not created on. The `Invoke()` method takes in an `Action` as a parameter which is set to the appropriate method in the **Main** class for the current handler.

```
connection.On<userData>("receiveUserData", (userData) =>
{
    main.Invoke(new Action(() => main.ClientConnected(userData)));
});
```

2.12.3 Starting a Connection

The connection is started by the `StartConnection()` method, which takes in the `HubConnection` object as a parameter. The number of retries is initially set to -1 since the first attempt at connection is not a retry. A while loop is then started which runs until the connection state is not `Disconnected`. The number of retries is incremented by one, and a check is made to see if it exceeds three retries. If this is the case then the connection status label displays `Disconnected` and the while loop is broken. Otherwise, the connection is attempted to be started and the information label is reset. If an exception is thrown such that the client failed to connect to the server, the information label displays an error.

2.12.4 Handling Connection Loss

Before a request is made to the server, a check is always made to confirm that the connection state is `Connected`. If this is not the case, then the `PerformClick()` method of the `Home` button is called to return the user to the home screen. The client application may not immediately recognise a loss of connection when it occurs, and the user interacting with any controls which communicate with the server may cause unexpected behaviour.

When it is detected that the connection has been lost, the `ConnectionClose()` method is called which attempts to return to the home screen. A new alert form is then configured to inform the user of the loss of connection and that the application will be restarted. This is because a disconnection may cause unexpected behaviour on the server regarding the user's `ConnectionID`, so it is safer to restart and reset the user's `ConnectionID`. Any attempt to interact with the form controls in this method is wrapped in a try-catch block, since the exact state of the client application is unknown.

3 Testing

3.1 Testing

The layout for the testing section first outlines the tests that will be completed, along with any information regarding these tests—such as the software used or any changes to the system. The tests are then given in a list, with each test having a timestamp in bold which links the test to the appropriate section in the testing video. If the test is directly testing one of the objectives, then this has been given in square brackets after the timestamp. If there is no link to an objective, then it is testing for the robustness of the solution, or for the complex algorithms. A table then outlines the input used to set up each test, along with the expected and observed outcomes.

The testing video is attached to the submission as a video file, and can also be accessed through [this link](#).

3.1.1 Accounts

1. Logging in to an account

These tests involve the login process to an existing account: ‘account1’ which was set up prior to these tests. For each test, the input is entered into the ‘Username’ and ‘Password’ text boxes, and the ‘Login’ button is clicked. The output is typically given by a red message beneath the ‘Password’ text box.

- (a) **00:00** [1.a.i] Entering an unregistered username returns a suitable error message.
- (b) **00:04** [1.a.i] Access is denied when entering an incorrect password for an existing account.
- (c) **00:09** [1.a.i] A login request is not made to the server if any fields are left blank.
- (d) **00:12** [1.a.ii] Entering valid credentials causes the main application to load for the user.

Input	Expected outcome	Observed outcome
“account2” and “password”	“User does not exist”	“User does not exist”
“account1” and “wrongpassword”	“Incorrect password”	“Incorrect password”
Leaving one or more fields blank	Login request is not made	Login request is not made
“account1” and “password”	Main application loads	Main application loads

4/4 tests passed.

2. Creating an account

For each test, the input is entered into the ‘Username’ and both ‘Password’ text boxes, followed by the user clicking the ‘Create Account’ button. Unless stated otherwise, the input into both ‘Password’ text boxes is identical.

- (a) **00:18** [1.b.ii] Entering a username which is already registered returns a suitable error message.
- (b) **00:26** [1.b.i] An account request is not made to the server if any fields are left blank.
- (c) **00:29** [1.b.i] An account request is not made to the server if the passwords do not match.
- (d) **00:36** [1.b.iii] Entering valid credentials causes the main application to load for the new user.
 - i. **00:40** [5.d.ii] A new account is created in the database with a hashed password.

- ii. **00:46** [1.b.iii] Empty statistics are created for the letters A-Z in the database.

Input	Expected outcome	Observed outcome
“account1” with “password”	“Username is not available”	“Username is not available”
Leaving one or more fields blank	Login request is not made	Login request is not made
“account2” with “pass” and “password”	“Passwords do not match”	“Passwords do not match”
“account2” and “password”	Main application loads	Main application loads
	Entry added in ‘userData’ table with a hashed password	Entry added in ‘userData’ table with a hashed password
	Empty statistics for letters A-Z created in ‘statistics’ table	Empty statistics for letters A-Z created in ‘statistics’ table

6/6 tests passed.

3. Localisation and Other

- (a) **00:54** [1.c] The language chosen is applied to the main application which loads with this language set.
- (b) **01:05** [1.c] The language chosen is saved to the user’s account data in the database.
- (c) **01:24** A user cannot login twice on two different instances of the client application.

Input	Expected outcome	Observed outcome
Choosing ‘Français’ as the language	Main application uses the French language	Main application uses the French language
	Localisation is set to ‘fr’ in the database	Localisation is set to ‘fr’ in the database
Logging in while the account is logged in on a different instance	“User is logged in on another device”	“User is logged in on another device”

3/3 tests passed.

3.1.2 Games

1. Features of a generic game

An ‘Elimination’ game may have more than 10 rounds, however this requires considerable setup beforehand. Instead I have changed the number of rounds of the ‘Accuracy’ game type to 20 for these tests only, since both game types use the same method to configure the right panel.

Obtaining an exact value for the elapsed time of a letter is not feasible, however it can be approximated with a timer. Some error in this measurement is expected due to server latency and human reaction time, however it should be sufficient to test the recorded time. In order to improve the accuracy of starting and stopping the timer, I set up a keybind to start and stop the timer. This allowed me to press the keybind with the ‘Continue’ and ‘Submit’ buttons at very similar times. After clicking

‘Continue’ there is a 3 second wait before the server timer starts and the letter is shown to the client. Therefore I will be comparing the time recorded by LiveSplit against the returned time with 3 seconds added to it.

- (a) **02:10** [2.e] The list of users currently in a game is updated when a user joins or leaves the game.
- (b) **02:15** [2.b] A range of characters from the Latin alphabet are presented to the user.
- (c) **02:50** The time displayed in the results is close in value to the actual elapsed time.
- (d) **02:59** [2.g] The next round starts when all users have clicked the ‘Continue’ button.
- (e) **03:38** [2.c.i] The drawing panel can be cleared.
- (f) **03:07** [2.f] Only the results of the last 10 rounds are displayed on the right panel.

Input	Expected outcome	Observed outcome
Leaving a game as ‘account2’ with ‘account1’ present	The list of users for a user in the game is updated	‘account2’ is removed from the list
Playing 5 rounds of the ‘Accuracy’ game type	There is variation in the letters presented	There is variation in the letters presented
Timing the elapsed time drawing a letter using LiveSplit	Returned time is within 5% of the recorded time of 2.29 seconds	Returned time is 2.28 seconds which is within 0.4%
Clicking ‘Continue’ on all client applications	Next round starts when all users have clicked ‘Continue’	Next round starts when all users have clicked ‘Continue’
Drawing a letter and clicking the ‘Clear’ button	The drawing panel is cleared	The drawing panel is cleared
Playing 11 rounds in the ‘Accuracy’ game type	Only the 10 most recent results are shown	Only the 10 most recent results are shown

6/6 tests passed.

2. Queueing for the ‘Accuracy’ game type

- (a) **01:30** [2.a] The ‘Accuracy’ game type starts when it is full.
- (b) **01:35** Queueing for the ‘Accuracy’ game type always creates a new game.

Input	Expected outcome	Observed outcome
Queueing for the ‘Accuracy’ game type	The game starts immediately	The game starts immediately
Queueing multiple users for the ‘Accuracy’ game type	Each user is queued into a different game	Each user is queued into a different game

1/1 test passed.

3. Queueing for the ‘Versus’ game type

- (a) **01:44** [2.a] The ‘Versus’ game type starts when two users are queued for it.
- (b) **01:39** [2.a] The ‘Versus’ game does not start if there are less than 2 users in the lobby.

- (c) **01:50** A third user who queues for the ‘Versus’ game type is queued into a new game.

Input	Expected outcome	Observed outcome
Queueing two user into ‘Versus’	The game starts	The game starts
Queueing one user into ‘Versus’	The game does not start	The game does not start
Queueing three users into ‘Versus’	The third user is queued into a different game	The third user is queued into a different game

3/3 tests passed.

4. Winning conditions for the ‘Versus’ game type

- (a) **04:08** [2.h.i.B] If one user is correct and the other user is incorrect, the user who is correct wins the round.
- (b) **04:18** [2.h.i.B] If both users are correct, the user with the fastest time wins the round.
- (c) **04:32** [2.h.i.B] If both users are incorrect, then it is a draw and neither user wins the round.

Input	Expected outcome	Observed outcome
Drawing the correct letter for one user, and an incorrect letter for the other user	The correct user wins the round	The correct user wins the round
Drawing the correct letter for both users	The user with the fastest time wins the round	The user with the fastest time wins the round
Drawing an incorrect letter for both users	Neither user wins the round	Neither user wins the round

3/3 tests passed.

5. Elo Formulae

For this test, two accounts are setup with a given Elo rating where ‘account1’ has a rating of 400, and ‘account2’ has a rating of 300. A ‘Versus’ game is then started with both of these users and ‘account1’ is given 4 wins, 1 draw, and 5 losses. This results in ‘account1’ obtaining a score of 4.5, and ‘account2’ obtaining a score of 5.5. The expected scores of each user are then calculated using the Elo rating of each user.

$$E_A = 10 \cdot \frac{1}{1 + 10^{(300-400)/400}} \approx 6.400649998$$

$$E_B = 10 \cdot \frac{1}{1 + 10^{(400-300)/400}} \approx 3.599350002$$

The updated ranks for both users can then be calculated using their expected score and their actual score.

$$R'_A = 400 + \frac{32}{10} \cdot (4.5 - 6.400649998) = 393.91792 \approx 393$$

$$R'_B = 300 + \frac{32}{10} \cdot (5.5 - 3.599350002) = 306.08208 \approx 306$$

- (a) **04:45** [2.h.i.A] [3.c.i] The Elo rating for users in a ‘Versus’ game is updated correctly at the end of the game.

Input	Expected outcome	Observed outcome
‘account1’ gaining a score of 4.5 and ‘account2’ gaining a score of 5.5	The rating of the users changes to 393 and 306 respectively	‘account1’ changes to 393 and ‘account2’ changes to 306

1/1 test passed.

6. Queueing for the ‘Elimination’ game type

These tests for the ‘Elimination’ game type involve start conditions. It should be noted that the number of players to start this game type was set to 3 instead of 12, in order to make testing more convenient.

- (a) **02:05**[2.a] The ‘Elimination’ game type starts when the appropriate number of users are queued for it.
- (b) **01:56** [2.a] The ‘Elimination’ game type does not start if it has less users than required to start the game.

Input	Expected outcome	Observed outcome
Queueing 3 users for the ‘Elimination’ game type	The game starts	The game starts
Queueing 2 users for the ‘Elimination’ game type	The game does not start	The game does not start

2/2 tests passed.

7. Winning conditions for the ‘Elimination’ game type

The following tests involve the logic for a user passing a given round in the ‘Elimination’ game type.

- (a) **05:13** [2.h.iii.A] If all of the users are correct, then the user with the longest elapsed time is eliminated.
- (b) **05:28** [2.h.iii.A] If some of the users are incorrect, then these users only are eliminated.
- (c) **05:41** [2.h.iii.A] If all of the users are incorrect, then none of the users are eliminated.

Input	Expected outcome	Observed outcome
Drawing the correct letter for all users	The user with the longest elapsed time is eliminated	The user with the longest elapsed time is eliminated
Drawing an incorrect letter for the user ‘account3’	This user is eliminated while the other users move to the next round	‘account3’ is eliminated
Drawing an incorrect letter for all users	None of the users are eliminated	None of the users are eliminated

3/3 tests passed.

8. Progression of the ‘Elimination’ game type

The following tests expand on the game progressing when all users have clicked the ‘Continue’ button. In the case of the ‘Elimination’ game type, only the alive users are required to click this button for the game to progress, even though eliminated users are also given this button. In the case of the eliminated users, they are directed to the ‘Game End’ screen. If there is only one alive user left, then the game has ended and that user has won.

- (a) **06:46** [2.h.iii.D] The next round in the ‘Elimination’ game type occurs when all alive users have clicked ‘Continue’.
- (b) **06:34** [2.h.iii.A] An eliminated user will be shown the ‘Game End’ screen when clicking the ‘Continue’ button.
- (c) **06:55** [2.h.iii.C] An ‘Elimination’ game will end when there is only one alive user.

Input	Expected outcome	Observed outcome
Clicking ‘Continue’ on an eliminated user, followed by all alive users	Next round will start after clicking ‘Continue’ on all alive users	Next round starts after clicking ‘Continue’ on all alive users
Clicking ‘Continue’ on an eliminated user	The ‘Game End’ screen is shown	The ‘Game End’ screen is shown
A player winning with only 2 players alive	The ‘Game End’ screen is shown for both users	The ‘Game End’ screen is shown for both users

3/3 tests passed.

3.1.3 Neural Network

1. Evaluating user submissions

The following tests ensure the neural network is correctly evaluating a user’s submission. These include tests for various orientations, positions, and obscure cases. The test for confirming that the neural network marks correct submissions with a high accuracy uses the same footage as showing that a range of Latin character are presented to the user.

- (a) **02:15** [5.c.ii] Drawing the correct letter is given a very high accuracy.
- (b) **03:19** [5.c.iii] Drawing the correct letter very small and in the corner is given a high accuracy.
- (c) **03:47** Drawing the correct letter upside down.
- (d) **03:25** [5.c.ii] Drawing the correct letter but malformed is given a medium accuracy.
- (e) **03:43** [5.c.ii] Drawing an incorrect letter is given a low accuracy and marked as incorrect.
- (f) **03:53** Filling the drawing panel in does not cause unexpected behaviour.
- (g) **04:02** Leaving the drawing panel empty does not cause unexpected behaviour.

Input	Expected outcome	Observed outcome
Accurately drawing the given letter in the drawing panel	The returned accuracy is high	The returned accuracy is high
Accurately drawing the given letter in the corner of the panel with a smaller size	The returned accuracy is high	The returned accuracy is 99%
Drawing the given letter upside down	The submission is marked as incorrect and given a low accuracy	The submission is marked as incorrect and given an accuracy of 0%
Drawing a malformed version of the correct letter	The submission is marked as correct and given a medium accuracy	The submissions are marked as correct and given accuracies of 64% and 60%
Filling in the drawing panel	No unexpected behaviour occurs	No unexpected behaviour occurs
Leaving the drawing panel empty	No unexpected behaviour occurs	No unexpected behaviour occurs

7/7 tests passed.

2. Mathematics of the neural network

The following tests confirm that the neural network is correctly applying matrix multiplication, and the backpropagation algorithm to the training data. The previous sets of tests show that the network is sufficiently trained therefore it is likely these tests will also pass. Regardless, these tests are still necessary for completeness. The randomness of the training data has been temporarily removed for these tests, and additional console logs have been added.

- (a) **05:52** [5.c.iv] The multiplication operation is correctly applied to two matrices.
- (b) **05:58** The neuron errors for the output layer are correctly calculated.
- (c) **06:08** The neuron errors for the hidden layers are correctly calculated.
- (d) **06:14** [5.c.v] The network shows significant statistical evidence of correctly selecting the drawn letter.

The algorithm for applying multiplication to two matrices is given in 1.4.2, however I will repeat it here in summary. Multiplication of matrices is not element-wise unlike addition, and instead sums the product of columns against rows. I have arbitrarily chosen two matrices of different dimensions where a multiplication operation is valid to perform on them.

$$\begin{bmatrix} -1 & 3 & 2 \end{bmatrix} \cdot \begin{bmatrix} 1 & 2 \\ 5 & 3 \\ 2 & -5 \end{bmatrix} = \begin{bmatrix} -1 \times 1 + 3 \times 5 + 2 \times 2 & -1 \times 2 + 3 \times 3 + 2 \times -5 \end{bmatrix} = \begin{bmatrix} 18 & -3 \end{bmatrix}$$

The neuron error for the output layer is calculated using the activated values of the neurons. Using a breakpoint in the program, I have determined the activated value of the 'K' neuron to be approximately 0.00199. The value of y is 0, since the expected forward pass would have 0% confidence that the 'N' in the image is a 'K'.

$$\delta = 2 \cdot (0.00199 - 0) \approx 0.00398$$

The neuron error for the first neuron of the last hidden layer is calculated using the its neuron value, the weights of the last layer, and the neuron errors of the output layer. The neuron value is approximately 1.050448.

$$\sigma(1.050448) = \frac{1}{1 + e^{-(1.050448)}} \approx 0.740861$$

$$\sigma'(1.050448) = 0.740861 \cdot (1 - 0.740861) \approx 0.191986$$

$$\delta = 0.191986 \times -1.937113 \approx -0.371899$$

Input	Expected outcome	Observed outcome
Inputting the multiplication of the two matrices described above	The result of the operation is [18, -3]	The result of the operation is [18, -3]
Running the network through the letter 'N'	The neuron error of the 'K' neuron ≈ 0.00398	The neuron error of the 'K' neuron ≈ 0.00398
Running the network through the letter 'N'	The neuron error of the first neuron in the last hidden layer ≈ -0.371899	The neuron error of the first neuron in the last hidden layer ≈ -0.371899
Training the network from initial parameters	The cumulative percentage accuracy exceeds 50%	The percentage accuracy reaches 59% after running the training data once

4/4 tests passed.

The table below details the neuron errors and weights required to perform this calculation. These have been rounded to 6 decimal places for clarity but should not be used in the calculation. The percentage error created by using the rounded values is 44%, which is very inaccurate.

Letter	Neuron Error	Weight
A	0.017701	-0.201546
B	0.000082	-0.575252
C	0.000000	0.217760
D	0.000340	0.838683
E	0.000001	-1.661811
F	0.000000	-1.072994
G	0.000002	1.666112
H	0.070553	0.208213
I	0.000000	-0.986409
J	0.000000	2.379106
K	0.003980	-1.601447
L	0.000000	-1.170204
M	0.059213	0.502268
N	-1.523186	0.725217
O	0.000013	1.300463
P	0.000004	-0.989713
Q	0.000014	-0.328058
R	0.010113	-1.835427
S	0.000000	0.656263
T	0.000000	0.445704
U	0.001286	1.646079
V	0.000021	-0.262805
W	0.000014	-0.625663
X	0.000107	-0.291998
Y	0.000014	0.724705
Z	0.000000	-0.535164

3.1.4 Social

1. Friend Invites

The following tests ensure that the social features of the application are functioning correctly, including any exceptions that may occur.

- (a) **07:06** [4.a] A user can send a friend invite to another user.
- (b) **07:12** Sending a friend request twice does not cause an error.
- (c) **07:25** [4.a.i] A friend invite is forwarded to the client if they are currently online.
- (d) **07:55** [4.a.i] A friend invite is forwarded to the client when they are next online if they are currently offline.

- (e) **07:44** [4.a] A user can remove a friend, which is immediately updated for the other user.
- (f) **07:38** Accepting a friend invite updates both users' friends list.

Input	Expected outcome	Observed outcome
Sending a friend request	Request received by server	Request received by server
Returning to the 'Home' screen and sending a friend request again	The server does not handle the invite and discards it	The server catches the failed 'unique' constraint for the database and discards the invite
Sending a friend request while the client is online	A pop-up appears for the receiving client	A pop-up appears for the receiving client
Sending a friend request while the client is offline, and then logging the client in	A pop-up only appears for the receiving client once when have logged in	A pop-up only appears for the receiving client once when have logged in
Removing a friend	Friends list for both users is updated	Friends list for both users is updated
Accepting a friend invite	Both users' friends list are updated	Friends list for only the sender is updated, and a manual refresh is required to refresh the receiver's friends list

5/6 tests passed.

One slight issue with test (c) is that the pop-up for the friend invite appeared on the active virtual desktop rather than the desktop running the application which 'account2' was logged into. This is likely due to how Windows handles Form dialogue boxes, and is not an issue with the application itself.

2. Updating profile information

These tests ensure that a user can update their profile information and that these changes are persistent.

- (a) **01:08** Changing the 'About me' is updated immediately.
- (b) **01:13** [4.c.ii] Updating the language refreshes the client application in the language selected.
- (c) **01:18** [4.c.i] The language chosen is retained when the user next logs in.

Input	Expected outcome	Observed outcome
Entering text into the 'About Me' field and clicking 'Confirm'	The 'About me' section of the home page refreshes	The 'About me' section of the home page refreshes
Changing the application language to 'Français' and clicking 'Confirm'	The language of the application changes to French	The language of the application changes to French
Selecting 'Français' as the application language, closing the app, and logging back in	The language of the application is still in French	The language of the application is still in French

3/3 tests passed.

3. Viewing and searching user profiles

The following tests ensure that a user's profile page is displayed correctly and that searching for other users functions as expected.

- (a) **08:01** [3.a] A user's profile page can be viewed which displays their statistics.
- (b) **08:05** [3.a.i] The statistics shown on a user's profile page are separated by letter and include the average accuracy and average time for each letter.
- (c) **08:13** [3.d] A user's profile can be searched for using their exact username.
- (d) **08:22** [3.d] Searching for a user that does not exist returns a suitable error message.

Input	Expected outcome	Observed outcome
Clicking the 'Profile' button on the main menu	The profile page is shown	The profile page is shown
	Each letter from A-Z is viewable with all statistics relating to it shown	The user's statistics for each letter are shown
Searching for 'account2'	The profile page of 'account2' is shown	The profile page of 'account2' is shown
Searching for 'account4'	'User does not exist' is displayed as an error message	'Could not find account' is displayed as an error message

4/4 tests passed.

3.1.5 Client-Server Connection

1. Accessing the server from various networks

The following tests ensure that the client-server connection is robust and can handle various network conditions. The client is able to successfully connect to the server if the connection status control on the login form shows 'Connected'. In the event that the client device is unable to run the client application, then it is sufficient to test if the client can reach the server by entering the socket into a browser. Unfortunately the footage for the tests requiring another device were at a lower quality, since the inbuilt screen recorder for the device did not have any options to adjust the resolution or bitrate.

- (a) **08:31** [5.a] A user can connect to the server from localhost.
- (b) **08:25** [5.a] A user can connect to the server from another device on the same subnet.
- (c) **08:50** [5.a] A user can connect to the server from a different network over the internet.

Input	Expected outcome	Observed outcome
Running the server and client on the same machine	Connection is successful	‘Connected’ is shown on the ‘Login’ page
Running the server on a device and going to <i>http://192.168.0.251:5252/cs-nea/accounts</i> on another device	The webpage displays ‘ConnectionID Required’	The webpage displays ‘ConnectionID Required’
Running the server on a device and going to <i>http://server-public-ip:5252/cs-nea/accounts</i> on another device using mobile data	The webpage displays ‘ConnectionID Required’	The request times out

2/3 tests passed. The failed test was a result of the internet service provider which the server uses to access the internet, and is further analysed in section 4.4.1.

3.2 Analysis of Testing

Around halfway through completing the tests I noticed that the ‘countdown’ for the games was not showing consistently. Since the method configuring this was asynchronous, I suspected there was a confliction between a ‘Task’ and Windows Forms. The controls in Windows Forms can only be accessed on the thread which they were created, so I added ‘Invoke()’ wrappers to the lines where the text of the ‘countdown’ labels were changed. I also changed the text foreground colour to white for legibility. These changes removed the inconsistencies in the ‘countdown’ displaying.

Additionally, I noticed that the list of users while in an ‘Elimination’ game type did not create ‘alive’ and ‘eliminated’ headers at the start of the game. Since all of the users are alive at the start of game regardless, this does not have a significant impact. I suspect the issue arises from how the list of users is refreshed, since it differs in the ‘Elimination’ game type. The panel is updated when a user joins or leaves the game, or a player has been eliminated. Since none of these events occur when the game is started, the panel is not converted from its configuration in the lobby menu, to how it should be in-game. Once the game has started, a boolean variable is set to true, such that on the next update event the panel is then split into alive and eliminated users. One way that this issue could be resolved is by directly calling the panel creation method when the game starts, passing in the list of users and an empty list to represent the eliminated users.

Failed Tests

Test 4.1(f) which ensured that the friends list for both users is updated when a new friendship unfortunately failed. Instead of both users receiving an update to their home screen, only the user who sent the request saw the receiving user added to their list. Interestingly, only a refresh of the home screen by clicking the ‘Home’ button was necessary for the receiving user to update their friends list. This suggested that the ‘friendData’ structure for the friend was received by the client, but the screen was not refreshed—the ‘Home’ button does not make a request to the server. Upon inspecting the source code for the ‘UpdateFriendData()’ method, I was expecting to see that the method was missing a call to the ‘ConfigFriendsPanel()’ method. However this would mean that the other user would also not receive an update to their friends list. The code does contain a call to update the friends list, but it is guarded by a selection statement which checks to see if the user is in-game by equating the ‘game’ attribute of the ‘menu’ structure to the null type. This implies that while performing the test, the client application had an instance of a game class loaded in the background. After some time debugging and further testing, I identified the source of this issue with the click event handler

for the close button. The ‘Home’ button has logic to set the ‘profile’ and ‘game’ attributes to null, however this was missing in the logic for the close button. If a user chose to quit the application while in-game, the instance of the game class would not be disposed of until the user either closed the application completely, or logged in again and clicked the ‘Home’ button. This must have been what occurred during testing: while setting up, I must have started a game, closed the application, and logged back in.

I have also chosen to analyse test 4.1(b): how the duplicate friend invite was handled by the server. While this test was not marked as failed since the expected outcome was observed, the server application did throw an exception. It appears I did not implement a safeguard for saving a duplicate invite, however this was caught by the defensive design of the **Database** class which threw an exception due to the ‘unique’ constraint for the primary key not being met. This prevented the server crashing and produced the expected outcome, however is not sustainable as a design choice. Furthermore the error received by the client implied that the request failed to be saved, which may be misleading since this is not what actually occurred.

4 Evaluation

4.1 Overall Effectiveness of the System

As defined in the problem statement, this solution was developed to address the need for an enjoyable and simple way to learn to write the Latin script. I have implemented a program which allows a user to receive instant feedback on writing a Latin character, through three different game types. A drawing panel is presented to the user for each round of a game, and they can submit an attempt at writing the given letter. The server application accurately evaluates the user's submission and returns a percentage accuracy and their elapsed time. These results are then updated for the user's account in the database, which allows a user to view their progress in learning to write the Latin characters.

The key component of this project is the multilayered neural network, which was implemented successfully and completely. It has been shown through extensive testing that the network is able to handle a variety of inputs and accurately evaluate each of them fairly. In particular, the speed of evaluation is almost instant—this was one of the concerns for using my own matrix and vector data structures. However it is clear that there is no noticeable time delay while a user's submission is being evaluated. Therefore the algorithm I have implemented for performing matrix operations is efficient.

Regarding the user experience while using the application, the client presents an appealing interface which is intuitive to use. Each section of the client application is split up, and navigating between these sections works flawlessly. Any exceptions which may occur on the server application are handled by the client by presenting relevant messages to the user, such that a runtime exception is completely avoided—both on the client and server application. A user's account data is stored securely in the database, along with their learning progress of the Latin characters. In my opinion, the technical solution I have produced acknowledges the proposed problem and provides an effective solution.

4.2 Evaluation of Objectives

4.2.1 Core Objectives

1. Accounts

These objectives were part of the 'accounts' system which was implemented completely. A user is able to login to their account or create a new account, and suitable error messages are displayed when appropriate. It was challenging at times to ensure that all the cases for an invalid login were met, especially when relaying this information to the client application and displaying an appropriate response.

2. Games

These objectives regard the three game types which the application offers to the user. The majority of the objectives were completed, however the 'Accuracy' game type was originally an offline game which would not require a connection to run. While designing the technical solution, it became clear that this would not be feasible since a user's statistics are stored on the server. It would also have been harder to integrate with the other games, and would require the client application to store a copy of the neural network locally. This would increase the memory usage of the application significantly, making it highly unsuitable for the 'Accuracy' game type to be offline.

Objective 2.c was successfully implemented: a user can use the mouse to draw the character on the panel and it is an intuitive input method to use. The user then receives feedback on their submission as a percentage for the accuracy and an elapsed time. Additionally, a 'delta' was implemented for both the accuracy and time of the submission, which compared the statistics of the current round with the user's average for the current letter. This allows a user to clearly see if they are improving as the text

is coloured red and green depending on the signs of the ‘deltas’.

There are three different types of games to choose from, and the solution has been programmed in such a way that adding new game types is simple and efficient without any major refactors. The games all inherit a base class and implement an interface: adding a new game type would only involve creating the new classes, and overriding any methods where the gamemode rules are different from the base class. Some of the methods provided by the interface do not have a definition in the base class, although these methods differ significantly between game types.

(a) **Accuracy**

The objectives for this game type were successfully met. The ‘Accuracy’ game type functions well as a way for users to practice writing the Latin script. It may have been more effective in learning to not randomise the characters and instead show characters which the user has a lower average accuracy on. However this involves an algorithm for **spaced repetition**, which is covered in 4.4.

(b) **Versus**

The objectives for this game type were met, although with some difficulties in programming the Elo formulae. Before testing, I noticed that the rating changes were greater than the K-factor which suggested that the implemented equations were incorrect. It was not easy to find the error of brackets being in the wrong position, so implementing objective 2.i.ii.A took longer than anticipated.

In retrospect, I noticed that I had overlooked using the Elo rating of a user to queue user’s more fairly, and was not even present in the objectives. This was discussed during Analysis, and it was what prompted the addition of the Elo rating system. Unfortunately, this method of queueing users was not implemented in the final solution and is therefore something I should consider as a possible system improvement.

Furthermore, objective 2.i.ii.A was successfully met and exceeded. The objective did not mention displaying to the user their change in Elo rating, however this was implemented in the technical solution. I believe the addition of this is useful for a user, since they may be unfamiliar with how the Elo rating system works. If they saw their rating change without warning it may cause some confusion—showing when their rating changes instead may remove this possibility.

(c) **Elimination**

The objectives for this game type were fully met. The users who are eliminated are informed that they did not win, and the winner is also informed of this. This exceeds the original objective 2.i.iii.C since it was not stated that the user should receive this information, even though it is a feature a user would expect.

3. **Statistics**

The objectives for the user’s statistics were completely met, however there were some challenges implementing objective 3.a.i. Separating the statistics for each letter required configuring a Windows Forms panel for each letter using an iteration structure. I had some issues adding scrollbars to the parent panel which the 26 sub-panels were added to. Ultimately the issue came down to how Windows Forms draws new controls in, and calling the ‘SuspendLayout()’ method had some odd quirks which had to be dealt with.

Regarding the ‘about me’ attribute of a user, this was implemented without much reason other than user experience since it is a common feature in other applications. However this is not viewable to other users since a panel to display it was not added to the ‘Profile’ page.

4. **Social**

There were some successes in implementing these objectives. In particular, objective 4.c had some issues regarding the translations. While I had aimed to ensure translations existed for every text field

in the client application, there were still some that lacked this. These include the description for each of the game types on the main menu and the button on the login form to create an account.

Fortunately, the ‘friends’ system was successfully implemented and the invitation system works without flaws. However I will highlight how the server ensures that a user does not send a friend invite more than once. Instead of checking before requesting the invite to be inserted into the database, the server attempts to insert the record regardless if it is a duplicate invite or not. This doesn’t cause any issues for the client, however the database does throw an exception when it attempts to add a record with the same primary key as an existing record. This exception is handled well, however is possibly not the most defensive design for such an occurrence.

5. Server

Implementing the objectives regarding the functionality of the server application saw some successes, and some failures. One aspect which was completed was how the progression of the games is managed. Each game progresses naturally, and there were no issues in programming due to the defensive design of the system and extensive planning done beforehand. Furthermore, the processing done by the server alleviates the clients of a significant amount of resource usage, especially the neural network. This ensures that a range of devices can run the client application without any issues.

Regarding the neural network and in particular its accuracy of evaluating the users’ submissions, I found that for the most part it achieves this objective very well and is able to handle a variety of inputs. In particular the preprocessing performed on the images works flawlessly, which allows a user to improve their writing ability without concerning themselves with the exact position and size of their submission.

One point of failure I noticed in the evaluation of an image involves submitting an empty image. The way the neural network outputs a result is such that regardless of the input, the output will always be a number between 1 and 26. The probability distribution for the output layer describes which letter the submission is most likely to be, not what the submission actually is. In this particular case, submitting an empty drawing for the character ‘T’ resulted in the submission being marked as correct, since this letter is the closest match to a blank image. This revealed an inherent flaw of the network: it must always choose a letter. If this were to be implemented with this consideration in mind, then the network should be able to identify when it has been given an image which is not recognisable as any of the Latin characters as an input. It should then be able to mark this submission as incorrect, rather than choosing the letter whose shape most closely matches the image.

4.2.2 Extension Objectives

Unfortunately, none of the extension objectives were implemented as they required significant refactors to the codebase. Extension objectives 1 and 2 could not be implemented easily as they would require adding a setting to games which makes them private or public. In this context, a private game would be one where a ‘host’ user would create the game and only users which directly receive an invite would be allowed to join the game. Any other users would not be able to see this game when queueing.

Implementing this feature would require an additional check when queueing, to check the visibility status of the game to ensure that the user only queues into public games. If a user were to receive an invite, they would need to make a request to a new method, which queues the user into the game with the same gameID that matches the invite they were sent. Additionally, the appropriate controls would need to be added to the client application such that a user can invite others to their game and change the visibility status of their game. One issue that may arise is whether only the ‘host’ user should be able to change the visibility status—this would require each game storing its respective ‘host’ and only allowing the relevant client access to these controls. Although, this is technically already implemented since the gameID is constructed from the ‘host’ user and the current time. However extracting the userID from this string is challenging if they

have numbers in their username.

The third extension objective would require a restructure of the SQL database, as well as optimisations to how this data is stored and when the unnecessary records are deleted. This is covered further in section 4.4.3.

Considering the fourth and final extension objective, adding an extra option for a user would need to be stored somewhere. It may be appropriate to add this as an extra attribute to the `userData` table in the database, however storing it locally in a JSON settings file is also viable. Regardless, this option would present some issues in the competitive game types, and it may be best to disable this feature when not in the ‘Accuracy’ game type. Implementing this would be relatively simple: the panel is updated with a ‘Graphics’ object of the user’s drawing every time the pen is moved while the left mouse button is held. This would just need to be disabled, and the panel would not display the user’s drawing however it would still be recorded.

4.3 End User Feedback

Unfortunately, the end user I chose for this project has deleted their Discord account—it is no longer possible to communicate with them. Instead, I have selected an active user of Duolingo to provide feedback on the technical solution. They are also employed in a teaching position where they help young children learn to write, which makes their opinion highly suitable and valuable for this project.

4.3.1 Feedback

“I tried to do an SQL injection using `DROP TABLE`, and your program handled it perfectly. I like the algorithm very much. It is lenient on minute human errors, whilst not allowing any large discrepancies to be given credit. The input method is also really good; perhaps a touchscreen version would be great too. As a tutoring assistant myself teaching children pencil control using very similar techniques, this solution I think would be a great way to get them to practice. The language switching still needs some work it seems. I like the fact that it stored progress data—not only does it make it more engaging to use, but it also is a valuable tool to know which letters you should practice writing most. I also think the competitive element added through the “versus” and “elimination” modes is a pretty clever and useful addition. I tried my best I cannot get it to error, very good defensive programming it seems. This, together with the very intuitive UI with larger buttons, makes me more confident that this will work with children learning pencil control especially.”

4.3.2 Analysis

This feedback was useful for the evaluation of the technical solution, as the interviewee considered both the effectiveness of the system and how it has been designed. The database has been robustly set up to use parameter queries, which is why their SQL injection attempt was unsuccessful. They are also content with how the neural network evaluates their submission, stating that it isn’t too lenient which was something I intended to avoid. The suggestion for a touchscreen method isn’t an inherently bad idea—allowing users to use tablet pens to directly draw onto the drawing panel. While this does rely on the user having access to such a device, it still may be something worth considering as a system improvement. Implementing a mobile version of the client application would require a complete rebuild however, since Windows Forms is only accessible on a desktop running Windows as its operating system.

Furthermore the interviewee highlighted some missing translations in the application. I had attempted to minimise the amount of text boxes without hindering the accessibility of the user interface, as a way to avoid missing translations. However it seems there are a few obscure text boxes which I did not incorporate translations into, so an improvement may be to fix any missing localisation.

As for the interviewee’s experience with teaching young children how to write, they stated that they believe the solution would be effective for those learning pencil control. While the end user for this project was not young children, this statement may still imply that the solution is also effective for those able to write, but are learning a new script. I myself found that a similar application from Analysis is convenient to use and

effective at its purpose. There are many similarities between learning to write and learning to write in a different script, hence this feedback suggests that the produced solution is effective in solving the proposed problem.

4.4 System Improvements

As discussed earlier, there are improvements that could feasibly be made to some of the existing components of the technical solution. Furthermore, there are additional features that could improve the experience for a user, such as applying a ‘spaced repetition’ algorithm to the ‘Accuracy’ game type. However, implementing these features would require significant research and alterations to the existing codebase. If this project were to be scaled to an application which its intended target users could rely on, then it is likely many of these proposed changes would be necessary.

4.4.1 Client-Server Connection

The connection between the client application and the server is the underlying system on which the technical solution runs on. It was shown during Testing that client devices from outside the Local Area Network (LAN) could not establish a connection to the server. This is an issue with the Internet Service Provider (ISP) which the server application uses to connect to the internet: Toob. Toob is one of the many ISPs which use Carrier-Grade NAT (CGNAT) where multiple customers share a single public IP address. The public IP address is required by the client to uniquely identify the machine on which the server is running, however CGNAT does not provide unique public IP addresses to its devices.

The main issue caused by CGNAT is the absence of custom port forwarding. If the server device has a unique public IP address, then a request made by the client application will only reach the router which connects the server’s LAN to the internet. By supplying a port number as part of the request, the router can send any packets which use this port number to the local IP address of the server machine. This is called port forwarding, and is required to expose the server application to the internet. CGNAT works in a similar way to regular NAT when making a request from the network: port forwarding is used to return a server response to a client. However in the setup which the technical solution uses, it is the server rather than the client using CGNAT. The client is not returning a response to the server and is instead making a request—a custom port forwarding must be set up in order for this request to reach the server, which CGNAT does not provide without a significant payment.

There are systems which provide a workaround to CGNAT. A ‘tunnel’ can be used to link a machine with a public website, which is hosted by the tunnel provider. The client can instead make its requests to this website which are ‘tunnelled’ to the server machine. However I found this to be quite a hacky alternative and the options often came with a subscription, as well as making the client-server network more complicated. Toob is designed to be easy to use for an average internet user—CGNAT acts as an extra layer between the router and the internet, and is not a suitable ISP choice for the technical solution I have produced.

Before switching to Toob, the ISP which the server connected through was Virgin Media. This is a more traditional ISP which allocates a unique public IPv4 address to a device. This allowed a device outside of the LAN to successfully establish a connection to the server.

4.4.2 User Interface

In regards to the user interface, there are many aspects which are less polished than the rest of the application, such as the ‘Profile’ page and when a game ends. This is due to the design of these elements not being prioritised during the implementation of the technical solution. Windows Forms is not a platform designed for creating the user interface in the style I used. It was awkward to use due to its limitations with asynchronous methods, and required a lot of code. A more suitable choice may have been to use WPF, which is an XML based graphic designer.

I also researched into other frameworks for building the client application, particularly focusing on cross-platform solutions. One such framework is Electron, which allows for building applications using HTML, CSS, and JavaScript. This would have allowed the client application to run on multiple operating systems, including Windows, macOS, and Linux. However this does not address the need for a mobile application, which may be more suitable for the target end user. I did not initially choose Electron as the framework for the client application because it uses JavaScript: a language I am less confident with.

4.4.3 Database Design

One of the extension objectives was to store the user's Elo rating from the previous 90 days to allow a graph to be produced. This would have been a good visualisation for a user to track their progress in learning the Latin characters. One way of implementing this involves adding a new table to store a user's rating over time. The 'userID' attribute of the record is a foreign key which references the userID in the 'userData' table.

```
userData(userID, password, aboutMe, localisation, dateCreated)
rating(userID*, date, rating)
```

The 'Rating' table uses a composite primary key consisting of the 'userID' and 'date' attributes. This allows for multiple records of a user's Elo rating history to exist, each with a different date. The 'rating' attribute stores the Elo rating of the user on that date. It is unnecessary to store the exact time of the rating in the day, since that precision could not easily be visualised on a graph.

The 'userData' structure will need to be updated where the 'rank' attribute is replaced with a list of a 'DateTime' integer tuple pairs. The 'friendData' structure will not be updated in the same way, since this data is unnecessary during a game. The alterations to the database will require a refactor of the 'LoadUserData()' method in the **Database** class. Instead of reading the user's Elo rating from the attribute in the 'userData' table, a new method should be implemented to get the user's rating history, possibly identified by 'LoadRatingHistory()'. This will need to be called during the 'LoadUserData()' method and should have an 'out' parameter of a list of times and integers, which is assigned to the new 'rating' attribute of the 'userData' structure. In order to reduce redundancies in the database, it is also necessary to ensure that the ratings stored do not exceed 90 days in age. It may be suitable to purge these records on a login event, using a new 'PurgeRatingHistory()' method which is called before loading the rating history for a user. The SQL commands for the two new methods are detailed below—the parameter 'cutoffDate' is equal to 90 days less than the current date.

```
SELECT date, rating
FROM rating
WHERE userID = @userID
ORDER BY date DESC

DELETE FROM rating
WHERE userID = @userID AND date < @cutoffDate
```

The 'UpdateRank()' method of the **Database** class will also need to be refactored slightly. Instead of using an UPDATE command to replace the user's rating in the 'userData' table, an INSERT INTO command should instead be used to add a new record to the 'rating' table. However this presents the possibility of a user's Elo rating changing more than once in a single day, which is likely to happen. To resolve this issue, a command should be issued to the database before inserting the new record that deletes any records in the 'rating' table for the user which have the same date value as the current date. This will only be one record at most, and ensures that the new rating is safely inserted into the database table.

Considering the changes required for the client application, it is firstly necessary to change the 'userData' structure to match the updated version on the server. To display the user's current rating, the first value in the 'rating' list is used since the SQL command sorts the dates into descending order. The most suitable

place for a graph of the user's Elo rating over time is the 'Profile' page, as this would allow other users to also view the graph. The graph could be implemented using the Chart object from Windows Forms. This is a single form control which allows for a variety of graphs to be plotted, including a line graph. The control class defines a method identified by 'AddXY()', which takes in a coordinate and plots it onto the chart. This is highly suitable for the input data, since it is effectively a list of X and Y values where the date is the X coordinate and the Elo rating is the Y coordinate.

4.4.4 Spaced Repetition

Spaced repetition is an evidence-based learning technique which improves the effectiveness of learning. It's most common use is within flashcards, however it also applies to writing the Latin script. In the case of this project, letters which the user has not seen before and letters which they score low accuracies in are shown more often. Similarly, letters which the user is more confident in are shown less often. However if the user were to get one of these letters wrong, then it would return to being shown more often.

One way of implementing an algorithm for spaced repetition is the Leitner method. The Leitner method is a simple algorithm of applying spaced repetition to flashcards, and is also relevant to writing Latin characters. Each user would have a set of 'boxes' which contain certain letters. The letters in the leftmost 'box' will be shown to the user more frequently and the letters in the rightmost 'box' will be shown to the user less frequently. When the user gets a letter correct, it is moved from its current 'box' to the 'box' on its right. If the user gets a letter incorrect, it is moved to the leftmost 'box'.

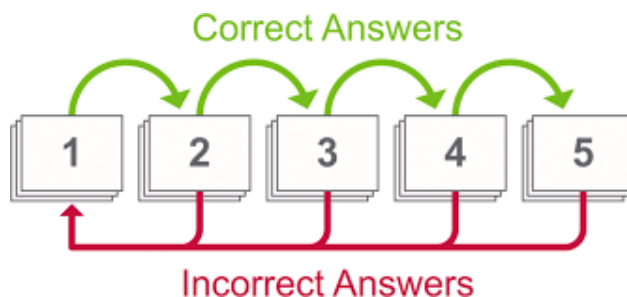


Figure 39: Visualisation of the Leitner method

However the Leitner method is generally executed by a person without the help of a computer. This is because the algorithm is easy and intuitive to perform, so it's most effective for learning flashcards. Since the option for more complicated processing is available, it may be suitable to choose a more effective algorithm. One algorithm which exists is the SuperMemo SM-2 algorithm. This implements two variables for each letter in the Latin alphabet: The 'easing factor' EF abstractly represent the difficulty of a given letter, and the number of repetitions n is the number of times the letter has been correctly drawn in a row. From this state defined by these two variables, the amount of time between showing a given letter can be calculated as a function of n using a recurrence relation.

$$\begin{aligned}
 I(0) &= 0 \\
 I(1) &= 1 \\
 I(2) &= 6 \\
 I(n) &= I(n-1) \times EF \\
 I(n) &= 6 \times EF^{(n-2)}
 \end{aligned}$$

To evaluate the 'easing factor' of each letter, the letter must be scored on a scale of 0 – 5 depending on the user's confidence. This could be done manually after each round, or by a separate algorithm which uses the accuracy and time of a submission to grade it between 0 – 5. The values in $[0, 2]$ represent 'forgetting', which

in this scenario is equivalent to struggling to write a letter accurately.

If the score q given to the confidence of a letter is in $[0, 2]$, then the n value for that letter is set to the given score. Otherwise, n is incremented by one since the number of correct repetitions has increased. The ‘easing factor’ is also updated using the score given to the letter.

$$\begin{aligned} \text{EF}'(q) &= \min(1.3, \text{EF} + f(q)) \\ f(q) &= -0.8 + 0.28q - 0.02q^2 \end{aligned}$$

This means that for any score which is less than a highly accurate recall, the ‘easing factor’ decreases such that the interval for the letter decreases. The function defined by $f(q)$ has a root at $q = 4$, which is where the interval is not changed.

Regarding the implementation of this algorithm for spaced repetition, the server would first require a way to store the ‘easing factor’, the value of n , and the number of games played since the letter was last seen. This could be achieved by adding the respective attributes to the ‘statistics’ table. The structure to store a user’s statistics would need to be extended to support these additional attributes, however this would only be for the server structure—the client does not need this information since the letters are generated by the server.

statistics	
PK, FK	<u>userID</u>
PK	<u>character</u>
	accuracy
	time
	total
	easingFactor
	correctStreak

Figure 40: Proposed changes to the ‘statistics’ table for spaced repetition

The ‘Accuracy’ game type would then need to implement the SuperMemo algorithm as its own encapsulated functions. The letter would all be generated at the start of the game, replacing the current call to the ‘GenerateLetters()’ method from the base class. A new function would need to be defined which takes in a ‘statistics’ structure and returns a list of characters. The variables for the algorithm would also need to be updated at the end of the game, which would be implemented as a function which is called for each letter of the game. Its parameters would include the rating given to these letter, and the ‘statistics’ structure for that letter.

In order to create the list of letters at the start of the game, the program must go through each letter in the user’s statistics and first calculate the ‘interval’ for that letter using the recurrence relation with the value of n . It can then compare the ‘number of games since last seen’, and the interval of that letter. If these two values are equal, then the letter should be shown in this game and is added to the list. If there are less letters in the list than there are number of rounds in the game, then the remaining letters are filled with letters chosen at random from the remaining letters, not including any duplicates. The game can then be started and the user will play each round, where they draw the letter and their confidence is rated from 0 to 5. This

could be done by adding buttons for each confidence level where the user would click the one they think best matches their confidence, or a separate algorithm could be implemented to calculate an approximation for this value from the time and accuracy. I have created pseudocode for the process of generating letters below.

```
func GenerateLetters(List<Statistics> statistics) -> List<char> {
    List<char> letters = []
    foreach (letter in statistics) {
        if (letter.lastSeen >= Interval(letter.n, letter.easingFactor)) {
            letters.Add(letter.letter)
        }
        if (letters.Count == rounds) {
            return letters
        }
    }

    while (letters.Count < 10) {
        char letter = char(random(0, 26) + 65)
        if (!letters.Contains(letter)) {
            letters.Add(letter)
        }
    }
    return letters
}

func Interval(int n, double easingFactor) -> int {
    return 6 * exp(easingFactor, (n - 2))
}
```

When the game ends, the ‘Accuracy’ game type must additionally calculate the new ‘easing factor’ for each letter. The ‘statistics’ structure contains the current values for the ‘easing factor’ and the value of n , which would be passed as a parameter to the function where they are updated. The ‘easing factor’ would be updated using the formulae described earlier, and the value of n is incremented by 1 if the score given to the letter was greater than 2; otherwise it is set to the score given.

```
func UpdateInterval(Statistics statistics, int score) -> (double, int) {
    double updatedEF = CalculateEasingFactor(statistics.easingFactor, score)
    int updatedN = statistics.n + 1 if score > 2 else score
}

func CalculateEasingFactor(double easingFactor, int q) -> double {
    return min(1.3, easingFactor + f(q))
}

func f(int q) -> double {
    return -0.8 + (0.28 * q) - (0.02 * exp(q, 2))
}
```

The database would then be updated with the new values for the ‘easing factor’ and n . Additionally, the number of games since the letter was last seen will be set to zero for all of the letters which were in the game. Any other letters will have this value incremented by 1, since the user has played a game which they were not present in—the user last saw these letters a longer time ago.

5 Technical Solution

5.1 Contents

Shown below is a table of contents which details any code files with complex algorithms or data structures. Each file is accompanied by a brief description of the functionality it provides, as well as the page number where the code can be found. Unfortunately it was not possible to create a link directly to the methods, so it should be noted that the page number links to the start of the file and the relevant method may be up to a few pages later.

File	Description	Page
server/games/ Game.cs/IPlayable, Game	Object-Oriented Programming	116
server/databases/ Database.cs/LoadUserData()	Loading account data using parameterised SQL	102
server/neuralNetwork/ Backpropagation.cs/Backpropagate()	Backpropagation algorithm	127
server/neuralNetwork/ Data.cs/LoadWeights(), SaveWeights()	Reading and writing to text files	130
server/games/ Versus.cs/CalculateRank()	Implementation of the Elo formulae	123
server/games/ Elimination.cs/EvaluationPhase()	List operations for determining which users are eliminated	113
server/games/ Game.cs/EvaluateSubmission()	Evaluating a submission using the neural network	116
server/games/ Game.cs/UpdateStatistics()	Updating averages in the database	116
server/neuralNetwork/ Data.cs/softmax()	Softmax function	130
server/neuralNetwork/ Data.cs/PreprocessImage()	Image preprocessing	130
server/neuralNetwork/ Network.cs/EvaluateNetwork()	Forward pass of the neural network	136
server/neuralNetwork/ structures/Matrix.cs, Vector.cs	Matrix and Vector data structures	138, 141
server/neuralNetwork/ structures/Matrix.cs/*()	Multiplication of matrices and vectors	138
server/ Accounts.cs	Client-server connection: account management	142
server/ Program.cs/HostBuilder()	Server configuration	144
client/menus/games/ Game.cs/IPlayable, Game	Object-Oriented Programming	204
client/menus/ Main.cs/CalculateStatsOverview()	Calculating a summary of a user's statistics	154
client/menus/ Main.Designer.cs/ConfigGamePanels()	Configuring the panels to display the available game types	161
client/ hub-connection.cs/AddHandles()	Client-server connection: client logic for receiving server invocations	208
client/menus/ UXelements.cs/ConfigResultsPanel()	Data manipulation while configuring the results panel after a round	176

5.2 Code

5.2.1 Server

connections/accounts.cs

```
using Microsoft.AspNetCore.SignalR;
using server_app.databases;

namespace server_app.connections
{
    public partial class Connection : Hub
    {
        public static readonly Dictionary<string, string> map = [];
        public async Task<bool> clientConnected(string userID)
        {
            // fail-safe for server crash
            map.Remove(userID);
            map.Add(userID, Context.ConnectionId);

            if (!await LoadUserData(userID))
            {
                map.Remove(userID);
                return false;
            }

            await UpdateOnline(userID, true);
            return true;
        }
        public async void clientDisconnected(string userID)
        {
            await UpdateOnline(userID, false);
            map.Remove(userID);
            Logger.Log("LOGOUT", "green", $"<{userID}> has disconnected");
        }
        public override Task OnDisconnectedAsync(Exception? exception)
        {
            // unexpected disconnection
            string connectionID = Context.ConnectionId;
            foreach (string user in map.Keys)
            {
                if (map[user] == connectionID)
                {
                    Logger.Log("WARN", "yellow", $"<{user}> has unexpectedly
                        ↪ disconnected");
                    map.Remove(user);
                    break;
                }
            }

            return base.OnDisconnectedAsync(exception);
        }

        private async Task<bool> LoadUserData(string userID)
        {
            if (!Database.LoadUserData(userID, out userData userData))
            {
                return false;
            }
            return true;
        }
    }
}
```

```

        {
            return false;
        }

        if (map.TryGetValue(userID, out string? connectionID))
        {
            await Clients.Client(connectionID).SendAsync("receiveUserData",
                ↪ userData);
        }

        return true;
    }

    private async Task UpdateOnline(string userID, bool online)
    {
        if (!Database.LoadFriends(userID, out List<string> friends))
        {
            return;
        }

        foreach (string friend in friends)
        {
            if (map.TryGetValue(friend, out string? connectionID))
            {
                await Clients.Client(connectionID).SendAsync("updateOnline", userID,
                    ↪ online);
            }
        }
    }
}

```

connections/games.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.games;

namespace server_app.connections
{
    public partial class Connection : Hub
    {
        public void receiveSubmission(string gameID, string userID, byte[] input)
        {
            Queueing.LoadSubmission(gameID, userID, input);
        }

        public void requestRound(string gameID, string userID)
        {
            Queueing.RequestRound(gameID, userID);
        }
    }
}

```

connections/queueing.cs

```

using Microsoft.AspNetCore.SignalR;

```

```

using server_app.databases;
using server_app.games;

namespace server_app.connections
{
    public partial class Connection : Hub
    {
        public string queueGame(Games gameType, string userID)
        {
            if (Program.hubContext != null)
            {
                Logger.Log("QUEUE", "blue", $"<{userID}> has queued for <{gameType}>");
                return Queueing.QueueGame(gameType, userID, Program.hubContext);
            }
            else
            {
                Database.outputException("IHubContext was null when attempting to queue a
↪ user");
                return string.Empty;
            }
        }
        public async Task dequeueGame(string gameID, string userID)
        {
            Logger.Log("QUEUE", "blue", $"<{userID}> has dequeued");
            await Queueing.DequeueUser(gameID, userID);
        }
        public bool userJoined(string gameID)
        {
            return Queueing.UserJoined(gameID);
        }
    }
}

```

connections/social.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.databases;

namespace server_app.connections
{
    public partial class Connection : Hub
    {
        public userData requestProfile(string userID)
        {
            if (Database.LoadUserData(userID, out userData userData))
            {
                return userData;
            }
            return new userData();
        }

        public async Task<bool> updateUserData(string userID, string aboutMe, string
↪ localisation)
        {
            if (!Database.UpdateUserData(userID, aboutMe, localisation))

```

```

    {
        Database.outputException($"Failed to update userData for <{userID}>");
        return false;
    }

    Logger.Log("ACCOUNT", "fuchsia", $"<{userID}> has updated their profile");
    if (map.TryGetValue(userID, out string? connectionID))
    {
        await Clients.Client(connectionID).SendAsync("updateUserData", userID,
            ↪ aboutMe, localisation);
    }

    return true;
}

private async Task<bool> UpdateFriendData(string userID, string friendID)
{
    if (!Database.LoadFriendData(friendID, out friendData friendData))
    {
        Database.outputException($"Failed to retrieve userData for
            ↪ <{friendID}>");
        return false;
    }

    if (map.TryGetValue(userID, out string? connectionID))
    {
        await Clients.Client(connectionID).SendAsync("updateFriendData",
            ↪ friendData);
    }
    return true;
}

private async Task DeleteFriend(string userID, string friendID)
{
    if (map.TryGetValue(userID, out string? connectionID))
    {
        await Clients.Client(connectionID).SendAsync("removeFriend", friendID);
    }
}

public async Task<bool> sendInvite(string userID, string senderID)
{
    Logger.Log("SOCIAL", "cyan", $"<{senderID}> has sent a friend invite to
        ↪ <{userID}>");
    if (map.TryGetValue(userID, out string? connectionID))
    {
        await Clients.Client(connectionID).SendAsync("receiveInvites", new
            ↪ List<string>() { senderID });
    }
    else
    {
        if (!Database.SaveInvite(userID, senderID))
        {
            Database.outputException($"Failed to save invite for <{userID}> from
                ↪ <{senderID}>");
        }
    }
}

```

```

        return false;
    }
}
return true;
}

public async void loadInvites(string userID)
{
    if (!Database.LoadInvites(userID, out List<string> invites))
    {
        Database.outputException($"Failed to load invites for user <{userID}>");
        return;
    }

    if (map.TryGetValue(userID, out string? connectionID))
    {
        await Clients.Client(connectionID).SendAsync("receiveInvites", invites);
    }
}

public async Task<bool> addFriends(string user1, string user2)
{
    Logger.Log("SOCIAL", "cyan", $"<{user2}> has accepted a friend invite from
    ↳ <{user1}>");

    if (!Database.AddFriends(user1, user2))
    {
        Database.outputException($"Failed to add <{user1}> and <{user2}> as
        ↳ friends");
        return false;
    }

    if (!await UpdateFriendData(user1, user2))
    {
        // alert client if retrieving friendData fails
        if (map.TryGetValue(user1, out string? connectionID))
        {
            await Clients.Client(connectionID).SendAsync("alert", $"Failed to
            ↳ retrieve data for friend <{user2}>");
        }
    }
    if (!await UpdateFriendData(user2, user1))
    {
        // no alert sent to other user as they may be in-game
        return false;
    }

    return true;
}

public async Task<bool> removeFriends(string user1, string user2)
{
    Logger.Log("SOCIAL", "cyan", $"<{user1}> has removed <{user2}> from their
    ↳ friends list");
}

```

```

        if (!Database.RemoveFriends(user1, user2))
        {
            Database.outputException($"Failed to remove <{user1}> and <{user2}> as
            ↪ friends");
            return false;
        }

        await DeleteFriend(user1, user2);
        await DeleteFriend(user2, user1);

        return true;
    }
}

```

databases/Database.cs

```

using Microsoft.Data.Sqlite;

namespace server_app.databases
{
    public struct userData
    {
        public string userID { get; set; }
        public string aboutMe { get; set; }
        public List<friendData> friends { get; set; }
        public string localisation { get; set; }
        public DateTime dateCreated { get; set; }
        public int rank { get; set; }
        public Dictionary<char, statistics> statistics { get; set; }
    }

    public struct statistics(double a, TimeSpan ts, int t)
    {
        public double accuracy { get; set; } = a;
        public TimeSpan time { get; set; } = ts;
        public int total { get; set; } = t;
    }

    public struct friendData
    {
        public string userID { get; set; }
        public bool online { get; set; }
        public int rank { get; set; }
    }

    public static class Database
    {
        private static readonly string dbPath = $"Data
        ↪ Source={Environment.GetEnvironmentVariable("cs-nea-server")}\\databases\\maindb.sqlite";
        private static readonly SqliteConnection connection = new(dbPath);
        public static void outputException(Exception ex) => Logger.ErrorLog(ex.Message);
        public static void outputException(string ex) => Logger.ErrorLog(ex);

        public static bool LoginRequest(string userID, string password, out int success)
        {
            string query = @"SELECT userData.password
            FROM userData

```

```

WHERE userData.userID = @userID";
try
{
    connection.Open();
    using (var command = new SqliteCommand(query, connection))
    {
        command.Parameters.AddWithValue("@userID", userID);

        using (var reader = command.ExecuteReader())
        {
            success = 2;

            while (reader.Read())
            {
                if (reader.GetString(0) == password)
                {
                    success = 1;
                }
                else
                {
                    success = 0;
                }
            }
        }
        connection.Close();
        return true;
    }
}
catch (Exception ex)
{
    outputException(ex);
    success = -1;
    connection.Close();
    return false;
}
}

public static bool AccountRequest(string userID, string password, string
↪ localisation, out int success)
{
    if (!UserExists(userID, out bool exists))
    {
        success = -1;
        return false;
    }
    if (exists)
    {
        success = 0;
        return true;
    }

    string query = @"INSERT INTO userData
VALUES (@userID, @password, @aboutMe, @dateCreated, @rank,
↪ @localisation)";

    try
    {

```

```

connection.Open();
using (var command = new SqliteCommand(query, connection))
{
    command.Parameters.AddWithValue("@userID", userID);
    command.Parameters.AddWithValue("@password", password);
    command.Parameters.AddWithValue("@aboutMe", "");
    command.Parameters.AddWithValue("@dateCreated", DateTime.UtcNow);
    command.Parameters.AddWithValue("@rank", 400);
    command.Parameters.AddWithValue("@localisation", localisation);

    command.ExecuteNonQuery();
}

for (int i = 0; i < 26; i++)
{
    query = @"INSERT INTO statistics
              VALUES(@userID, @letter, @accuracy, @time, @total)";

    using (var command = new SqliteCommand(query, connection))
    {
        command.Parameters.AddWithValue("@userID", userID);
        command.Parameters.AddWithValue("@letter", ((char)(i +
            ↪ 65)).ToString());
        command.Parameters.AddWithValue("@accuracy", 0);
        command.Parameters.AddWithValue("@time", TimeSpan.Zero);
        command.Parameters.AddWithValue("@total", 0);

        command.ExecuteNonQuery();
    }
}

connection.Close();
success = 1;
return true;
}
catch (Exception ex)
{
    outputException(ex);
    success = -1;
    connection.Close();
    return false;
}
}

private static bool UserExists(string userID, out bool exists)
{
    string query = @"SELECT userID
                    FROM userData
                    WHERE userID = @userID";

    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);

```



```

        var reader = command.ExecuteReader();

        exists = reader.HasRows;
    }
    connection.Close();
    return true;
}
catch (Exception ex)
{
    outputException(ex);
    exists = false;
    connection.Close();
    return false;
}
}

public static bool LoadUserData(string userID, out userData userData)
{
    userData = new();

    if (!UserExists(userID, out bool exists))
    {
        // error checking if user exists
        return false;
    }

    if (!exists)
    {
        // return empty userData
        return true;
    }

    string query = @"SELECT aboutMe, dateCreated, rank, localisation
FROM userData
WHERE userData.userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            var reader = command.ExecuteReader();
            while (reader.Read())
            {
                userData.aboutMe = reader.GetString(0);
                userData.dateCreated = reader.GetDateTime(1);
                userData.rank = reader.GetInt32(2);
                userData.localisation = reader.GetString(3);
            }
        }
        connection.Close();
    }
    catch (Exception ex)
    {
        outputException(ex);
    }
}

```

```

        connection.Close();
        return false;
    }

    if (!LoadStatistics(userID, out var stats))
    {
        // error loading statistics
        return false;
    }

    if (!LoadFriends(userID, out List<string> friends))
    {
        // error loading friends
        return false;
    }

    List<friendData> friendData = [];
    foreach (var friend in friends)
    {
        if (!LoadFriendData(friend, out friendData data))
        {
            // error loading friend data
            return false;
        }
        friendData.Add(data);
    }

    userData.userID = userID;
    userData.friends = friendData;
    userData.statistics = stats;

    return true;
}

public static bool UpdateUserData(string userID, string aboutMe, string
↪ localisation)
{
    string query = @"UPDATE userData
SET aboutMe = @aboutMe, localisation = @localisation
WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            command.Parameters.AddWithValue("@aboutMe", aboutMe);
            command.Parameters.AddWithValue("@localisation", localisation);

            command.ExecuteNonQuery();
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {

```

```

        outputException(ex);
        connection.Close();
        return false;
    }
}

private static bool LoadStatistics(string userID, out Dictionary<char,
↳ statistics> statistics)
{
    statistics = [];
    string query = @"SELECT letter, accuracy, time, total
        FROM statistics
        WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            var reader = command.ExecuteReader();
            while (reader.Read())
            {
                char letter = reader.GetChar(0);
                double accuracy = reader.GetDouble(1);
                TimeSpan time = reader.GetTimeSpan(2);
                int total = reader.GetInt32(3);

                statistics[letter] = new statistics(accuracy, time, total);
            }
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }
}

public static bool LoadFriends(string userID, out List<string> friends)
{
    friends = [];
    string query = @"SELECT user1, user2
        FROM friends
        WHERE user1 = @userID OR user2 = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            var reader = command.ExecuteReader();
            while (reader.Read())
            {
                string u1 = reader.GetString(0);

```

```

        string u2 = reader.GetString(1);

        if (u1 == userID)
        {
            friends.Add(u2);
        }
        if (u2 == userID)
        {
            friends.Add(u1);
        }
    }
}
connection.Close();
return true;
}
catch (Exception ex)
{
    outputException(ex);
    connection.Close();
    return false;
}
}
public static bool LoadFriendData(string userID, out friendData friendData)
{
    friendData = new();
    string query = @"SELECT rank
FROM userData
WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            var reader = command.ExecuteReader();
            while (reader.Read())
            {
                friendData.rank = reader.GetInt32(0);
            }
        }
        connection.Close();
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }

    friendData.userID = userID;
    friendData.online = connections.Connection.map.ContainsKey(userID);
    return true;
}
public static bool AddFriends(string user1, string user2)
{

```

```

string query = @"INSERT INTO friends
VALUES (@user1, @user2)";
try
{
    connection.Open();
    using (var command = new SqliteCommand(query, connection))
    {
        command.Parameters.AddWithValue("@user1", user1);
        command.Parameters.AddWithValue("@user2", user2);

        command.ExecuteNonQuery();
    }
    connection.Close();
    return true;
}
catch (Exception ex)
{
    outputException(ex);
    connection.Close();
    return false;
}
}

public static bool RemoveFriends(string user1, string user2)
{
    string query = @"DELETE FROM friends
WHERE (user1 = @user1 AND user2 = @user2) OR (user2 = @user1 AND user1 =
↪ @user2)";
    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))
        {
            command.Parameters.AddWithValue("@user1", user1);
            command.Parameters.AddWithValue("@user2", user2);

            command.ExecuteNonQuery();
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }
}

public static bool SaveInvite(string userID, string senderID)
{
    string query = @"INSERT INTO friendInvites
VALUES (@userID, @senderID)";
    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))

```

```

        {
            command.Parameters.AddWithValue("@userID", userID);
            command.Parameters.AddWithValue("@senderID", senderID);

            command.ExecuteNonQuery();
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }
}

public static bool LoadInvites(string userID, out List<string> senderIDs)
{
    senderIDs = [];
    string query = @"SELECT senderID
                     FROM friendInvites
                     WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            var reader = command.ExecuteReader();
            while (reader.Read())
            {
                string sender = reader.GetString(0);
                senderIDs.Add(sender);
            }
        }
        connection.Close();
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }

    bool success = DeleteInvites(userID);
    return success;
}

private static bool DeleteInvites(string userID)
{
    string query = @"DELETE FROM friendInvites
                     WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqlCommand(query, connection))

```

```

        {
            command.Parameters.AddWithValue("@userID", userID);
            command.ExecuteNonQuery();
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }
}

public static bool UpdateStatistics(string userID, char letter, double accuracy,
    ↪ TimeSpan time, int total)
{
    string query = @"UPDATE statistics
        SET accuracy = @accuracy, time = @time, total = @total
        WHERE userID = @userID AND letter = @letter";
    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            command.Parameters.AddWithValue("@letter", letter);
            command.Parameters.AddWithValue("@accuracy", accuracy);
            command.Parameters.AddWithValue("@time", time);
            command.Parameters.AddWithValue("@total", total);

            command.ExecuteNonQuery();
        }
        connection.Close();
        return true;
    }
    catch (Exception ex)
    {
        outputException(ex);
        connection.Close();
        return false;
    }
}

public static bool UpdateRank(string userID, int rank)
{
    string query = @"UPDATE userData
        SET rank = @rank
        WHERE userID = @userID";
    try
    {
        connection.Open();
        using (var command = new SqliteCommand(query, connection))
        {
            command.Parameters.AddWithValue("@userID", userID);
            command.Parameters.AddWithValue("@rank", rank);

```

```

        command.ExecuteNonQuery();
    }
    connection.Close();
    return true;
}
catch (Exception ex)
{
    outputException(ex);
    connection.Close();
    return false;
}
}
}
}

```

games/Accuracy.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.connections;

namespace server_app.games
{
    public class Accuracy(string userID, IHubContext<Connection> context) : Game(context,
        ↪ Games.Accuracy, userID, 1), IPlayable
    {
        private const int rounds = 10;
        public override async Task StartGame()
        {
            await base.StartGame();

            letters = GenerateLetters(rounds);
            await SubmissionPhase();
        }

        public async Task SubmissionPhase()
        {
            if (roundCount < rounds)
            {
                await AwaitRound();
                await Task.Delay(3000);

                startTime = DateTime.UtcNow;
                currentResponses.Clear();
                await SendLetter(userIDs, letters[roundCount]);
            }
            else
            {
                EndGame();
            }
        }
        public override void LoadResponse(string userID, byte[] input)
        {
            base.LoadResponse(userID, input);
            if (currentResponses.Count == GetPlayerCount())

```



```

        {
            EvaluationPhase(letters[roundCount]);
        }
    }

    public async void EvaluationPhase(char letter)
    {
        for (int i = 0; i < GetPlayerCount(); i++)
        {
            EvaluateSubmission(userIDs[i], letter);
            await SendResult(userIDs[i], gameStats[userIDs[i]]);
        }
        roundCount++;
    }
    public async Task ContinueRequest(string userID)
    {
        if (!continueRequests.Contains(userID))
        {
            continueRequests.Add(userID);
        }

        if (continueRequests.Count == GetPlayerCount())
        {
            await SubmissionPhase();
        }
    }
}
}

```

games/Elimination.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.connections;

namespace server_app.games
{
    public class Elimination(string userID, IHubContext<Connection> context) :
        ↪ Game(context, Games.Elimination, userID, 12), IPlayable
    {
        private List<string> aliveUsers = [];
        public override bool DequeueUser(string userID)
        {
            aliveUsers.Remove(userID);
            return base.DequeueUser(userID);
        }
        public override async Task StartGame()
        {
            aliveUsers = [... userIDs];

            await base.StartGame();
            await SubmissionPhase();
        }

        public async Task SubmissionPhase()
        {

```

```

    if (aliveUsers.Count > 1)
    {
        char letter = (char)(rnd.Next(0, 26) + 65);
        letters.Add(letter);

        await AwaitRound();
        await Task.Delay(3000);

        startTime = DateTime.UtcNow;
        currentResponses.Clear();
        await SendLetter(aliveUsers, letter);
    }
    else
    {
        EndGame();
    }
}

protected override async Task AwaitRound()
{
    continueRequests.Clear();
    foreach (string userID in aliveUsers)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await
                ↪ hubContext.Clients.Client(connectionID).SendAsync("awaitRound");
        }
    }
}

public override void LoadResponse(string userID, byte[] input)
{
    base.LoadResponse(userID, input);
    if (currentResponses.Count == aliveUsers.Count)
    {
        EvaluationPhase(letters[^1]);
    }
}

public async void EvaluationPhase(char letter)
{
    List<string> eliminatedUsers = [];
    List<string> incorrectUsers = [];

    for (int i = 0; i < aliveUsers.Count; i++)
    {
        if (!EvaluateSubmission(aliveUsers[i], letter))
        {
            incorrectUsers.Add(aliveUsers[i]);
        }
        await SendResult(aliveUsers[i], gameStats[aliveUsers[i]]);
    }

    if (incorrectUsers.Count == 0)
    {
        // eliminate user with longest time
    }
}

```

```

        (string user, TimeSpan time) highest = (string.Empty, TimeSpan.MinValue);
        foreach (string userID in aliveUsers)
        {
            var time = gameStats[userID].time[roundCount];
            if (time > highest.time)
            {
                highest = (userID, time);
            }
        }

        eliminatedUsers.Add(highest.user);

        aliveUsers.Remove(highest.user);
    }
    else if (incorrectUsers.Count < aliveUsers.Count)
    {
        // eliminate incorrect users
        eliminatedUsers.AddRange(incorrectUsers);
        foreach (string user in incorrectUsers)
        {
            aliveUsers.Remove(user);
        }
    }

    await SendEliminationResults(eliminatedUsers);
    roundCount++;
}

public async Task ContinueRequest(string userID)
{
    if (!aliveUsers.Contains(userID))
    {
        // if user is eliminated, then endGame for client
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await hubContext.Clients.Client(connectionID).SendAsync("endGame");
        }
        return;
    }

    if (!continueRequests.Contains(userID) && aliveUsers.Contains(userID))
    {
        continueRequests.Add(userID);
    }

    if (continueRequests.Count == aliveUsers.Count)
    {
        await SubmissionPhase();
    }
}

private async Task SendEliminationResults(List<string> eliminatedUsers)
{
    foreach (string userID in aliveUsers)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {

```



```

{
    bool QueueUser(string userID);
    bool DequeueUser(string userID);
    Task UpdateUsers();
    Task StartGame();
    Task SubmissionPhase();
    void LoadResponse(string userID, byte[] input);
    void EvaluationPhase(char letter);
    Task ContinueRequest(string userID);
    void EndGame();
    Games GetGameType();
    string GetGameID();
    bool HasStarted();
    int GetPlayerCount();
    int GetMaxPlayers();
}

public abstract class Game
{
    protected IHubContext<Connection> hubContext;

    protected string gameID;
    protected int maxPlayers;
    protected Games type;
    private bool started;

    protected List<string> userIDs;
    protected List<friendData> userDatas;
    protected Dictionary<string, gameStats> gameStats;

    protected Random rnd;
    protected List<char> letters;
    protected int roundCount;

    protected DateTime startTime;
    protected Dictionary<string, (double[] submission, DateTime time)>
        ↪ currentResponses;
    protected List<string> continueRequests;

    public Games GetGameType() => type;
    public string GetGameID() => gameID;
    public bool HasStarted() => started;
    public int GetMaxPlayers() => maxPlayers;
    public int GetPlayerCount() => userIDs.Count;

    public Game(IHubContext<Connection> context, Games type, string userID, int
        ↪ maxPlayers)
    {
        hubContext = context;

        gameID = userID + DateTime.UtcNow.ToString();
        this.maxPlayers = maxPlayers;
        this.type = type;
        started = false;
    }

```

```

        userIDs = [];
        userDatas = [];
        gameStats = [];

        rnd = new();
        letters = [];
        roundCount = 0;

        currentResponses = [];
        continueRequests = [];
    }

    public bool QueueUser(string userID)
    {
        if (!Database.LoadFriendData(userID, out friendData data))
        {
            return false;
        }

        userIDs.Add(userID);
        userDatas.Add(data);
        return true;
    }

    public virtual bool DequeueUser(string userID)
    {
        int index = -1;
        for (int i = 0; i < GetPlayerCount(); i++)
        {
            if (userDatas[i].userID == userID)
            {
                index = i;
                break;
            }
        }

        if (index == -1) return false;

        userIDs.Remove(userID);
        userDatas.RemoveAt(index);

        return true;
    }

    public async Task UpdateUsers()
    {
        foreach (var user in userIDs)
        {
            if (Connection.map.TryGetValue(user, out string? connectionID))
            {
                await
                    ↪ hubContext.Clients.Client(connectionID).SendAsync("updateUsers",
                    ↪ userDatas);
            }
        }
    }
}

```

```

public virtual async Task StartGame()
{
    started = true;

    foreach (string user in userIDs)
    {
        gameStats.Add(user, new gameStats());
    }

    foreach (string userID in userIDs)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await
                ↪ hubContext.Clients.Client(connectionID).SendAsync("awaitStart");
        }
    }

    await Task.Delay(5000);

    foreach (string userID in userIDs)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await hubContext.Clients.Client(connectionID).SendAsync("startGame");
        }
    }
}

protected List<char> GenerateLetters(int count)
{
    List<char> letters = [];

    Random rnd = new();
    for (int i = 0; i < count; i++)
    {
        letters.Add((char)(rnd.Next(0, 26) + 65));
    }
    return letters;
}

protected virtual async Task AwaitRound()
{
    continueRequests.Clear();
    foreach (string userID in userIDs)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await
                ↪ hubContext.Clients.Client(connectionID).SendAsync("awaitRound");
        }
    }
}

protected async Task SendLetter(List<string> userIDs, char letter)
{
    foreach (string userID in userIDs)

```

```

    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await
                ↳ hubContext.Clients.Client(connectionID).SendAsync("receiveLetter",
                ↳ letter);
        }
    }
}

public virtual void LoadResponse(string userID, byte[] input)
{
    DateTime endTime = DateTime.UtcNow;
    double[] array;

    using (var ms = new MemoryStream(input))
    {
        var bmp = new Bitmap(ms);
        array = Data.PreprocessImage(bmp);
    }

    currentResponses.Add(userID, (array, endTime));
}

protected bool EvaluateSubmission(string userID, char character)
{
    int letter = character - 65;

    Network network = new(currentResponses[userID].submission);
    bool correct = network.GetResult() == letter;

    if (gameStats.TryGetValue(userID, out gameStats currentStats))
    {
        DateTime endTime = currentResponses[userID].time;
        double accuracy = network.GetAccuracy(letter);

        currentStats.Update(accuracy, endTime - startTime, correct);
    }
    gameStats[userID] = currentStats;
    return correct;
}

protected async Task SendResult(string userID, gameStats stats)
{
    bool correct = stats.correct[roundCount];
    double accuracy = stats.accuracy[roundCount];
    TimeSpan time = stats.time[roundCount];

    if (Connection.map.TryGetValue(userID, out string? connectionID))
    {
        await hubContext.Clients.Client(connectionID).SendAsync("receiveResults",
            ↳ correct, accuracy, time);
    }
}

public virtual async void EndGame()
{

```



```

foreach (string userID in userIDs)
{
    if (Connection.map.TryGetValue(userID, out string? connectionID))
    {
        await hubContext.Clients.Client(connectionID).SendAsync("endGame");
    }
}

foreach (string userID in userIDs)
{
    // iterate through each round the current user completed
    for (int i = 0; i < gameStats[userID].accuracy.Count; i++)
    {
        // reload userData after each update for duplicate letters
        if (Database.LoadUserData(userID, out userData userData))
        {
            await UpdateStatistics(userData, letters[i], i);
        }
        else
        {
            Database.outputException("Failed to retrieve statistics");
        }
    }
}
}

private async Task UpdateStatistics(userData userData, char letter, int round)
{
    double accuracy = userData.statistics[letter].accuracy;
    TimeSpan time = userData.statistics[letter].time;
    int total = userData.statistics[letter].total;

    double updatedAccuracy = (accuracy * total +
        ↪ gameStats[userData.userID].accuracy[round]) / (total + 1);
    TimeSpan updateTime = (time * total +
        ↪ gameStats[userData.userID].time[round]) / (total + 1);

    if (!Database.UpdateStatistics(userData.userID, letter, updatedAccuracy,
        ↪ updateTime, total + 1))
    {
        Database.outputException("Failed to update statistics");
        return;
    }

    if (Connection.map.TryGetValue(userData.userID, out string? connectionID))
    {
        // update statistics client-side for the current round
        statistics updated = new(updatedAccuracy, updateTime, total + 1);
        await
            ↪ hubContext.Clients.Client(connectionID).SendAsync("updateStatistics",
            ↪ letter, updated);
    }
}
}
}
}

```

```

games/Queueing.cs

using Microsoft.AspNetCore.SignalR;
using server_app.connections;
using System.ComponentModel;

namespace server_app.games
{
    public static class Queueing
    {
        private static readonly List<IPlayable> currentGames = [];
        public static string QueueGame(Games gameType, string userID,
            ↪ IHubContext<Connection> context)
        {
            foreach (IPlayable game in currentGames)
            {
                if (game.GetGameType() != gameType) continue;
                if (game.GetPlayerCount() >= game.GetMaxPlayers() || game.HasStarted())
                    ↪ continue;
                if (game.QueueUser(userID))
                {
                    return game.GetGameID();
                }
                return string.Empty;
            }

            IPlayable newGame = gameType switch
            {
                Games.Accuracy => new Accuracy(userID, context),
                Games.Versus => new Versus(userID, context),
                Games.Elimination => new Elimination(userID, context),

                _ => throw new InvalidEnumArgumentException()
            };

            currentGames.Add(newGame);
            if (newGame.QueueUser(userID))
            {
                return newGame.GetGameID();
            }
            return string.Empty;
        }

        public static bool UserJoined(string gameID)
        {
            // client acknowledgement on joining a game
            foreach (IPlayable game in currentGames)
            {
                if (game.GetGameID() == gameID)
                {
                    game.UpdateUsers();
                    if (game.GetPlayerCount() == game.GetMaxPlayers() &&
                        ↪ !game.HasStarted())
                    {
                        game.StartGame();
                    }
                }
            }
        }
    }
}

```



```

public class Versus(string userID, IHubContext<Connection> context) : Game(context,
↳ Games.Versus, userID, 2), IPlayable
{
    private const int rounds = 10;
    private readonly List<friendData> userCache = [];
    private readonly Dictionary<string, double> scores = [];

    public override async Task StartGame()
    {
        foreach (string userID in userIDs)
        {
            scores[userID] = 0;
        }

        // cache user data to allow for rank updates after dequeue during game
        userCache.Add(userDatas[0]);
        userCache.Add(userDatas[1]);

        await base.StartGame();

        letters = GenerateLetters(rounds);
        await SubmissionPhase();
    }

    public async Task SubmissionPhase()
    {
        if (roundCount < rounds)
        {
            await AwaitRound();
            await Task.Delay(3000);

            startTime = DateTime.UtcNow;
            currentResponses.Clear();
            await SendLetter(userIDs, letters[roundCount]);
        }
        else
        {
            EndGame();
        }
    }

    public override void LoadResponse(string userID, byte[] input)
    {
        base.LoadResponse(userID, input);
        if (currentResponses.Count == GetPlayerCount())
        {
            EvaluationPhase(letters[roundCount]);
        }
    }

    public async void EvaluationPhase(char letter)
    {
        List<string> correctUsers = [];

        for (int i = 0; i < userIDs.Count; i++)
        {

```

```

        if (EvaluateSubmission(userIDs[i], letter))
        {
            correctUsers.Add(userIDs[i]);
        }
        await SendResult(userIDs[i], gameStats[userIDs[i]]);
    }

    if (correctUsers.Count == 0)
    {
        // if none correct then a winner is not determined
        foreach (string userID in userIDs)
        {
            scores[userID] += 0.5;
        }

        await SendVersusResults(userIDs, null);
    }
    else
    {
        // otherwise the user with the lowest time who is also correct is the
        ↪ winner
        (string user, TimeSpan time) lowest = (string.Empty, TimeSpan.MaxValue);
        foreach (string userID in correctUsers)
        {
            var time = gameStats[userID].time[roundCount];
            if (time < lowest.time)
            {
                lowest = (userID, time);
            }
        }

        scores[lowest.user] += 1;
        await SendVersusResults(userIDs, lowest.user);
    }
    roundCount++;
}

public async Task ContinueRequest(string userID)
{
    if (!continueRequests.Contains(userID))
    {
        continueRequests.Add(userID);
    }

    if (continueRequests.Count == GetPlayerCount())
    {
        await SubmissionPhase();
    }
}

public override async void EndGame()
{
    for (int i = 0; i < userCache.Count; i++)
    {

```

```

double expectedScore = 1.0 / (1 + Math.Pow(10, (i == 0 ?
    ↪ userCache[1].rank - userCache[0].rank : userCache[0].rank -
    ↪ userCache[1].rank) / 400.0));
expectedScore *= rounds;

int rank = CalculateRank(userCache[i], expectedScore);
if (Database.UpdateRank(userCache[i].userID, rank))
{
    if (Connection.map.TryGetValue(userCache[i].userID, out string?
        ↪ connectionID))
    {
        await
            ↪ hubContext.Clients.Client(connectionID).SendAsync("updateRank",
            ↪ rank);
    }
}
else
{
    Database.outputException($"Failed to update user rank :
        ↪ <{userCache[i].userID}>");
}
}

base.EndGame();
}
private int CalculateRank(friendData user, double expectedScore)
{
    double k;
    if (user.rank < 2100)
    {
        k = 32;
    }
    else if (user.rank > 2400)
    {
        k = 16;
    }
    else
    {
        k = 24;
    }

    k /= rounds;

    return (int)(user.rank + k * (scores[user.userID] - expectedScore));
}
private async Task SendVersusResults(List<string> userIDs, string? winner)
{
    foreach (string userID in userIDs)
    {
        if (Connection.map.TryGetValue(userID, out string? connectionID))
        {
            await
                ↪ hubContext.Clients.Client(connectionID).SendAsync("receiveVersusResult",
                ↪ winner);
        }
    }
}

```

```

    }
}
}

```

neuralNetwork/Backpropagation.cs

```

namespace server_app.neuralNetwork
{
    public class Backpropagation
    {
        private static int epochs = 0;
        private static int correct = 0;

        private readonly double[,] neuronErrors = new double[Network.layerCount] [];
        private const double learningRate = 0.01;
        private readonly int batchSize;

        public Backpropagation(List<double[]> input, List<int> expected)
        {
            List<double[,]> weightAdjustments = [];
            List<double[,]> biasAdjustments = [];

            List<double> loss = [];

            batchSize = input.Count;

            // load weights and biases
            var weights = Data.LoadWeights();
            var biases = Data.LoadBiases();

            // evaluate for each input
            for (int i = 0; i < input.Count; i++)
            {
                (double[,] weights, double[,] biases, double loss) adjustments =
                    ↪ Backpropagate(input[i], expected[i], weights, biases);

                weightAdjustments.Add(adjustments.weights);
                biasAdjustments.Add(adjustments.biases);
                loss.Add(adjustments.loss);
            }

            // update weights and biases
            var updatedWeights = UpdateWeights(weights, ref weightAdjustments);
            var updatedBiases = UpdateBiases(biases, ref biasAdjustments);

            // save weights and biases
            Data.SaveWeights(updatedWeights);
            Data.SaveBiases(updatedBiases);

            // log cumulative percentage and average loss
            Console.WriteLine($"{Math.Round((double)correct / (double)epochs * 100.0),
                ↪ 3}%\t{loss.Sum() / loss.Count}");
        }
    }
}

```

```

private double[,] UpdateWeights(double[,] weights, ref List<double[,]>
↪ weightAdjustments)
{
    // update weights and biases
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        for (int j = 0; j < Network.layerSizes[i]; j++)
        {
            for (int k = 0; k < Network.layerSizes[i + 1]; k++)
            {
                double weightSum = 0;
                foreach (var weight in weightAdjustments)
                {
                    weightSum += weight[i][j, k];
                }
                weights[i][j, k] -= (learningRate / batchCount) * weightSum;
            }
        }
    }
    return weights;
}

private double[][] UpdateBiases(double[][] biases, ref List<double[][]>
↪ biasAdjustments)
{
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        for (int j = 0; j < Network.layerSizes[i + 1]; j++)
        {
            double biasSum = 0;
            foreach (var bias in biasAdjustments)
            {
                biasSum += bias[i + 1][j];
            }
            biases[i][j] -= (learningRate / batchCount) * biasSum;
        }
    }
    return biases;
}

private (double[,] , double[] , double) Backpropagate(double[] inputValues, int
↪ expectedResult, double[,] weights, double[][] biases)
{
    // evaluate network
    Network network = new(inputValues, weights, biases);

    epochs++;
    if (network.GetResult() == expectedResult - 1)
    {
        correct++;
    }

    // calculate neuron errors
    double loss = CalculateOutputErrors(ref network, expectedResult);
    CalculateHiddenErrors(ref network, ref weights);
}

```



```

// weight gradients
double[,] weightGradients = new double[Network.layerCount - 1][,];
for (int layer = 0; layer < Network.layerCount - 1; layer++)
{
    weightGradients[layer] = new double[Network.layerSizes[layer],
        ↪ Network.layerSizes[layer + 1]];
    for (int neuron = 0; neuron < Network.layerSizes[layer]; neuron++)
    {
        for (int weight = 0; weight < Network.layerSizes[layer + 1];
            ↪ weight++)
        {
            weightGradients[layer][neuron, weight] = neuronErrors[layer +
                ↪ 1][weight] * network.activatedValues[layer][neuron];
        }
    }
}

// bias gradients are equal to the neuron errors
return (weightGradients, neuronErrors, loss);
}

private double CalculateOutputErrors(ref Network network, int expectedResult)
{
    // output layer errors
    int layer = Network.layerCount - 1;
    double loss = 0;
    neuronErrors[layer] = new double[Network.layerSizes[layer]];
    for (int i = 0; i < Network.layerSizes[layer]; i++)
    {
        // softmax error function
        int y = expectedResult - 1 == i ? 1 : 0;

        loss += Math.Pow(network.activatedValues[layer][i] - y, 2);
        neuronErrors[layer][i] = 2 * (network.activatedValues[layer][i] - y);
    }
    return loss;
}

private void CalculateHiddenErrors(ref Network network, ref double[,] weights)
{
    // for each hidden layer
    for (int layer = Network.layerCount - 2; layer > 0; layer--)
    {
        neuronErrors[layer] = new double[Network.layerSizes[layer]];
        for (int i = 0; i < Network.layerSizes[layer]; i++)
        {
            double sum = 0;
            for (int j = 0; j < Network.layerSizes[layer + 1]; j++)
            {
                sum += weights[layer][i, j] * neuronErrors[layer + 1][j];
            }
            // sigmoid error function
            neuronErrors[layer][i] = sum *
                ↪ Data.dx_sigmoid(network.neuronValues[layer][i]);
        }
    }
}
}

```

```

    }
}

```

neuralNetwork/Data.cs

```

using server_app.neuralNetwork.structures;
using System.Drawing;
using System.IO.Compression;
using System.Text;

namespace server_app.neuralNetwork
{
    public static class Data
    {
        private static readonly string location =
            ↪ $"{Environment.GetEnvironmentVariable("cs-nea-server")}\neuralNetwork\data\";

        public static readonly Matrix[] weightsMatrices = new Matrix[Network.layerCount -
            ↪ 1];
        public static readonly Vector[] biasesVector = new Vector[Network.layerCount -
            ↪ 1];

        public static void BuildMatrices(double[,] weights, double[][] biases)
        {
            for (int layer = 1; layer < Network.layerCount; layer++)
            {
                weightsMatrices[layer - 1] = new Matrix(weights[layer - 1]);
                biasesVector[layer - 1] = new Vector(biases[layer - 1]);
            }
        }

        public static double sigmoid(double x) => 1 / (1 + Math.Exp(-x));
        public static double dx_sigmoid(double x) => sigmoid(x) * (1 - sigmoid(x));
        public static double[] softmax(double[] input)
        {
            double[] output = new double[input.Length];
            double sum = 0;
            for (int i = 0; i < input.Length; i++)
            {
                output[i] = Math.Exp(input[i]);
                sum += output[i];
            }
            for (int i = 0; i < output.Length; i++)
            {
                output[i] /= sum;
            }
            return output;
        }

        public static void InitialiseParameters()
        {
            // initialise weights
            double[,] weights = new double[Network.layerCount - 1][,];
            for (int i = 0; i < weights.Length; i++)
            {
                Random rnd = new();

```

```

        weights[i] = new double[Network.layerSizes[i], Network.layerSizes[i +
        ↪ 1]];
        double limit = Math.Sqrt(6 / (double)(Network.layerSizes[i] +
        ↪ Network.layerSizes[i + 1]));
        for (int j = 0; j < Network.layerSizes[i]; j++)
        {
            for (int k = 0; k < Network.layerSizes[i + 1]; k++)
            {
                // uniform distribution between -limit and limit
                weights[i][j, k] = (rnd.NextDouble() * 2 - 1) * limit;
            }
        }
    }

    // initialise biases
    double[][] biases = new double[Network.layerCount - 1][];
    for (int i = 0; i < biases.Length; i++)
    {
        biases[i] = new double[Network.layerSizes[i + 1]];
    }

    // save weights and biases
    SaveWeights(weights);
    SaveBiases(biases);
}

public static double[] PreprocessImage(Bitmap original)
{
    Bitmap image = addPadding(
        extendToSquare(
            cropToContent(original)
        )
    );

    int width = image.Width;
    int height = image.Height;
    double[] pixels = new double[width * height];

    for (int y = 0; y < height; y++)
    {
        for (int x = 0; x < width; x++)
        {
            Color c = image.GetPixel(x, y);
            double gray = (0.299 * c.R + 0.587 * c.G + 0.114 * c.B);
            pixels[y * width + x] = 1.0 - (gray / 255.0);
        }
    }

    return pixels;

    Bitmap cropToContent(Bitmap image)
    {
        int left = image.Width + 1;
        int top = image.Height + 1;
        int right = -1;
    }
}

```

```

    int bottom = -1;

    bool pixelExists = false;
    for (int y = 0; y < image.Height; y++)
    {
        for (int x = 0; x < image.Width; x++)
        {
            if (image.GetPixel(y, x).Name != "ffffffff")
            {
                pixelExists = true;
                if (y < top) top = y;
                if (y > bottom) bottom = y;
                if (x < left) left = x;
                if (x > right) right = x;
            }
        }
    }

    if (!pixelExists)
    {
        // failsafe for empty image
        return image;
    }

    // return clone of image with cropped dimensions and same pixel format
    return image.Clone(new Rectangle(top, left, bottom - top + 1, right -
        ↪ left + 1), image.PixelFormat);
}

Bitmap extendToSquare(Bitmap image)
{
    if (image.Width == image.Height)
    {
        return new Bitmap(image, 24, 24);
    }

    int largestDimension = Math.Max(image.Width, image.Height);
    int offset = Math.Abs((image.Width - image.Height) / 2);
    char extendDirection = largestDimension == image.Height ? 'w' : 'h';

    var square = new Bitmap(largestDimension, largestDimension);

    for (int x = 0; x < largestDimension; x++)
    {
        for (int y = 0; y < largestDimension; y++)
        {
            square.SetPixel(x, y, Color.White);
        }
    }

    for (int i = 0; i < largestDimension; i++)
    {
        for (int j = 0; j < largestDimension; j++)
        {
            // check pixel is not out of bounds

```

```

        if (i < image.Width && j < image.Height)
        {
            if (extendDirection == 'w')
            {
                square.SetPixel(i + offset, j, image.GetPixel(i, j));
            }
            if (extendDirection == 'h')
            {
                square.SetPixel(i, j + offset, image.GetPixel(i, j));
            }
        }
    }
}

return new Bitmap(square, 24, 24);
}

Bitmap addPadding(Bitmap image)
{
    var square = new Bitmap(28, 28);

    for (int x = 0; x < 28; x++)
    {
        for (int y = 0; y < 28; y++)
        {
            square.SetPixel(x, y, Color.White);
        }
    }

    for (int i = 0; i < 28; i++)
    {
        for (int j = 0; j < 28; j++)
        {
            // check pixel is not out of bounds
            if (i < image.Width && j < image.Height)
            {
                square.SetPixel(i + 2, j + 2, image.GetPixel(i, j));
            }
        }
    }

    return square;
}

}

public static double[,] LoadWeights()
{
    double[,] weights = new double[Network.layerCount - 1][,];
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        weights[i] = new double[Network.layerSizes[i], Network.layerSizes[i +
            1]];
        using (StreamReader sr = new StreamReader($"{location}weights\\{i}.txt"))
        {
            string[] lines = sr.ReadToEnd().Split('\n');
            for (int j = 0; j < Network.layerSizes[i]; j++)
            {
                string[] s = lines[j].Split(',');
            }
        }
    }
}

```

```

        for (int k = 0; k < Network.layerSizes[i + 1]; k++)
        {
            weights[i][j, k] = double.Parse(s[k]);
        }
    }
}
return weights;
}
public static double[][] LoadBiases()
{
    double[][] biases = new double[Network.layerCount - 1][];
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        biases[i] = new double[Network.layerSizes[i + 1]];
        using (StreamReader sr = new($@"{location}biases\{i}.txt"))
        {
            string[] s = sr.ReadToEnd().Split(',');
            for (int j = 0; j < Network.layerSizes[i + 1]; j++)
            {
                biases[i][j] = double.Parse(s[j]);
            }
        }
    }
    return biases;
}
public static void SaveWeights(double[,] weights)
{
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        StringBuilder builder = new();
        for (int j = 0; j < weights[i].GetLength(0); j++)
        {
            for (int k = 0; k < weights[i].GetLength(1) - 1; k++)
            {
                builder.Append($"{weights[i][j, k]},");
            }
            builder.Append($"{weights[i][j, weights[i].GetLength(1) - 1]}\n");
        }
        using (StreamWriter sw = new($@"{location}weights\{i}.txt"))
        {
            sw.Write(builder);
        }
    }
}
public static void SaveBiases(double[][] biases)
{
    for (int i = 0; i < Network.layerCount - 1; i++)
    {
        using (StreamWriter sw = new($@"{location}biases\{i}.txt"))
        {
            sw.Write(string.Join(',', biases[i]));
        }
    }
}
}

```

```

public static (List<double[]>, List<int>) LoadImages()
{
    int done = 0;
    const int total = 100000;

    Console.WriteLine($"\\r[ {100 * done / total,3}% ] Loading training images");

    FileStream fs = new($"{location}training\\images.gz", FileMode.Open,
        ↪ FileAccess.ReadWrite);
    CompressionMode cm = CompressionMode.Decompress;

    List<double[]> images = [];
    List<int> labels = [];

    using (GZipStream gz = new(fs, cm))
    {
        // discard header info
        byte[] header = new byte[16];
        gz.ReadExactly(header, 0, 16);

        // read images
        for (int i = 0; i < total; i++)
        {
            var image = new byte[784];
            gz.ReadExactly(image, 0, 784);

            var a = new double[784];
            int count = 0;
            for (int row = 0; row < 28; row++)
            {
                for (int column = 0; column < 28; column++, count++)
                {
                    a[column * 28 + row] = (double)image[count] / 255;
                }
            }

            images.Add(a);

            int hold = 100 * done / total;
            done++;
            if (100 * done / total != hold)
            {
                Console.WriteLine($"\\r[ {100 * done / total,3}% ] Loading training
                    ↪ images");
            }
        }
    }

    Console.WriteLine();

    done = 0;
    fs = new($"{location}training\\labels.gz", FileMode.Open,
        ↪ FileAccess.ReadWrite);

    Console.WriteLine($"\\r[ {100 * done / total,3}% ] Loading training labels");
}

```

```

using (GZipStream gz = new(fs, cm))
{
    // discard header info
    byte[] header = new byte[8];
    gz.ReadExactly(header, 0, 8);

    // read labels
    for (int i = 0; i < total; i++)
    {
        labels.Add(gz.ReadByte());

        int hold = 100 * done / total;
        done++;
        if (100 * done / total != hold)
        {
            Console.Write($"\\r[ {100 * done / total,3}% ] Loading training
                ↪ labels");
        }
    }

    Console.WriteLine('\\n');
    return (images, labels);
}

public static (List<double[]>, List<int>) FilterImages((List<double[]> images,
    ↪ List<int> labels) fullData)
{
    int length = fullData.labels.Count;

    List<double[]> filteredImages = [];
    List<int> filteredLabels = [];

    for (int i = 0; i < length; i++)
    {
        // extract uppercase only
        if (10 <= fullData.labels[i] && fullData.labels[i] <= 35)
        {
            filteredImages.Add(fullData.images[i]);
            filteredLabels.Add(fullData.labels[i] - 9);
        }
    }

    return (filteredImages, filteredLabels);
}
}
}

```

neuralNetwork/Network.cs

```

using server_app.neuralNetwork.structures;

namespace server_app.neuralNetwork
{
    public class Network

```



```

{
    public static readonly int[] layerSizes = [784, 144, 72, 26];
    public static readonly int layerCount = layerSizes.Length;

    public double[][] neuronValues = new double[layerCount][];
    public double[][] activatedValues = new double[layerCount][];

    private int result;

    public int GetResult() => result;
    public double GetAccuracy(int letter) => activatedValues[layerCount - 1][letter];
    public Network(double[] input)
    {
        // initialise input layer
        neuronValues[0] = input;
        activatedValues[0] = input;

        EvaluateNetwork();
    }
    public Network(double[] input, double[,] weights, double[][] biases)
    {
        // initialises input layer
        neuronValues[0] = input;
        activatedValues[0] = input;

        // build matrices from loaded weights and biases
        Data.BuildMatrices(weights, biases);

        EvaluateNetwork();
    }

    private void EvaluateNetwork()
    {
        // for each layer excluding the input layer
        for (int layer = 1; layer < layerCount; layer++)
        {
            // calculate neuron values
            Vector neuronsVector = new(activatedValues[layer - 1]);
            neuronValues[layer] = ((neuronsVector * Data.weightsMatrices[layer - 1])
                ↪ + Data.biasesVector[layer - 1]).GetArray();

            // calculate activated values
            activatedValues[layer] = new double[layerSizes[layer]];
            if (layer == layerCount - 1)
            {
                activatedValues[layer] = Data.softmax(neuronValues[layer]);
            }
            else
            {
                for (int i = 0; i < neuronValues[layer].Length; i++)
                {
                    activatedValues[layer][i] = Data.sigmoid(neuronValues[layer][i]);
                }
            }
        }
    }
}

```

```

        (int index, double maxValue) = (-1, -1);
        for (int i = 0; i < activatedValues[layerCount - 1].Length; i++)
        {
            if (activatedValues[layerCount - 1][i] > maxValue)
            {
                maxValue = activatedValues[layerCount - 1][i];
                index = i;
            }
        }

        // output letter as integer from 0-25
        result = index;
    }
}

```

neuralNetwork/Training.cs

```

namespace server_app.neuralNetwork
{
    public class Training
    {
        public Training()
        {
            // load training data
            (List<double[]> images, List<int> labels) =
                ↪ Data.FilterImages(Data.LoadImages());

            //random sample of 50 images
            Random rnd = new();
            for (int i = 0; i < images.Count / 50; i++)
            {
                // load sample index
                int index = rnd.Next(images.Count - 50 - 1);

                // load sampled images and labels
                var subimages = images.GetRange(index, 50);
                var subresults = labels.GetRange(index, 50);

                // forward propagation and backpropagation
                _ = new Backpropagation(subimages, subresults);
            }
        }
    }
}

```

neuralNetwork/structures/Matrix.cs

```

namespace server_app.neuralNetwork.structures
{
    public readonly struct Matrix
    {
        private readonly double[,] values;
        public double this[int i, int j]
        {

```

```

        get {
            return values[i, j];
        }
        set {
            values[i, j] = value;
        }
    }

    public int GetRowCount() => values.GetLength(0);
    public int GetColumnCount() => values.GetLength(1);
    public double[,] GetArray() => values;

    public Matrix(int x, int y)
    {
        values = new double[x, y];
    }
    public Matrix(double[,] matrix)
    {
        values = matrix;
    }

    public static Matrix operator +(Matrix m1, Matrix m2)
    {
        // check if addition is valid
        if (m1.GetRowCount() != m2.GetRowCount() || m1.GetColumnCount() != m2.GetColumnCount())
        {
            throw new InvalidOperationException();
        }

        int rows = m1.GetRowCount();
        int columns = m1.GetColumnCount();
        Matrix result = new(rows, columns);

        for (int i = 0; i < rows; i++)
        {
            for (int j = 0; j < columns; j++)
            {
                result[i, j] = m1[i, j] + m2[i, j];
            }
        }

        return result;
    }
    public static Matrix operator -(Matrix m1, Matrix m2)
    {
        // check if subtraction is valid
        if (m1.GetRowCount() != m2.GetRowCount() || m1.GetColumnCount() != m2.GetColumnCount())
        {
            throw new InvalidOperationException();
        }

        int rows = m1.GetRowCount();
        int columns = m1.GetColumnCount();
        Matrix result = new(rows, columns);

```

```

        for (int i = 0; i < rows; i++)
        {
            for (int j = 0; j < columns; j++)
            {
                result[i, j] = m1[i, j] - m2[i, j];
            }
        }

        return result;
    }
    public static Matrix operator *(Matrix m1, Matrix m2)
    {
        // check if multiplication is valid
        if (m1.GetColumnCount() != m2.GetRowCount())
        {
            throw new InvalidOperationException();
        }

        int rows = m1.GetRowCount();
        int columns = m2.GetColumnCount();
        int multiplyLength = m1.GetColumnCount();

        Matrix result = new(rows, columns);

        for (int i = 0; i < rows; i++)
        {
            for (int j = 0; j < columns; j++)
            {
                double sum = 0;
                for (int k = 0; k < multiplyLength; k++)
                {
                    sum += m1[i, k] * m2[k, j];
                }
                result[i, j] = sum;
            }
        }

        return result;
    }

    public static Vector operator *(Matrix matrix, Vector vector)
    {
        // check if multiplication is valid
        if (matrix.GetColumnCount() != vector.GetLength())
        {
            throw new InvalidOperationException();
        }

        int length = matrix.GetRowCount();
        int multiplyLength = matrix.GetColumnCount();

        Vector result = new(length);

        for (int i = 0; i < length; i++)
        {

```

```

        double sum = 0;
        for (int j = 0; j < multiplyLength; j++)
        {
            sum += matrix[i, j] * vector[j];
        }
        result[i] = sum;
    }

    return result;
}

public static Vector operator *(Vector vector, Matrix matrix)
{
    // check if multiplication is valid
    if (vector.GetLength() != matrix.GetRowCount())
    {
        throw new InvalidOperationException();
    }

    int length = matrix.GetColumnCount();
    int multiplyLength = matrix.GetRowCount();

    Vector result = new(length);

    for (int i = 0; i < length; i++)
    {
        double sum = 0;
        for (int j = 0; j < multiplyLength; j++)
        {
            sum += matrix[j, i] * vector[j];
        }
        result[i] = sum;
    }

    return result;
}
}
}

```

neuralNetwork/structures/Vector.cs

```

namespace server_app.neuralNetwork.structures
{
    public readonly struct Vector
    {
        private readonly double[] values;
        public double this[int i]
        {
            get {
                return values[i];
            }
            set {
                values[i] = value;
            }
        }
    }
}

```

```

public int GetLength() => values.GetLength(0);
public double[] GetArray() => values;

public Vector(int x)
{
    values = new double[x];
}
public Vector(double[] vector)
{
    values = vector;
}

public static Vector operator +(Vector v1, Vector v2)
{
    // check if addition is valid
    if (v1.GetLength() != v2.GetLength())
    {
        throw new InvalidOperationException();
    }

    int length = v1.GetLength();
    Vector result = new(length);

    for (int i = 0; i < length; i++)
    {
        result.values[i] = v1.values[i] + v2.values[i];
    }

    return result;
}
public static Vector operator -(Vector v1, Vector v2)
{
    // check if subtraction is valid
    if (v1.GetLength() != v2.GetLength())
    {
        throw new InvalidOperationException();
    }

    int length = v1.GetLength();
    Vector result = new(length);

    for (int i = 0; i < length; i++)
    {
        result.values[i] = v1.values[i] - v2.values[i];
    }

    return result;
}
}
}

```

Accounts.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.databases;

```

```

using server_app.connections;
using System.Security.Cryptography;
using System.Text;

namespace server_app
{
    public class Accounts : Hub
    {
        private static string HashPassword(string input) =>
            Encoding.UTF8.GetString(SHA512.HashData(Encoding.UTF8.GetBytes(input)));
        public async void loginRequest(string userID, string password)
        {
            if (Connection.map.ContainsKey(userID))
            {
                await Clients.Caller.SendAsync("loginSuccess", 3, userID);
                return;
            }

            if (Database.LoginRequest(userID, HashPassword(password), out int success))
            {
                Logger.Log("LOGIN", "green", $"<{userID}> logged in with success
                ↳ <{success}> ");
            }
            else
            {
                Logger.Log("WARN", "yellow", $"Login failed for user <{userID}>");
            }
            await Clients.Caller.SendAsync("loginSuccess", success, userID);
        }

        public async void accountRequest(string userID, string password, string
        ↳ localisation)
        {
            if (Database.AccountRequest(userID, HashPassword(password), localisation, out
            ↳ int success))
            {
                Logger.Log("ACCOUNT", "magenta", $"<{userID}> created account with
                ↳ success <{success}>");
            }
            else
            {
                Logger.Log("WARN", "yellow", $"Account creation failed for user
                ↳ <{userID}>");
            }
            await Clients.Caller.SendAsync("accountSuccess", success, userID);
        }
    }
}

```

logger.cs

```

namespace server_app
{
    public static class Logger
    {

```

```

public static void Log(string code, string colour, string message)
{
    Console.Write($"["");
    if (Enum.TryParse(colour[0].ToString().ToUpper() + colour[1..], out
        ↪ ConsoleColor c))
    {
        // capitalise the first letter of the colour string to match the enum
        ↪ type
        Console.ForegroundColor = c;
    }

    Console.Write($" {code}");
    Console.ResetColor();
    Console.WriteLine($" {message}");
}
public static void ErrorLog(string message)
{
    Console.Write($"["");
    Console.ForegroundColor = ConsoleColor.Red;
    Console.Write($"ERROR");
    Console.ResetColor();
    Console.WriteLine($" {message}");
}
}
}

```

Program.cs

```

using Microsoft.AspNetCore.SignalR;
using server_app.connections;
using server_app.databases;
using server_app.neuralNetwork;
using System.Diagnostics;

namespace server_app
{
    internal class Program : Hub
    {
        public static IHubContext<Connection>? hubContext;

        static void Main(string[] args)
        {
            Logger.SetupAsync();
            Logger.Log("SERVER", "white", "Application started");
            Data.BuildMatrices(Data.LoadWeights(), Data.LoadBiases());

            startNginx();
            hostBuilder(args).Build().Run();
        }

        private static void startNginx()
        {
            ProcessStartInfo startInfo = new()
            {
                FileName = "nginx.exe",
            }
        }
    }
}

```



```

        WorkingDirectory = Environment.GetEnvironmentVariable("nginx"),
        UseShellExecute = true
    };
    Process.Start(startInfo);

    Logger.Log("NGINX", "white", $"Started process");

    // kill nginx bound to server app close
    AppDomain.CurrentDomain.ProcessExit += (sender, e) =>
    {
        foreach (var process in Process.GetProcessesByName("nginx"))
        {
            try
            {
                process.Kill();
                Logger.Log("NGINX", "white", $"Killed process <{process.Id}>");
            }
            catch (Exception ex)
            {
                Database.outputException(ex);
            }
        }
        Thread.Sleep(1000);
    };
}
private static IHostBuilder hostBuilder(string[] args)
{
    IHostBuilder host = Host.CreateDefaultBuilder(args);

    host.ConfigureWebHostDefaults(config =>
    {
        config.ConfigureServices(services =>
        {
            // add signalR service
            services.AddSignalR();
        });
        config.Configure(setup =>
        {
            setup.UseRouting();
            setup.Use((context, next) =>
            {
                // load the hubContext
                hubContext =
                    ↪ context.RequestServices.GetRequiredService<IHubContext<Connection>>();
                return next(context);
            });
            setup.UseEndpoints(endpoints =>
            {
                // map endpoints to a class
                endpoints.MapHub<Connection>("/cs-nea/connections");
                endpoints.MapHub<Accounts>("/cs-nea/accounts");
            });
        });
        config.ConfigureLogging(logging =>
        ↪ logging.SetMinimumLevel(LogLevel.None));
    }
}

```

```

        // bind to localhost on port 3900
        config.UseUrls("http://localhost:3900");
    });

    return host;
}
}
}

```

5.2.2 Client

components/AlertForm.cs

```

using System.Drawing;
using System.Windows.Forms;
using Guna.UI2.WinForms;

namespace client_app.components
{
    public class AlertForm : Form
    {
        private readonly Guna2TextBox header;
        private readonly Guna2GradientButton btn_close;

        public AlertForm(string text, bool closeButton, bool autoShow)
        {
            SuspendLayout();

            header = new Guna2TextBox()
            {
                BorderColor = Color.FromArgb(156, 156, 156),
                BorderRadius = 10,
                BorderThickness = 2,
                Cursor = Cursors.Arrow,
                DefaultText = text,
                FillColor = Color.FromArgb(208, 208, 208),
                Font = new Font("Bahnschrift SemiBold", 15.75F, FontStyle.Bold,
                    ↵ GraphicsUnit.Point, 0),
                ForeColor = Color.White,
                Location = new Point(20, 20),
                Margin = new Padding(5, 5, 5, 5),
                Multiline = true,
                ReadOnly = true,
                Size = new Size(720, 300),
                TabIndex = 0,
                TabStop = false,
            };
            btn_close = new Guna2GradientButton()
            {
                AutoRoundedCorners = true,
                BorderRadius = 14,
                FillColor = Color.FromArgb(247, 113, 163),
                FillColor2 = Color.FromArgb(197, 113, 247),
                Font = new Font("Bahnschrift", 9.75F),
                ForeColor = Color.White,
            };
        }
    }
}

```

```

        Location = new Point(615, 345),
        Size = new Size(160, 30),
        TabIndex = 1,
        Text = "Close",
    };

    btn_close.Click += (sender, e) => Close();

    AcceptButton = btn_close;
    BackColor = Color.FromArgb(208, 208, 208);
    ClientSize = new Size(800, 400);
    Controls.Add(header);
    if (closeButton)
    {
        Controls.Add(btn_close);
    }
    FormBorderStyle = FormBorderStyle.None;
    ShowIcon = false;
    ShowInTaskbar = false;
    StartPosition = FormStartPosition.CenterScreen;
    TopMost = true;
    ResumeLayout(false);

    if (autoShow)
    {
        ShowDialog();
    }
}
}

```

components/ConfirmForm.cs

```

using System.Drawing;
using System.Windows.Forms;
using Guna.UI2.WinForms;

namespace client_app.components
{
    public class ConfirmForm : Form
    {
        private readonly Guna2TextBox header;
        private readonly Guna2GradientButton btn_accept;
        private readonly Guna2GradientButton btn_cancel;

        public ConfirmForm(string text)
        {
            SuspendLayout();

            header = new Guna2TextBox()
            {
                BorderColor = Color.FromArgb(156, 156, 156),
                BorderRadius = 10,
                BorderThickness = 2,
                Cursor = Cursors.Arrow,
            }
        }
    }
}

```

```

        DefaultText = text,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift SemiBold", 15.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(20, 20),
        Margin = new Padding(5, 5, 5, 5),
        Multiline = true,
        Size = new Size(360, 100),
        TabIndex = 0,
        TabStop = false,
    };
    btn_accept = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        BorderRadius = 14,
        FillColor = Color.FromArgb(247, 113, 163),
        FillColor2 = Color.FromArgb(197, 113, 247),
        Font = new Font("Bahnschrift", 9.75F),
        ForeColor = Color.White,
        Location = new Point(215, 145),
        Size = new Size(160, 30),
        TabIndex = 1,
        Text = Languages.localisation["Accept"] [Main.userData.localisation],
    };
    btn_cancel = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        BorderRadius = 14,
        FillColor = Color.FromArgb(156, 156, 156),
        FillColor2 = Color.FromArgb(156, 156, 156),
        Font = new Font("Bahnschrift", 9.75F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(25, 145),
        Size = new Size(160, 30),
        TabIndex = 1,
        Text = "Ignore",
    };

    btn_accept.Click += (sender, e) =>
    {
        DialogResult = DialogResult.OK;
        Close();
    };
    btn_cancel.Click += (sender, e) =>
    {
        DialogResult = DialogResult.Cancel;
        Close();
    };

    AcceptButton = btn_accept;
    BackColor = Color.FromArgb(208, 208, 208);
    CancelButton = btn_cancel;
    ClientSize = new Size(400, 200);

```

```

        Controls.Add(header);
        Controls.Add(btn_accept);
        Controls.Add(btn_cancel);
        FormBorderStyle = FormBorderStyle.None;
        ShowIcon = false;
        ShowInTaskbar = false;
        StartPosition = FormStartPosition.CenterScreen;
        TopMost = true;
        ResumeLayout(false);

        ShowDialog();
    }
}

```

components/InputPanel.cs

```

using System.Drawing;
using System.Drawing.Drawing2D;
using System.Windows.Forms;

namespace client_app.components
{
    public class InputPanel : Form
    {
        private readonly Panel panel_base;
        private Panel panel_input;
        private Bitmap drawing;

        private bool draw = false;
        private (int x, int y) pos;
        const int PEN_THICKNESS = 40;

        public Bitmap GetDrawing() => drawing;

        public InputPanel(Panel panel, (int, int) pos, (int, int) size)
        {
            this.panel_base = panel;
            LoadPanel(pos, size);
            ClearPanel();
        }

        public void EnablePanel()
        {
            ClearPanel();

            panel_input.MouseDown += panel_MouseDown;
            panel_input.MouseUp += panel_MouseUp;
            panel_input.MouseMove += panel_MouseMove;
        }

        public void DisablePanel()
        {
            panel_input.MouseDown -= panel_MouseDown;
            panel_input.MouseUp -= panel_MouseUp;
            panel_input.MouseMove -= panel_MouseMove;
        }
    }
}

```

```

public void ClearPanel()
{
    Graphics.FromImage(drawing).Clear(Color.White);
    panel_input.CreateGraphics().DrawImageUnscaled(drawing, new Point(0, 0));
}
public void LoadPanel((int x, int y) coords, (int x, int y) size)
{
    panel_input = new Panel()
    {
        Location = new Point(coords.x, coords.y),
        Size = new Size(size.x, size.y),
        Name = "panel_input",
    };

    panel_base.Controls.Add(panel_input);

    drawing = new Bitmap(panel_input.Width, panel_input.Height,
        ↪ panel_input.CreateGraphics());
}

private void panel_MouseDown(object sender, MouseEventArgs e)
{
    draw = true;

    pos.x = e.X;
    pos.y = e.Y;
}
private void panel_MouseUp(object sender, MouseEventArgs e)
{
    draw = false;
}
private void panel_MouseMove(object sender, MouseEventArgs e)
{
    if (draw)
    {
        Graphics panel = Graphics.FromImage(drawing);
        Pen pen = new Pen(Color.Black, PEN_THICKNESS)
        {
            EndCap = LineCap.Round,
            StartCap = LineCap.Round
        };

        panel.DrawLine(pen, pos.x, pos.y, e.X, e.Y);
        panel_input.CreateGraphics().DrawImageUnscaled(drawing, new Point(0, 0));
    }

    pos.x = e.X;
    pos.y = e.Y;
}
}
}

```

components/UpdateForm.cs

```
using client_app.Properties;
```

```

using Guna.UI2.WinForms;
using System;
using System.Drawing;
using System.Windows.Forms;

namespace client_app.components
{
    public class UpdateForm : Form
    {
        private readonly string userID;
        private string aboutMe;
        private string localisation;
        private int languageIndex;

        private Guna2HtmlLabel lbl_header;
        private Guna2GradientButton btn_accept;
        private Guna2GradientButton btn_cancel;
        private Guna2TextBox txt_username;
        private Guna2TextBox txt_aboutMe;
        private Guna2PictureBox pic_language;
        private Guna2Button btn_language;
        private Guna2HtmlLabel lbl_textLength;

        public string GetAboutMe() => aboutMe;
        public string GetLocalisation() => localisation;

        public UpdateForm(userData user)
        {
            userID = user.userID;
            aboutMe = user.aboutMe;
            localisation = user.localisation;

            languageIndex = Languages.languageCodes.IndexOf(localisation);

            InitializeComponent();

            txt_username.Text = userID;
            txt_aboutMe.Text = aboutMe;
            lbl_header.Text = Languages.localisation["Account"][localisation];

            btn_language.Text = Languages.supportedLanguages[languageIndex];
            lbl_textLength.Text = $"{txt_aboutMe.Text.Length} / 500";

            btn_accept.Click += (sender, e) =>
            {
                localisation = Languages.languageCodes[languageIndex];
                aboutMe = txt_aboutMe.Text;

                DialogResult = DialogResult.OK;
                Close();
            };
            btn_cancel.Click += (sender, e) => { DialogResult = DialogResult.Cancel;
            ↪ Close(); };

            ShowDialog();
        }
    }
}

```

```

}
private void InitialiseComponent()
{
    SuspendLayout();

    lbl_header = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift SemiBold", 27.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(20, 15),
        Size = new Size(760, 50),
        TabStop = false,
    };
    btn_accept = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        FillColor = Color.FromArgb(247, 113, 163),
        FillColor2 = Color.FromArgb(197, 113, 247),
        Font = new Font("Segoe UI", 9F),
        ForeColor = Color.White,
        Location = new Point(580, 330),
        Size = new Size(200, 50),
        TabStop = false,
        Text = "Confirm",
    };
    btn_cancel = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        FillColor = Color.FromArgb(208, 208, 208),
        FillColor2 = Color.FromArgb(208, 208, 208),
        Font = new Font("Segoe UI", 9F),
        ForeColor = Color.White,
        Location = new Point(360, 330),
        Size = new Size(200, 50),
        TabStop = false,
        Text = "Cancel",
    };
    txt_aboutMe = new Guna2TextBox()
    {
        BorderRadius = 10,
        BorderThickness = 0,
        Cursor = Cursors.IBeam,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift", 11.25F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.FromArgb(104, 104, 104),
        IconLeftOffset = new Point(5, 0),
        IconLeftSize = new Size(17, 20),
        Location = new Point(20, 116),
        MaxLength = 500,
        Multiline = true,
        PlaceholderForeColor = Color.FromArgb(156, 156, 156),
    };
}

```



```

        PlaceholderText = Languages.localisation["About
        ↪ me"] [Main.userData.localisation],
        Size = new Size(760, 100),
    };

txt_username = new Guna2TextBox()
{
    BorderRadius = 10,
    BorderThickness = 0,
    Cursor = Cursors.Arrow,
    FillColor = Color.FromArgb(208, 208, 208),
    Font = new Font("Bahnschrift", 11.25F, FontStyle.Regular,
    ↪ GraphicsUnit.Point, 0),
    ForeColor = Color.FromArgb(104, 104, 104),
    IconLeft = Resources.account,
    IconLeftOffset = new Point(5, 0),
    IconLeftSize = new Size(17, 20),
    Location = new Point(20, 80),
    ReadOnly = true,
    Size = new Size(540, 30),
    TabStop = false,
    TextOffset = new Point(10, -1),
};
pic_language = new Guna2PictureBox()
{
    Image = Resources.language,
    ImageRotate = 0F,
    Location = new Point(20, 223),
    Size = new Size(40, 40),
    SizeMode = PictureBoxSizeMode.Zoom,
    TabStop = false,
};
btn_language = new Guna2Button()
{
    AutoRoundedCorners = true,
    FillColor = Color.FromArgb(104, 104, 104),
    Font = new Font("Bahnschrift", 9.75F),
    ForeColor = Color.White,
    Location = new Point(67, 223),
    Size = new Size(180, 40),
};
lbl_textLength = new Guna2HtmlLabel()
{
    AutoSize = false,
    BackColor = Color.Transparent,
    ForeColor = Color.White,
    Location = new Point(700, 223),
    Size = new Size(80, 15),
    TabStop = false,
    TextAlignment = ContentAlignment.TopRight,
};

txt_aboutMe.TextChanged += new EventHandler(txt_aboutMe_TextChanged);
btn_language.Click += new EventHandler(btn_language_Click);

```

```

        Controls.Add(lbl_textLength);
        Controls.Add(btn_language);
        Controls.Add(pic_language);
        Controls.Add(txt_aboutMe);
        Controls.Add(txt_username);
        Controls.Add(lbl_header);
        Controls.Add(btn_accept);
        Controls.Add(btn_cancel);

        AcceptButton = btn_accept;
        BackColor = Color.FromArgb(58, 51, 54);
        CancelButton = btn_cancel;
        ClientSize = new Size(800, 400);
        FormBorderStyle = FormBorderStyle.None;
        ShowIcon = false;
        ShowInTaskbar = false;
        StartPosition = FormStartPosition.CenterScreen;
        TopMost = true;
        ResumeLayout(false);
    }

    private void btn_language_Click(object sender, EventArgs e)
    {
        languageIndex++;
        if (languageIndex == Languages.supportedLanguages.Count)
        {
            languageIndex = 0;
        }
        btn_language.Text = Languages.supportedLanguages[languageIndex];

        lbl_header.Text =
            ↪ Languages.localisation["Account"][Languages.languageCodes[languageIndex]];
    }
    private void txt_aboutMe_TextChanged(object sender, EventArgs e)
    {
        lbl_textLength.Text = $"{txt_aboutMe.Text.Length} / 500";
    }
}

```

menus/main.cs

```

using client_app.components;
using client_app.menus;
using client_app.menus.games;
using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Collections.Generic;
using System.Drawing;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace client_app
{
    public struct userData

```

```

{
    public string userID { get; set; }
    public string aboutMe { get; set; }
    public List<friendData> friends { get; set; }
    public string localisation { get; set; }
    public DateTime dateCreated { get; set; }
    public int rank { get; set; }
    public Dictionary<char, statistics> statistics { get; set; }
}
public struct statistics
{
    public double accuracy { get; set; }
    public TimeSpan time { get; set; }
    public int total { get; set; }
}
public struct friendData
{
    public string userID { get; set; }
    public bool online { get; set; }
    public int rank { get; set; }
}
public struct menu
{
    public static Main main;
    public static Profile profile;
    public static IPlayable game;
}

public partial class Main : Form
{
    public static HubConnection connection;
    public static userData userData;
    public const string address = "http://192.168.0.251:5252/cs-nea";

    public Main(string userID, string defaultLocalisation)
    {
        userData.localisation = defaultLocalisation;
        hub_connection.InjectForm(null, this);

        UXelements.InitialiseComponent(this);
        InitialiseConnection(userID);
    }
    private async void InitialiseConnection(string userID)
    {
        connection = hub_connection.configConnection($"{address}/connections");
        connection = hub_connection.addHandles(connection);
        connection = await hub_connection.startConnection(connection);

        connection.Closed += ConnectionClosed;

        if (connection.State != HubConnectionState.Connected)
        {
            Close();
        }
    }
}

```

```

        if (!await connection.InvokeAsync<bool>("clientConnected", userID))
        {
            LoadAlert("Failed to connect to server. Quitting application.");
            Close();
        }
    }

private Task ConnectionClosed(Exception ex)
{
    try { btn_home.Invoke(new Action(() => btn_home.PerformClick())); } catch { }

    var alert = LoadAlert("Disconnected from server. Restarting application...");
    try { Invoke(new Action(() => Close())); } catch { }
    return Task.CompletedTask;
}

public static AlertForm LoadAlert(string message, bool addCloseButton = true,
    ↪ bool autoShow = true)
{
    return new AlertForm(message, addCloseButton, autoShow);
}

public async void ClientConnected(userData userData)
{
    Main.userData = userData;

    InitialiseComponent();

    if (connection.State == HubConnectionState.Connected)
    {
        await connection.InvokeAsync("loadInvites", userData.userID);
    }
}

public void UpdateUserData(string userID, string aboutMe, string localisation)
{
    if (userID != userData.userID)
    {
        return;
    }

    userData.aboutMe = aboutMe;
    userData.localisation = localisation;

    if (menu.game != null)
    {
        return;
    }

    if (menu.profile == null)
    {
        // if home then refresh all
        btn_home.PerformClick();
    }
    else
    {
        UpdatePageText("Profile");
    }
}

```

```

        ConfigFriendsPanel();
        UXelements.ConfigUserDataPanel(this, userData);
        if (menu.profile.GetUserID() == userData.userID)
        {
            // if viewing own profile then refresh
            menu.profile = new Profile(this, userData);
        }
    }
}

public void UpdateOnline(string user, bool online)
{
    int index = 0;
    for (int i = 0; i < userData.friends.Count; i++)
    {
        if (userData.friends[i].userID == user)
        {
            index = i;
            break;
        }
    }
    friendData copy = userData.friends[index];
    copy.online = online;
    userData.friends[index] = copy;

    if (menu.game == null)
    {
        // user is not in-game
        ConfigFriendsPanel();
    }
}

public void UpdateFriendData(friendData data)
{
    bool exists = false;
    for (int i = 0; i < userData.friends.Count; i++)
    {
        if (userData.friends[i].userID == data.userID)
        {
            exists = true;
            userData.friends[i] = data;
        }
    }
    if (!exists)
    {
        userData.friends.Add(data);
    }

    if (menu.game == null)
    {
        // user is not in-game
        ConfigFriendsPanel();
    }
}

public void RemoveFriend(string friendID)
{

```

```

        foreach (var friend in userData.friends)
        {
            if (friend.userID == friendID)
            {
                userData.friends.Remove(friend);
                break;
            }
        }

        if (menu.game == null)
        {
            // user is not in-game
            ConfigFriendsPanel();
        }
    }

    public async void HandleInvites(List<string> invites)
    {
        foreach (string invite in invites)
        {
            if (new ConfirmForm($"Received a friend invite from
            ↪ {invite}").DialogResult == DialogResult.OK)
            {
                if (connection.State != HubConnectionState.Connected)
                {
                    LoadAlert("Failed to accept friend invite.");
                }
                if (!await connection.InvokeAsync<bool>("addFriends", invite,
                ↪ userData.userID))
                {
                    LoadAlert("Failed to accept friend invite.");
                }
            }
        }
    }
}

    public static (string, string, string) CalculateStatsOverview(userData user)
    {
        string rank = user.rank.ToString();

        int totalLetters = 0;
        double meanAccuracy = 0;
        foreach (var letter in user.statistics.Keys)
        {
            totalLetters += user.statistics[letter].total;
            meanAccuracy += user.statistics[letter].accuracy;
        }

        string total = totalLetters.ToString();
        meanAccuracy /= user.statistics.Count;
        string accuracy = (Math.Round(100 * meanAccuracy, 2)).ToString();

        return (rank, total, accuracy);
    }
}

```

```

private async void btn_userSearch_Click(object sender, EventArgs e)
{
    string userID = txt_userSearch.Text;
    if (!string.IsNullOrEmpty(userID))
    {
        txt_userSearch.ResetText();
        await RequestProfile(userID);
    }
}

public async Task RequestProfile(string userID)
{
    if (connection.State != HubConnectionState.Connected)
    {
        return;
    }

    userData user = await connection.InvokeAsync<userData>("requestProfile",
        ↪ userID);
    if (user.userID != userID)
    {
        LoadAlert($"Could not find user with username: {userID}");
    }
    else
    {
        UpdatePageText("Profile");
        menu.profile = new Profile(this, user);
    }
}

public void UpdatePageText(string text)
{
    panel_topLeft.Controls.Clear();
    lbl_menu = new Guna.UI2.WinForms.Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        BorderStyle = BorderStyle.None,
        Font = new Font("Bahnschrift", 24.25F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.FromArgb(247, 113, 163),
        Location = new Point(0, 0),
        Name = "lbl_menu",
        Size = new Size(300, 100),
        TabIndex = 0,
        Text = Languages.localisation[text][userData.localisation],
        TextAlignment = ContentAlignment.MiddleCenter,
    };

    panel_topLeft.Controls.Add(lbl_menu);
}

private void btn_queueAccuracy_Click(object sender, EventArgs e)
{
    UpdatePageText("Accuracy");
}

```

```

        menu.game = new Accuracy(this);
        menu.game.QueueGame();
    }
    private void btn_queueVersus_Click(object sender, EventArgs e)
    {
        UpdatePageText("Versus");

        menu.game = new Versus(this);
        menu.game.QueueGame();
    }
    private void btn_queueElimination_Click(object sender, EventArgs e)
    {
        UpdatePageText("Knockout");

        menu.game = new Elimination(this);
        menu.game.QueueGame();
    }

    public async void btn_home_Click(object sender, EventArgs e)
    {
        UpdatePageText("Home");
        if (connection.State != HubConnectionState.Connected)
        {
            return;
        }

        if (menu.game != null)
        {
            await connection.InvokeAsync("dequeueGame", menu.game.GetGameID(),
                ↪ userData.userID);
        }

        // dispose all other classes
        menu.profile = null;
        menu.game = null;

        InitialiseComponent();
    }
    public async void btn_close_Click(object sender, EventArgs e)
    {
        if (connection.State != HubConnectionState.Connected)
        {
            return;
        }

        Hide();
        if (menu.game != null)
        {
            await connection.InvokeAsync("dequeueGame", menu.game.GetGameID(),
                ↪ userData.userID);
        }
        await connection.InvokeAsync("clientDisconnected", userData.userID);

        // dispose all other classes
    }

```



```

        menu.profile = null;
        menu.game = null;

        Close();
    }
}

```

menus/main.Designer.cs

```

using client_app.menus;
using client_app.Properties;
using Guna.UI2.WinForms;
using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Collections.Generic;
using System.Drawing;
using System.Resources;
using System.Windows.Forms;

namespace client_app
{
    partial class Main
    {
        private System.ComponentModel.IContainer components = null;

        private void InitialiseComponent()
        {
            UXElements.ResetLayout(this);

            this.panel_friendList = new Panel();
            this.seperator = new PictureBox();
            this.lbl_friendsLabel = new Guna2HtmlLabel();
            this.lbl_menu = new Guna2HtmlLabel();
            this.txt_userSearch = new Guna2TextBox();
            this.btn_userSearch = new Guna2CircleButton();

            this.panel_topBorder.SuspendLayout();
            ((System.ComponentModel.ISupportInitialize)(this.seperator)).BeginInit();
            this.panel_main.SuspendLayout();
            this.panel_left.SuspendLayout();

            this.SuspendLayout();
            //
            // panel_friendList
            //
            this.panel_friendList.AutoScroll = true;
            this.panel_friendList.BackColor = System.Drawing.Color.FromArgb(46, 46, 46);
            this.panel_friendList.Location = new System.Drawing.Point(20, 90);
            this.panel_friendList.Name = "panel_friendList";
            this.panel_friendList.Size = new System.Drawing.Size(260, 384);
            this.panel_friendList.TabIndex = 2;
            //
            // seperator
            //

```

```

this.seperator.Image = global::client_app.Properties.Resources.seperator;
this.seperator.InitialImage = null;
this.seperator.Location = new System.Drawing.Point(50, 60);
this.seperator.Name = "seperator";
this.seperator.Size = new System.Drawing.Size(200, 5);
this.seperator.SizeMode =
    ↳ System.Windows.Forms.PictureBoxSizeMode.StretchImage;
this.seperator.TabIndex = 1;
this.seperator.TabStop = false;
//
// txt_friendsLabel
//
this.lbl_friendsLabel.AutoSize = false;
this.lbl_friendsLabel.BackColor = Color.Transparent;
this.lbl_friendsLabel.BorderStyle = System.Windows.Forms.BorderStyle.None;
this.lbl_friendsLabel.Font = new System.Drawing.Font("Bahnschrift", 20.25F,
    ↳ System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point, 0);
this.lbl_friendsLabel.ForeColor = System.Drawing.Color.FromArgb(247, 113,
    ↳ 163);
this.lbl_friendsLabel.Location = new System.Drawing.Point(0, 20);
this.lbl_friendsLabel.Name = "txt_friendsLabel";
this.lbl_friendsLabel.Size = new System.Drawing.Size(300, 40);
this.lbl_friendsLabel.TabIndex = 0;
this.lbl_friendsLabel.Text =
    ↳ Languages.localisation["Friends"][userData.localisation];
this.lbl_friendsLabel.TextAlign = ContentAlignment.MiddleCenter;
//
// txt_userSearch
//
this.txt_userSearch.BorderRadius = 8;
this.txt_userSearch.BorderThickness = 0;
this.txt_userSearch.Cursor = System.Windows.Forms.Cursors.IBeam;
this.txt_userSearch.FillColor = System.Drawing.Color.FromArgb(208, 208, 208);
this.txt_userSearch.ForeColor = System.Drawing.Color.FromArgb(26, 26, 26);
this.txt_userSearch.Location = new Point(20, 500);
this.txt_userSearch.Name = "txt_userSearch";
this.txt_userSearch.PlaceholderForeColor = System.Drawing.Color.Gray;
this.txt_userSearch.PlaceholderText = "Search players";
this.txt_userSearch.Size = new Size(200, 50);
//
// btn_userSearch
//
this.btn_userSearch.BorderThickness = 0;
this.btn_userSearch.Cursor = System.Windows.Forms.Cursors.IBeam;
this.btn_userSearch.FillColor = System.Drawing.Color.FromArgb(208, 208, 208);
this.btn_userSearch.ForeColor = System.Drawing.Color.FromArgb(26, 26, 26);
this.btn_userSearch.Name = "btn_userSearch";
this.btn_userSearch.Image = global::client_app.Properties.Resources.search;
this.btn_userSearch.Location = new Point(230, 500);
this.btn_userSearch.Size = new Size(50, 50);
this.btn_userSearch.Click += btn_userSearch_Click;
//
// main
//
this.panel_left.Controls.Add(panel_friendList);

```

```

        this.panel_left.Controls.Add(seperator);
        this.panel_left.Controls.Add(lbl_friendsLabel);
        this.panel_left.Controls.Add(txt_userSearch);
        this.panel_left.Controls.Add(btn_userSearch);
        this.panel_topLeft.Controls.Add(lbl_menu);

        ((System.ComponentModel.ISupportInitialize)(this.seperator)).EndInit();

        ConfigFriendsPanel();
        ConfigGamePanels();
        UpdatePageText("Home");

        this.panel_main.ResumeLayout(false);
        this.panel_left.ResumeLayout(false);
        this.ResumeLayout(false);

        UXElements.ConfigUserDataPanel(this, userData);
    }

    private void ConfigGamePanels()
    {
        const int gamePanelX = 60;
        const int gamePanelY = 100;
        const int gamePanelSizeX = 1000;
        const int gamePanelSizeY = 90;
        const int gamePanelYSpacing = 50;

        const int padding = 10;
        const int lbl_nameSizeX = 300;
        const int btn_queueSizeX = 160;
        const int paddedSizeY = gamePanelSizeY - 2 * padding;

        Guna2GradientPanel createGamePanel((int X, int Y) location, (int X, int Y)
        ↪ size)
        {
            return new Guna2GradientPanel()
            {
                BackColor = System.Drawing.Color.Transparent,
                BorderRadius = 20,
                FillColor = System.Drawing.Color.FromArgb(208, 208, 208),
                FillColor2 = System.Drawing.Color.FromArgb(208, 208, 208),
                Location = new Point(location.X, location.Y),
                Size = new Size(size.X, size.Y),
                TabIndex = 0,
                UseTransparentBackground = true,
            };
        }

        Guna2HtmlLabel createGameLabel(string text, (int X, int Y) location, (int X,
        ↪ int Y) size)
        {
            return new Guna2HtmlLabel()
            {
                AutoSize = false,
                BackColor = System.Drawing.Color.Transparent,
                Cursor = System.Windows.Forms.Cursors.Arrow,
            };
        }
    }

```

```

        Text = text,
        Font = new Font("Bahnschrift", 27.75F,
            ↪ System.Drawing.FontStyle.Bold),
        ForeColor = System.Drawing.Color.White,
        Location = new Point(location.X, location.Y),
        Margin = new System.Windows.Forms.Padding(6),
        Size = new Size(size.X, size.Y),
        TabStop = false,
        TextAlignment = ContentAlignment.MiddleCenter,
    };
}
Guna2GradientButton createQueueButton((int X, int Y) location, (int X, int Y)
    ↪ size)
{
    return new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        FillColor = System.Drawing.Color.FromArgb(247, 113, 163),
        FillColor2 = System.Drawing.Color.FromArgb(197, 113, 247),
        Font = new Font("Bahnschrift SemiBold", 11.25F,
            ↪ System.Drawing.FontStyle.Bold),
        ForeColor = System.Drawing.Color.White,
        Location = new Point(location.X, location.Y),
        Size = new Size(size.X, size.Y),
        Text = Languages.localisation["Queue"][Main.userData.localisation],
    };
}
Guna2TextBox createGameInfoTextbox(string text, (int X, int Y) location, (int
    ↪ X, int Y) size)
{
    var t = new Guna2TextBox()
    {
        BorderRadius = 10,
        Cursor = Cursors.Arrow,
        DefaultText = text,
        FillColor = Color.FromArgb(156, 156, 156),
        Font = new Font("Bahnschrift", 9.75F),
        ForeColor = Color.White,
        Location = new Point(location.X, location.Y),
        ReadOnly = true,
        Size = new Size(size.X, size.Y),
        TabStop = false,
        TextAlign = HorizontalAlignment.Center,
    };

    t HoverState.BorderColor = Color.Transparent;

    return t;
}

this.panel_accuracy = createGamePanel((gamePanelX, gamePanelY),
    ↪ (gamePanelSizeX, gamePanelSizeY));
this.panel_1v1 = createGamePanel((gamePanelX, gamePanelY + gamePanelSizeY +
    ↪ gamePanelYSpacing), (gamePanelSizeX, gamePanelSizeY));

```

```

this.panel_knockout = createGamePanel((gamePanelX, gamePanelY + 2 *
    ↳ (gamePanelSizeY + gamePanelYSpacing)), (gamePanelSizeX, gamePanelSizeY));

this.lbl_accuracy =
    ↳ createGameLabel(Languages.localisation["Accuracy"] [Main.userData.localisation],
    ↳ (2 * padding, padding), (lbl_nameSizeX, paddedSizeY));
this.lbl_1v1 =
    ↳ createGameLabel(Languages.localisation["Versus"] [Main.userData.localisation],
    ↳ (2 * padding, padding), (lbl_nameSizeX, paddedSizeY));
this.lbl_knockout =
    ↳ createGameLabel(Languages.localisation["Knockout"] [Main.userData.localisation],
    ↳ (2 * padding, padding), (lbl_nameSizeX, paddedSizeY));

this.btn_queueAccuracy = createQueueButton((gamePanelSizeX - 2 * padding -
    ↳ btn_queueSizeX, 2 * padding), (btn_queueSizeX, gamePanelSizeY - 4 *
    ↳ padding));
this.btn_queue1v1 = createQueueButton((gamePanelSizeX - 2 * padding -
    ↳ btn_queueSizeX, 2 * padding), (btn_queueSizeX, gamePanelSizeY - 4 *
    ↳ padding));
this.btn_queueKnockout = createQueueButton((gamePanelSizeX - 2 * padding -
    ↳ btn_queueSizeX, 2 * padding), (btn_queueSizeX, gamePanelSizeY - 4 *
    ↳ padding));

string accuracyInfo = "PLAYERS : 1 | ROUNDS : 10
    ↳ | UNRANKED";
string versusInfo = "PLAYERS : 2 | ROUNDS : 10
    ↳ | RANKED";
string eliminationInfo = "PLAYERS : 12 | ELIMINATION
    ↳ | UNRANKED";
this.txt_accuracy = createGameInfoTextbox(accuracyInfo, (4 * padding +
    ↳ lbl_nameSizeX, padding), (gamePanelSizeX - (4 * padding + lbl_nameSizeX)
    ↳ - (4 * padding + btn_queueSizeX), paddedSizeY));
this.txt_1v1 = createGameInfoTextbox(versusInfo, (4 * padding +
    ↳ lbl_nameSizeX, padding), (gamePanelSizeX - (4 * padding + lbl_nameSizeX)
    ↳ - (4 * padding + btn_queueSizeX), paddedSizeY));
this.txt_knockout = createGameInfoTextbox(eliminationInfo, (4 * padding +
    ↳ lbl_nameSizeX, padding), (gamePanelSizeX - (4 * padding + lbl_nameSizeX)
    ↳ - (4 * padding + btn_queueSizeX), paddedSizeY));

this.panel_accuracy.Controls.Add(this.lbl_accuracy);
this.panel_accuracy.Controls.Add(this.btn_queueAccuracy);
this.panel_accuracy.Controls.Add(this.txt_accuracy);

this.panel_1v1.Controls.Add(this.lbl_1v1);
this.panel_1v1.Controls.Add(this.btn_queue1v1);
this.panel_1v1.Controls.Add(this.txt_1v1);

this.panel_knockout.Controls.Add(this.lbl_knockout);
this.panel_knockout.Controls.Add(this.btn_queueKnockout);
this.panel_knockout.Controls.Add(this.txt_knockout);

this.btn_queueAccuracy.Click += btn_queueAccuracy_Click;
this.btn_queue1v1.Click += btn_queueVersus_Click;
this.btn_queueKnockout.Click += btn_queueElimination_Click;

```

```

        this.panel_main.Controls.Add(this.panel_knockout);
        this.panel_main.Controls.Add(this.panel_1v1);
        this.panel_main.Controls.Add(this.panel_accuracy);
    }
    private void ConfigFriendsPanel()
    {
        panel_friendList.Controls.Clear();

        List<friendData> onlineList = new List<friendData>();
        List<friendData> offlineList = new List<friendData>();

        foreach (var friend in userData.friends)
        {
            if (friend.online)
            {
                onlineList.Add(friend);
            }
            else
            {
                offlineList.Add(friend);
            }
        }

        const int buttonX = 260;
        const int buttonY = 30;
        const int padding = 5;
        int y_offset = 10;

        Guna2HtmlLabel createLabel(string text, (int X, int Y) location, (int X, int
        ↪ Y) size, ContentAlignment align)
        {
            return new Guna2HtmlLabel()
            {
                AutoSize = false,
                BackColor = System.Drawing.Color.Transparent,
                Cursor = System.Windows.Forms.Cursors.Arrow,
                Font = new System.Drawing.Font("Bahnschrift SemiBold", 12.75F,
                ↪ System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point,
                ↪ 0),
                ForeColor = System.Drawing.Color.White,
                Location = new Point(location.X, location.Y),
                Margin = new System.Windows.Forms.Padding(6),
                Size = new Size(size.X, size.Y),
                TabStop = false,
                Text = text,
                TextAlignment = align,
            };
        }
        Guna2Button createUserButton(string text, (int X, int Y) location, (int X,
        ↪ int Y) size)
        {
            var b = new Guna2Button()
            {
                BackColor = Color.Transparent,

```

```

        Font = new System.Drawing.Font("Bahnschrift SemiBold", 12.75F,
        ↪ System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point,
        ↪ 0),
        FillColor = Color.Transparent,
        Location = new System.Drawing.Point(location.X, location.Y),
        Name = text,
        PressedColor = Color.Transparent,
        Size = new System.Drawing.Size(size.X, size.Y),
        TabIndex = 0,
        Text = text,
        TextAlign = HorizontalAlignment.Left,
    };

    b HoverState.BorderColor = Color.Transparent;

    b.Click += async (sender, e) =>
    {
        string userID = ((Guna2Button)sender).Name;
        await RequestProfile(userID);
    };

    return b;
}

Guna2HtmlLabel online =
    ↪ createLabel(Languages.localisation["ONLINE"][userData.localisation], (10,
    ↪ y_offset), (200, buttonY), ContentAlignment.MiddleLeft);
Guna2HtmlLabel onlineCount = createLabel(onlineList.Count.ToString(), (230,
    ↪ 10), (25, 20), ContentAlignment.MiddleRight);

panel_friendList.Controls.Add(online);
panel_friendList.Controls.Add(onlineCount);

y_offset += 30;

for (int i = 0; i < onlineList.Count; i++, y_offset += buttonY + padding)
{
    Guna2Button user = createUserButton(onlineList[i].userID, (0, y_offset),
    ↪ (buttonX, buttonY));
    panel_friendList.Controls.Add(user);
}

y_offset += 30;

Guna2HtmlLabel offline =
    ↪ createLabel(Languages.localisation["OFFLINE"][userData.localisation],
    ↪ (10, y_offset), (200, buttonY), ContentAlignment.MiddleLeft);
Guna2HtmlLabel offlineCount = createLabel(offlineList.Count.ToString(), (230,
    ↪ y_offset), (25, 20), ContentAlignment.MiddleRight);

panel_friendList.Controls.Add(offline);
panel_friendList.Controls.Add(offlineCount);

y_offset += 30;

```

```

        for (int i = 0; i < offlineList.Count; i++, y_offset += buttonY + padding)
        {
            Guna2Button user = createUserButton(offlineList[i].userID, (0, y_offset),
            ↪ (buttonX, buttonY));
            panel_friendList.Controls.Add(user);
        }
    }

    public Panel panel_topBorder;
    public Button btn_close;
    public Label lbl_appName;
    public Panel panel_left;
    public Panel panel_topLeft;
    public Panel panel_main;
    public Panel panel_right;
    public Button btn_home;

    private Panel panel_friendList;
    private PictureBox seperator;
    private Guna2HtmlLabel lbl_friendsLabel;
    private Guna2HtmlLabel lbl_menu;
    private Guna2TextBox txt_userSearch;
    private Guna2CircleButton btn_userSearch;

    private Guna2GradientPanel panel_accuracy;
    private Guna2HtmlLabel lbl_accuracy;
    private Guna2TextBox txt_accuracy;
    private Guna2GradientButton btn_queueAccuracy;
    private Guna2GradientPanel panel_1v1;
    private Guna2GradientButton btn_queue1v1;
    private Guna2TextBox txt_1v1;
    private Guna2HtmlLabel lbl_1v1;
    private Guna2GradientPanel panel_knockout;
    private Guna2GradientButton btn_queueKnockout;
    private Guna2TextBox txt_knockout;
    private Guna2HtmlLabel lbl_knockout;
}
}

```

menus/profile.cs

```

using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Windows.Forms;

namespace client_app.menus
{
    public partial class Profile : Form
    {
        private readonly Main main;
        private readonly userData user;
        public string GetUserID() => user.userID;
        public userData GetUserData() => user;
        public Profile(Main main, userData user)
    }
}

```



```

{
    this.main = main;
    this.user = user;

    InitialiseComponent();
    SetupButtons();
}
private void SetupButtons()
{
    if (user.userID == Main.userData.userID)
    {
        btn_addFriends.Enabled = false;
        btn_addFriends.Hide();
        btn_removeFriends.Enabled = false;
        btn_removeFriends.Hide();
    }

    bool isFriend = false;
    foreach (var friend in Main.userData.friends)
    {
        if (friend.userID == user.userID)
        {
            isFriend = true;
            break;
        }
    }

    if (isFriend)
    {
        btn_addFriends.Enabled = false;
    }
    else
    {
        btn_removeFriends.Enabled = false;
    }
}

private async void btn_addFriends_Click(object sender, EventArgs e)
{
    if (Main.connection.State != HubConnectionState.Connected)
    {
        return;
    }

    btn_addFriends.Enabled = false;
    if (!await Main.connection.InvokeAsync<bool>("sendInvite", user.userID,
        ↪ Main.userData.userID))
    {
        Main.LoadAlert("Failed to send friend invite. Please try again.");
    }
}
private async void btn_removeFriends_Click(object sender, EventArgs e)
{
    if (Main.connection.State != HubConnectionState.Connected)
    {

```

```

        return;
    }

    btn_removeFriends.Enabled = false;
    if (!await Main.connection.InvokeAsync<bool>("removeFriends", user.userID,
        ↪ Main.userData.userID))
    {
        Main.LoadAlert("Failed to remove friend. Please try again");
    }
}
}
}
}
}

```

menus/profile.Designer.cs

```

using client_app.Properties;
using System;
using System.Drawing;
using System.Linq;
using System.Runtime.CompilerServices;
using System.Windows.Forms;
using Guna.UI2.WinForms;

namespace client_app.menus
{
    partial class Profile
    {
        private System.ComponentModel.IContainer components = null;

        private void InitialiseComponent()
        {
            main.panel_main.Controls.Clear();

            this.lbl_username = new Guna.UI2.WinForms.Guna2TextBox();
            this.lbl_rank = new Guna.UI2.WinForms.Guna2TextBox();
            this.lbl_total = new Guna.UI2.WinForms.Guna2TextBox();
            this.lbl_accuracy = new Guna.UI2.WinForms.Guna2TextBox();
            this.pic_seperator = new System.Windows.Forms.PictureBox();
            this.panel_stats = new Panel();
            this.btn_addFriends = new Guna.UI2.WinForms.Guna2GradientButton();
            this.btn_removeFriends = new Guna.UI2.WinForms.Guna2GradientButton();
            ((System.ComponentModel.ISupportInitialize)(this.pic_seperator)).BeginInit();
            //
            // lbl_username
            //
            this.lbl_username.BorderRadius = 20;
            this.lbl_username.BorderThickness = 0;
            this.lbl_username.Cursor = System.Windows.Forms.Cursors.IBeam;
            this.lbl_username.DefaultText = "username";
            this.lbl_username.DisabledState.BorderColor =
                ↪ System.Drawing.Color.FromArgb(208, 208, 208);
            this.lbl_username.DisabledState.FillColor =
                ↪ System.Drawing.Color.FromArgb(226, 226, 226);
            this.lbl_username.DisabledState.ForeColor =
                ↪ System.Drawing.Color.FromArgb(138, 138, 138);

```

```

this.lbl_username.DisabledState.PlaceholderForeColor =
    ↪ System.Drawing.Color.FromArgb(138, 138, 138);
this.lbl_username.FocusedState.BorderColor =
    ↪ System.Drawing.Color.FromArgb(94, 148, 255);
this.lbl_username.Font = new System.Drawing.Font("Bahnschrift SemiBold",
    ↪ 31.75F, System.Drawing.FontStyle.Bold);
this.lbl_username.ForeColor = System.Drawing.Color.FromArgb(26, 26, 26);
this.lbl_username HoverState.BorderColor = System.Drawing.Color.FromArgb(94,
    ↪ 148, 255);
this.lbl_username.IconLeft = global::client_app.Properties.Resources.account;
this.lbl_username.IconLeftOffset = new System.Drawing.Point(10, 0);
this.lbl_username.IconLeftSize = new System.Drawing.Size(45, 50);
this.lbl_username.Location = new System.Drawing.Point(20, 20);
this.lbl_username.Name = "lbl_username";
this.lbl_username.PlaceholderText = "";
this.lbl_username.ReadOnly = true;
this.lbl_username.SelectedText = "";
this.lbl_username.Size = new System.Drawing.Size(1080, 70);
this.lbl_username.TabIndex = 0;
this.lbl_username.TabStop = false;
this.lbl_username.TextOffset = new System.Drawing.Point(20, -3);
//
// lbl_rank
//
this.lbl_rank.BorderRadius = 10;
this.lbl_rank.BorderThickness = 0;
this.lbl_rank.Cursor = System.Windows.Forms.Cursors.IBeam;
this.lbl_rank.DefaultText = "rank";
this.lbl_rank.DisabledState.BorderColor = System.Drawing.Color.FromArgb(208,
    ↪ 208, 208);
this.lbl_rank.DisabledState.FillColor = System.Drawing.Color.FromArgb(226,
    ↪ 226, 226);
this.lbl_rank.DisabledState.ForeColor = System.Drawing.Color.FromArgb(138,
    ↪ 138, 138);
this.lbl_rank.DisabledState.PlaceholderForeColor =
    ↪ System.Drawing.Color.FromArgb(138, 138, 138);
this.lbl_rank.FocusedState.BorderColor = System.Drawing.Color.FromArgb(94,
    ↪ 148, 255);
this.lbl_rank.Font = new System.Drawing.Font("Bahnschrift", 15.75F);
this.lbl_rank.ForeColor = System.Drawing.Color.FromArgb(52, 52, 52);
this.lbl_rank HoverState.BorderColor = System.Drawing.Color.FromArgb(94, 148,
    ↪ 255);
this.lbl_rank.IconLeft = global::client_app.Properties.Resources.rank;
this.lbl_rank.IconLeftOffset = new System.Drawing.Point(10, 0);
this.lbl_rank.Location = new System.Drawing.Point(20, 100);
this.lbl_rank.Name = "lbl_rank";
this.lbl_rank.PlaceholderText = "";
this.lbl_rank.ReadOnly = true;
this.lbl_rank.SelectedText = "";
this.lbl_rank.Size = new System.Drawing.Size(350, 30);
this.lbl_rank.TabIndex = 1;
this.lbl_rank.TabStop = false;
this.lbl_rank.TextOffset = new System.Drawing.Point(10, -1);
//
// lbl_total

```

```

//
this.lbl_total.BorderRadius = 10;
this.lbl_total.BorderThickness = 0;
this.lbl_total.Cursor = System.Windows.Forms.Cursors.IBeam;
this.lbl_total.DefaultText = "total";
this.lbl_total.DisabledState.BorderColor = System.Drawing.Color.FromArgb(208,
    ↪ 208, 208);
this.lbl_total.DisabledState.FillColor = System.Drawing.Color.FromArgb(226,
    ↪ 226, 226);
this.lbl_total.DisabledState.ForeColor = System.Drawing.Color.FromArgb(138,
    ↪ 138, 138);
this.lbl_total.DisabledState.PlaceholderForeColor =
    ↪ System.Drawing.Color.FromArgb(138, 138, 138);
this.lbl_total.FocusedState.BorderColor = System.Drawing.Color.FromArgb(94,
    ↪ 148, 255);
this.lbl_total.Font = new System.Drawing.Font("Bahnschrift", 15.75F);
this.lbl_total.ForeColor = System.Drawing.Color.FromArgb(52, 52, 52);
this.lbl_total.HoverState.BorderColor = System.Drawing.Color.FromArgb(94,
    ↪ 148, 255);
this.lbl_total.IconLeft = global::client_app.Properties.Resources.total;
this.lbl_total.IconLeftOffset = new System.Drawing.Point(10, 0);
this.lbl_total.Location = new System.Drawing.Point(385, 100);
this.lbl_total.Name = "lbl_total";
this.lbl_total.PlaceholderText = "";
this.lbl_total.ReadOnly = true;
this.lbl_total.SelectedText = "";
this.lbl_total.Size = new System.Drawing.Size(350, 30);
this.lbl_total.TabIndex = 2;
this.lbl_total.TabStop = false;
this.lbl_total.TextOffset = new System.Drawing.Point(10, -1);
//
// lbl_accuracy
//
this.lbl_accuracy.BorderRadius = 10;
this.lbl_accuracy.BorderThickness = 0;
this.lbl_accuracy.Cursor = System.Windows.Forms.Cursors.IBeam;
this.lbl_accuracy.DefaultText = "accuracy";
this.lbl_accuracy.DisabledState.BorderColor =
    ↪ System.Drawing.Color.FromArgb(208, 208, 208);
this.lbl_accuracy.DisabledState.FillColor =
    ↪ System.Drawing.Color.FromArgb(226, 226, 226);
this.lbl_accuracy.DisabledState.ForeColor =
    ↪ System.Drawing.Color.FromArgb(138, 138, 138);
this.lbl_accuracy.DisabledState.PlaceholderForeColor =
    ↪ System.Drawing.Color.FromArgb(138, 138, 138);
this.lbl_accuracy.FocusedState.BorderColor =
    ↪ System.Drawing.Color.FromArgb(94, 148, 255);
this.lbl_accuracy.Font = new System.Drawing.Font("Bahnschrift", 15.75F);
this.lbl_accuracy.ForeColor = System.Drawing.Color.FromArgb(52, 52, 52);
this.lbl_accuracy.HoverState.BorderColor = System.Drawing.Color.FromArgb(94,
    ↪ 148, 255);
this.lbl_accuracy.IconLeft =
    ↪ global::client_app.Properties.Resources.accuracy;
this.lbl_accuracy.IconLeftOffset = new System.Drawing.Point(10, 0);
this.lbl_accuracy.Location = new System.Drawing.Point(750, 100);

```

```

this.lbl_accuracy.Name = "lbl_accuracy";
this.lbl_accuracy.PlaceholderText = "";
this.lbl_accuracy.ReadOnly = true;
this.lbl_accuracy.SelectedText = "";
this.lbl_accuracy.Size = new System.Drawing.Size(350, 30);
this.lbl_accuracy.TabIndex = 3;
this.lbl_accuracy.TabStop = false;
this.lbl_accuracy.TextOffset = new System.Drawing.Point(10, -1);
//
// pic_seperator
//
this.pic_seperator.Image = global::client_app.Properties.Resources.seperator;
this.pic_seperator.Location = new System.Drawing.Point(305, 150);
this.pic_seperator.Name = "pic_seperator";
this.pic_seperator.Size = new System.Drawing.Size(510, 5);
this.pic_seperator.SizeMode =
    ↳ System.Windows.Forms.PictureBoxSizeMode.StretchImage;
this.pic_seperator.TabStop = false;
//
// panel_stats
//
this.panel_stats.AutoScroll = true;
this.panel_stats.AutoSize = false;
this.panel_stats.BorderStyle = BorderStyle.None;
this.panel_stats.BackColor = System.Drawing.Color.White;
this.panel_stats.Location = new System.Drawing.Point(40, 175);
this.panel_stats.Name = "panel_stats";
this.panel_stats.Size = new System.Drawing.Size(1040, UXelements.clientY - 30
    ↳ - 175 - 40 - 70);
this.panel_stats.TabStop = false;
//
// btn_addFriends
//
this.btn_addFriends.AutoRoundedCorners = true;
this.btn_addFriends.BorderRadius = 14;
this.btn_addFriends.FillColor = System.Drawing.Color.FromArgb(247, 113, 163);
this.btn_addFriends.FillColor2 = System.Drawing.Color.FromArgb(197, 113,
    ↳ 247);
this.btn_addFriends.ForeColor = System.Drawing.Color.White;
this.btn_addFriends.Location = new Point(40, 900);
this.btn_addFriends.Name = "btn_login";
this.btn_addFriends.Size = new Size(200, 40);
this.btn_addFriends.Text = Languages.localisation["Add
    ↳ Friend"] [Main.userData.localisation];
this.btn_addFriends.Click += new
    ↳ System.EventHandler(this.btn_addFriends_Click);
//
// btn_removeFriends
//
this.btn_removeFriends.AutoRoundedCorners = true;
this.btn_removeFriends.BorderRadius = 14;
this.btn_removeFriends.FillColor = System.Drawing.Color.FromArgb(247, 113,
    ↳ 163);
this.btn_removeFriends.FillColor2 = System.Drawing.Color.FromArgb(197, 113,
    ↳ 247);

```

```

this.btn_removeFriends.ForeColor = System.Drawing.Color.White;
this.btn_removeFriends.Location = new Point(240, 900);
this.btn_removeFriends.Name = "btn_login";
this.btn_removeFriends.Size = new Size(200, 40);
this.btn_removeFriends.Text = Languages.localisation["Remove
↪ Friend"] [Main.userData.localisation];
this.btn_removeFriends.Click += new
↪ System.EventHandler(this.btn_removeFriends_Click);

(string rank, string total, string accuracy) =
↪ Main.CalculateStatsOverview(user);

this.lbl_username.Text = user.userID;
this.lbl_rank.Text = rank;
this.lbl_total.Text = total;
this.lbl_accuracy.Text = accuracy + "%";

ConfigStats();
panel_stats.ResumeLayout(false);

main.panel_main.Controls.Add(this.panel_stats);
main.panel_main.Controls.Add(this.pic_seperator);
main.panel_main.Controls.Add(this.lbl_accuracy);
main.panel_main.Controls.Add(this.lbl_total);
main.panel_main.Controls.Add(this.lbl_rank);
main.panel_main.Controls.Add(this.lbl_username);
main.panel_main.Controls.Add(this.btn_addFriends);
main.panel_main.Controls.Add(this.btn_removeFriends);

((System.ComponentModel.ISupportInitialize)(this.pic_seperator)).EndInit();
}

private void ConfigStats()
{
    const int X = 10;
    int y = 10;

    const int panelX = 900;
    const int panelY = 50;
    const int padding = 5;
    const int defaultSize = panelY - 2 * padding;

    panel_stats.SuspendLayout();

    foreach (var stat in user.statistics)
    {
        string letter = stat.Key.ToString();
        int total = stat.Value.total;
        double accuracy = stat.Value.accuracy;
        TimeSpan time = stat.Value.time;

        (int r, int g, int b) colour = ((int)(255 * (1 - accuracy)), (int)(255 *
↪ (accuracy)), 0);

        Label lbl_letter = new System.Windows.Forms.Label()

```

```

{
    Location = new System.Drawing.Point(0 + padding, 0 + padding),
    Name = "lbl_letter",
    Size = new System.Drawing.Size(defaultSize, defaultSize),
    TabIndex = 0,
    Text = letter,
    TextAlign = System.Drawing.ContentAlignment.MiddleCenter,
    BorderStyle = BorderStyle.FixedSingle,
};
Label lbl_total = new System.Windows.Forms.Label()
{
    Location = new System.Drawing.Point(panelX - 2 * defaultSize -
        ↪ padding, padding),
    Name = "lbl_total",
    Size = new System.Drawing.Size(2 * defaultSize, defaultSize),
    TabIndex = 1,
    Text = total.ToString(),
    TextAlign = System.Drawing.ContentAlignment.MiddleCenter,
    BorderStyle = BorderStyle.FixedSingle,
};
Label lbl_time = new System.Windows.Forms.Label()
{
    Location = new System.Drawing.Point(lbl_total.Location.X - 2 *
        ↪ defaultSize - padding, padding),
    Name = "lbl_time",
    Size = new System.Drawing.Size(2 * defaultSize, defaultSize),
    TabIndex = 2,
    Text = $"{time.TotalSeconds}",
    TextAlign = System.Drawing.ContentAlignment.MiddleCenter,
    BorderStyle = BorderStyle.FixedSingle,
};
Label lbl_percentage = new System.Windows.Forms.Label()
{
    Location = new System.Drawing.Point(lbl_time.Location.X - defaultSize
        ↪ - padding, padding),
    Name = "lbl_percentage",
    Size = new System.Drawing.Size(defaultSize, defaultSize),
    TabIndex = 3,
    Text = $"{100 * accuracy}%",
    TextAlign = System.Drawing.ContentAlignment.MiddleCenter,
    BorderStyle = BorderStyle.FixedSingle,
};
Guna2Panel bar_base = new Guna2Panel()
{
    BackColor = System.Drawing.SystemColors.ControlLight,
    BorderRadius = 3,
    FillColor = System.Drawing.SystemColors.ControlLight,
    Location = new System.Drawing.Point(lbl_letter.Location.X +
        ↪ defaultSize + padding, 2 * padding),
    Name = "bar_base",
    Size = new System.Drawing.Size(lbl_percentage.Location.X - padding -
        ↪ (lbl_letter.Location.X + defaultSize + padding), defaultSize - 2
        ↪ * padding),
    TabStop = false,
};

```

```

Guna2Panel bar_fill = new Guna2Panel()
{
    BackColor = System.Drawing.ColorTranslator.FromHtml($"{{colour.r}},
    ↪ {{colour.g}}, {{colour.b}}"),
    BorderRadius = 3,
    FillColor = System.Drawing.ColorTranslator.FromHtml($"{{colour.r}},
    ↪ {{colour.g}}, {{colour.b}}"),
    Location = new System.Drawing.Point(bar_base.Location.X,
    ↪ bar_base.Location.Y),
    Name = "panel_fill",
    Size = new System.Drawing.Size(((int)(accuracy *
    ↪ bar_base.Size.Width)), bar_base.Size.Height),
    TabStop = false,
};

Guna2Panel panel_char = new Guna2Panel()
{
    BackColor = System.Drawing.SystemColors.ControlDark,
    BorderRadius = 10,
    FillColor = System.Drawing.SystemColors.ControlDark,
    Location = new System.Drawing.Point(X, y),
    Name = "panel_char",
    Size = new System.Drawing.Size(panelX, panelY),
    TabStop = false,
};

panel_char.Controls.Add(bar_fill);
panel_char.Controls.Add(bar_base);
panel_char.Controls.Add(lbl_percentage);
panel_char.Controls.Add(lbl_time);
panel_char.Controls.Add(lbl_total);
panel_char.Controls.Add(lbl_letter);

bar_fill.BringToFront();

panel_stats.Controls.Add(panel_char);

y += panelY + 2 * padding;
}

panel_stats.ResumeLayout();
}

private Guna2TextBox lbl_username;
private Guna2TextBox lbl_rank;
private Guna2TextBox lbl_total;
private Guna2TextBox lbl_accuracy;
private Guna2GradientButton btn_addFriends;
private Guna2GradientButton btn_removeFriends;
private PictureBox pic_seperator;
private Panel panel_stats;
}
}

```

menus/UXelements.cs


```

using client_app.components;
using client_app.menus.games;
using client_app.Properties;
using Guna.UI2.WinForms;
using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Collections.Generic;
using System.Drawing;
using System.Linq;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace client_app.menus
{
    public abstract class UXelements : Form
    {
        public static int clientX = Screen.PrimaryScreen.WorkingArea.Width;
        public static int clientY = Screen.PrimaryScreen.WorkingArea.Height;

        public static void InitialiseComponent(Main main)
        {
            main.Controls.Clear();

            main.panel_topBorder = new Panel();
            main.lbl_appName = new Label();
            main.btn_close = new Button();
            main.btn_home = new Button();
            main.panel_left = new Panel();
            main.panel_topLeft = new Panel();
            main.panel_main = new Panel();
            main.panel_right = new Panel();
            main.panel_topBorder.SuspendLayout();
            main.panel_left.SuspendLayout();
            main.panel_main.SuspendLayout();
            main.SuspendLayout();
            //
            // panel_topBorder
            //
            main.panel_topBorder.BackColor = Color.FromArgb(26, 23, 24);
            main.panel_topBorder.Controls.Add(main.lbl_appName);
            main.panel_topBorder.Controls.Add(main.btn_close);
            main.panel_topBorder.Location = new Point(0, 0);
            main.panel_topBorder.Size = new Size(1920, 30);
            //
            // lbl_appName
            //
            main.lbl_appName.BackColor = main.panel_topBorder.BackColor;
            main.lbl_appName.Font = new Font("Bahnschrift SemiBold", 9.75F,
                ↪ FontStyle.Bold, GraphicsUnit.Point, 0);
            main.lbl_appName.Location = new Point(10, 7);
            main.lbl_appName.Name = "lbl_appName";
            main.lbl_appName.Size = new Size(100, 16);
            main.lbl_appName.Text = "v1.0.0a";
            //
            // btn_close

```

```

//
main.btn_close.Location = new Point(1890, 0);
main.btn_close.Size = new Size(30, 30);
main.btn_close.TabStop = false;
main.btn_close.Text = "X";
main.btn_close.UseVisualStyleBackColor = true;
main.btn_close.Click += (sender, e) => main.btn_close_Click(sender, e);
//
// btn_home
//
main.btn_home.Location = new Point(50, 880);
main.btn_home.Size = new Size(200, 30);
main.btn_home.TabStop = false;
main.btn_home.Text =
    ↳ Languages.localisation["Home"][Main.userData.localisation];
main.btn_home.UseVisualStyleBackColor = true;
//
// panel_left
//
main.panel_left.AutoScroll = true;
main.panel_left.BackColor = Color.FromArgb(35, 31, 32);
main.panel_left.Controls.Add(main.btn_home);
main.panel_left.Location = new Point(0, 130);
main.panel_left.Size = new Size(300, 950);
//
// panel_topLeft
//
main.panel_topLeft.BackColor = Color.FromArgb(46, 46, 46);
main.panel_topLeft.Location = new Point(0, 30);
main.panel_topLeft.Size = new Size(300, 100);
//
// panel_main
//
main.panel_main.BackColor = Color.FromArgb(104, 104, 104);
main.panel_main.Location = new Point(300, 30);
main.panel_main.Size = new Size(1120, clientY - 30);
//
// panel_right
//
main.panel_right.BackColor = Color.FromArgb(35, 31, 32);
main.panel_right.Location = new Point(1420, 30);
main.panel_right.Size = new Size(500, 1050);
//
// abstractMenu
//
main.AutoScroll = false;
main.BackColor = Color.White;
main.ClientSize = new Size(clientX, clientY);
main.Controls.Add(main.panel_topLeft);
main.Controls.Add(main.panel_topBorder);
main.Controls.Add(main.panel_left);
main.Controls.Add(main.panel_main);
main.Controls.Add(main.panel_right);
main.StartPosition = FormStartPosition.Manual;
main.Location = new Point(0, 0);

```

```

        main.FormBorderStyle = FormBorderStyle.None;
        main.panel_topBorder.ResumeLayout(false);
        main.panel_left.ResumeLayout(false);
        main.panel_main.ResumeLayout(false);
        main.ResumeLayout(false);
    }

    public static void ResetLayout(Main main)
    {
        main.panel_main?.Controls.Clear();
        main.panel_left?.Controls.Clear();
        main.panel_right?.Controls.Clear();
        main.btn_home.Click -= main.btn_home_Click;

        main.panel_left.Controls.Add(main.btn_home);
        main.btn_home.Click += main.btn_home_Click;
    }

    public static InputPanel ConfigGamePanel(Game game)
    {
        game.main.panel_main.Controls.Clear();

        Guna2Shapes panel_outline = new Guna2Shapes()
        {
            BorderColor = Color.FromArgb(52, 52, 52),
            BorderThickness = 10,
            FillColor = Color.White,
            Location = new Point(260, 250),
            PolygonSkip = 1,
            Rotate = 0F,
            Shape = Guna.UI2.WinForms.Enums.ShapeType.Rounded,
            Size = new Size(600, 600),
            TabStop = false,
            Zoom = 100,
        };
        game.lbl_letter = new Guna2HtmlLabel()
        {
            AutoSize = false,
            BackColor = Color.FromArgb(208, 208, 208),
            Font = new Font("Calibri", 144F),
            ForeColor = Color.Black,
            Location = new Point(380, 50),
            Size = new Size(360, 150),
            TabStop = false,
            TextAlignment = ContentAlignment.MiddleCenter,
        };
        game.btn_submit = new Guna2GradientButton()
        {
            AutoRoundedCorners = true,
            BorderRadius = 49,
            Enabled = false,
            FillColor = Color.FromArgb(247, 113, 163),
            FillColor2 = Color.FromArgb(197, 113, 247),
            Font = new Font("Bahnschrift SemiBold", 31.75F, FontStyle.Bold),
            ForeColor = Color.White,

```

```

        Location = new Point(460, 900),
        Size = new Size(440, 100),
        TabStop = false,
        Text = Languages.localisation["Submit"] [Main.userData.localisation],
    };
    game.btn_clear = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        BorderRadius = 49,
        Enabled = false,
        FillColor = Color.FromArgb(156, 156, 156),
        FillColor2 = Color.FromArgb(156, 156, 156),
        Font = new Font("Bahnschrift SemiBold", 31.75F, FontStyle.Bold),
        ForeColor = Color.White,
        Location = new Point(220, 900),
        Size = new Size(225, 100),
        TabStop = false,
        Text = Languages.localisation["Clear"] [Main.userData.localisation],
    };

    var input = new InputPanel(game.main.panel_main, (260, 250), (600, 600));

    game.main.panel_main.Controls.Add(panel_outline);
    game.main.panel_main.Controls.Add(game.lbl_letter);
    game.main.panel_main.Controls.Add(game.btn_submit);
    game.main.panel_main.Controls.Add(game.btn_clear);
    return input;
}

public static void ConfigRightGamePanel(Game game)
{
    game.lbl_rounds = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.FromArgb(35, 31, 32),
        Cursor = Cursors.Arrow,
        Font = new Font("Bahnschrift SemiBold", 48F, FontStyle.Bold),
        Location = new Point(40, 40),
        Size = new Size(420, 80),
        TabStop = false,
        Text = $"{Languages.localisation["Round"] [Main.userData.localisation]}
        ↳ {game.GetRounds()}",
        TextAlignment = ContentAlignment.MiddleCenter,
    };
    PictureBox seperator = new PictureBox()
    {
        Image = Resources.seperator,
        Location = new Point(30, 120),
        Size = new Size(440, 7),
        SizeMode = PictureBoxSizeMode.StretchImage,
        TabStop = false,
    };
    game.panel_stats = new Guna2Panel()
    {
        BorderRadius = 20,

```

```

        FillColor = Color.FromArgb(104, 104, 104),
        Location = new Point(40, 160),
        Size = new Size(420, 720),
    };

    game.main.panel_right.Controls.Add(game.lbl_rounds);
    game.main.panel_right.Controls.Add(seperator);
    game.main.panel_right.Controls.Add(game.panel_stats);
}
public static void ConfigRightGamePanelStats(Panel panel, List<char> letters,
↪ List<double> accuracies)
{
    panel.Controls.Clear();

    // only display last 10 rounds
    int start = 0;
    if (letters.Count > 10)
    {
        start = letters.Count - 10;
    }

    const int panelY = 50;
    const int padding = 20;

    int y = 20;
    for (int i = start; i < letters.Count; i++, y += panelY + padding)
    {
        panel.Controls.Add(configStatPanel(letters[i], accuracies[i]));
    }

    Guna2Panel configStatPanel(char letter, double accuracy)
    {
        (int r, int g, int b) = ((int)(255 * (1 - accuracy)), (int)(255 *
↪ (accuracy)), 0);

        Guna2Panel panel_stat = new Guna2Panel()
        {
            BackColor = Color.FromArgb(104, 104, 104),
            BorderRadius = 10,
            FillColor = Color.FromArgb(156, 156, 156),
            Location = new Point(padding, y),
            Size = new Size(420 - 2 * padding, panelY),
        };

        Label lbl_letter = new Label()
        {
            BackColor = Color.FromArgb(156, 156, 156),
            Font = new Font("Bahnschrift SemiBold", 27.75F, FontStyle.Bold),
            Location = new Point(10, 2),
            Size = new Size(43, 45),
            Text = letter.ToString(),
        };
        Panel bar_base = new Panel()
        {
            BackColor = Color.White,

```

```

        Location = new Point(60, 10),
        Size = new Size(230, 30),
    };
    Guna2TextBox lbl_accuracy = new Guna2TextBox()
    {
        BorderThickness = 0,
        Cursor = Cursors.Arrow,
        DefaultText = $"{Math.Round(accuracy * 100)}%",
        FillColor = Color.FromArgb(156, 156, 156),
        Font = new Font("Bahnschrift", 19.75F),
        ForeColor = Color.FromArgb(52, 52, 52),
        Location = new Point(290, 10),
        Size = new Size(80, 30),
        TabStop = false,
        TextAlign = HorizontalAlignment.Right,
    };
    Guna2Panel bar_fill = new Guna2Panel()
    {
        BackColor = ColorTranslator.FromHtml($"{{r}}, {{g}}, {{b}}"),
        Location = new Point(60, 10),
        Size = new Size((int)(accuracy * bar_base.Size.Width),
            → bar_base.Size.Height),
    };

    panel_stat.Controls.Add(bar_fill);
    panel_stat.Controls.Add(lbl_accuracy);
    panel_stat.Controls.Add(bar_base);
    panel_stat.Controls.Add(lbl_letter);

    return panel_stat;
}

}

public static void ConfigLeftGamePanel(Game game, List<friendData> users)
{
    game.main.panel_left.Controls.Clear();

    Panel panel_players = new Panel()
    {
        AutoScroll = true,
        BackColor = Color.FromArgb(46, 46, 46),
        Location = new Point(20, 90),
        Name = "panel_friendList",
        Size = new Size(260, 384),
    };
    PictureBox seperator = new PictureBox()
    {
        Image = Resources.seperator,
        InitialImage = null,
        Location = new Point(50, 60),
        Name = "seperator",
        Size = new Size(200, 5),
        SizeMode = PictureBoxSizeMode.StretchImage,
        TabIndex = 1,
    }

```

```

        TabStop = false,
    };
    Label lbl_players = new Label()
    {
        BackColor = Color.FromArgb(35, 31, 32),
        BorderStyle = BorderStyle.None,
        Font = new Font("Bahnschrift", 20.25F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.FromArgb(247, 113, 163),
        Location = new Point(0, 20),
        Name = "txt_friendsLabel",
        Size = new Size(300, 33),
        Text = "Players",
        TextAlign = (ContentAlignment)HorizontalAlignment.Center,
    };

    int y_offset = 10;

    for (int i = 0; i < users.Count; i++, y_offset += 35)
    {
        Label user = new Label()
        {
            BackColor = panel_players.BackColor,
            Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
                ↪ GraphicsUnit.Point, 0),
            Location = new Point(10, y_offset),
            Size = new Size(200, 30),
            Text = users[i].userID,
        };
        Label rank = new Label()
        {
            BackColor = panel_players.BackColor,
            BorderStyle = BorderStyle.None,
            Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
                ↪ GraphicsUnit.Point, 0),
            Location = new Point(210, y_offset),
            Name = "txt_onlineCount",
            Size = new Size(50, 20),
            Text = users[i].rank.ToString(),
            TextAlign = ContentAlignment.MiddleRight,
        };

        panel_players.Controls.Add(user);
        panel_players.Controls.Add(rank);
    }

    game.main.panel_left.Controls.Add(panel_players);
    game.main.panel_left.Controls.Add(seperator);
    game.main.panel_left.Controls.Add(lbl_players);
}

public static void ConfigLeftGamePanel(Game game, List<friendData> alive,
    ↪ List<friendData> dead)
{
    game.main.panel_left.Controls.Clear();

```

```

Panel panel_players = new Panel()
{
    AutoScroll = true,
    BackColor = Color.FromArgb(46, 46, 46),
    Location = new Point(20, 90),
    Name = "panel_friendList",
    Size = new Size(260, 384),
};
PictureBox seperator = new PictureBox()
{
    Image = Resources.seperator,
    InitialImage = null,
    Location = new Point(50, 60),
    Name = "seperator",
    Size = new Size(200, 5),
    SizeMode = PictureBoxSizeMode.StretchImage,
    TabStop = false,
};
Label lbl_players = new Label()
{
    BackColor = Color.FromArgb(35, 31, 32),
    BorderStyle = BorderStyle.None,
    Font = new Font("Bahnschrift", 20.25F, FontStyle.Bold,
        ↪ GraphicsUnit.Point, 0),
    ForeColor = Color.FromArgb(247, 113, 163),
    Location = new Point(0, 20),
    Name = "txt_friendsLabel",
    Size = new Size(300, 33),
    Text = "Players",
    TextAlign = (ContentAlignment)HorizontalAlignment.Center,
};

const int labelX = 200;
const int labelY = 30;
const int padding = 5;

int y_offset = 10;

Label lbl_alive = new Label()
{
    BackColor = panel_players.BackColor,
    BorderStyle = BorderStyle.None,
    Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
        ↪ GraphicsUnit.Point, 0),
    Location = new Point(10, y_offset),
    Size = new Size(200, labelY),
    TabStop = false,
    Text = "Alive"
};
panel_players.Controls.Add(lbl_alive);

Label aliveCount = new Label()
{
    BackColor = panel_players.BackColor,
    BorderStyle = BorderStyle.None,

```



```

        Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        Location = new Point(230, 10),
        Size = new Size(30, 20),
        TabStop = false,
        Text = alive.Count.ToString(),
        TextAlign = ContentAlignment.MiddleRight,
    };
    panel_players.Controls.Add(aliveCount);
    y_offset += 30;

    for (int i = 0; i < alive.Count; i++, y_offset += labelY + padding)
    {
        Label user = new Label()
        {
            BackColor = panel_players.BackColor,
            Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
                ↪ GraphicsUnit.Point, 0),
            Location = new Point(10, y_offset),
            Size = new Size(labelX, labelY),
            TabStop = false,
            Text = alive[i].userID,
            FlatStyle = FlatStyle.Flat,
        };
        panel_players.Controls.Add(user);
    }

    y_offset += 30;
    Label lbl_dead = new Label()
    {
        BackColor = panel_players.BackColor,
        BorderStyle = BorderStyle.None,
        Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        Location = new Point(10, y_offset),
        Size = new Size(200, labelY),
        TabStop = false,
        Text = Languages.localisation["Eliminated"][Main.userData.localisation],
    };
    panel_players.Controls.Add(lbl_dead);

    Label offlineCount = new Label()
    {
        BackColor = panel_players.BackColor,
        BorderStyle = BorderStyle.None,
        Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        Location = new Point(230, y_offset),
        Size = new Size(30, 20),
        TabStop = false,
        Text = dead.Count.ToString(),
        TextAlign = ContentAlignment.MiddleRight,
    };
    panel_players.Controls.Add(offlineCount);
    y_offset += 30;

```

```

for (int i = 0; i < dead.Count; i++, y_offset += labelY + padding)
{
    Label user = new Label()
    {
        BackColor = panel_players.BackColor,
        Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        Location = new Point(10, y_offset),
        Size = new Size(labelX, labelY),
        TabStop = false,
        Text = dead[i].userID,
        FlatStyle = FlatStyle.Flat,
    };
    panel_players.Controls.Add(user);
}

game.main.panel_left.Controls.Add(panel_players);
game.main.panel_left.Controls.Add(seperator);
game.main.panel_left.Controls.Add(lbl_players);
}

public static Guna2Panel ConfigResultsPanel(Game game, char c, gameStats stats)
{
    game.main.panel_main.Controls.Clear();

    string letter = c.ToString();
    bool correct = stats.correct.Last();
    double accuracy = stats.accuracy.Last();
    TimeSpan time = stats.time.Last();

    double accuracyDelta = accuracy - Main.userData.statistics[c].accuracy;
    string accuracyDeltaText = $"{(accuracyDelta < 0 ? "" :
        ↪ "+")}{Math.Round(accuracyDelta * 100, 2)}";
    Color accuracyColour = accuracyDelta < 0 ? Color.Red : Color.Lime;

    double timeDelta = time.TotalSeconds -
        ↪ Main.userData.statistics[c].time.TotalSeconds;
    string timeDeltaText = $"{(timeDelta < 0 ? "" : "+")}{Math.Round(timeDelta,
        ↪ 2)}";
    Color timeColour = timeDelta < 0 ? Color.Lime : Color.Red;

    Guna2GradientButton btn_continue = new Guna2GradientButton()
    {
        AutoRoundedCorners = true,
        BorderRadius = 49,
        FillColor = Color.FromArgb(247, 113, 163),
        FillColor2 = Color.FromArgb(197, 113, 247),
        Font = new Font("Bahnschrift SemiBold", 31.75F, FontStyle.Bold),
        ForeColor = Color.White,
        Location = new Point(220, 900),
        Size = new Size(680, 100),
        TabStop = false,
        Text = Languages.localisation["Continue"] [Main.userData.localisation],
    };
}

```

```

Guna2Panel panel_results = new Guna2Panel()
{
    BorderRadius = 30,
    FillColor = Color.FromArgb(62, 55, 55),
    Location = new Point(110, 200),
    Size = new Size(900, 500),
    TabStop = false,
};
Guna2TextBox txt_timeDiff = new Guna2TextBox()
{
    BackColor = Color.Transparent,
    BorderRadius = 20,
    BorderThickness = 0,
    Cursor = Cursors.Arrow,
    FillColor = Color.FromArgb(82, 65, 65),
    Font = new Font("Bahnschrift", 18F, FontStyle.Regular,
        ↪ GraphicsUnit.Point, 0),
    ForeColor = timeColour,
    Location = new Point(740, 270),
    Text = timeDeltaText,
    ReadOnly = true,
    Size = new Size(140, 40),
    TabStop = false,
    TextAlign = HorizontalAlignment.Center,
    TextOffset = new Point(0, -1),
};
Guna2HtmlLabel lbl_time = new Guna2HtmlLabel()
{
    AutoSize = false,
    BackColor = Color.Transparent,
    Font = new Font("Bahnschrift", 20.25F, FontStyle.Regular,
        ↪ GraphicsUnit.Point, 0),
    ForeColor = Color.White,
    Location = new Point(40, 270),
    Size = new Size(160, 40),
    TabStop = false,
    Text = Languages.localisation["Time"][Main.userData.localisation],
    TextAlignment = ContentAlignment.TopRight,
};
Guna2ProgressBar bar_time = new Guna2ProgressBar()
{
    BackColor = Color.Transparent,
    BorderRadius = 15,
    FillColor = Color.FromArgb(208, 208, 208),
    Font = new Font("Bahnschrift", 14.75F),
    ForeColor = Color.Black,
    Location = new Point(220, 275),
    ProgressColor = Color.White,
    ProgressColor2 = Color.FromArgb(208, 208, 208),
    RightToLeft = RightToLeft.No,
    ShowText = true,
    Size = new Size(500, 30),
    Style = ProgressBarStyle.Continuous,
    TabStop = false,
    Text = time.ToString(@"mm\:ss\:ff"),

```

```

        TextMode = Guna.UI2.WinForms.Enums.ProgressBarTextMode.Custom,
        TextOffset = new Point(0, 2),
        TextRenderingHint = System.Drawing.Text.TextRenderingHint.SystemDefault,
        UseTransparentBackground = true,
        Value = 100,
    };
    Guna2TextBox txt_accuracyDiff = new Guna2TextBox()
    {
        BackColor = Color.Transparent,
        BorderRadius = 20,
        BorderThickness = 0,
        Cursor = Cursors.Arrow,
        FillColor = Color.FromArgb(82, 65, 65),
        Font = new Font("Bahnschrift", 18F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = accuracyColour,
        Location = new Point(740, 220),
        Text = accuracyDeltaText,
        ReadOnly = true,
        Size = new Size(140, 40),
        TabStop = false,
        TextAlign = HorizontalAlignment.Center,
        TextOffset = new Point(0, -1),
    };
    Guna2HtmlLabel lbl_accuracy = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift", 20.25F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(40, 220),
        Size = new Size(160, 40),
        TabStop = false,
        Text = Languages.localisation["Accuracy"] [Main.userData.localisation],
        TextAlignment = ContentAlignment.TopRight,
    };
    Guna2ProgressBar bar_accuracy = new Guna2ProgressBar()
    {
        BackColor = Color.Transparent,
        BorderRadius = 15,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift", 14.75F),
        ForeColor = Color.Black,
        Location = new Point(220, 225),
        ProgressColor = Color.PaleGreen,
        ProgressColor2 = Color.SpringGreen,
        RightToLeft = RightToLeft.No,
        ShowText = true,
        Size = new Size(500, 30),
        Style = ProgressBarStyle.Continuous,
        TabStop = false,
        TextAlign = HorizontalAlignment.Right,
        TextOffset = new Point(0, 2),
        TextRenderingHint = System.Drawing.Text.TextRenderingHint.SystemDefault,
    };

```

```

        UseTransparentBackground = true,
        Value = (int)(accuracy * 100),
    };
    Guna2HtmlLabel lbl_letter = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift SemiBold", 96F, FontStyle.Bold),
        ForeColor = Color.Black,
        Location = new Point(60, 63),
        Size = new Size(120, 120),
        TabStop = false,
        Text = letter,
        TextAlignment = ContentAlignment.MiddleCenter,
    };
    Guna2Shapes shape_letterOutline = new Guna2Shapes()
    {
        BackColor = Color.Transparent,
        BorderColor = Color.FromArgb(247, 113, 163),
        BorderThickness = 5,
        FillColor = Color.FromArgb(208, 208, 208),
        Location = new Point(40, 40),
        PolygonSides = 4,
        PolygonSkip = 1,
        Rotate = 0F,
        Shape = Guna.UI2.WinForms.Enums.ShapeType.Rounded,
        Size = new Size(160, 160),
        TabStop = false,
        UseTransparentBackground = true,
        Zoom = 100,
    };
    Guna2PictureBox seperator = new Guna2PictureBox()
    {
        Image = Resources.seperator,
        ImageRotate = 0F,
        Location = new Point(50, 160),
        Margin = new Padding(0),
        Size = new Size(1020, 10),
        SizeMode = PictureBoxSizeMode.StretchImage,
        TabStop = false,
    };
    Guna2HtmlLabel lbl_results = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift", 72F, FontStyle.Bold, GraphicsUnit.Point,
            ↪ 0),
        ForeColor = Color.White,
        Location = new Point(50, 20),
        Size = new Size(1020, 120),
        TabStop = false,
        Text = Languages.localisation["Results"][Main.userData.localisation],
        TextAlignment = ContentAlignment.MiddleCenter,
    };
    Guna2HtmlLabel lbl_diff = new Guna2HtmlLabel()

```

```

{
    AutoSize = false,
    BackColor = Color.Transparent,
    Font = new Font("Bahnschrift", 14.25F),
    ForeColor = Color.White,
    Location = new Point(740, 170),
    Size = new Size(140, 40),
    TabStop = false,
    Text = Languages.localisation["Delta"][Main.userData.localisation],
    TextAlignment = ContentAlignment.BottomCenter,
};
Guna2HtmlLabel lbl_correct = new Guna2HtmlLabel()
{
    AutoSize = false,
    BackColor = Color.Transparent,
    Font = new Font("Bahnschrift", 40.25F),
    ForeColor = Color.White,
    Location = new Point(220, 40),
    Size = new Size(330, 70),
    TabStop = false,
    Text = correct ?
        ↪ Languages.localisation["Correct"][Main.userData.localisation] :
        ↪ Languages.localisation["Incorrect"][Main.userData.localisation],
};

panel_results.Controls.Add(lbl_correct);
panel_results.Controls.Add(lbl_diff);
panel_results.Controls.Add(txt_timeDiff);
panel_results.Controls.Add(lbl_time);
panel_results.Controls.Add(bar_time);
panel_results.Controls.Add(txt_accuracyDiff);
panel_results.Controls.Add(lbl_accuracy);
panel_results.Controls.Add(bar_accuracy);
panel_results.Controls.Add(lbl_letter);
panel_results.Controls.Add(shape_letterOutline);

btn_continue.Click += async (sender, e) =>
{
    if (Main.connection.State != HubConnectionState.Connected)
    {
        game.main.btn_home.PerformClick();
        return;
    }

    btn_continue.Enabled = false;

    await Main.connection.InvokeAsync("requestRound", game.GetGameID(),
        ↪ Main.userData.userID);
};

game.main.panel_main.Controls.Add(lbl_results);
game.main.panel_main.Controls.Add(seperator);
game.main.panel_main.Controls.Add(panel_results);
game.main.panel_main.Controls.Add(btn_continue);

```

```

        return panel_results;
    }

    public static void ConfigUserDataPanel(Main main, userData userData)
    {
        main.panel_right.Controls.Clear();

        Guna2PictureBox pic_account = new Guna2PictureBox()
        {
            Image = Resources.account,
            ImageRotate = 0F,
            Location = new Point(150, 50),
            Size = new Size(200, 200),
            SizeMode = PictureBoxSizeMode.Zoom,
            TabStop = false
        };
        Guna2GradientButton btn_profile = new Guna2GradientButton()
        {
            AutoRoundedCorners = true,
            BorderRadius = 24,
            FillColor = Color.FromArgb(247, 113, 163),
            FillColor2 = Color.FromArgb(197, 113, 247),
            Font = new Font("Bahnschrift SemiBold", 11.25F,
                ↪ System.Drawing.FontStyle.Bold),
            Location = new Point(140, 930),
            Size = new Size(220, 50),
            TabStop = false,
            Text = Languages.localisation["Profile"] [Main.userData.localisation],
        };
        Guna2GradientButton btn_edit = new Guna2GradientButton()
        {
            AutoRoundedCorners = true,
            BorderRadius = 24,
            FillColor = Color.FromArgb(247, 113, 163),
            FillColor2 = Color.FromArgb(197, 113, 247),
            Font = new Font("Bahnschrift SemiBold", 11.25F,
                ↪ System.Drawing.FontStyle.Bold),
            Location = new Point(140, 850),
            Size = new Size(220, 50),
            TabStop = false,
            Text = Languages.localisation["Edit"] [Main.userData.localisation],
        };
        Guna2TextBox lbl_userID = new Guna2TextBox()
        {
            BackColor = Color.FromArgb(44, 39, 41),
            BorderThickness = 0,
            Cursor = Cursors.Arrow,
            DefaultText = userData.userID,
            BorderColor = Color.FromArgb(208, 208, 208),
            FillColor = Color.FromArgb(44, 39, 41),
            Font = new Font("Bahnschrift", 27.75F, System.Drawing.FontStyle.Bold),
            ForeColor = Color.White,
            Location = new Point(40, 265),
            ReadOnly = true,
            Size = new Size(420, 70),
        }
    }

```

```

        TabStop = false,
        TextAlign = HorizontalAlignment.Center,
    };
    Guna2TextBox lbl_aboutMe = new Guna2TextBox()
    {
        BorderColor = Color.FromArgb(156, 156, 156),
        BorderRadius = 10,
        BorderThickness = 4,
        Cursor = Cursors.Arrow,
        DefaultText = userData.aboutMe,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift SemiBold", 15.75F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(40, 350),
        Margin = new Padding(5, 5, 5, 5),
        Multiline = true,
        ReadOnly = true,
        Size = new Size(420, 180),
        TabStop = false,
    };

    btn_profile.Click += (sender, e) =>
    {
        main.UpdatePageText("Profile");
        menu.profile = new Profile(main, userData);
    };
    btn_edit.Click += async (sender, e) =>
    {
        var update = new UpdateForm(Main.userData);
        if (update.DialogResult == DialogResult.OK)
        {
            if (Main.connection.State != HubConnectionState.Connected)
            {
                Main.LoadAlert(Languages.localisation["An error occurred. Please
                    ↪ wait and try again"][Main.userData.localisation]);
                return;
            }
            if (!await Main.connection.InvokeAsync<bool>("updateUserData",
                ↪ Main.userData.userID, update.GetAboutMe(),
                ↪ update.GetLocalisation()))
            {
                Main.LoadAlert(Languages.localisation["An error occurred. Please
                    ↪ wait and try again"][Main.userData.localisation]);
            }
        }
    };

    main.panel_right.Controls.Add(lbl_userID);
    main.panel_right.Controls.Add(lbl_aboutMe);
    main.panel_right.Controls.Add(btn_profile);
    main.panel_right.Controls.Add(btn_edit);
    main.panel_right.Controls.Add(pic_account);

    ConfigStatsPanel(main.panel_right, (40, 570), userData);

```



```

}
public static void ConfigStatsPanel(Panel panel, (int X, int Y) pos, userData
↪ user)
{
    (string rank, string total, string accuracy) =
    ↪ Main.CalculateStatsOverview(user);

    Guna2Panel createPanel((int X, int Y) p)
    {
        return new Guna2Panel()
        {
            BackColor = Color.Transparent,
            BorderRadius = 20,
            FillColor = Color.FromArgb(208, 208, 208),
            Location = new Point(p.X, p.Y),
            Size = new Size(380, 50),
            TabIndex = 0,
        };
    }

    Guna2Shapes createCircle((int X, int Y) p)
    {
        return new Guna2Shapes()
        {
            BackColor = Color.Transparent,
            BorderColor = Color.White,
            BorderThickness = 5,
            FillColor = Color.Transparent,
            Location = new Point(31, 80),
            PolygonSides = 3,
            PolygonSkip = 1,
            Rotate = 9F,
            Shape = Guna.UI2.WinForms.Enums.ShapeType.Ellipse,
            Size = new Size(70, 70),
            TabIndex = 1,
            UseTransparentBackground = true,
            Zoom = 80,
        };
    }

    Guna2PictureBox createPicture((int X, int Y) p, (int X, int Y) s, Bitmap
    ↪ image)
    {
        return new Guna2PictureBox()
        {
            BackColor = Color.Transparent,
            FillColor = Color.Transparent,
            Image = image,
            ImageRotate = 0F,
            Location = new Point(p.X, p.Y),
            Size = new Size(s.X, s.Y),
            SizeMode = PictureBoxSizeMode.Zoom,
            TabStop = false,
            UseTransparentBackground = true,
        };
    }

    Guna2TextBox createLabel((int X, int Y) p, (int X, int Y) s, string text)

```

```

{
    return new Guna2TextBox()
    {
        BorderThickness = 0,
        Cursor = Cursors.Arrow,
        DefaultText = text,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift SemiBold", 11.25F, FontStyle.Bold,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.FromArgb(52, 52, 52),
        Location = new Point(p.X, p.Y),
        ReadOnly = true,
        Size = new Size(s.X, s.Y),
        TabStop = false,
    };
}

Guna2TextBox createTxt(string text)
{
    return new Guna2TextBox()
    {
        BorderThickness = 0,
        Cursor = Cursors.Arrow,
        DefaultText = text,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift", 14.25F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.FromArgb(104, 104, 104),
        Location = new Point(280, 10),
        ReadOnly = true,
        RightToLeft = RightToLeft.Yes,
        Size = new Size(80, 30),
        TabStop = false,
        TextOffset = new Point(0, -1),
    };
}

Guna2Separator createSeparator((int X, int Y) p, (int X, int Y) s)
{
    return new Guna2Separator()
    {
        FillColor = Color.FromArgb(247, 113, 163),
        FillThickness = 2,
        Location = new Point(p.X, p.Y),
        Size = new Size(s.X, s.Y),
        TabStop = false,
    };
}

Guna2Panel panel_statsOverview = new Guna2Panel()
{
    BorderRadius = 20,
    BorderThickness = 5,
    BorderColor = Color.White,
    FillColor = Color.FromArgb(156, 156, 156),
    Location = new Point(pos.X, pos.Y),
    Size = new Size(420, 230),
}

```

```

        TabIndex = 0,
    };
    Guna2Shapes line_stats = new Guna2Shapes()
    {
        BorderThickness = 0,
        FillColor = Color.White,
        LineThickness = 1,
        Location = new Point(63, 1),
        PolygonSkip = 1,
        Rotate = 0F,
        Shape = Guna.UI2.WinForms.Enums.ShapeType.Rectangle,
        Size = new Size(5, 228),
        TabIndex = 2,
        Zoom = 100,
    };

    Guna2Panel panel_rank = createPanel((20, 20));
    Guna2TextBox lbl_rank = createLabel((90, 10), (48, 30), "Elo");
    Guna2Shapes circle_rank = createCircle((31, 10));
    Guna2PictureBox pic_rank = createPicture((30, 10), (30, 30), Resources.rank);
    Guna2TextBox txt_rank = createTxt(rank);
    Guna2Separator seperator_rank = createSeperator((144, 20), (150, 10));

    Guna2Panel panel_accuracy = createPanel((20, 160));
    Guna2TextBox lbl_accuracy = createLabel((90, 10), (93, 30),
        ↪ Languages.localisation["Accuracy"] [Main.userData.localisation]);
    Guna2TextBox txt_accuracy = createTxt($"{accuracy}%");
    Guna2Shapes circle_accuracy = createCircle((31, 150));
    Guna2PictureBox pic_accuracy = createPicture((27, 7), (36, 36),
        ↪ Resources.accuracy);
    Guna2Separator seperator_accuracy = createSeperator((189, 20), (86, 10));

    Guna2Panel panel_total = createPanel((20, 90));
    Guna2TextBox lbl_total = createLabel((90, 10), (62, 30),
        ↪ Languages.localisation["Total"] [Main.userData.localisation]);
    Guna2TextBox txt_total = createTxt(total);
    Guna2Shapes circle_total = createCircle((31, 80));
    Guna2PictureBox pic_total = createPicture((30, 10), (30, 30),
        ↪ Resources.total);
    Guna2Separator seperator_total = createSeperator((158, 20), (136, 10));

    panel_rank.Controls.Add(seperator_rank);
    panel_rank.Controls.Add(txt_rank);
    panel_rank.Controls.Add(lbl_rank);
    panel_rank.Controls.Add(pic_rank);

    panel_total.Controls.Add(seperator_total);
    panel_total.Controls.Add(txt_total);
    panel_total.Controls.Add(lbl_total);
    panel_total.Controls.Add(pic_total);

    panel_accuracy.Controls.Add(seperator_accuracy);
    panel_accuracy.Controls.Add(txt_accuracy);
    panel_accuracy.Controls.Add(lbl_accuracy);
    panel_accuracy.Controls.Add(pic_accuracy);

```

```

        panel_statsOverview.Controls.Add(circle_accuracy);
        panel_statsOverview.Controls.Add(panel_accuracy);
        panel_statsOverview.Controls.Add(circle_rank);
        panel_statsOverview.Controls.Add(panel_rank);
        panel_statsOverview.Controls.Add(circle_total);
        panel_statsOverview.Controls.Add(panel_total);
        panel_statsOverview.Controls.Add(line_stats);

        panel.Controls.Add(panel_statsOverview);
    }

    public static void ConfigLobbyPanel(Game game, List<friendData> users)
    {
        game.main.panel_main.Controls.Clear();

        Panel panel_users = new Panel()
        {
            BackColor = game.main.panel_main.BackColor,
            BorderStyle = BorderStyle.FixedSingle,
            Location = new Point(50, 150),
            Size = new Size(game.main.panel_main.Width - 100, 500)
        };
        Guna2TextBox lbl_remainingPlayers = new Guna2TextBox()
        {
            BorderThickness = 0,
            BorderRadius = 10,
            Cursor = Cursors.Arrow,
            FillColor = Color.FromArgb(156, 156, 156),
            Font = new Font("Bahnschrift SemiBold", 32F, FontStyle.Bold),
            Location = new Point(220, 700),
            Size = new Size(680, 100),
            TabStop = false,
            ForeColor = Color.FromArgb(52, 52, 52),
            Text = $"{users.Count}/{game.GetMaxPlayers()}"
            ↪ {Languages.localisation["players"] [Main.userData.localisation]},
            TextAlign = HorizontalAlignment.Center,
        };

        int X = 10;
        int Y = 10;
        const int userX = 400;
        const int userY = 50;
        const int padding = 5;

        foreach (friendData user in users)
        {
            Panel panel_user = new Panel()
            {
                Name = user.userID,
                BackColor = panel_users.BackColor,
                BorderStyle = BorderStyle.FixedSingle,
                Location = new Point(X, Y),
                Size = new Size(userX, userY),
            };

```

```

Label userID = new Label()
{
    BackColor = game.main.panel_main.BackColor,
    Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
        ↳ GraphicsUnit.Point, 0),
    Location = new Point(padding, padding),
    Name = user.userID,
    Size = new Size(userX - userY - 2 * padding, userY - 2 * padding),
    TabStop = false,
    Text = user.userID,
    BorderStyle = BorderStyle.FixedSingle,
    TextAlign = ContentAlignment.MiddleLeft,
};
Label rank = new Label()
{
    BackColor = game.main.panel_main.BackColor,
    Font = new Font("Bahnschrift SemiBold", 12.75F, FontStyle.Bold,
        ↳ GraphicsUnit.Point, 0),
    Location = new Point(userID.Width + 2 * padding, padding),
    Name = "rank",
    Size = new Size(userY - padding, userY - 2 * padding),
    TabStop = false,
    Text = user.rank.ToString(),
    TextAlign = ContentAlignment.MiddleCenter,
    BorderStyle = BorderStyle.FixedSingle,
};

panel_user.Controls.Add(userID);
panel_user.Controls.Add(rank);

panel_users.Controls.Add(panel_user);

Y = Y + userY + 10;
}

game.main.panel_main.Controls.Add(panel_users);
game.main.panel_main.Controls.Add(lbl_remainingPlayers);
}

public static async Task Countdown(Panel panel, int num, string text)
{
    Guna2HtmlLabel lbl_countdown = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.FromArgb(35, 31, 32),
        Font = new Font("Bahnschrift SemiBold", 64F, FontStyle.Bold),
        ForeColor = Color.White,
        Location = new Point(20, 700),
        Margin = new Padding(15, 15, 15, 15),
        Size = new Size(260, 100),
        TabStop = false,
        TextAlign = ContentAlignment.MiddleCenter,
    };
    Guna2HtmlLabel lbl_status = new Guna2HtmlLabel()

```

```

{
    AutoSize = false,
    BackColor = Color.FromArgb(35, 31, 32),
    Font = new Font("Bahnschrift SemiBold", 32F, FontStyle.Bold),
    ForeColor = Color.White,
    Location = new Point(20, 650),
    Margin = new Padding(15, 15, 15, 15),
    Size = new Size(260, 70),
    TabStop = false,
    TextAlignment = ContentAlignment.TopCenter,
};

panel.Controls.Add(lbl_countdown);
panel.Controls.Add(lbl_status);

lbl_status.Text = text;
for (int i = num; i > 0; i--)
{
    lbl_countdown.Invoke(new Action(() => lbl_countdown.Text =
        ↪ i.ToString()));
    await Task.Delay(1000);
}
lbl_countdown.ResetText();
lbl_status.ResetText();
}

public static void ConfigVersusResults(Panel panel_results, string winner)
{
    Guna2HtmlLabel lbl_winner = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift", 20.25F, FontStyle.Regular,
            ↪ GraphicsUnit.Point, 0),
        ForeColor = Color.White,
        Location = new Point(40, 360),
        Size = new Size(160, 40),
        TabStop = false,
        Text = Languages.localisation["Winner"][Main.userData.localisation],
        TextAlignment = ContentAlignment.TopRight,
    };
    Guna2ProgressBar bar_winner = new Guna2ProgressBar()
    {
        BackColor = Color.Transparent,
        BorderRadius = 15,
        FillColor = Color.FromArgb(208, 208, 208),
        Font = new Font("Bahnschrift", 14.75F),
        ForeColor = Color.Black,
        Location = new Point(220, 365),
        ProgressColor = Color.White,
        ProgressColor2 = Color.FromArgb(208, 208, 208),
        RightToLeft = RightToLeft.No,
        ShowText = true,
        Size = new Size(200, 30),
        Style = ProgressBarStyle.Continuous,
    }
}

```

```

        TabStop = false,
        Text = winner,
        TextMode = Guna.UI2.WinForms.Enums.ProgressBarTextMode.Custom,
        TextOffset = new Point(0, 2),
        TextRenderingHint = System.Drawing.Text.TextRenderingHint.SystemDefault,
        UseTransparentBackground = true,
        Value = 100,
    };

    panel_results.Controls.Add(lbl_winner);
    panel_results.Controls.Add(bar_winner);
}

public static void ConfigEliminationResults(Panel panel_results, bool eliminated,
    ↪ bool correct)
{
    Guna2HtmlLabel lbl_eliminated = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift", 30.25F),
        ForeColor = Color.LightCoral,
        Location = new Point(550, 40),
        Size = new Size(330, 70),
        TabStop = false,
        Text = eliminated ?
            ↪ Languages.localisation["Eliminated"] [Main.userData.localisation] :
            ↪ Languages.localisation["Passed"] [Main.userData.localisation],
        TextAlignment = ContentAlignment.TopRight,
    };
    Guna2HtmlLabel lbl_eliminateReason = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.Transparent,
        Font = new Font("Bahnschrift", 16.25F),
        ForeColor = Color.MistyRose,
        Location = new Point(550, 90),
        Size = new Size(330, 60),
        TabStop = false,
        Text = Languages.localisation[correct ? "by longest time elapsed" : "by
            ↪ incorrect submission"] [Main.userData.localisation],
        TextAlignment = ContentAlignment.TopRight,
    };

    panel_results.Controls.Add(lbl_eliminated);
    if (eliminated)
    {
        panel_results.Controls.Add(lbl_eliminateReason);
    }
    lbl_eliminateReason.BringToFront();
}

public static void ConfigEndGamePanel(Game game, List<char> letters, gameStats
    ↪ statistics)
{
    game.main.panel_main.Controls.Clear();

```

```

const int X = 10;
int y = 10;

const int panelX = 900;
const int panelY = 50;
const int padding = 5;
const int defaultSize = panelY - 2 * padding;

Guna2Panel panel_stats = new Guna2Panel()
{
    AutoScroll = true,
    BorderRadius = 0,
    FillColor = Color.White,
    Location = new Point(40, 175),
    Size = new Size(1040, 500),
};

for (int i = 0; i < statistics.accuracy.Count; i++)
{
    string letter = letters[i].ToString();
    bool correct = statistics.correct[i];
    double accuracy = statistics.accuracy[i];
    TimeSpan time = statistics.time[i];

    (int r, int g, int b) colour = ((int)(255 * (1 - accuracy)), (int)(255 *
    ↪ (accuracy)), 0);

    Label lbl_letter = new Label()
    {
        Location = new Point(0 + padding, 0 + padding),
        Size = new Size(defaultSize, defaultSize),
        Text = letter,
        TextAlign = ContentAlignment.MiddleCenter,
        BorderStyle = BorderStyle.FixedSingle,
    };
    Label lbl_correct = new Label()
    {
        Location = new Point(panelX - 2 * defaultSize - padding, padding),
        Size = new Size(2 * defaultSize, defaultSize),
        Text = correct.ToString(),
        TextAlign = ContentAlignment.MiddleCenter,
        BorderStyle = BorderStyle.FixedSingle,
    };
    Label lbl_time = new Label()
    {
        Location = new Point(lbl_correct.Location.X - 2 * defaultSize -
        ↪ padding, padding),
        Size = new Size(2 * defaultSize, defaultSize),
        Text = $"{time.TotalSeconds}",
        TextAlign = ContentAlignment.MiddleCenter,
        BorderStyle = BorderStyle.FixedSingle,
    };
    Label lbl_percentage = new Label()
    {

```



```

        Location = new Point(lbl_time.Location.X - defaultSize - padding,
            ↳ padding),
        Size = new Size(defaultSize, defaultSize),
        Text = $"{100 * accuracy}%",
        TextAlign = ContentAlignment.MiddleCenter,
        BorderStyle = BorderStyle.FixedSingle,
    };
    Panel bar_base = new Panel()
    {
        BackColor = SystemColors.ControlLight,
        Location = new Point(lbl_letter.Location.X + defaultSize + padding, 2
            ↳ * padding),
        Size = new Size(lbl_percentage.Location.X - padding -
            ↳ (lbl_letter.Location.X + defaultSize + padding), defaultSize - 2
            ↳ * padding),
        BorderStyle = BorderStyle.FixedSingle,
    };
    Panel bar_fill = new Panel()
    {
        BackColor = ColorTranslator.FromHtml($"{colour.r}, {colour.g},
            ↳ {colour.b}"),
        Location = new Point(bar_base.Location.X, bar_base.Location.Y),
        Size = new Size(((int)(accuracy * bar_base.Size.Width)),
            ↳ bar_base.Size.Height),
        BorderStyle = BorderStyle.FixedSingle,
    };

    Panel panel_char = new Panel()
    {
        BackColor = SystemColors.ControlDark,
        Location = new Point(X, y),
        Size = new Size(panelX, panelY),
        BorderStyle = BorderStyle.FixedSingle,
    };

    panel_char.Controls.Add(bar_fill);
    panel_char.Controls.Add(bar_base);
    panel_char.Controls.Add(lbl_percentage);
    panel_char.Controls.Add(lbl_time);
    panel_char.Controls.Add(lbl_correct);
    panel_char.Controls.Add(lbl_letter);

    bar_fill.BringToFront();

    panel_stats.Controls.Add(panel_char);

    y += panelY + 2 * padding;
}

panel_stats.VerticalScroll.Enabled = true;
game.main.panel_main.Controls.Add(panel_stats);
}

public static void ConfigVersusEndgame(Panel panel, int change)
{

```

```

Guna2HtmlLabel txt_rank = new Guna2HtmlLabel()
{
    AutoSize = false,
    BackColor = Color.White,
    Font = new Font("Bahnschrift", 16.25F),
    ForeColor = Color.Black,
    Location = new Point(10, 10),
    Size = new Size(330, 60),
    TabStop = false,
    Text = $"{Main.userData.rank} | {(change < 0 ? "" : "+")}{change}",
    TextAlignment = ContentAlignment.MiddleLeft,
};

panel.Controls.Add(txt_rank);
}
public static void ConfigEliminationEndgame(Panel panel, bool win)
{
    Guna2HtmlLabel txt_winner = new Guna2HtmlLabel()
    {
        AutoSize = false,
        BackColor = Color.White,
        Font = new Font("Bahnschrift", 16.25F),
        ForeColor = Color.Black,
        Location = new Point(100, 900),
        Size = new Size(330, 60),
        TabStop = false,
        Text = $"You {(win ? "won" : "did not win")}",
        TextAlignment = ContentAlignment.MiddleLeft,
    };

    panel.Controls.Add(txt_winner);
}
}
}

```

menus/games/Accuracy.cs

```

namespace client_app.menus.games
{
    public class Accuracy : Game, IPlayable
    {
        public Accuracy(Main main) : base(main, Games.Accuracy, 1)
        {
        }
    }
}

```

menus/games/Elimination.cs

```

using System.Collections.Generic;
using System.Linq;

namespace client_app.menus.games
{

```

```

public class Elimination : Game, IPlayable
{
    private bool eliminated;
    private List<string> aliveUsers;

    public Elimination(Main main) : base(main, Games.Elimination, 12)
    {
        eliminated = false;
        aliveUsers = new List<string>();
    }

    public override void UpdateUsers(List<friendData> users)
    {
        if (HasStarted())
        {
            this.users = users;

            List<friendData> alive = new List<friendData>();
            List<friendData> dead = new List<friendData>();
            foreach (var user in this.users)
            {
                if (aliveUsers.Contains(user.userID))
                {
                    alive.Add(user);
                }
                else
                {
                    dead.Add(user);
                }
            }

            UXelements.ConfigLeftGamePanel(this, alive, dead);
            main.panel_left.Controls.Add(main.btn_home);
        }
        else
        {
            base.UpdateUsers(users);
        }
    }

    public override void AwaitStart()
    {
        foreach (var user in users)
        {
            aliveUsers.Add(user.userID);
        }
        UXelements.ConfigLeftGamePanel(this, users, new List<friendData>());
        base.AwaitStart();
    }

    public void EliminationResults(List<string> aliveUsers)
    {
        this.aliveUsers = aliveUsers;
        if (!aliveUsers.Contains(Main.userData.userID))
        {

```

```

        eliminated = true;
    }

    UpdateUsers(users);
    UXelements.ConfigEliminationResults(panel_results, eliminated,
    ↪ gameStats.correct.Last());
}

public override void EndGame()
{
    base.EndGame();

    bool winner = aliveUsers.Contains(Main.userData.userID);
    UXelements.ConfigEliminationEndgame(main.panel_main, winner);
}
}
}

```

menus/games/Game.cs

```

using client_app.components;
using Guna.UI2.WinForms;
using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Collections.Generic;
using System.IO;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace client_app.menus.games
{
    public struct gameStats
    {
        public gameStats(object _)
        {
            correct = new List<bool>();
            accuracy = new List<double>();
            time = new List<TimeSpan>();
        }

        public List<bool> correct;
        public List<double> accuracy;
        public List<TimeSpan> time;

        public void UpdateStats(bool correct, double accuracy, TimeSpan time)
        {
            this.correct.Add(correct);
            this.accuracy.Add(accuracy);
            this.time.Add(time);
        }
    }

    public enum Games
    {
        Accuracy,
        Versus,
    }
}

```

```

        Elimination,
    }

    public interface IPlayable
    {
        void QueueGame();
        Task JoinGameLobby();
        void AwaitStart();
        void StartGame();
        void AwaitRound();
        void SubmissionPhase(char letter);
        void EvaluationPhase(bool correct, double accuracy, TimeSpan time);
        void EndGame();
        void UpdateUsers(List<friendData> users);
        Games GetGameType();
        string GetGameID();
    }

    public abstract class Game : Form
    {
        public readonly Main main;

        private string gameID;
        private readonly Games type;
        protected List<friendData> users;

        private bool started;
        private int rounds;
        private readonly int maxPlayers;

        protected gameStats gameStats;
        protected readonly List<char> letters;

        protected Guna2Panel panel_results;
        public Guna2Panel panel_stats;
        public Guna2HtmlLabel lbl_letter;
        public Guna2GradientButton btn_submit;
        public Guna2GradientButton btn_clear;
        public Guna2HtmlLabel lbl_rounds;

        private InputPanel drawingPanel;

        public int GetMaxPlayers() => maxPlayers;
        public string GetGameID() => gameID;
        public Games GetGameType() => type;
        public bool HasStarted() => started;
        public int GetRounds() => rounds;

        public Game(Main main, Games type, int maxPlayers)
        {
            this.main = main;
            this.type = type;
            gameStats = new gameStats(null);
            started = false;
            rounds = 0;
        }
    }

```

```

        letters = new List<char>();
        this.maxPlayers = maxPlayers;
    }
    public virtual void UpdateUsers(List<friendData> users)
    {
        this.users = users;

        if (!started)
        {
            UXelements.ConfigLobbyPanel(this, users);
        }

        UXelements.ConfigLeftGamePanel(this, users);
        main.panel_left.Controls.Add(main.btn_home);
    }
    public async void QueueGame()
    {
        if (Main.connection.State != HubConnectionState.Connected)
        {
            main.btn_home.PerformClick();
            return;
        }

        gameID = await Main.connection.InvokeAsync<string>("queueGame", type,
            ↪ Main.userData.userID);

        if (string.IsNullOrEmpty(gameID))
        {
            Main.LoadAlert(Languages.localisation["An error occured. Please wait and
            ↪ try again"] [Main.userData.localisation]);
            main.btn_home.PerformClick();
        }
        else
        {
            await JoinGameLobby();
        }
    }
    public async Task JoinGameLobby()
    {
        if (Main.connection.State != HubConnectionState.Connected)
        {
            main.btn_home.PerformClick();
        }

        UXelements.ResetLayout(main);
        if (!await Main.connection.InvokeAsync<bool>("userJoined", gameID))
        {
            Main.LoadAlert(Languages.localisation["An error occured. Please wait and
            ↪ try again"] [Main.userData.localisation]);
            main.btn_home.PerformClick();
        }
    }
    public async virtual void AwaitStart()
    {

```

```

        started = true;
        await UXelements.Countdown(main.panel_left, 5,
            ↪ Languages.localisation["Starting in"][Main.userData.localisation]);
    }
    public void StartGame()
    {
        UXelements.ConfigRightGamePanel(this);
    }
    public async void AwaitRound()
    {
        drawingPanel = UXelements.ConfigGamePanel(this);

        btn_clear.Click += (sender, e) => drawingPanel.ClearPanel();
        btn_submit.Click += async (sender, e) =>
        {
            btn_submit.Enabled = false;
            btn_clear.Enabled = false;
            drawingPanel.DisablePanel();

            var submission = drawingPanel.GetDrawing();

            byte[] data;
            using (var ms = new MemoryStream())
            {
                submission.Save(ms, System.Drawing.Imaging.ImageFormat.Png);
                data = ms.ToArray();
            }

            if (Main.connection.State != HubConnectionState.Connected)
            {
                main.btn_home.PerformClick();
            }

            await Main.connection.InvokeAsync("receiveSubmission", gameId,
                ↪ Main.userData.userID, data);

            drawingPanel.ClearPanel();
        };

        UXelements.ConfigLeftGamePanel(this, users);
        main.panel_left.Controls.Add(main.btn_home);
        await UXelements.Countdown(main.panel_left, 3, Languages.localisation["Next
            ↪ letter in"][Main.userData.localisation]);
    }
    public void SubmissionPhase(char letter)
    {
        rounds++;
        lbl_rounds.Text =
            ↪ $"{Languages.localisation["Round"][Main.userData.localisation]}
            ↪ {rounds}";

        letters.Add(letter);
        lbl_letter.Text = letter.ToString();

        drawingPanel.EnablePanel();
    }

```

```

        btn_submit.Enabled = true;
        btn_clear.Enabled = true;
    }
    public void EvaluationPhase(bool correct, double accuracy, TimeSpan time)
    {
        gameStats.UpdateStats(correct, accuracy, time);
        panel_results = UXelements.ConfigResultsPanel(this, letters[letters.Count -
            ↪ 1], gameStats);

        UXelements.ConfigRightGamePanelStats(panel_stats, letters,
            ↪ gameStats.accuracy);
    }
    public virtual void EndGame()
    {
        UXelements.ConfigEndGamePanel(this, letters, gameStats);
    }
}
}

```

menus/games/Versus.cs

```

namespace client_app.menus.games
{
    public class Versus : Game, IPlayable
    {
        private int rankDelta;
        public Versus(Main main) : base(main, Games.Versus, 2)
        {
            rankDelta = 0;
        }

        public void VersusResults(string winner)
        {
            UXelements.ConfigVersusResults(panel_results, winner);
        }

        public void UpdateRank(int currentRank)
        {
            int previousRank = Main.userData.rank;
            rankDelta = currentRank - previousRank;

            Main.userData.rank = currentRank;
            UXelements.ConfigVersusEndgame(main.panel_main, rankDelta);
        }
    }
}

```

hub-connection.cs

```

using client_app.components;
using client_app.menus.games;
using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Collections.Generic;
using System.Threading.Tasks;

```



```

namespace client_app
{
    public static class hub_connection
    {
        private static Login login;
        private static Main main;

        public static void InjectForm(Login l, Main m)
        {
            if (m != null) main = m;
            if (l != null) login = l;
        }
        public static HubConnection configConnection(string address)
        {
            HubConnection connection = new HubConnectionBuilder()
                .WithUrl(address)
                .Build();
            return connection;
        }
        public async static Task<HubConnection> startConnection(HubConnection connection)
        {
            int retries = -1;
            while (connection.State == HubConnectionState.Disconnected)
            {
                if (retries++ > 3)
                {
                    login?.Invoke(new Action(() =>
                    {
                        login.loader_connecting.Stop();
                        login.lbl_connection.Text = "Disconnected";
                    }));
                    break;
                }

                try
                {
                    await connection.StartAsync();
                    login?.lbl_information.ResetText();
                }
                catch
                {
                    login?.Invoke(new Action(() => login.lbl_information.Text =
                        ↪ Languages.localisation["An error occurred while connecting to the
                        ↪ server"] [Languages.languageCodes[login.GetLanguageIndex()]]));
                }
            }

            return connection;
        }

        public static HubConnection addLoginHandles(HubConnection connection)
        {
            connection.On<int, string>("loginSuccess", (success, userID) =>
            {

```

```

        login.lbl_information.Invoke(new Action(() =>
            ↪ login.HandleLoginSuccess(success, userID)));
    });
    connection.On<int, string>("accountSuccess", (success, userID) =>
    {
        login.lbl_information.Invoke(new Action(() =>
            ↪ login.HandleAccountCreationSuccess(success, userID)));
    });

    return connection;
}

public static HubConnection addHandles(HubConnection connection)
{
    connection.On<userData>("receiveUserData", (userData) =>
    {
        main.Invoke(new Action(() => main.ClientConnected(userData)));
    });
    connection.On<string, string, string>("updateUserData", (userID, aboutMe,
        ↪ localisation) =>
    {
        main.Invoke(new Action(() => main.UpdateUserData(userID, aboutMe,
            ↪ localisation)));
    });
    connection.On<List<string>>("receiveInvites", (invites) =>
    {
        main.Invoke(new Action(() => main.HandleInvites(invites)));
    });
    connection.On<friendData>("updateFriendData", (data) =>
    {
        main.Invoke(new Action(() => main.UpdateFriendData(data)));
    });
    connection.On<string>("removeFriend", (friendID) =>
    {
        main.Invoke(new Action(() => main.RemoveFriend(friendID)));
    });
    connection.On<string, bool>("updateOnline", (user, online) =>
    {
        main.Invoke(new Action(() => main.UpdateOnline(user, online)));
    });

    connection.On<char, statistics>("updateStatistics", (letter, statistics) =>
    {
        Main.userData.statistics[letter] = statistics;
    });

    connection.On<List<friendData>>("updateUsers", (users) =>
    {
        main.panel_main.Invoke(new Action(() => menu.game.UpdateUsers(users)));
    });

    connection.On("awaitStart", () =>
    {
        main.Invoke(new Action(() => menu.game.AwaitStart()));
    });
}

```

```

connection.On("startGame", () =>
{
    main.Invoke(new Action(() => menu.game.StartGame()));
});

connection.On("awaitRound", () =>
{
    main.Invoke(new Action(() => menu.game.AwaitRound()));
});
connection.On<char>("receiveLetter", (letter) =>
{
    main.Invoke(new Action(() => menu.game.SubmissionPhase(letter)));
});

connection.On<bool, double, TimeSpan>("receiveResults", (correct, accuracy,
↵ time) =>
{
    main.Invoke(new Action(() => menu.game.EvaluationPhase(correct, accuracy,
↵ time)));
});
connection.On<string>("receiveVersusResult", (winner) =>
{
    if (menu.game.GetGameType() == Games.Versus)
    {
        main.Invoke(new Action(() =>
        {
            Versus game = (Versus)menu.game;
            game.VersusResults(winner);
        }));
    }
    else
    {
        Main.LoadAlert("Unexpected game type. Returning to main menu.");
        main.btn_home.PerformClick();
    }
});
connection.On<List<string>>("receiveKnockoutResult", (aliveUsers) =>
{
    if (menu.game.GetGameType() == Games.Elimination)
    {
        main.Invoke(new Action(() =>
        {
            Elimination game = (Elimination)menu.game;
            game.EliminationResults(aliveUsers);
        }));
    }
    else
    {
        Main.LoadAlert("Unexpected game type. Returning to main menu.");
        main.btn_home.PerformClick();
    }
});

connection.On("endGame", () =>
{

```

```

        main.Invoke(new Action(() => menu.game.EndGame()));
    });
    connection.On<int>("updateRank", (rank) =>
    {
        if (menu.game.GetGameType() == Games.Versus)
        {
            main.Invoke(new Action(() =>
            {
                Versus game = (Versus)menu.game;
                game.UpdateRank(rank);
            }));
        }
        else
        {
            Main.LoadAlert("Unexpected game type. Returning to main menu.");
            main.btn_home.PerformClick();
        }
    });

    connection.On<string>("alert", (message) =>
    {
        main.Invoke(new Action(() => Main.LoadAlert(message)));
    });

    return connection;
}
}
}

```

localisation.cs

```

using System.Collections.Generic;

namespace client_app
{
    public static class Languages
    {
        public static readonly List<string> supportedLanguages = new List<string>()
        {
            "English",
            "Française",
            "Español",
            "Português",
            "Deutsch",
        };

        public static readonly List<string> languageCodes = new List<string>()
        {
            "en",
            "fr",
            "es",
            "pt",
            "de",
        };

        public static readonly Dictionary<string, Dictionary<string, string>>
        ↪ localisation = new Dictionary<string, Dictionary<string, string>>();
    }
}

```

```

public static void LoadWords()
{
    localisation.Add("Friends", new Dictionary<string, string>()
    {
        {"en", "Friends" },
        {"fr", "Amis" },
        {"es", "Amigos" },
        {"pt", "Amigos" },
        {"de", "Freunde" },
    });
    // ... (additional localisation entries have been omitted for brevity)
}
}
}

```

login.cs

```

using Microsoft.AspNetCore.SignalR.Client;
using System;
using System.Threading.Tasks;
using System.Drawing;
using System.Windows.Forms;
using client_app.Properties;

namespace client_app
{
    public partial class Login : Form
    {
        private HubConnection connection;
        private int languageIndex = 0;

        public int GetLanguageIndex() => languageIndex;

        const int VALID = 1;

        const int INCORRECT_PASSWORD = 0;
        const int USERID_TAKEN = 0;

        const int USER_DOES_NOT_EXIST = 2;
        const int USER_LOGGED_IN_ON_OTHER_DEVICE = 3;

        const int ERROR_OCCURED = -1;

        public Login()
        {
            InitializeComponent();

            txt_userID.TextChanged += (sender, e) => lbl_information.ResetText();
            txt_password.TextChanged += (sender, e) => lbl_information.ResetText();
            txt_passwordconfirm.TextChanged += (sender, e) =>
                ↪ lbl_information.ResetText();

            btn_language.Text = Languages.supportedLanguages[languageIndex];
            hub_connection.InjectForm(this, null);
        }
    }
}

```

```

        InitialiseConnection();
    }
    private async void InitialiseConnection()
    {
        connection = hub_connection.configConnection($"{Main.address}/accounts");
        connection = hub_connection.addLoginHandles(connection);
        connection = await hub_connection.startConnection(connection);

        connection.Closed += ConnectionClosed;
        if (connection.State == HubConnectionState.Disconnected) return;

        this.lbl_connection.Text = "Connected";
        this.loader_connecting.Stop();
    }

    private async Task ConnectionClosed(Exception arg)
    {
        this.Invoke(new Action(() =>
        {
            this.lbl_connection.Text = "Reconnecting";
            this.loader_connecting.Start();
        }));
        connection = await hub_connection.startConnection(connection);
        this.Invoke(new Action(() =>
        {
            this.lbl_connection.Text = "Connected";
            this.loader_connecting.Stop();
        }));
    }

    private void LoadMainApplication(string userID)
    {
        Hide();
        menu.main = new Main(userID, Languages.languageCodes[languageIndex]);
        menu.main.ShowDialog();
        menu.main.Dispose();
        Show();
        hub_connection.InjectForm(this, null);
    }

    public void HandleLoginSuccess(int success, string userID)
    {
        switch (success)
        {
            case INCORRECT_PASSWORD:
                lbl_information.Text = "Incorrect Password";
                break;
            case VALID:
                LoadMainApplication(userID);
                break;
            case USER_DOES_NOT_EXIST:
                lbl_information.Text = Languages.localisation["Account does not  
→ exist"] [Languages.languageCodes[languageIndex]];
                break;
            case ERROR_OCCURED:

```

```

        lbl_information.Text = Languages.localisation["An error occurred.
        ↪ Please wait and try
        ↪ again"] [Languages.languageCodes[languageIndex]];
        break;
    case USER_LOGGED_IN_ON_OTHER_DEVICE:
        lbl_information.Text = Languages.localisation["User is currently
        ↪ logged in on another
        ↪ device"] [Languages.languageCodes[languageIndex]];
        break;
    default:
        throw new Exception($"{Languages.localisation["Unrecognised success
        ↪ code"] [Languages.languageCodes[languageIndex]]} < {success} >");
    }
}

public void HandleAccountCreationSuccess(int success, string userID)
{
    switch (success)
    {
        case VALID:
            this.Controls.Add(btn_login);
            this.Controls.Add(btn_createAccount);

            this.Controls.Remove(txt_passwordconfirm);
            this.Controls.Remove(btn_requestAccount);

            this.txt_password.Location = new Point(560, 250);
            this.lbl_information.Location = new Point(560, 290);

            this.txt_password.ResetText();
            this.txt_passwordconfirm.ResetText();

            LoadMainApplication(userID);
            break;
        case USERID_TAKEN:
            lbl_information.Text = Languages.localisation["Username is not
            ↪ available"] [Languages.languageCodes[languageIndex]];
            break;
        case ERROR_OCCURED:
            lbl_information.Text = Languages.localisation["An error occurred.
            ↪ Please wait and try
            ↪ again"] [Languages.languageCodes[languageIndex]];
            break;
        default:
            throw new Exception($"{Languages.localisation["Unrecognised success
            ↪ code"] [Languages.languageCodes[languageIndex]]} < {success} >");
    }
}

private async void btn_login_Click(object sender, EventArgs e)
{
    string userID = txt_userID.Text.Trim();
    string password = txt_password.Text;
    txt_password.ResetText();
    this.lbl_information.ResetText();

```

```

        if (string.IsNullOrEmpty(userID) || string.IsNullOrEmpty(password))
        {
            return;
        }

        if (connection.State == HubConnectionState.Connected)
        {
            await connection.InvokeAsync("loginRequest", userID, password);
        }
    }
    private void btn_createAccount_Click(object sender, EventArgs e)
    {
        this.Controls.Remove(btn_login);
        this.Controls.Remove(btn_createAccount);

        this.txt_password.Location = new Point(560, 260);
        this.lbl_information.Location = new Point(lbl_information.Location.X,
            ↪ txt_passwordconfirm.Location.Y + txt_passwordconfirm.Size.Height);

        this.Controls.Add(txt_passwordconfirm);
        this.Controls.Add(btn_requestAccount);
    }
    private async void btn_requestAccount_Click(object sender, EventArgs e)
    {
        lbl_information.ResetText();
        if (txt_password.Text != txt_passwordconfirm.Text)
        {
            lbl_information.Text = "Passwords do not match";
            return;
        }

        string userID = txt_userID.Text.Trim();
        string password = txt_password.Text;
        string localisation = Languages.languageCodes[languageIndex];

        if (string.IsNullOrEmpty(userID) || string.IsNullOrEmpty(password))
        {
            return;
        }

        if (connection.State == HubConnectionState.Connected)
        {
            await connection.InvokeAsync("accountRequest", userID, password,
                ↪ localisation);
        }
    }
    private void btn_language_Click(object sender, EventArgs e)
    {
        languageIndex++;
        if (languageIndex == Languages.supportedLanguages.Count)
        {
            languageIndex = 0;
        }
        btn_language.Text = Languages.supportedLanguages[languageIndex];
    }

```



```

        txt_userID.PlaceholderText =
            → Languages.localisation["Username"] [Languages.languageCodes[languageIndex]];
        txt_password.PlaceholderText =
            → Languages.localisation["Password"] [Languages.languageCodes[languageIndex]];
        lbl_header.Text =
            → Languages.localisation["Account"] [Languages.languageCodes[languageIndex]];
    }
}
}

```

login.Designer.cs

```

using System.Windows.Forms;

namespace client_app
{
    partial class Login
    {
        private System.ComponentModel.IContainer components = null;

        private void InitializeComponent()
        {
            System.ComponentModel.ComponentResourceManager resources = new
                → System.ComponentModel.ComponentResourceManager(typeof(Login));
            this.btn_login = new Guna.UI2.WinForms.Guna2GradientButton();
            this.btn_createAccount = new Guna.UI2.WinForms.Guna2Button();
            this.lbl_header = new Guna.UI2.WinForms.Guna2HtmlLabel();
            this.btn_language = new Guna.UI2.WinForms.Guna2Button();
            this.btn_requestAccount = new Guna.UI2.WinForms.Guna2GradientButton();
            this.loader_connecting = new Guna.UI2.WinForms.Guna2ProgressIndicator();
            this.lbl_connection = new Guna.UI2.WinForms.Guna2HtmlLabel();
            this.lbl_information = new Guna.UI2.WinForms.Guna2HtmlLabel();
            this.pic_language = new Guna.UI2.WinForms.Guna2PictureBox();
            this.txt_userID = new Guna.UI2.WinForms.Guna2TextBox();
            this.txt_password = new Guna.UI2.WinForms.Guna2TextBox();
            this.txt_passwordconfirm = new Guna.UI2.WinForms.Guna2TextBox();
            ((System.ComponentModel.ISupportInitialize)(this.pic_language)).BeginInit();
            this.SuspendLayout();
            //
            // btn_login
            //
            this.btn_login.AutoRoundedCorners = true;
            this.btn_login.BorderRadius = 14;
            this.btn_login.FillColor =
                → System.Drawing.Color.FromArgb(((int)(((byte)(247)))),
                → ((int)(((byte)(113)))), ((int)(((byte)(163)))));
            this.btn_login.FillColor2 =
                → System.Drawing.Color.FromArgb(((int)(((byte)(197)))),
                → ((int)(((byte)(113)))), ((int)(((byte)(247)))));
            resources.ApplyResources(this.btn_login, "btn_login");
            this.btn_login.ForeColor = System.Drawing.Color.White;
            this.btn_login.Name = "btn_login";
            this.btn_login.Click += new System.EventHandler(this.btn_login_Click);
            //
            // btn_createAccount

```

```

//
this.btn_createAccount.BackColor = System.Drawing.Color.Transparent;
this.btn_createAccount.FillColor = System.Drawing.Color.Transparent;
resources.ApplyResources(this.btn_createAccount, "btn_createAccount");
this.btn_createAccount.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(200)))),
    → ((int)(((byte)(200)))), ((int)(((byte)(200)))));
this.btn_createAccount.HoverState.FillColor =
    → System.Drawing.Color.Transparent;
this.btn_createAccount.HoverState.ForeColor = System.Drawing.Color.White;
this.btn_createAccount.Name = "btn_createAccount";
this.btn_createAccount.PressedColor = System.Drawing.Color.Transparent;
this.btn_createAccount.Click += new
    → System.EventHandler(this.btn_createAccount_Click);
//
// lbl_header
//
resources.ApplyResources(this.lbl_header, "lbl_header");
this.lbl_header.BackColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(44)))),
    → ((int)(((byte)(39)))), ((int)(((byte)(41)))));
this.lbl_header.Cursor = System.Windows.Forms.Cursors.Arrow;
this.lbl_header.ForeColor = System.Drawing.Color.White;
this.lbl_header.Name = "lbl_header";
this.lbl_header.TabStop = false;
this.lbl_header.TextAlignment = System.Drawing.ContentAlignment.MiddleCenter;
//
// btn_language
//
this.btn_language.AutoRoundedCorners = true;
this.btn_language.DisabledState.BorderColor = System.Drawing.Color.DarkGray;
this.btn_language.DisabledState.CustomBorderColor =
    → System.Drawing.Color.DarkGray;
this.btn_language.DisabledState.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(169)))),
    → ((int)(((byte)(169)))), ((int)(((byte)(169)))));
this.btn_language.DisabledState.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(141)))),
    → ((int)(((byte)(141)))), ((int)(((byte)(141)))));
this.btn_language.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(104)))),
    → ((int)(((byte)(104)))), ((int)(((byte)(104)))));
resources.ApplyResources(this.btn_language, "btn_language");
this.btn_language.ForeColor = System.Drawing.Color.Gainsboro;
this.btn_language.Name = "btn_language";
this.btn_language.Click += new System.EventHandler(this.btn_language_Click);
//
// btn_requestAccount
//
this.btn_requestAccount.AutoRoundedCorners = true;
this.btn_requestAccount.BorderRadius = 14;
this.btn_requestAccount.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(247)))),
    → ((int)(((byte)(113)))), ((int)(((byte)(163)))));

```

```

this.btn_requestAccount.FillColor2 =
    ↳ System.Drawing.Color.FromArgb(((int)(((byte)(197))))),
    ↳ (((int)(((byte)(113))))), ((int)(((byte)(247)))));
resources.ApplyResources(this.btn_requestAccount, "btn_requestAccount");
this.btn_requestAccount.ForeColor = System.Drawing.Color.White;
this.btn_requestAccount.Name = "btn_requestAccount";
this.btn_requestAccount.Click += new
    ↳ System.EventHandler(this.btn_requestAccount_Click);
//
// pic_connecting
//
this.loader_connecting.AutoStart = true;
this.loader_connecting.BackColor = System.Drawing.Color.Transparent;
resources.ApplyResources(this.loader_connecting, "pic_connecting");
this.loader_connecting.Name = "pic_connecting";
this.loader_connecting.ProgressColor =
    ↳ System.Drawing.Color.FromArgb(((int)(((byte)(247))))),
    ↳ (((int)(((byte)(113))))), ((int)(((byte)(163)))));
this.loader_connecting.TabStop = false;
//
// lbl_connection
//
resources.ApplyResources(this.lbl_connection, "lbl_connection");
this.lbl_connection.BackColor = System.Drawing.Color.Transparent;
this.lbl_connection.ForeColor =
    ↳ System.Drawing.Color.FromArgb(((int)(((byte)(200))))),
    ↳ (((int)(((byte)(200))))), ((int)(((byte)(200)))));
this.lbl_connection.Name = "lbl_connection";
this.lbl_connection.TabStop = false;
this.lbl_connection.TextAlign =
    ↳ System.Drawing.ContentAlignment.MiddleLeft;
//
// lbl_information
//
this.lbl_information.BackColor = System.Drawing.Color.Transparent;
resources.ApplyResources(this.lbl_information, "lbl_information");
this.lbl_information.ForeColor =
    ↳ System.Drawing.Color.FromArgb(((int)(((byte)(240))))),
    ↳ (((int)(((byte)(120))))), ((int)(((byte)(120)))));
this.lbl_information.Name = "lbl_information";
this.lbl_information.TabStop = false;
this.lbl_information.TextAlign =
    ↳ System.Drawing.ContentAlignment.MiddleLeft;
//
// pic_language
//
this.pic_language.FillColor = System.Drawing.Color.Transparent;
this.pic_language.Image = global::client_app.Properties.Resources.language;
this.pic_language.ImageRotate = 0F;
resources.ApplyResources(this.pic_language, "pic_language");
this.pic_language.Name = "pic_language";
this.pic_language.TabStop = false;
//
// txt_userID
//

```

```

this.txt_userID.BorderRadius = 8;
this.txt_userID.BorderThickness = 0;
this.txt_userID.Cursor = System.Windows.Forms.Cursors.IBeam;
this.txt_userID.DefaultText = "";
this.txt_userID.DisabledState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208)))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208)))));
this.txt_userID.DisabledState.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(226)))),
    → ((int)(((byte)(226)))), ((int)(((byte)(226)))));
this.txt_userID.DisabledState.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138)))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138)))));
this.txt_userID.DisabledState.PlaceholderForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138)))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138)))));
this.txt_userID.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208)))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208)))));
this.txt_userID.FocusedState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(94)))),
    → ((int)(((byte)(148)))), ((int)(((byte)(255)))));
resources.ApplyResources(this.txt_userID, "txt_userID");
this.txt_userID.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(26)))),
    → ((int)(((byte)(26)))), ((int)(((byte)(26)))));
this.txt_userID.HoverState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(94)))),
    → ((int)(((byte)(148)))), ((int)(((byte)(255)))));
this.txt_userID.IconLeft = global::client_app.Properties.Resources.account;
this.txt_userID.IconLeftOffset = new System.Drawing.Point(5, 0);
this.txt_userID.IconLeftSize = new System.Drawing.Size(17, 20);
this.txt_userID.MaxLength = 32;
this.txt_userID.Name = "txt_userID";
this.txt_userID.PlaceholderForeColor = System.Drawing.Color.Gray;
this.txt_userID.PlaceholderText = "Username";
this.txt_userID.SelectedText = "";
this.txt_userID.TextOffset = new System.Drawing.Point(10, 0);
//
// txt_password
//
this.txt_password.BorderRadius = 8;
this.txt_password.BorderThickness = 0;
this.txt_password.Cursor = System.Windows.Forms.Cursors.IBeam;
this.txt_password.DefaultText = "";
this.txt_password.DisabledState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208)))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208)))));
this.txt_password.DisabledState.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(226)))),
    → ((int)(((byte)(226)))), ((int)(((byte)(226)))));
this.txt_password.DisabledState.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138)))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138)))));

```

```

this.txt_password.DisabledState.PlaceholderForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138))))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138))));
this.txt_password.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208))))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208))));
this.txt_password.FocusedState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(94))))),
    → ((int)(((byte)(148)))), ((int)(((byte)(255))));
resources.ApplyResources(this.txt_password, "txt_password");
this.txt_password.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(26))))),
    → ((int)(((byte)(26)))), ((int)(((byte)(26))));
this.txt_password HoverState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(94))))),
    → ((int)(((byte)(148)))), ((int)(((byte)(255))));
this.txt_password.IconLeft =
    → global::client_app.Properties.Resources.password;
this.txt_password.IconLeftOffset = new System.Drawing.Point(5, 0);
this.txt_password.IconLeftSize = new System.Drawing.Size(17, 20);
this.txt_password.Name = "txt_password";
this.txt_password.PlaceholderForeColor = System.Drawing.Color.Gray;
this.txt_password.PlaceholderText = "Password";
this.txt_password.SelectedText = "";
this.txt_password.TextOffset = new System.Drawing.Point(10, 0);
this.txt_password.UseSystemPasswordChar = true;
//
// txt_passwordconfirm
//
this.txt_passwordconfirm.BorderRadius = 8;
this.txt_passwordconfirm.BorderThickness = 0;
this.txt_passwordconfirm.Cursor = System.Windows.Forms.Cursors.IBeam;
this.txt_passwordconfirm.DefaultText = "";
this.txt_passwordconfirm.DisabledState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208))))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208))));
this.txt_passwordconfirm.DisabledState.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(226))))),
    → ((int)(((byte)(226)))), ((int)(((byte)(226))));
this.txt_passwordconfirm.DisabledState.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138))))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138))));
this.txt_passwordconfirm.DisabledState.PlaceholderForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(138))))),
    → ((int)(((byte)(138)))), ((int)(((byte)(138))));
this.txt_passwordconfirm.FillColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(208))))),
    → ((int)(((byte)(208)))), ((int)(((byte)(208))));
this.txt_passwordconfirm.FocusedState.BorderColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(94))))),
    → ((int)(((byte)(148)))), ((int)(((byte)(255))));
resources.ApplyResources(this.txt_passwordconfirm, "txt_passwordconfirm");
this.txt_passwordconfirm.ForeColor =
    → System.Drawing.Color.FromArgb(((int)(((byte)(26))))),
    → ((int)(((byte)(26)))), ((int)(((byte)(26))));

```

```

        this.txt_passwordconfirm.HoverState.BorderColor =
            → System.Drawing.Color.FromArgb(((int)(((byte)(94)))),
            → ((int)(((byte)(148)))), ((int)(((byte)(255)))));
        this.txt_passwordconfirm.IconLeft =
            → global::client_app.Properties.Resources.password;
        this.txt_passwordconfirm.IconLeftOffset = new System.Drawing.Point(5, 0);
        this.txt_passwordconfirm.IconLeftSize = new System.Drawing.Size(17, 20);
        this.txt_passwordconfirm.Name = "txt_passwordconfirm";
        this.txt_passwordconfirm.PlaceholderForeColor = System.Drawing.Color.Gray;
        this.txt_passwordconfirm.PlaceholderText = "Confirm Password";
        this.txt_passwordconfirm.SelectedText = "";
        this.txt_passwordconfirm.TextOffset = new System.Drawing.Point(10, 0);
        this.txt_passwordconfirm.TabIndex = 2;
        this.txt_passwordconfirm.UseSystemPasswordChar = true;
        //
        // login
        //
        this.AcceptButton = this.btn_login;
        resources.ApplyResources(this, "$this");
        this.AutoScaleMode = System.Windows.Forms.AutoScaleMode.Font;
        this.BackColor = System.Drawing.Color.FromArgb(((int)(((byte)(44)))),
            → ((int)(((byte)(39)))), ((int)(((byte)(41)))));
        this.Controls.Add(this.lbl_information);
        this.Controls.Add(this.loader_connecting);
        this.Controls.Add(this.lbl_connection);
        this.Controls.Add(this.pic_language);
        this.Controls.Add(this.btn_language);
        this.Controls.Add(this.lbl_header);
        this.Controls.Add(this.txt_userID);
        this.Controls.Add(this.txt_password);
        this.Controls.Add(this.btn_login);
        this.Controls.Add(this.btn_createAccount);
        this.FormBorderStyle = System.Windows.Forms.FormBorderStyle.FixedDialog;
        this.MaximizeBox = false;
        this.Name = "login";
        this.ShowIcon = false;
        ((System.ComponentModel.ISupportInitialize)(this.pic_language)).EndInit();
        this.ResumeLayout(false);
        this.PerformLayout();

    }

    private Guna.UI2.WinForms.Guna2GradientButton btn_login;
    private Guna.UI2.WinForms.Guna2Button btn_createAccount;
    private Guna.UI2.WinForms.Guna2TextBox txt_userID;
    private Guna.UI2.WinForms.Guna2TextBox txt_password;
    private Guna.UI2.WinForms.Guna2HtmlLabel lbl_header;
    private Guna.UI2.WinForms.Guna2Button btn_language;
    private Guna.UI2.WinForms.Guna2PictureBox pic_language;
    private Guna.UI2.WinForms.Guna2GradientButton btn_requestAccount;
    private Guna.UI2.WinForms.Guna2TextBox txt_passwordconfirm;
    public Guna.UI2.WinForms.Guna2ProgressIndicator loader_connecting;
    public Guna.UI2.WinForms.Guna2HtmlLabel lbl_connection;
    public Guna.UI2.WinForms.Guna2HtmlLabel lbl_information;
}

```

```
}
```

Program.cs

```
using System;
using System.Windows.Forms;

namespace client_app
{
    internal static class Program
    {
        [STAThread]
        static void Main()
        {
            Application.EnableVisualStyles();
            Application.SetCompatibleTextRenderingDefault(false);
            Languages.LoadWords();
            Application.Run(new Login());
        }
    }
}
```

5.3 References

I have included references to the main documentation used when researching and creating the technical solution. These mainly consist of documentation for the libraries I have used, along with some obscure Windows Forms behaviour.

[Theory of neural networks - Grant Sanderson \(Oct 2017\)](#)

[How the backpropagation algorithm works - Michael Nielsen \(Dec 2019\)](#)

[Operator overloading](#)

[Using indexers](#)

[Creating a 'Graphics' object to represent the drawing surface of a Panel](#)

[Drawing a line between two points on a Panel](#)

[SignalR documentation](#)

[SignalR configuration example for the server](#)

[SignalR configuration example for client-side Windows Forms applications](#)

[Communication outside of a Hub class](#)

[Using Async, Await, and Task to keep the WinForms UI responsive - Grant Winney \(Jun 2021\)](#)

[Accessing a form's control from a separate thread \(Oct 2011\)](#)