EXPERIMENT - 7

Name : Nakul Jibhakate
PRN : 25070521161

7.1.1] Inverted Star Pattern

A) ALGORITHM

Step 1: Start

Step 2: Read an integer n (number of rows).

Step 3: Initialize a loop from i = n down to 1 (decrement by 1 each time).

Step 4: For each value of i, print i stars (*) in the same line without spaces.

Step 5: Move to the next line after printing stars.

Step 6: Repeat Steps 3 to 5 until i becomes 0.

Step 7: Stop

B) PYTHON CODE

```
n = int(input())

for i in range(n, 0, -1):

   print("*" * i)
```

C) FLOWCHART

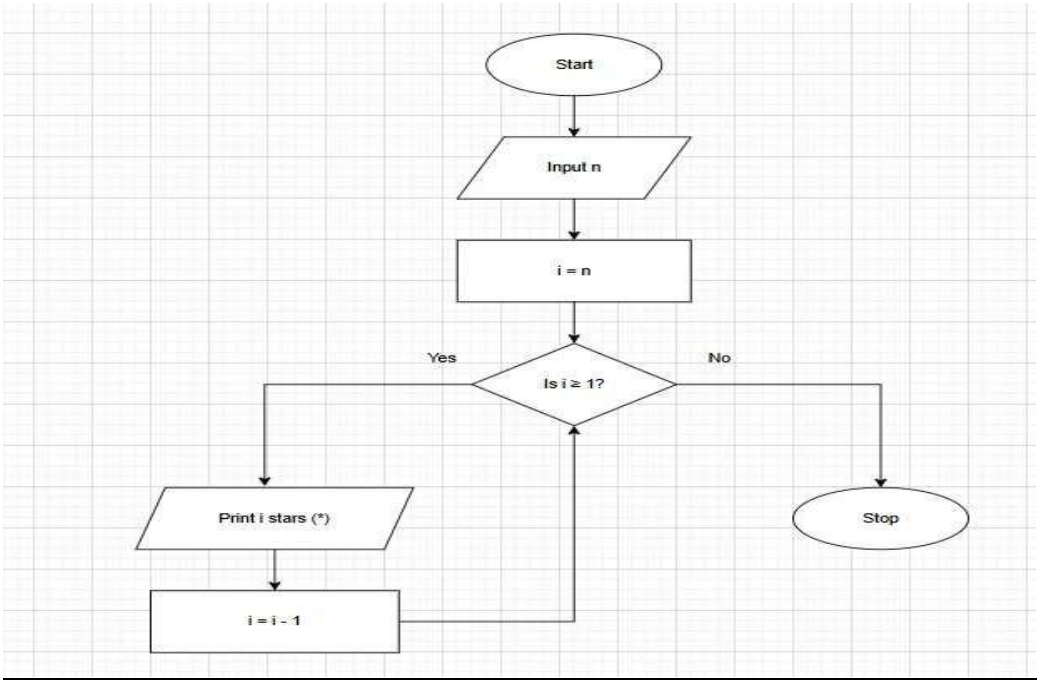

CODETANTRA Home

nakuljibhakate.batch2025@sitnagpur.siu.edu.in Support Logout

7.1.2. Possible Combinations from Three Digits

00:11

Write a Python program to accept three digits and print all possible 3-digit combinations that can be formed using those three digits. Each digit should be used exactly once in each combination.

For three digits a, b, and c, there are 6 possible arrangements based on their indices: abc, acb, bac, bca, cab, cba.

Input Format:

- Single line contains three space-separated non-negative integers, a, b, and c, representing the three digits

Output Format:

- Print all possible 3-digit combinations
- Each combination should be printed as a 3-digit number on a separate line
- Print combinations as they appear (maintain leading zeros if first digit is 0)

Constraints:

- $0 \leq \text{each digit} \leq 9$
- Digits can be same or different

Sample Test Cases +

Explorer

combinat...

Submit

Debugger

```python
a, b, c = input().split()

digits = [a, b, c]

for i in range(3):
    for j in range(3):
        for k in range(3):
            if i != j and j != k and i != k:
                print(digits[i] + digits[j] + digits[k])
```

Average time: 0.004 s, 3.86 ms

Maximum time: 0.005 s, 5.00 ms

3 out of 3 shown test case(s) passed

4 out of 4 hidden test case(s) passed

Test case 1 5 ms Debug

Expected output	Actual output
1 2 3	1 2 3
123	123
132	132
213	213
231	231
312	312

Terminal Test cases

‹ Prev Reset Submit Next ›