

MariaDB安装

下载

下载地址


<https://mariadb.com/downloads/>

安装

安装Mariadb软件包

如果之前安装过,请卸载后再安装,否则安装过程无法进行!

双击msi格式安装包

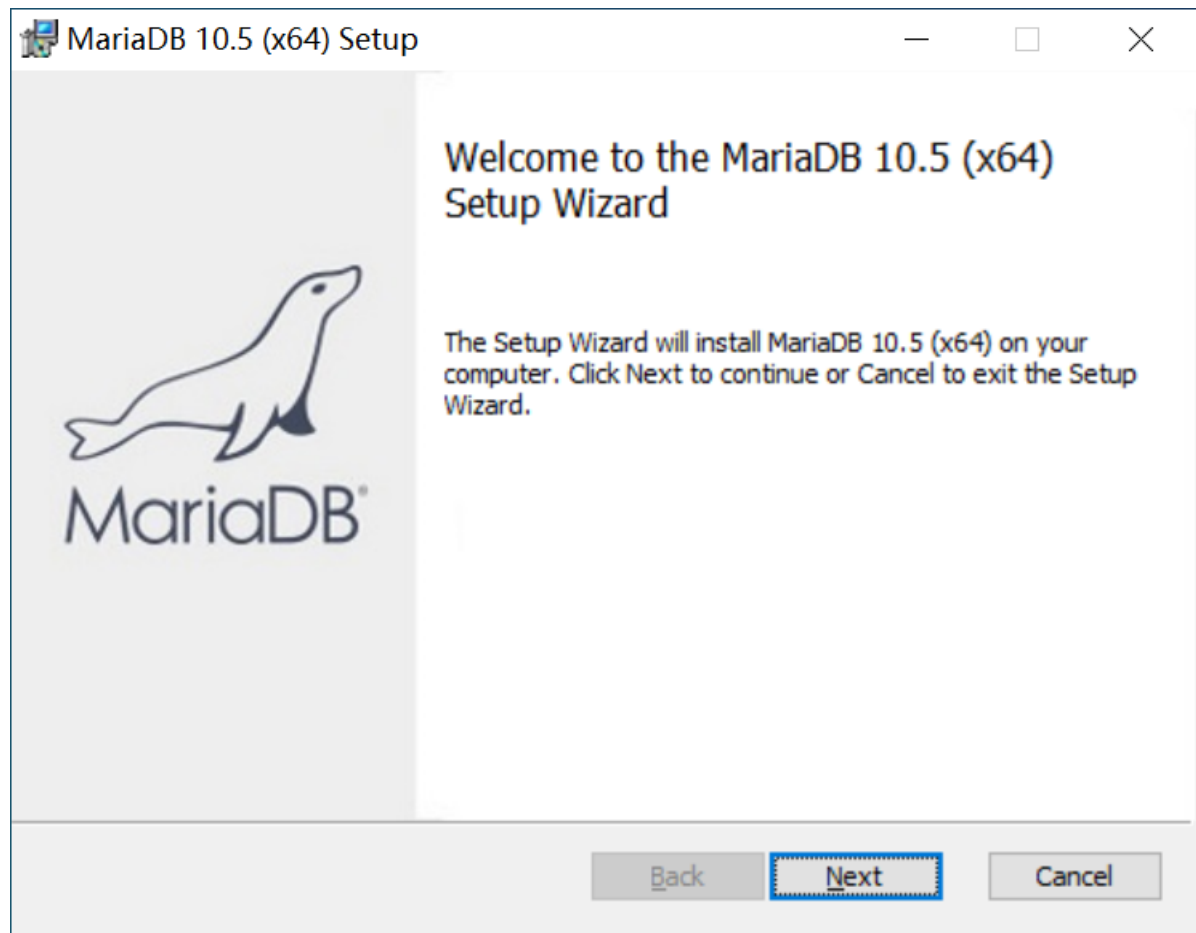

End-User License Agreement

Please read the following license agreement carefully



GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1335 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom

☒ I accept the terms in the License Agreement

Print

Back

Next

Cancel


MariaDB 10.5 (x64) Setup

Custom Setup

Select the way you want features to be installed.



Click the icons in the tree below to change the way features will be installed.

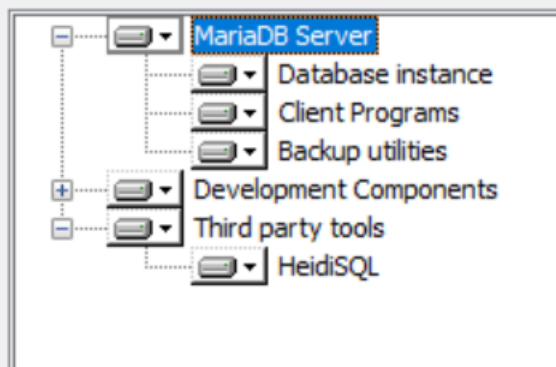

Install server

This feature requires 158MB on your hard drive. It has 3 of 3 subfeatures selected. The subfeatures require 72MB on your hard drive.

Location: E:\teachsoft\maradb\

Browse...

Reset

Disk Usage

Back

Next


Cancel

User settings

Default instance properties

MariaDB 10.5 (x64) database configuration

MariaDB Server



☒ **Modify password for database user 'root'**

New root password:

配置root用户的密码
Enter new root password

Confirm:

Retype the password

☒ **Enable access from remote machines for 'root' user**

是否允许使用root用户进行远程登录

☒ **Use UTF8 as default server's character set**

使用utf-8作为服务器的默认字符集

Back

Next


Cancel

Database settings

Default instance properties

MariaDB 10.5 (x64) database configuration

MariaDB Server



☒ **Install as service**

将MariaDB安装为windows的一个服务

Service Name:

服务的名称

☒ **Enable networking**

是否允许网络访问

TCP port:

MariaDB监听的端口号,默认是3306,没有特殊需求,不要修改

InnoDB engine settings

Buffer pool size: MB

配置内存,默认无需修改



Page size:

KB


Back

Next

Cancel

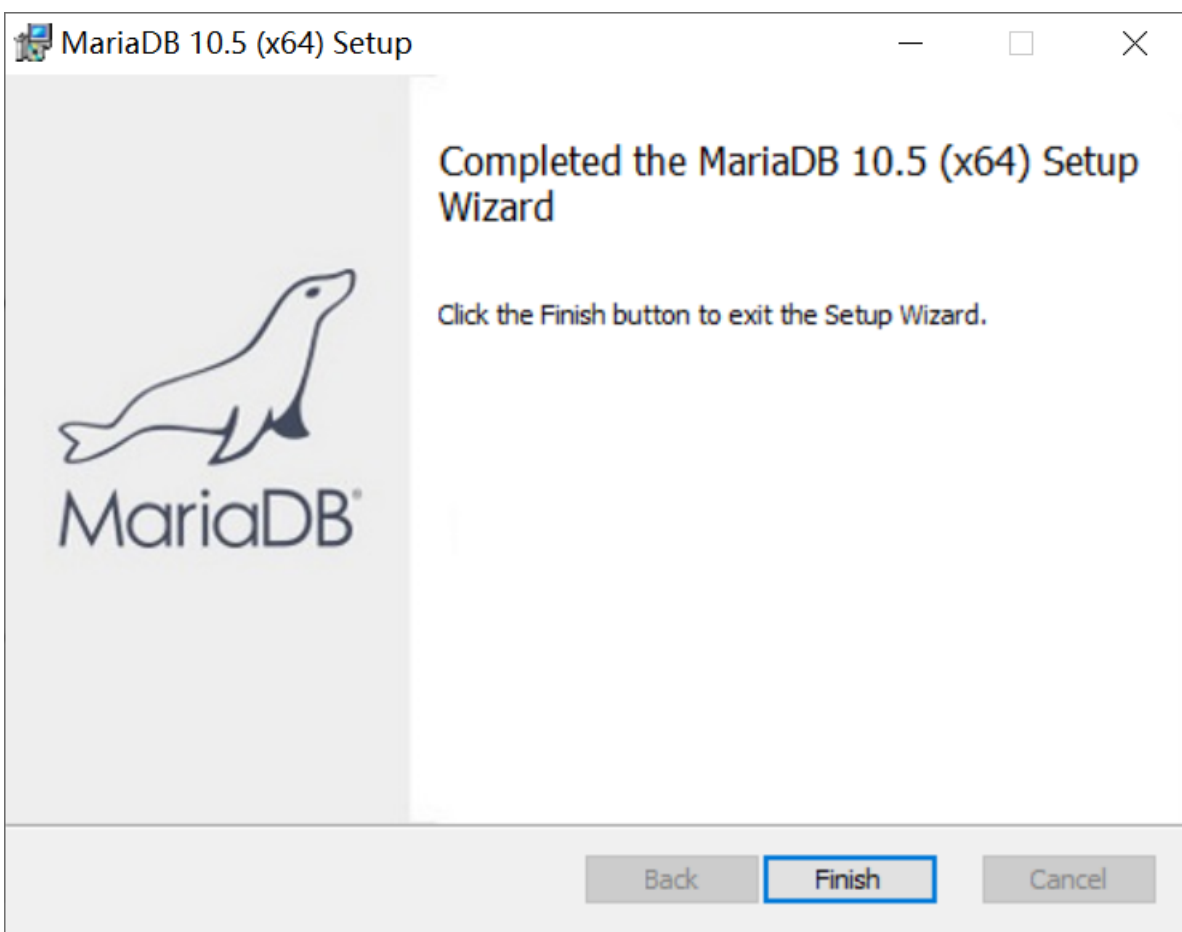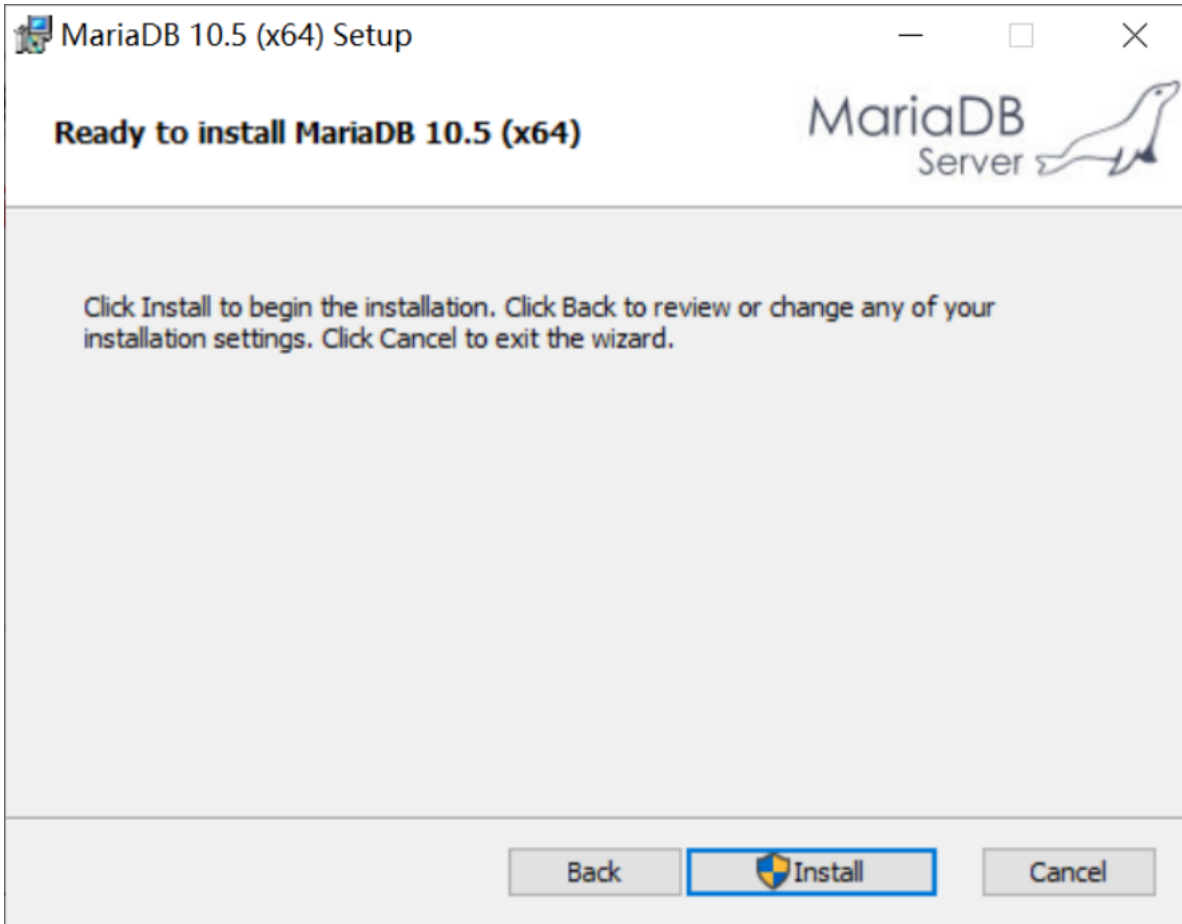

配置环境变量

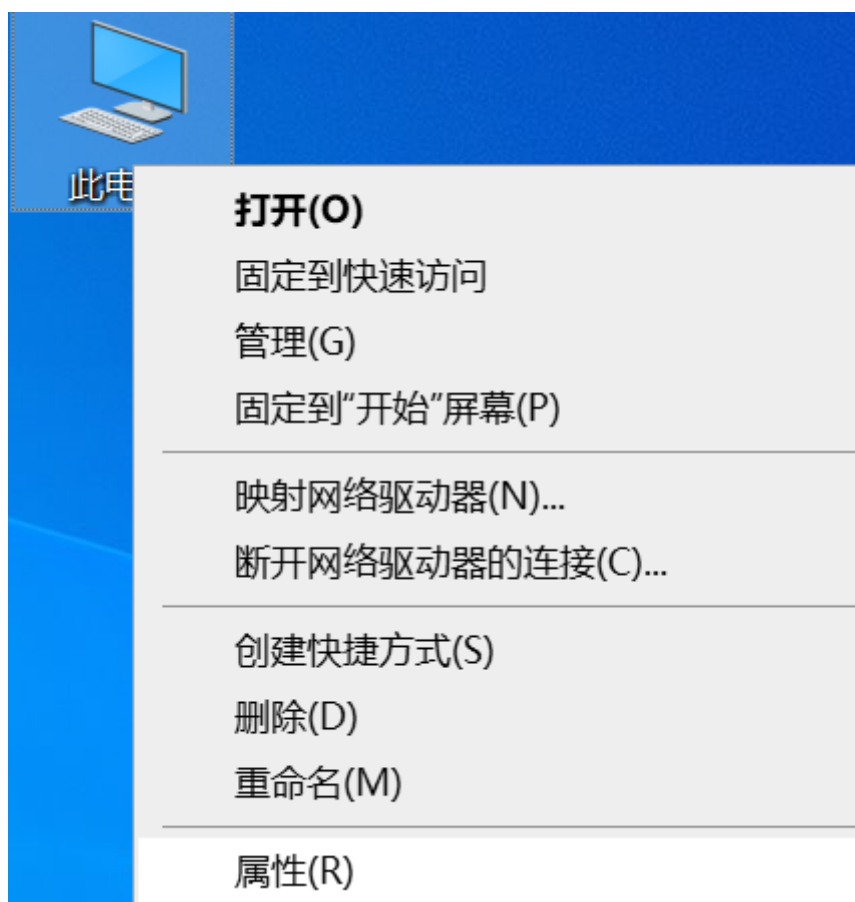

远程桌面

系统保护

高级系统设置

重命名这台电脑

计算机名 硬件 高级 系统保护 远程

要进行大多数更改，你必须作为管理员登录。

性能

视觉效果，处理器计划，内存使用，以及虚拟内存

设置(S)...

用户配置文件

与登录帐户相关的桌面设置

设置(E)...

启动和故障恢复

系统启动、系统故障和调试信息

设置(T)...

环境变量(N)...


确定 取消 应用(A)

编辑用户变量 ✕

变量名(N): MYSQL_HOME



变量值(V): E:\teachsoft\maradb


浏览目录(D)... 浏览文件(F)... 确定 取消

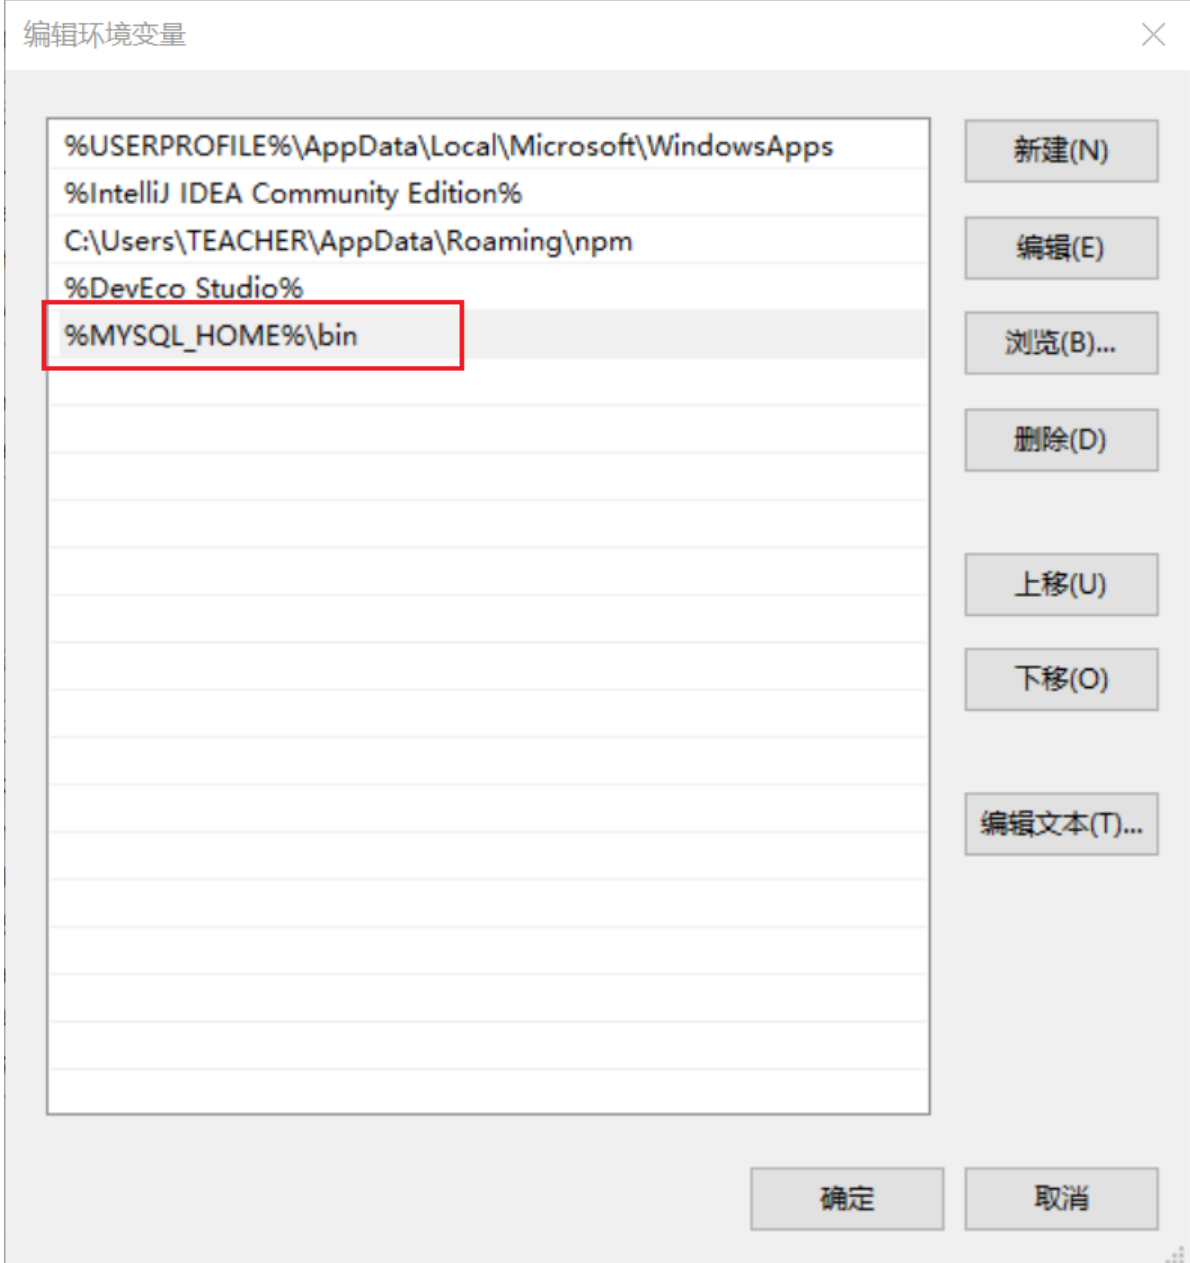

管理

启动/停止/重启

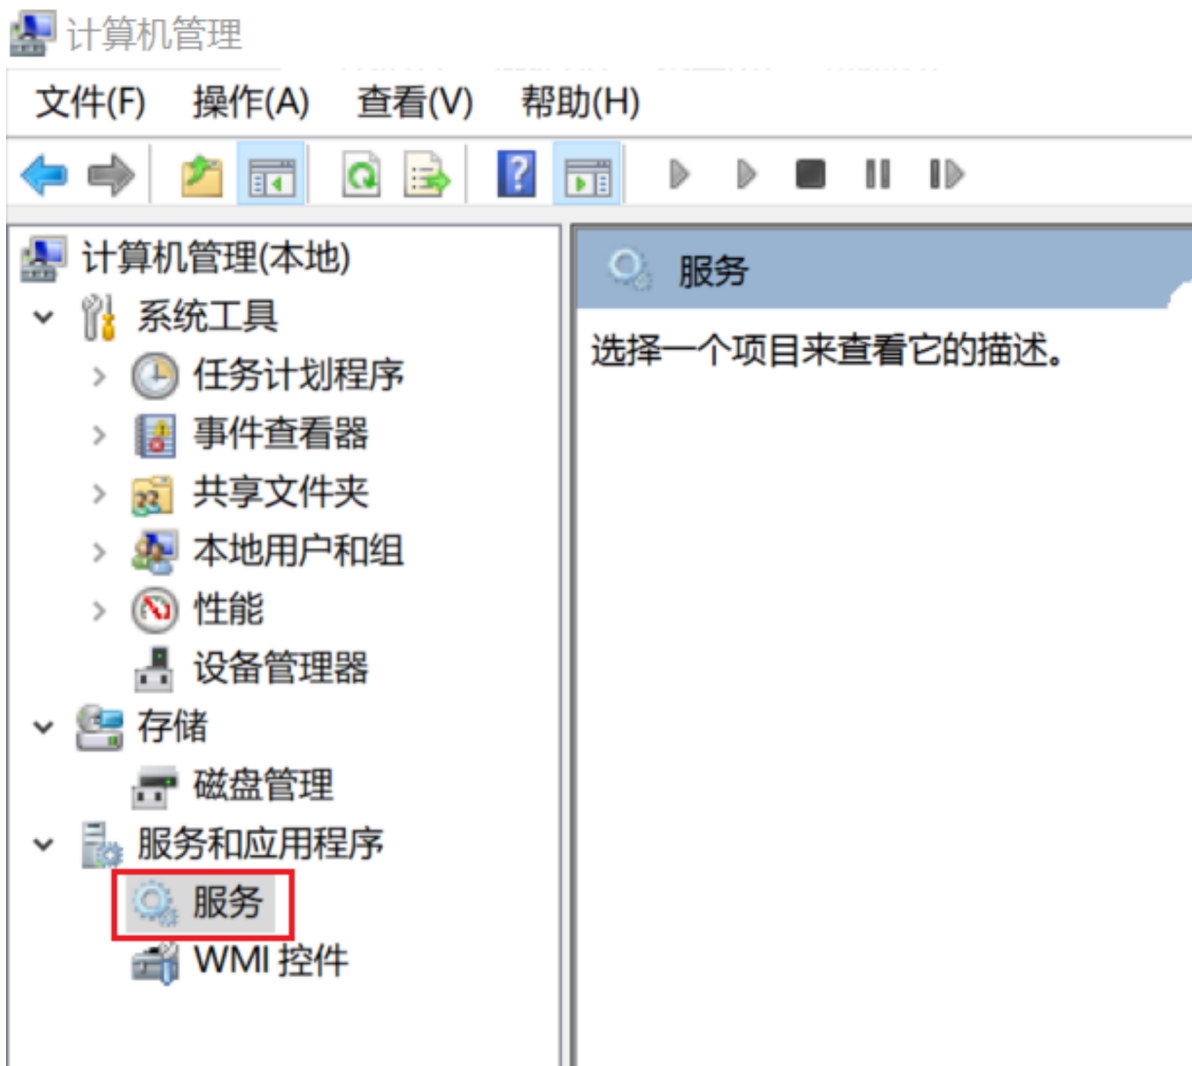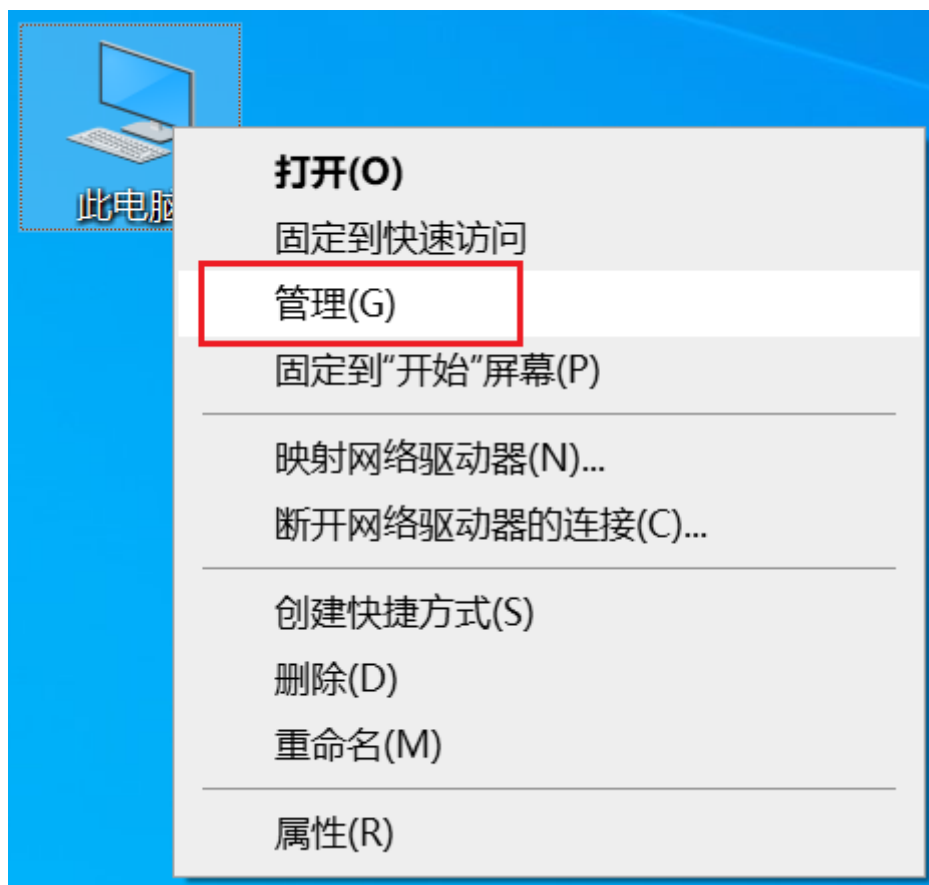

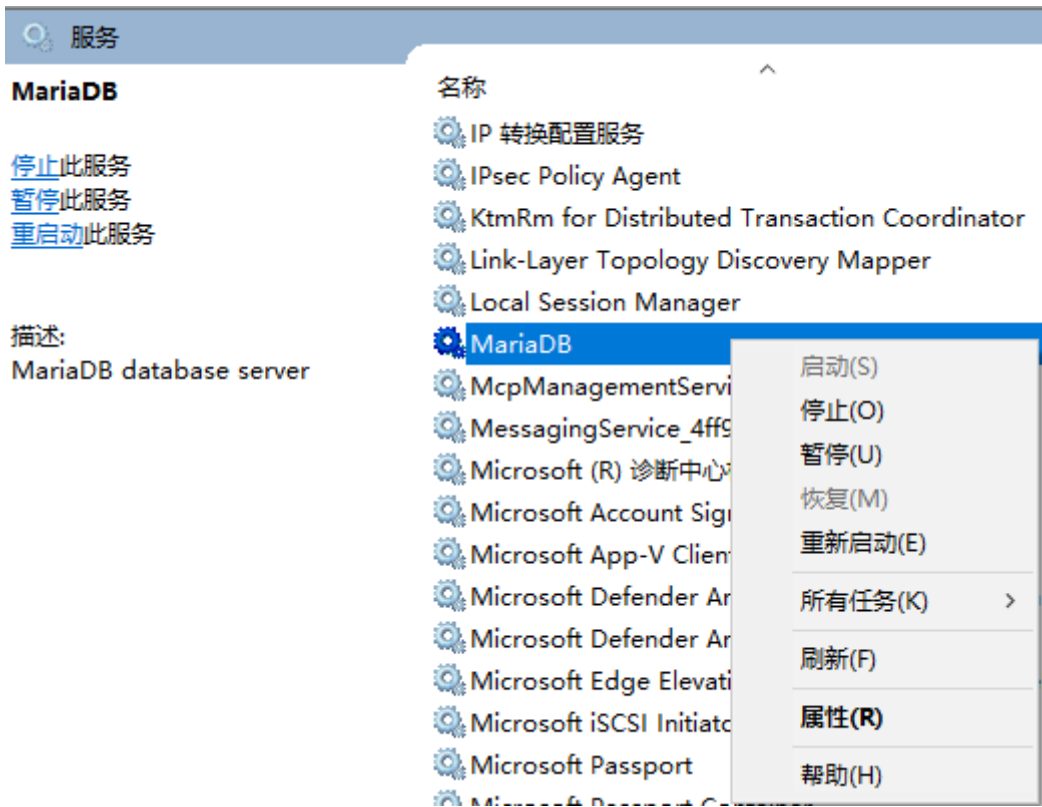

配置开机启动

MariaDB 的属性(本地计算机)



常规

登录

恢复

依存关系

服务名称: MariaDB

显示名称: MariaDB

描述: MariaDB database server

可执行文件的路径:

`"E:\teachsoft\maradb\bin\mysqld.exe" "--defaults-file=E:\teachsoft\maradb\`

启动类型(E):

自动

修改是否开机启动

服务状态: 正在运行

启动(S)

停止(T)

暂停(P)

恢复(R)

当从此处启动服务时, 你可指定所适用的启动参数。

启动参数(M):

确定

取消

应用(A)