



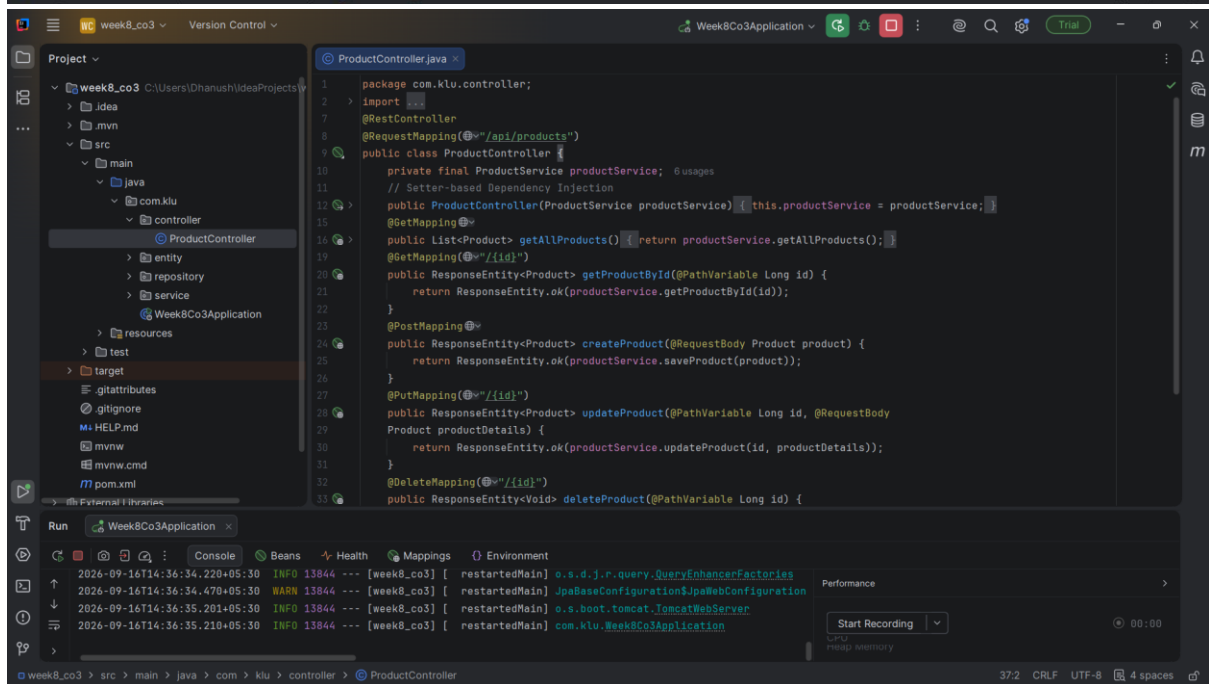
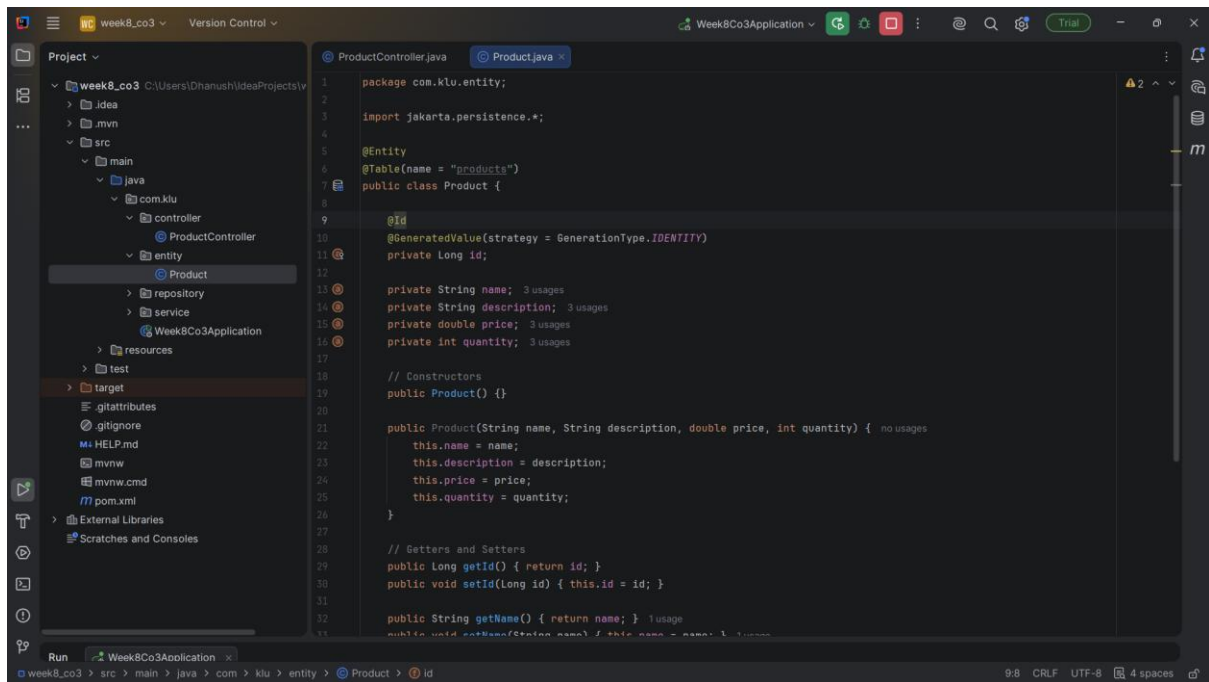
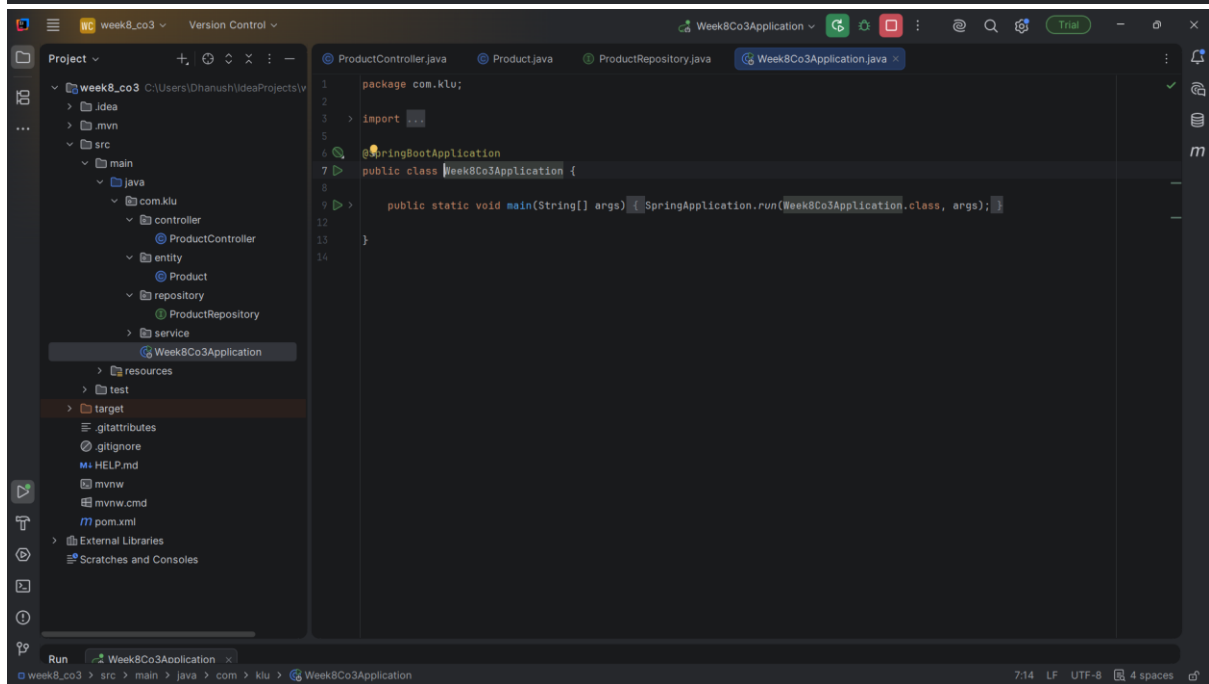


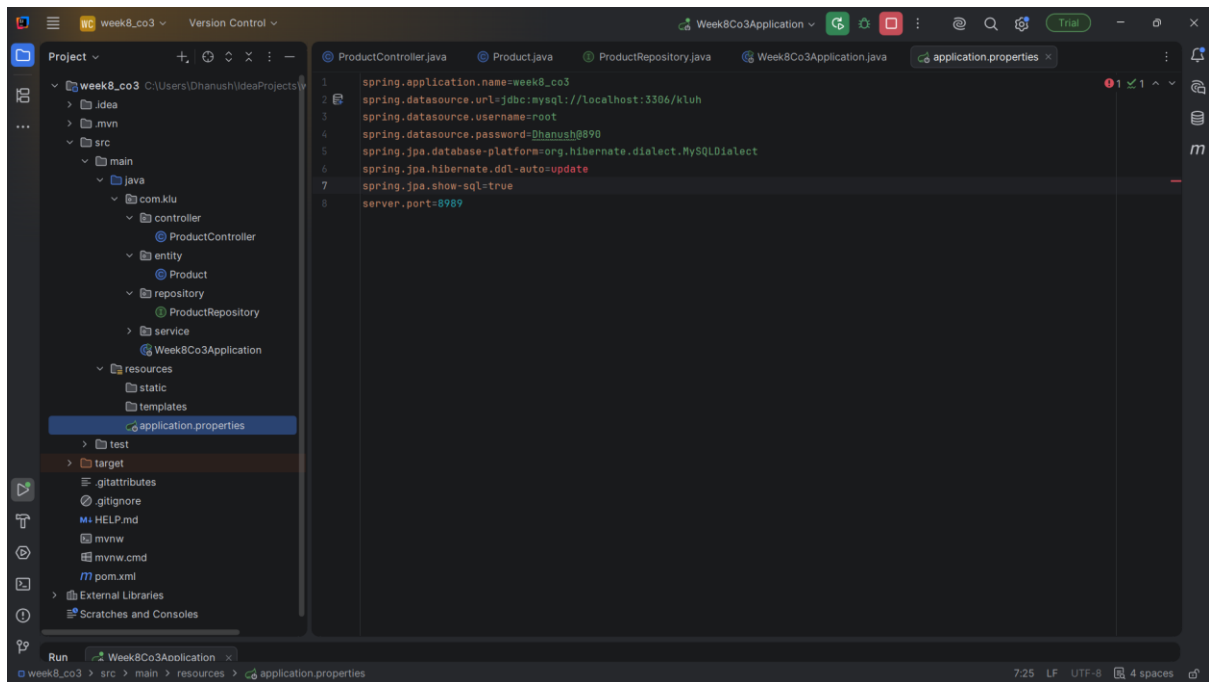

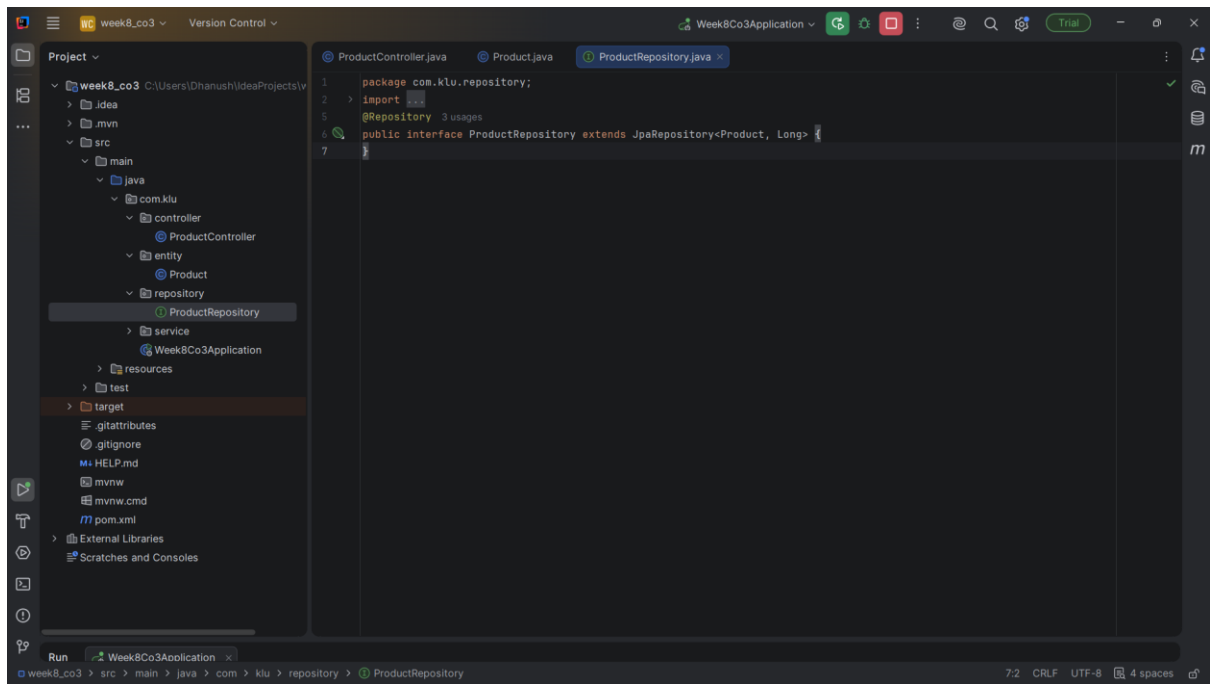

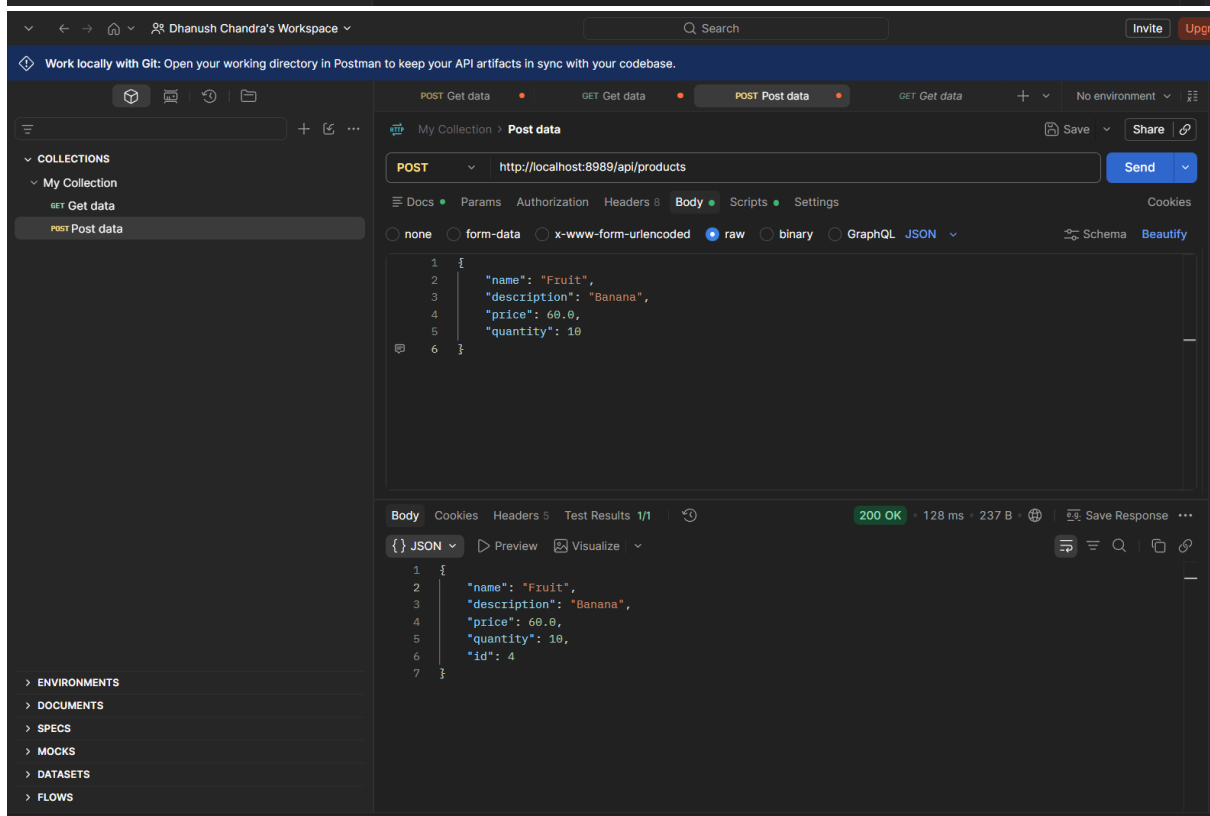

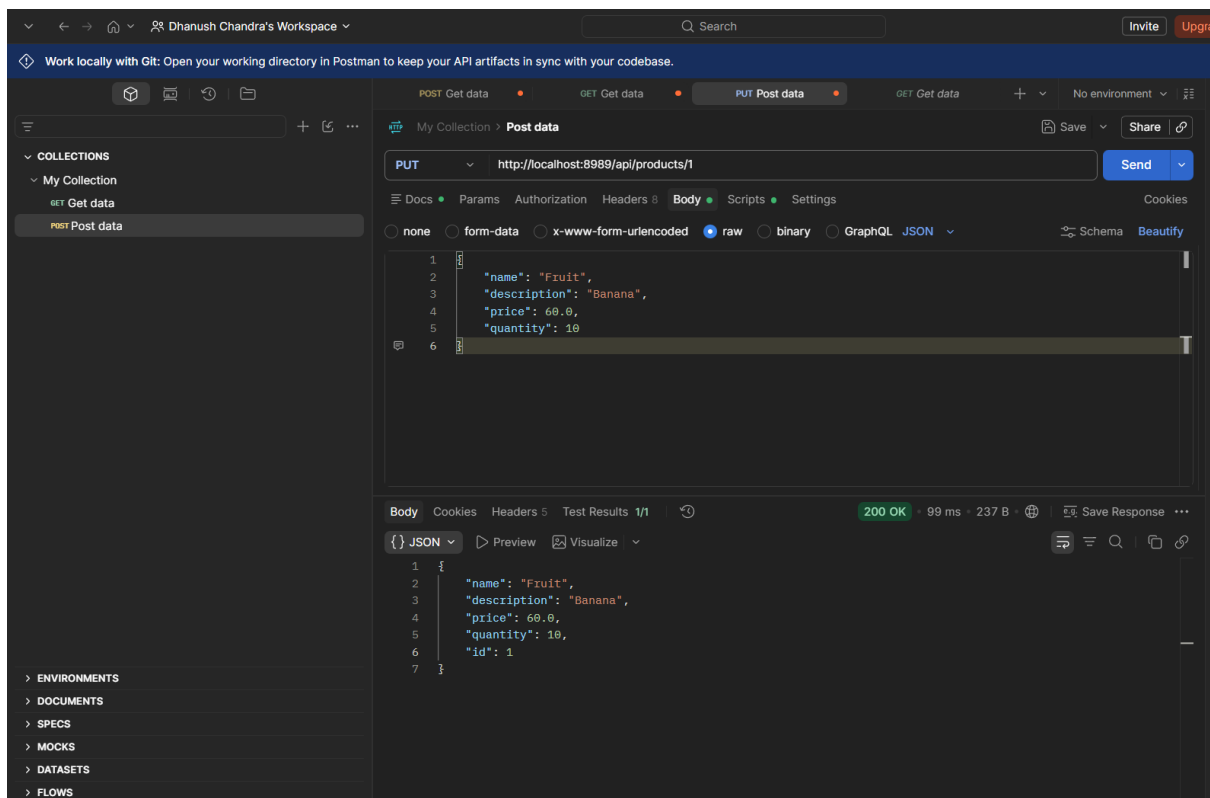

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

GET Get data

GET Get data

My Collection > Get data

Save

Share

GET

http://localhost:8989/api/products/1

Send

Docs

Params

Authorization

Headers

Body

Scripts

Settings

Body

Cookies

Headers

Test Results 1/1

200 OK · 15 ms · 245 B

Save Response

JSON

Preview

Visualize

```
1 {
2   "name": "Laptop",
3   "description": "Dell XPS 13",
4   "price": 1200.0,
5   "quantity": 10,
6   "id": 1
7 }
```

ENVIRONMENTS

DOCUMENTS

SPECS

MOCKS

DATASETS

FLOWS

Open Folder

Terminal

Console

Fix status code assertion

Fix status code assertion

Update the status code assertion to expect 404, as the current endpoint is returning a Not Found error.

Test script

```
1 - pm.test("Status code is 200", function () {
2   -
3   + pm.response.to.have
4   + pm.test("Status code is 404", function () {
5     +
6     + pm.response.to.have
```

Accept

Decline

Think Harder

Start using Agent Model!

Your plan includes 50 AI credits per month to use Agent Mode.

Fix URL and assert 404/200

Add a follow-up request

Create an environment for base URL

Describe what you need. Press @ for context, / for Skills.

Auto

Globals

Vault

Tools

Work locally with Git: Open your working directory in Postman to keep your API artifacts in sync with your codebase.

GET Get data

GET Get data

My Collection > Get data

Save

Share

GET

http://localhost:8989/api/products

Send

Docs

Params

Authorization

Headers

Body

Scripts

Settings

Body

Cookies

Headers

Test Results 1/1

200 OK · 14 ms · 416 B

Save Response

JSON

Preview

Visualize

```
1 [
2   {
3     "name": "Laptop",
4     "description": "Dell XPS 13",
5     "price": 1200.0,
6     "quantity": 10,
7     "id": 1
8   },
9   {
10    "name": "Smartphone",
11    "description": "Samsung Galaxy S21",
12    "price": 999.0,
13    "quantity": 20,
14    "id": 2
15  },
16  {
17    "name": "Tablet",
18    "description": "Apple iPad Pro",
19    "price": 799.0,
20    "quantity": 15,
21    "id": 3
22  }
23 ]
```

ENVIRONMENTS

DOCUMENTS

SPECS

MOCKS

DATASETS

FLOWS

Open Folder

Terminal

Console

Fix status code assertion

Fix status code assertion

Update the status code assertion to expect 404, as the current endpoint is returning a Not Found error.

Test script

```
1 - pm.test("Status code is 200", function () {
2   -
3   + pm.response.to.have
4   + pm.test("Status code is 404", function () {
5     +
6     + pm.response.to.have
```

Accept

Decline

Think Harder

Start using Agent Model!

Your plan includes 50 AI credits per month to use Agent Mode.

Rebuild path variables and tests

Parameterize request body for POST

Convert into a collection runner run

Describe what you need. Press @ for context, / for Skills.

Auto

Globals

Vault

Tools

