

Outdoor Air Conditioner OC 5704-230V



Product Features

Brand Name:	SoliTherm Outdoor
Order Number:	570400001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
IP class EN 60529:	IP 56 (TYPE 12, 3, 3R, 4)
Optional:	With 150 W cabinet heater order no. 570401001
Approvals:	CE, cURus, cULus
UL File Nummer:	cURus (SA32278) cULus (E498756)
Taric Code:	84158200

Technical data OC 5704-230V

Cooling capacity L35L35:	290 W @ 50 Hz 300 W @ 60 Hz
Cooling capacity L35L50:	250 W @ 50 Hz 250 W @ 60 Hz
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R 134a / 1430
Refrigerant charge:	100 g / 4 oz
High / low pressure:	25.5 / 4.7 bar 370 / 68 psig
Temperature range:	-20°C - +55°C
Air volume flow (system / unimpeded):	Ambient air circuit: 85 / 300 m³/h Cabinet air circuit: 85 / 136 m³/h
Mounting:	External
Dimension HxWxD:	480 x 250 x 190 mm
Weight:	15.2 kg
Cut out dimensions:	204 x 250 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	1.5 A
Starting current:	8 A
Max. current:	1.62 A
Nominal power L35L35:	290 W
Max. power:	340 W
Fuse:	3 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview product group Cabinet cooling units - Outdoor](#)

Performance Graph:


T = Ambient temperature

P = Cooling capacity

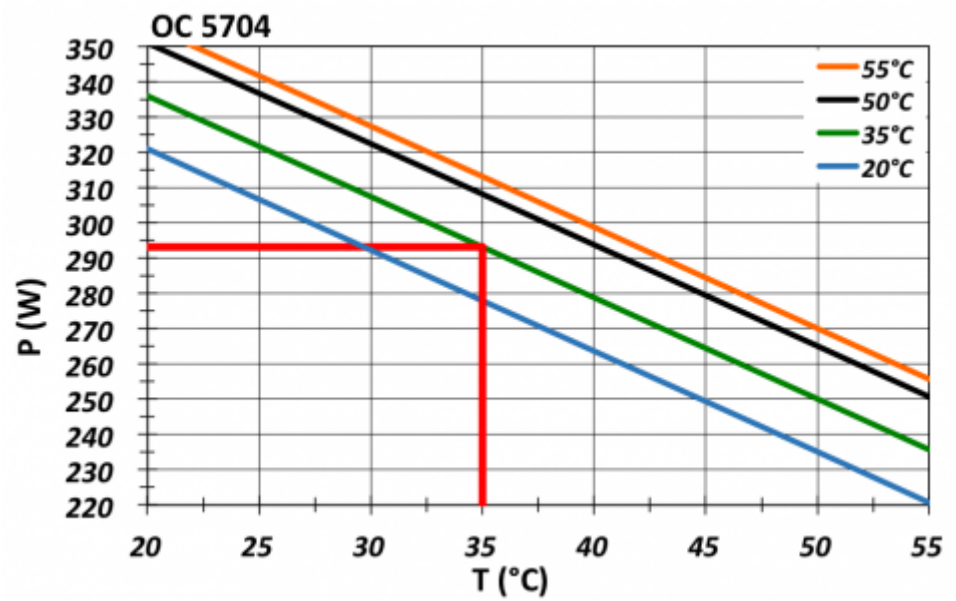

[click image to enlarge](#)

Cut out dimensions:

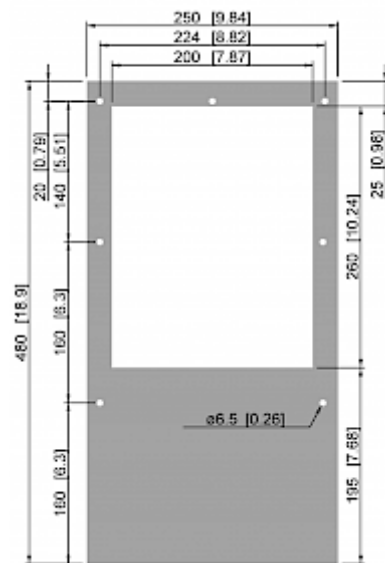

[click image to enlarge](#)