


D-FL 220

Ultrasonic Volume Flow Measuring System

- In situ measurement, continuous measurement
- Measurement even in wet or dust-laden flue gases
- Allows calibration to measure the volume flow
- Automatic zero and reference point check
- Easy installation, adjustment and maintenance
- Very low maintenance
- Remote access possible

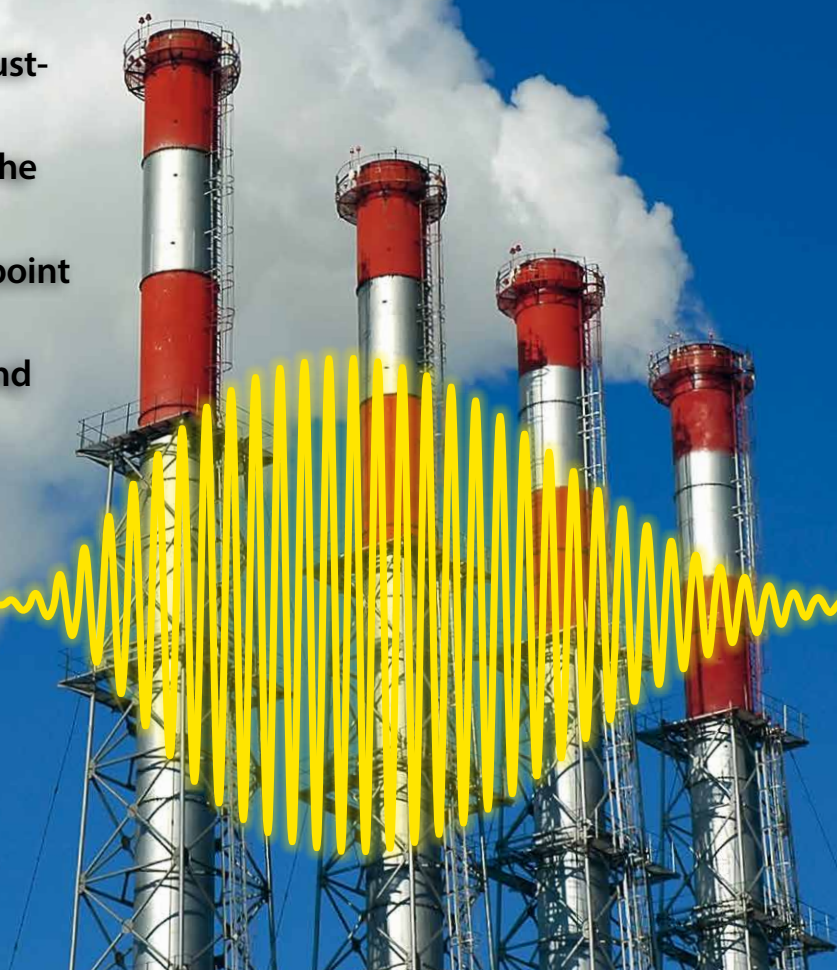

Volume Flow Measuring System

The new D-FL 220 allows for reliable measurement of the velocity and volume

Ultrasonic sensor system to measure the velocity and the volume flow of flue gas or process gas in pipes or ducts.

Features

- In situ measurement, continuous measurement
- Contactless measurement without any moving parts
- Operation via USB or Modbus RTU interface, optional with the universal control unit D-ISC 100
- Data transfer via Modbus RTU interface according to VDI 4201-3

- Remote access possible
- Measurement even in wet or dust-laden flue gas
- Allows calibration to measure the volume flow
- Automatic zero and reference point check
- Easy installation, adjustment and maintenance
- Very low maintenance

Applications

- Volume flow measurements at low speed
- Plants with damp and/or aggressive exhaust gas, e.g. in waste incineration plants
- Volume flow measurement at high dust content
- Incinerators in general
- Power plants, heating plants, cement plants
- Chemical and petrochemical industries
- Pulp and paper industry
- Biomass incinerators



Refinery



Cracker



Chemical Industry

flow of flue gas or process gas in a broad range of applications.

Operating principle

The flow velocity of sample gas is precisely calculated from the transit time difference dependant on the direction. Taking into account the cross-section of the stack, the gas temperature and absolute pressure the flow rate is calculated.

D-FL 220 performs automatic check cycles and is extremely low maintenance.

System components

System components:

- Measuring heads
- Purge flanges (material 1.4571)
- Welding pipe with flange (1.4571, FRP)
- Purge air unit for cleaning and cooling the sensors
- Terminal box for power supply of the sensors
- Universal control unit D-ISC 100 optional

The D-FL 220 can either be operated through local USB port or remotely using the RS 485 bidirectional Modbus RTU interface. Optional the universal control unit D-ISC 100 can be used.

Universal control unit D-ISC 100

The universal control unit allows the connection of up to eight measuring heads and allows a combination of dust and volume flow measurement. The D-ISC 100 offers remote inquiry and easy parameterization of connected DURAG devices. The display allows direct view of the current measuring values.


- Connection of up to 8 measuring heads
- Operation with keypad, through local USB port or remotely using RS 485 Modbus RTU interface
- Allows remote access to the connected measuring heads
- Expandable with extension modules



Technical data	
Measurements	flow velocity, volume flow, at operating conditions or normalized
Sample gas	air, flue gas, non flammable process gas
Flow velocity	0 .. 40 m/s
Duct diameter	0.5 – 13 m
Sample gas temperature	-20 to 120 / 150 / 200 / 250 / 300°C, others on request
Sample gas pressure (relative to ambient pressure)	-50 to +20 hPa, others on request
Sample gas moisture	0 – 100 % rel. humidity, condensation allowed
Ambient temperature	-20 to 50 °C, others on request



Steelworks

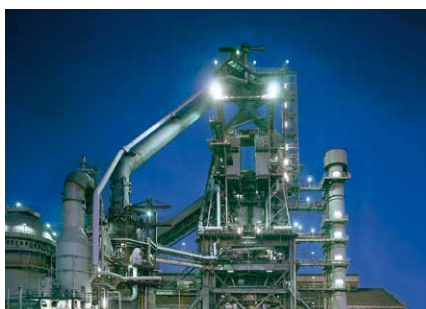

Blast furnace



Steam reformer



DURAG

DURAG GmbH

Kollaustraße 105
22453 Hamburg, Germany
Tel. +49 40 55 42 18-0
Fax +49 40 58 41 54
E-Mail: info@durag.de

DURAG Niederlassung Nord

Kollaustraße 105
22453 Hamburg, Germany
Tel. +49 40 55 42 18-0
Fax +49 40 58 41 54
E-Mail: DURAG-Nord@durag.de

DURAG Niederlassung Ost

Halsbrücker Straße 34
09599 Freiberg, Germany
Tel. +49 3731 30 04-0
Fax +49 3731 30 04-22
E-Mail: DURAG-Ost@durag.de

DURAG Niederlassung Süd

Weidenweg 16
73087 Bad Boll, Germany
Tel. +49 7164 912 25-0
Fax +49 7164 912 25-50
E-Mail: DURAG-Sued@durag.de

DURAG Niederlassung West

An der Pönt 53a
40885 Ratingen, Germany
Tel. +49 2102 74 00-0
Fax +49 2102 74 00 28
E-Mail: DURAG-West@durag.de

International

DURAG, Inc., USA

1355 Mendota Heights Road · Suite 200
Mendota Heights · MN 55120, USA
Tel. +1 651 451-1710
Fax +1 651 457-7684
E-Mail: durag@durag.com

DURAG India Instrumentation Ltd

#27/30, 2nd Main Road
Industrial Town, Rajajinagar
Bengaluru 560 044, India
Tel. +91 80 2314 5626 / 4215 1191
Fax +91 80 2314 5627
E-Mail: info@duragindia.com

DURAG France S.a.r.l.

Parc GIP Charles de Gaulle
49, rue Léonard de Vinci, BP 70166
95691 Goussainville CEDEX, France
Tel. +33 1 301 811 80
Fax +33 1 393 383 60
E-Mail: info@durag-france.fr

DURAG Italia S.r.l.

Via Carlo Panseri, 118, CIM uffici, P. secondo
28100 Novara, Italy
Tel. +39 0321 679569
Fax +39 0321 474165
E-Mail: info@durag.it

DURAG UK Office

Suite 17, Brookside Business Park
Cold Meece, Stone, Staffordshire
ST15 0RZ, United Kingdom
Tel. +44 1785 760 007
Fax +44 1785 760 014
E-Mail: durag.uk@durag.de

DURAG Instrumentation (Shanghai) Co., Ltd.

Room 706, Dibao Plaza, No. 3998 Hongxin Rd.
Minhang District, Shanghai, 201103 PR China
Tel. +86 21 60732979-206
Fax +86 21 60732980
E-Mail: lianggc@durag-cn.com

DURAG Japan Office

c/o TMS Planning Inc.
291-2 Umena, Mishima-shi, Shizuoka-ken,
411-0816 Japan
Tel./Fax: +81 55 977 3994
E-Mail: saito@durag.jp

DURAG Korea Office

RM #1131, Manhattan Building,
36-2, Yeouido-Dong, Yeongdeungpo-Gu, Seoul,
Korea
Tel. +82 2 761 8970
Fax +82 2 761 8971
E-Mail: mac_lim@durag-group.co.kr

DURAG Brazil Office

Rua José Amaro Pecanha, 58
05126-150 Sao Paulo - SP, Brazil
Tel. +55 11 3906 8921
Fax +55 11 3902 2382
E-Mail: ednaldo@durag.com.br



DURAG data systems GmbH

Kollaustraße 105,
22453 Hamburg, Germany
Tel. +49 40 55 42 18-3000
Fax +49 40 55 42 18-3099
E-Mail: info@durag-data.de



DURAG process & systems technology gmbh

Kollaustraße 105
22453 Hamburg, Germany
Tel. +49 40 55 42 18-0
Fax +49 40 58 41 54
E-Mail: info@durag-process.de



VEREWA Umwelt- und Prozessmesstechnik GmbH

Kollaustraße 105
22453 Hamburg, Germany
Tel. +49 40 55 42 18-0
Fax +49 40 58 41 54
E-Mail: verewa@durag.de



Hegwein GmbH

Am Boschwerk 7
70469 Stuttgart, Germany
Tel. +49 711 135 788-0
Fax +49 711 135 788-5
E-Mail: info@hegwein.de



SMITSVONK Holland B.V.

P.O. Box 180, 2700 AD Zoetermeer
Loodstraat 57, 2718 RV Zoetermeer
Netherlands
Tel. +31 79 361 35 33
Fax +31 79 361 13 78
E-mail: sales@smitsvonk.nl

www.durag.de