

Pratik Agrawal

500123601

Devops B2

Lab Exercise 5- Understanding CMD, RUN, and ENTRYPOINT in Dockerfile

Objective:

To learn the differences between CMD, RUN, and ENTRYPOINT instructions in Dockerfiles by creating and running Docker containers with different configurations.

Prerequisites:

- Docker installed on your machine
 - Basic understanding of Docker and Dockerfile
-

Part 1: Overview of CMD, RUN, and ENTRYPOINT

- **RUN:** Executes commands at build time to install software, download dependencies, or configure the environment. The result is saved in the image.
- **CMD:** Specifies the default command to be executed when a container starts. It can be overridden when running a container.

- **ENTRYPOINT:** Defines the main executable for the container, which can't be easily overridden. However, additional arguments can be passed when the container starts.
-

Part 2: Exploring RUN Command

1. Create a Dockerfile with RUN:

Create a directory called dockerfile-run-cmd-entrypoint and navigate to it:

```
mkdir dockerfile-run-cmd-entrypoint && cd dockerfile-run-cmd-entrypoint
```

```
C:\Users\prati>cd dockerfile-run-cmd-entrypoint
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>notepad dockerfile
```

Create a simple Dockerfile that uses the RUN instruction:

```
# Use an official Ubuntu base image
```

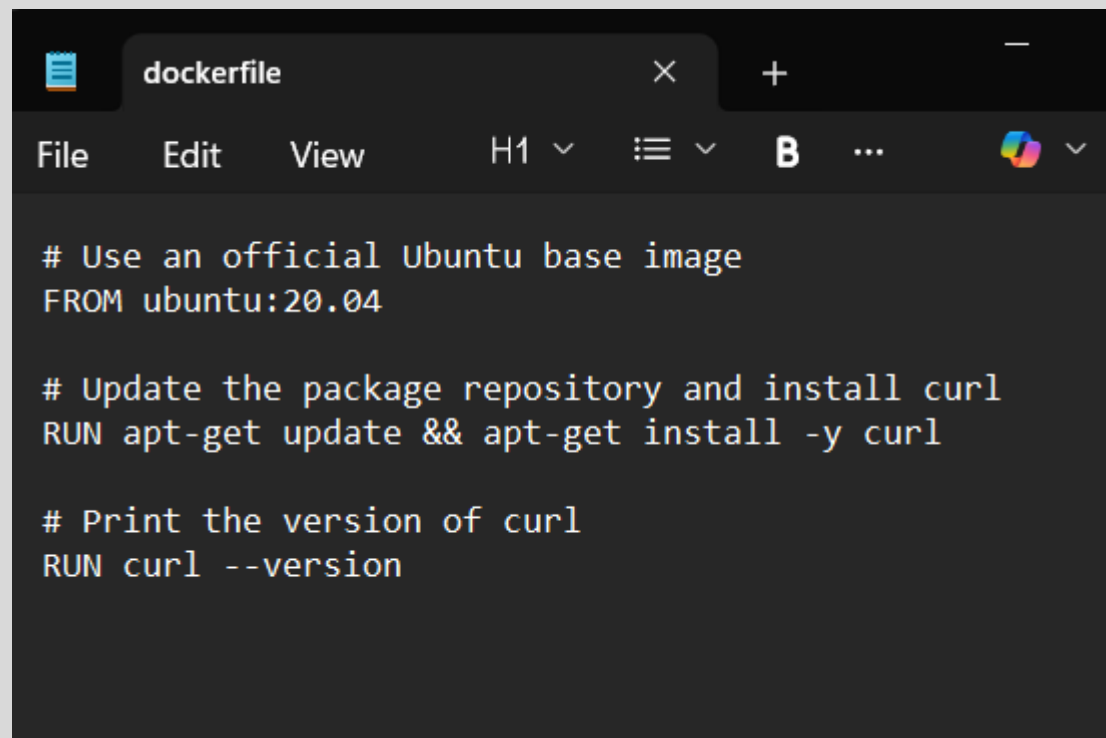
```
FROM ubuntu:20.04
```

```
# Update the package repository and install curl
```

```
RUN apt-get update && apt-get install -y curl
```

```
# Print the version of curl
```

RUN curl --version

A screenshot of a code editor window titled 'dockerfile'. The editor has a dark theme and a menu bar with 'File', 'Edit', and 'View'. The code inside the editor is as follows:

```
# Use an official Ubuntu base image
FROM ubuntu:20.04

# Update the package repository and install curl
RUN apt-get update && apt-get install -y curl

# Print the version of curl
RUN curl --version
```

2. Build the Docker Image:

Build the image using the Dockerfile:

```
docker build -t run-example .
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker build -t run-example .
[+] Building 46.1s (8/8) FINISHED                                docker:desktop-linux
=> [internal] load build definition from dockerfile              0.0s
=> => transferring dockerfile: 245B                               0.0s
=> [internal] load metadata for docker.io/library/ubuntu:20.04  3.2s
=> [auth] library/ubuntu:pull token for registry-1.docker.io    0.0s
=> [internal] load .dockerignore                                0.0s
=> => transferring context: 2B                                     0.0s
=> [1/3] FROM docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 7.6s
=> => resolve docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 0.0s
=> => sha256:13b7e930469f6d3575a320709035c6acf6f54 27.51MB / 27.51MB 7.0s
=> => extracting sha256:13b7e930469f6d3575a320709035c6acf6f5485a76ab 0.5s
=> [2/3] RUN apt-get update && apt-get install -y curl         31.9s
=> [3/3] RUN curl --version                                     0.3s
=> exporting to image                                           2.8s
=> => exporting layers                                           2.1s
=> => exporting manifest sha256:75971c2ad648cef6fff5579448eac24deac0 0.0s
=> => exporting config sha256:f13b6baf0f76f67d845564fcf9a69cf1c2401b 0.0s
=> => exporting attestation manifest sha256:b26967549e0a33460e0f59c1 0.0s
=> => exporting manifest list sha256:6bfabf61c9b0fe581822f4014063dd6 0.0s
=> => naming to docker.io/library/run-example:latest            0.0s
=> => unpacking to docker.io/library/run-example:latest         0.5s
```

View build details: <docker-desktop://dashboard/build/desktop-linux/desktop-linux/yvzh6auomsz3rh5ok7y233d>

3. Explanation:

The RUN commands in this Dockerfile are executed during the image build process. The first RUN installs curl, and the second RUN command checks and prints the curl version. After the image is built, the commands executed by RUN are already baked into the image.

4. Verify with Docker History:

You can check the layers created by RUN using:

docker history run-example

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker history run-example
```

IMAGE	COMMENT	CREATED	CREATED BY	SIZE
6bfabf61c9b0		9 seconds ago	RUN /bin/sh -c curl --version # buildkit	4.1k
B	buildkit.dockerfile.v0			
<missing>		9 seconds ago	RUN /bin/sh -c apt-get update && apt-get ins...	76.6
MB	buildkit.dockerfile.v0			
<missing>		10 months ago	/bin/sh -c #(nop) CMD ["/bin/bash"]	0B
<missing>		10 months ago	/bin/sh -c #(nop) ADD file:f9ee450324e6ff2c9...	81.7
MB				
<missing>		10 months ago	/bin/sh -c #(nop) LABEL org.opencontainers...	0B
<missing>		10 months ago	/bin/sh -c #(nop) LABEL org.opencontainers...	0B
<missing>		10 months ago	/bin/sh -c #(nop) ARG LAUNCHPAD_BUILD_ARCH	0B
<missing>		10 months ago	/bin/sh -c #(nop) ARG RELEASE	0B

Each RUN command creates a new layer in the image.

Part 3: Exploring CMD Command

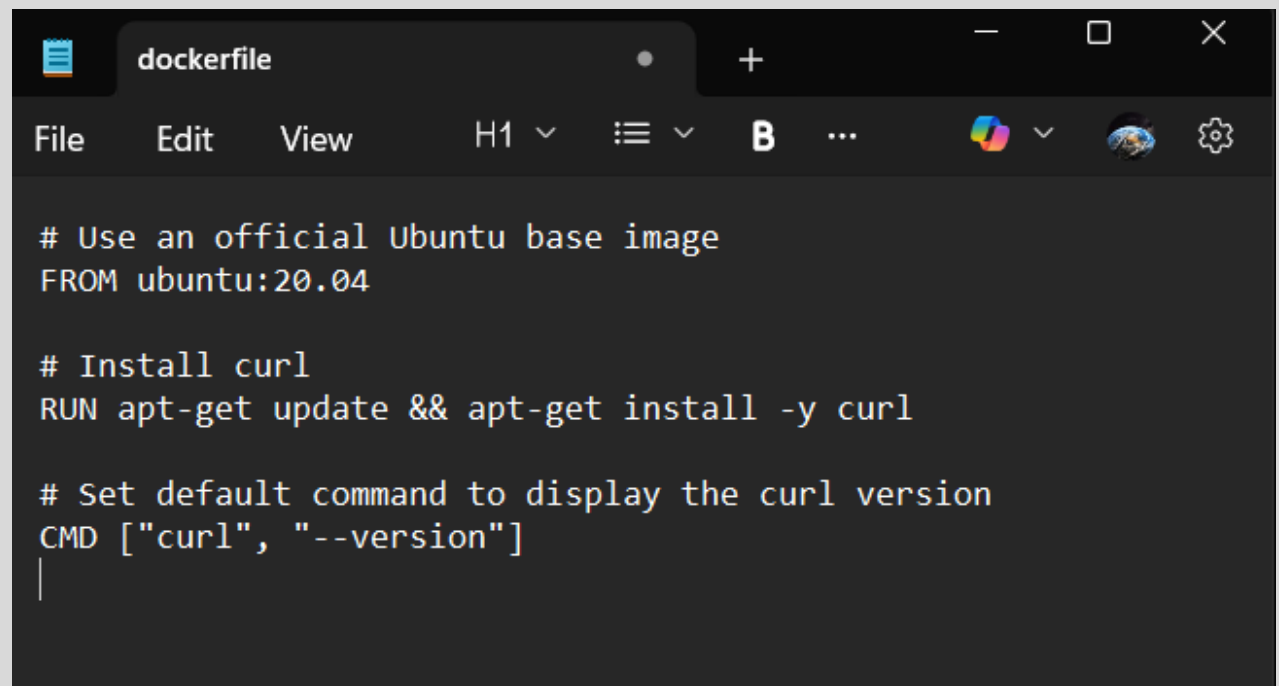
1. Create a Dockerfile with CMD:

Modify the Dockerfile to include the CMD instruction:

```
# Use an official Ubuntu base image
FROM ubuntu:20.04

# Install curl
RUN apt-get update && apt-get install -y curl

# Set default command to display the curl version
CMD ["curl", "--version"]
```

A screenshot of a code editor window titled 'dockerfile'. The editor has a dark theme and shows the same Dockerfile content as the previous block. The menu bar includes 'File', 'Edit', 'View', 'H1', a list icon, 'B', and a search icon. The toolbar includes a color picker, a globe icon, and a settings gear icon. The code is as follows:

```
# Use an official Ubuntu base image
FROM ubuntu:20.04

# Install curl
RUN apt-get update && apt-get install -y curl

# Set default command to display the curl version
CMD ["curl", "--version"]
|
```

2. Build the Docker Image:

Build the Docker image again:

```
docker build -t cmd-example .
```

```

C:\Users\prati\dockerfile-run-cmd-entrypoint>docker build -t cmd-example .
[+] Building 1.6s (6/6) FINISHED                                docker:desktop-linux
=> [internal] load build definition from dockerfile             0.0s
=> => transferring dockerfile: 240B                             0.0s
=> [internal] load metadata for docker.io/library/ubuntu:20.04 1.2s
=> [internal] load .dockerignore                               0.0s
=> => transferring context: 2B                                    0.0s
=> [1/2] FROM docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 0.0s
=> => resolve docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 0.0s
=> CACHED [2/2] RUN apt-get update && apt-get install -y curl 0.0s
=> exporting to image                                           0.2s
=> => exporting layers                                           0.0s
=> => exporting manifest sha256:ac3b8f31f647d56b2a0be47f2e6b7038c967 0.0s
=> => exporting config sha256:8e8fa895941d0cb8e249cfaab38a1fd7be98f6 0.0s
=> => exporting attestation manifest sha256:4a335b16adc5270f7800a682 0.0s
=> => exporting manifest list sha256:ab9ce85801cc5cc3268d23225ed3e94 0.0s
=> => naming to docker.io/library/cmd-example:latest           0.0s
=> => unpacking to docker.io/library/cmd-example:latest         0.0s

View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/a942xnjqy2nfk4k5gwniv7yyk

```

3. Run the Container:

Run the container and see the output:

```
docker run cmd-example
```

```

C:\Users\prati\dockerfile-run-cmd-entrypoint>docker run cmd-example
curl 7.68.0 (x86_64-pc-linux-gnu) libcurl/7.68.0 OpenSSL/1.1.1f zlib/1.2.11 brotli/
1.0.7 libidn2/2.2.0 libpsl/0.21.0 (+libidn2/2.2.0) libssh/0.9.3/openssl/zlib nghttp
2/1.40.0 librtmp/2.3
Release-Date: 2020-01-08
Protocols: dict file ftp ftps gopher http https imap imaps ldap ldaps pop3 pop3s rt
mp rtsp scp sftp smb smbs smtp smtps telnet tftp
Features: AsynchDNS brotli GSS-API HTTP2 HTTPS-proxy IDN IPv6 Kerberos Largefile li
bz NTLM NTLM_WB PSL SPNEGO SSL TLS-SRP UnixSockets

```

The output will display the curl version as the default command defined by CMD is executed when the container starts.

4. Override CMD:

You can override the CMD by specifying a different command when you run the container:

```
docker run cmd-example echo "Hello from CMD!"
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker run cmd-example echo "Hello from CMD!"  
Hello from CMD!
```

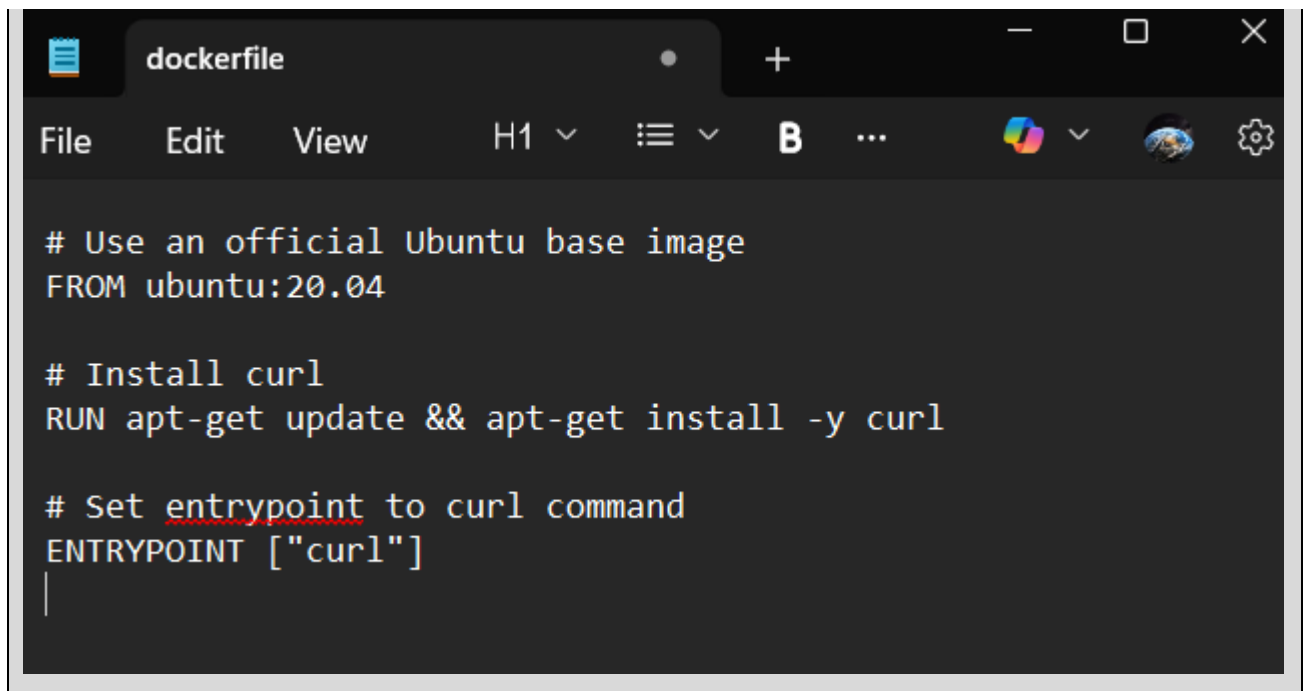
This will print Hello from CMD!, showing that the CMD can be overridden at runtime.

Part 4: Exploring ENTRYPOINT Command

1. Create a Dockerfile with ENTRYPOINT:

Modify the Dockerfile to use ENTRYPOINT instead of CMD:

```
# Use an official Ubuntu base image  
FROM ubuntu:20.04  
  
# Install curl  
RUN apt-get update && apt-get install -y curl  
  
# Set entrypoint to curl command  
ENTRYPOINT ["curl"]
```


A screenshot of a code editor window titled 'dockerfile'. The editor has a dark theme and a menu bar with 'File', 'Edit', and 'View'. The content of the Dockerfile is as follows:

```
# Use an official Ubuntu base image
FROM ubuntu:20.04

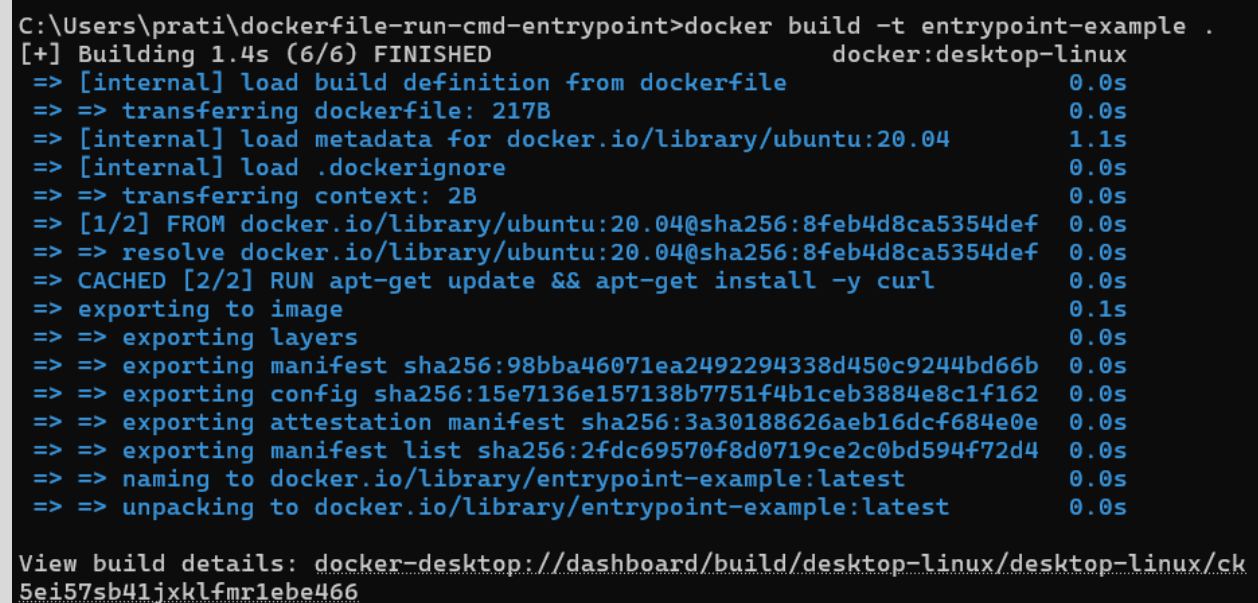
# Install curl
RUN apt-get update && apt-get install -y curl

# Set entrypoint to curl command
ENTRYPOINT ["curl"]
```

2. Build the Docker Image:

Build the image with the ENTRYPOINT instruction:

```
docker build -t entrypoint-example .
```

A screenshot of a terminal window showing the output of the 'docker build' command. The command is 'C:\Users\prati\dockerfile-run-cmd-entrypoint>docker build -t entrypoint-example .'. The output shows the build process for 'docker:desktop-linux', including loading the Dockerfile, resolving the Ubuntu base image, installing curl, and exporting the final image. The build is successful and takes 1.4 seconds.

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker build -t entrypoint-example .
[+] Building 1.4s (6/6) FINISHED                                docker:desktop-linux
=> [internal] load build definition from dockerfile             0.0s
=> => transferring dockerfile: 217B                             0.0s
=> [internal] load metadata for docker.io/library/ubuntu:20.04 1.1s
=> [internal] load .dockerignore                               0.0s
=> => transferring context: 2B                                   0.0s
=> [1/2] FROM docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 0.0s
=> => resolve docker.io/library/ubuntu:20.04@sha256:8feb4d8ca5354def 0.0s
=> CACHED [2/2] RUN apt-get update && apt-get install -y curl    0.0s
=> exporting to image                                           0.1s
=> => exporting layers                                           0.0s
=> => exporting manifest sha256:98bba46071ea2492294338d450c9244bd66b 0.0s
=> => exporting config sha256:15e7136e157138b7751f4b1ceb3884e8c1f162 0.0s
=> => exporting attestation manifest sha256:3a30188626aeb16dcf684e0e 0.0s
=> => exporting manifest list sha256:2fddc69570f8d0719ce2c0bd594f72d4 0.0s
=> => naming to docker.io/library/entrypoint-example:latest    0.0s
=> => unpacking to docker.io/library/entrypoint-example:latest  0.0s

View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/ck5ei57sb41jxklfmrlebe466
```

3. Run the Container:

When you run the container, since ENTRYPOINT is set to curl, you need to provide arguments to the curl command:

```
docker run entryptpoint-example --version
```

```
C:\Users\prati\dockerfile-run-cmd-entryptpoint>docker run entryptpoint-example --version
n
curl 7.68.0 (x86_64-pc-linux-gnu) libcurl/7.68.0 OpenSSL/1.1.1f zlib/1.2.11 brotli/
1.0.7 libidn2/2.2.0 libpsl/0.21.0 (+libidn2/2.2.0) libssh/0.9.3/openssl/zlib nghttp
2/1.40.0 librtmp/2.3
Release-Date: 2020-01-08
Protocols: dict file ftp ftps gopher http https imap imaps ldap ldaps pop3 pop3s rt
mp rtsp scp sftp smb smbs smtp smtps telnet tftp
Features: AsynchDNS brotli GSS-API HTTP2 HTTPS-proxy IDN IPv6 Kerberos Largefile li
bz NTLM NTLM_WB PSL SPNEGO SSL TLS-SRP UnixSockets
```

This will print the curl version because ENTRYPOINT defines the main executable (in this case, curl) and --version is passed as an argument to curl.

4. Override ENTRYPOINT:

Unlike CMD, the ENTRYPOINT is not easily overridden. If you try to override it using:

```
docker run entryptpoint-example echo "Hello from ENTRYPOINT!"
```

```
C:\Users\prati\dockerfile-run-cmd-entryptpoint>docker run entryptpoint-example echo "He
llo from ENTRYPOINT!"
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total   Spent    Left   Speed
  0     0    0     0    0     0      0  0 --:--:-- --:--:-- --:--:--    0
  0     0    0     0    0     0      0  0 --:--:-- --:--:-- --:--:--    0
    0     0    0     0    0     0      0  0 --:--:-- 0:00:01 --:--:--    0
    0     0    0     0    0     0      0  0 --:--:-- 0:00:02 --:--:--    0
    0     0    0     0    0     0      0  0 --:--:-- 0:00:03 --:--:--    0
curl: (6) Could not resolve host:
echo
curl: (3) URL using bad/illegal format or missing URL
```

It will result in an error because curl will interpret echo as an argument.

However, you can use the --entrypoint option to change the entrypoint:

```
docker run --entrypoint /bin/bash entrypoint-example -c "echo Hello from ENTRYPOINT!"
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker run --entrypoint /bin/bash entrypoint-example -c "echo Hello from ENTRYPOINT!"  
Hello from ENTRYPOINT!
```

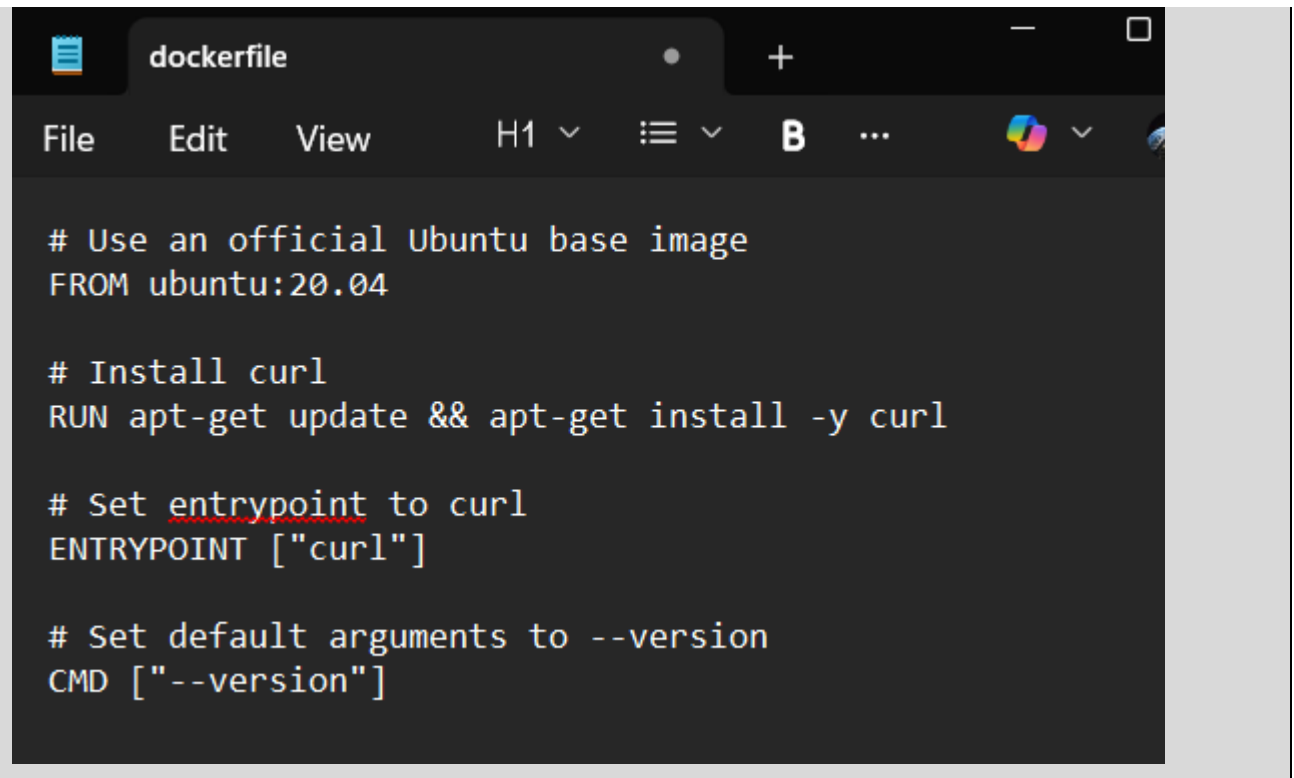
This runs the container with `/bin/bash` as the entrypoint, overriding the default ENTRYPOINT.

Part 5: Combining CMD and ENTRYPOINT

1. Create a Dockerfile with Both CMD and ENTRYPOINT:

Modify the Dockerfile to use both CMD and ENTRYPOINT:

```
# Use an official Ubuntu base image  
FROM ubuntu:20.04  
  
# Install curl  
RUN apt-get update && apt-get install -y curl  
  
# Set entrypoint to curl  
ENTRYPOINT ["curl"]  
  
# Set default arguments to --version  
CMD ["--version"]
```

A screenshot of a code editor window titled 'dockerfile'. The editor has a dark theme and shows a Dockerfile with the following content:

```
# Use an official Ubuntu base image
FROM ubuntu:20.04

# Install curl
RUN apt-get update && apt-get install -y curl

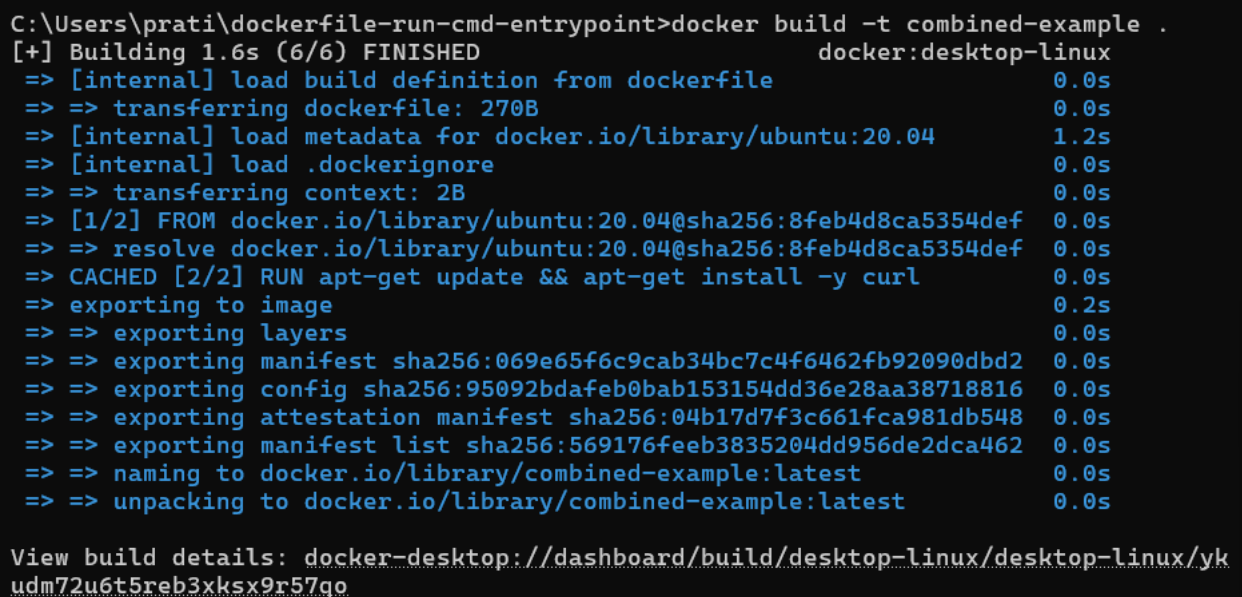
# Set entrypoint to curl
ENTRYPOINT ["curl"]

# Set default arguments to --version
CMD ["--version"]
```

2. Build the Image:

Build the new image:

`docker build -t combined-example .`

A screenshot of a terminal window showing the output of the command `docker build -t combined-example .`. The output shows the build process for a Docker image named 'combined-example'. It starts with 'Building 1.6s (6/6) FINISHED' and then lists various steps and their durations. The final output is 'View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/ykudm72u6t5reb3xksx9r57qo'.

3. Run the Container:

When you run the container without specifying any arguments, it will use the CMD as arguments to ENTRYPOINT:

```
docker run combined-example
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker run combined-example
curl 7.68.0 (x86_64-pc-linux-gnu) libcurl/7.68.0 OpenSSL/1.1.1f zlib/1.2.11 brotli/
1.0.7 libidn2/2.2.0 libpsl/0.21.0 (+libidn2/2.2.0) libssh/0.9.3/openssl/zlib nghttp
2/1.40.0 librtmp/2.3
Release-Date: 2020-01-08
Protocols: dict file ftp ftps gopher http https imap imaps ldap ldaps pop3 pop3s rt
mp rtsp scp sftp smb smbs smtp smtps telnet tftp
Features: AsynchDNS brotli GSS-API HTTP2 HTTPS-proxy IDN IPv6 Kerberos Largefile li
bz NTLM NTLM_WB PSL SPNEGO SSL TLS-SRP UnixSockets
```

The output will show the curl version, as ENTRYPOINT is curl and CMD provides --version as the argument.

4. Override CMD Arguments:

You can override the CMD arguments by specifying your own arguments:

```
docker run combined-example https://www.google.com
```

```
C:\Users\prati\dockerfile-run-cmd-entrypoint>docker run combined-example https://www.google.com
```

% Total	% Received	% Xferd	Average Speed	Time	Time	Time	Current
			Dload Upload	Total	Spent	Left	Speed
0	0	0	0	0	--::--::	--::--::	0<!doctype htm

```
l<html itemscope="" itemtype="http://schema.org/WebPage" lang="en-IN"><head><meta content="text/html; charset=UTF-8" http-equiv="Content-Type"><meta content="/images/branding/google/g/1x/googleleg_standard_color_128dp.png" itemprop="image"><title>Google</title><script nonce="JiWthsrspk4KfYM0-mIudg">(function(){var _g={kEI:'coaZaZDYFbnrlsQP8b2R-Qk',kEXPt:'0,1304203,2935842,14111,34680,30022,217969,142932,270476,30674,5231813,15,36811390,25381059,65167,39775,61250,14068,23254,37805,28334,48295,608,16392,14019,7714,33385,3050,2,26042,22727,33266,13071,20680,11883,6437,9742,2646,4521,14219,5506,14506,1382,2,1,1515,3355,2,194,5814,2,4205,3,10939,5159,2,874,24,2207,5089,19,3007,13,783,4081,4,5067,319,25902,1250,2116,3221,311,5,34,846,1200,2,12,16,1545,3,5941,1010,1747,4,3522,3,5896,3,1,5768,4,2243,241,296,5,1113,389,4,2647,5,2698,2870,298,6260,2993,1275,7,1784,7,1049,2,1912,10457,2,3004,2720,9,602,96,1553,4,5929,915,3640,1,2,827,3,1117,242,2,82,4829,81,10,204,441,158,2,1645,191,4,1928,1638,544,4,1567,1034,1399,187,2105,5,259,5,197,985,936,209,236,19,1421,119,4,372,13,1979,2363,5,40,394,984,1191,4,3845,4,76,278,1696,264,107,5,4,970,4,966,5,1125,3,2,2636,1114,4,32,4,833,1870,4,40,4,1854,256,4,134,304,323,1,2352,1636,4,225,41,5,1,476,708,4,14,3,2,1,447,4,598,132,5,75,4,1940,4,894,537,1563,1,1091,1,265,698,1230,1,1,2,23,740,4,1513,3183,13,179,329,824,542,204,4,331,4,959,425,8,5,14,57,258,695,8,817,1427,4,281,264,563,3459,12,352,3430,503,4,2623,4,138,4,12,26,2100,4,939,22,4,190,425,1,808,21007070,5,2253,739,4,2960,3,3237,5254,2,1558,3,2691,3,9181,2998,1195,3,746,6,1149,3,5578,2,1968,2,646,6491829,182,1899,2316,2,3639,565,296,487,1057,85,108490,1896122,14330057,256607,48968,4055371,42,5,116,590,5,2693,857,137,3,12,1,257,343,4,65,388,2,972,34,4,157,4,550,219,3,2,2,2,550,4,876,1059,2,473,218,5,3235,5,117,1,1059,2,12,16,362,218,1148,1,2,642,215,452,1032,1056,101,3235,1,2,753,5,326,229,1029,293,115,503,5,142,4,1015,307,526,878,2,196,262,87,471,65,100,8,48,2,104,5,81,73,909,3,289,130,169,4,76,15,1026,333,600,480,662,101,948,187,5,2,8,47,389,301,4,214,8,14,6,1011,20,3,2,2,2,928,4,283,276,4,41,70,212,125,4,4,3,2,2,1,3,1,3,1,3,2,1,2,2,2,2,3,2,2,2,2,1,2,2,3,1,2,2,2,3,2,1,2,3,2,1,2,3,2,1,3,2,10,2,2,2,2,9,3,1,3,1,2,11,2,1,3,2,1,11,1,2,2,3,1,3,1,3,2,2,2,1,2,3,2,1,2,2,2,3,1,2,2,2,3,1,3,2,2,1,2,2,3,1,10,2,2,3,1,3,10,1,2,2,2,2,11,2,2,1,2,2,180,97,60,120,145,43,240,77,3,2,2,2,1039,178,5,22,414,1119,921,156,8,292,131,139,134,83,11,501,10,499,1,2,849,3,2,2,2,355,288,4,99,236,2145,1239,337,1027,756,595,112,3,2,2,2,905,3,2,2,2,720,442,79,924,4239,799,132,1343',kBKL:'eR4I',KOPI:89978449};(function(){var a;((a=window.google)==null?0:a.stvsc)?google.kEI=_g.kEI:window.google=_g;}).call(this);})(function(){google.sn='webhp';google.kHL='en-IN';google.rdn=true;})();(function(){var g=this|self;function k(a){return window.google&&window.google.KOPI[|null];var l,m=[];function n(a){for(var b;a&&(!a.getAttribute(|!(b=a.getAttribute("eid"))));)a=a.parentNode;return b}function p(a){for(var b=null;a&&(!a.getAttribute(|!(b=a.getAttribute("leid"))));)a=a.parentNode;return b}function q(a){/^http:/i.test(a)&&window.location.protocol==="https:"&&(google.ml&&google.ml(Error("a"),|1,{src:a,gllm:1}),a==="")return a}function r(a,b,d,c,h){var e="";b.search("&ei=")===-1&&(e+"&ei="+n(c),b.search("&lei=")===-1&&(c=p(c))&&(e+="+&lei="+c));var f=b.search("&cshid=")===-1&&a!=="slh":c+"&z="+Date.now().t
```

This command will run `curl https://www.google.com` inside the container.

Summary of Differences:

- **RUN:** Executes commands during the image build process and creates layers. It is used to install packages and configure the environment.

- **CMD:** Specifies the default command to run when the container starts. It can be overridden by passing a different command when running the container.
 - **ENTRYPOINT:** Specifies the main command for the container. It is harder to override but allows passing arguments from the command line. When combined with CMD, CMD provides the default arguments for ENTRYPOINT.
-

Conclusion:

This lab exercise demonstrates the fundamental differences between RUN, CMD, and ENTRYPOINT in Docker. Each command serves a different purpose, from image build-time configuration (RUN) to defining the container's behavior at runtime (CMD and ENTRYPOINT). Understanding these differences is crucial for building effective and flexible Docker images.