MINH CHỨNG HOÀN THÀNH GAME CSS DINER

Họ và tên: Nguyễn Thanh Nam

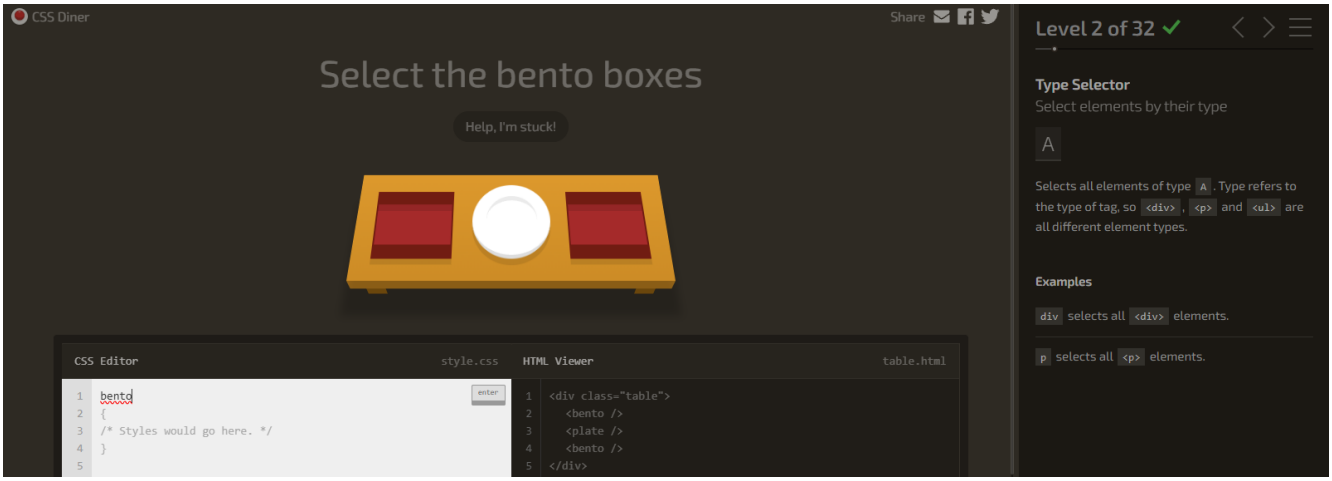
MSSV: 31241024675

Số level: 32

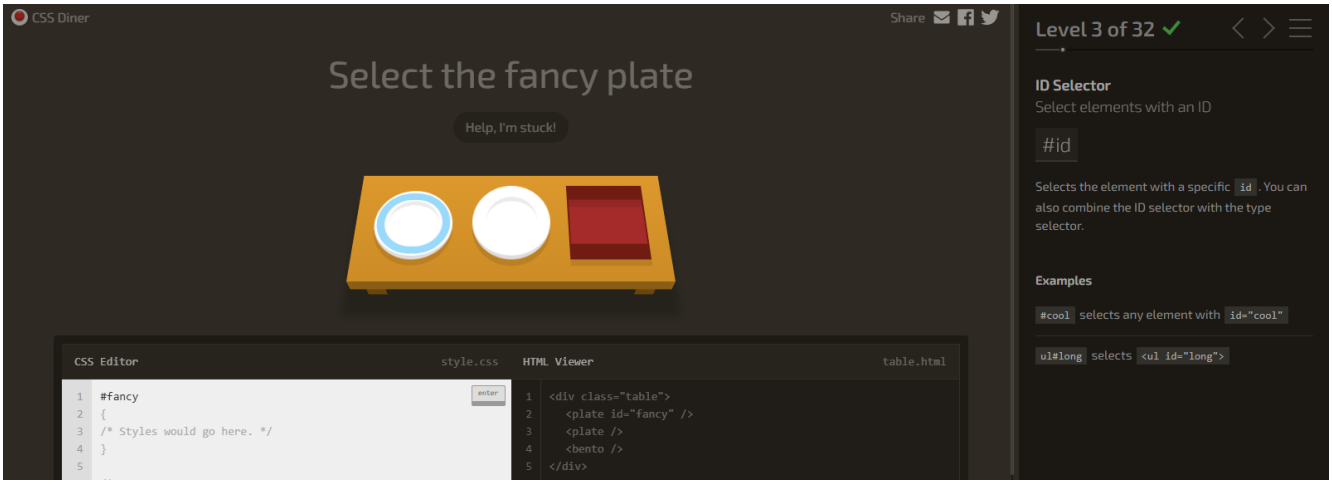
1.



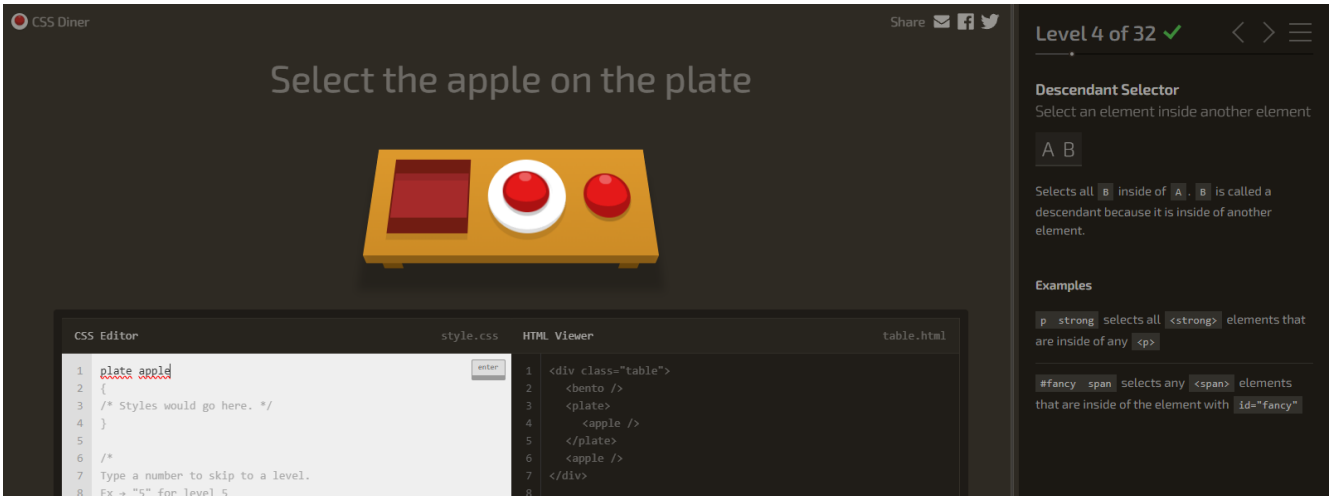
2.



3.



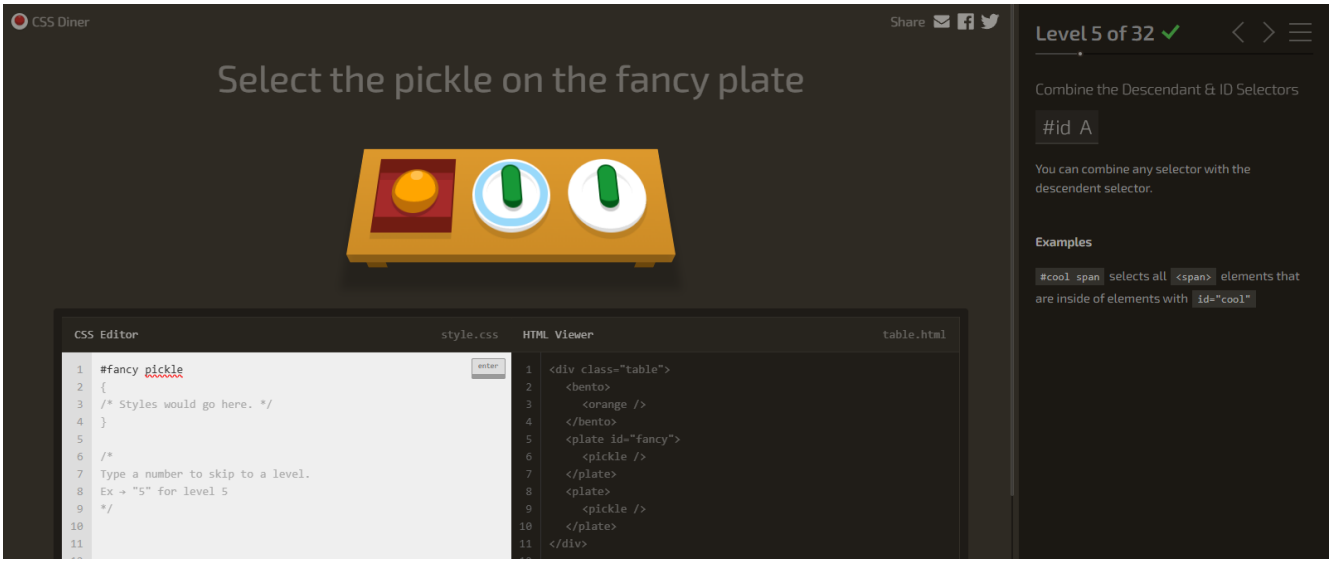
4.


CSS Diner
Share
Select the apple on the plate
CSS Editor
style.css
HTML Viewer
table.html
plate apple
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5

<bento />
<plate>
<apple />
</plate>
<apple />

Level 4 of 32
Descendant Selector
Select an element inside another element
A B
Selects all B inside of A . B is called a descendant because it is inside of another element.
Examples
p strong selects all elements that are inside of any <p>
#fancy span selects any elements that are inside of the element with id="fancy"

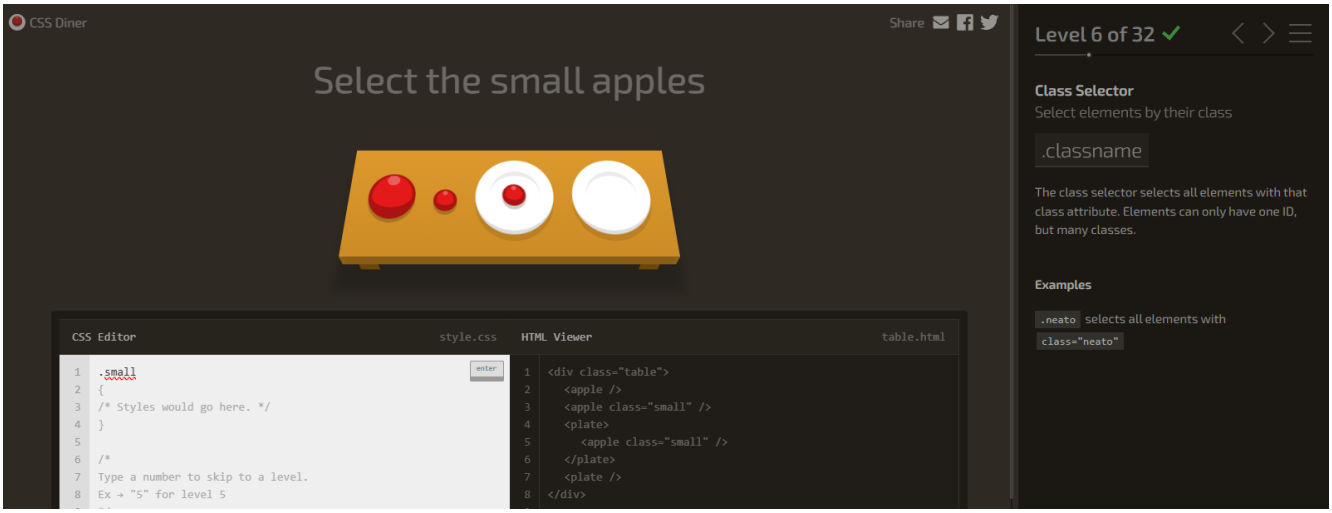
5.


CSS Diner
Share
Select the pickle on the fancy plate
CSS Editor
style.css
HTML Viewer
table.html
#fancy pickle
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

<bento>
<orange />
</bento>
<plate id="fancy">
<pickle />
</plate>
<plate>
<pickle />
</plate>

Level 5 of 32
Combine the Descendant & ID Selectors
#id A
You can combine any selector with the descendent selector.
Examples
#cool span selects all elements that are inside of elements with id="cool"

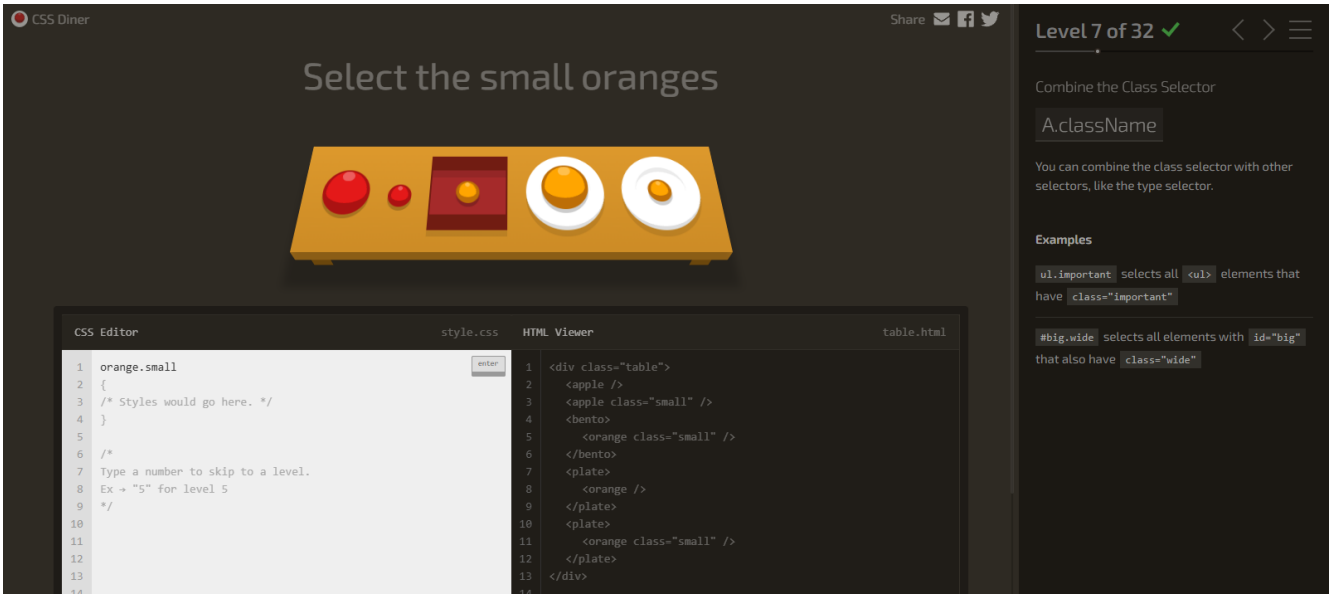
6.


CSS Diner
Share
Select the small apples
CSS Editor
style.css
HTML Viewer
table.html
.small
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5

<apple />
<apple class="small" />
<plate>
<apple class="small" />
</plate>
<plate />

Level 6 of 32
Class Selector
Select elements by their class
.classname
The class selector selects all elements with that class attribute. Elements can only have one ID, but many classes.
Examples
.neato selects all elements with class="neato"

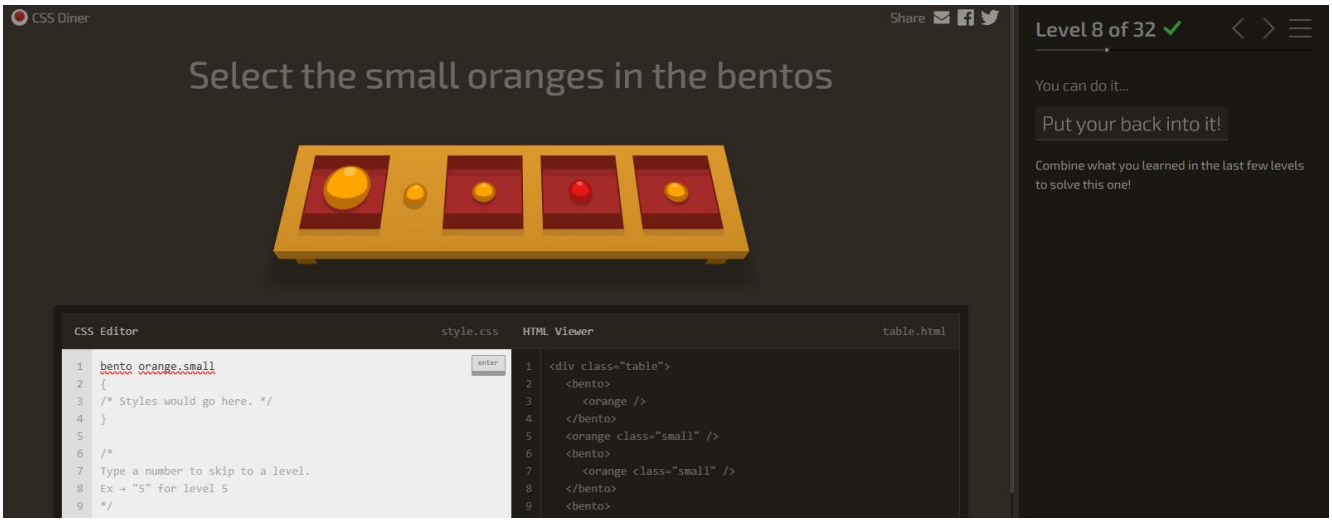
7.


CSS Diner
Share
Select the small oranges
CSS Editor
style.css
orange.small
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

<apple />
<apple class="small" />
<bento>
<orange class="small" />
</bento>
<plate>
<orange />
</plate>
<plate>
<orange class="small" />
</plate>

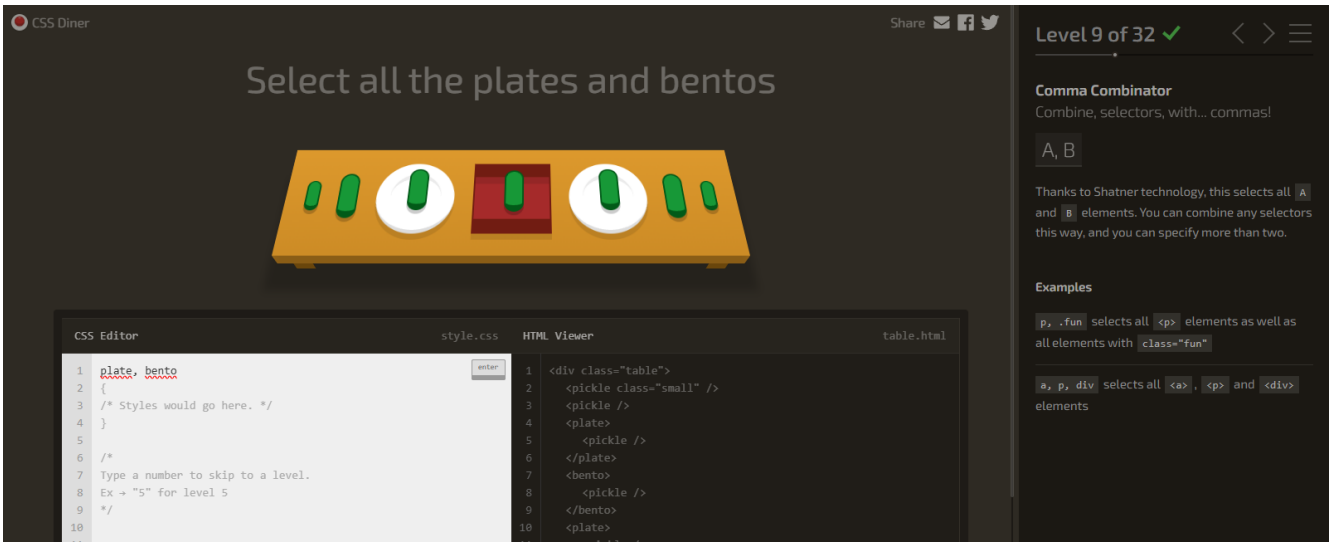
Level 7 of 32
Combine the Class Selector
A.className
You can combine the class selector with other selectors, like the type selector.
Examples
ul.important selects all <ul> elements that have class="important"
#big.wide selects all elements with id="big" that also have class="wide"

8.


CSS Diner
Share
Select the small oranges in the bentos
CSS Editor
style.css
bento orange.small
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

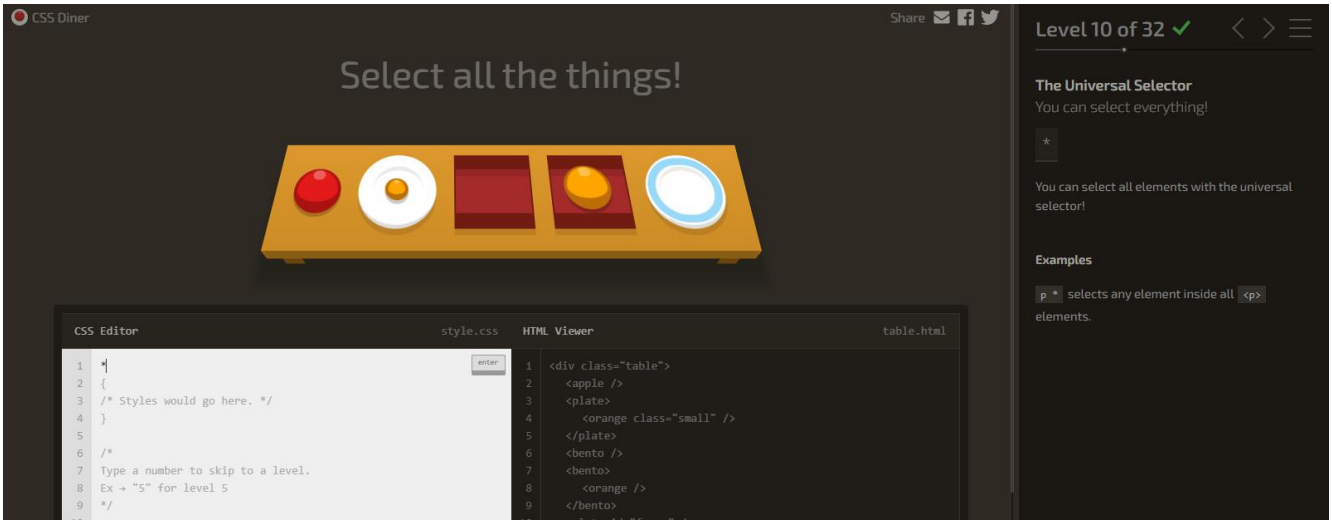
<bento>
<orange />
</bento>
<orange class="small" />
<bento>
<orange class="small" />
</bento>
<bento>
Level 8 of 32
You can do it...
Put your back into it!
Combine what you learned in the last few levels to solve this one!

9.

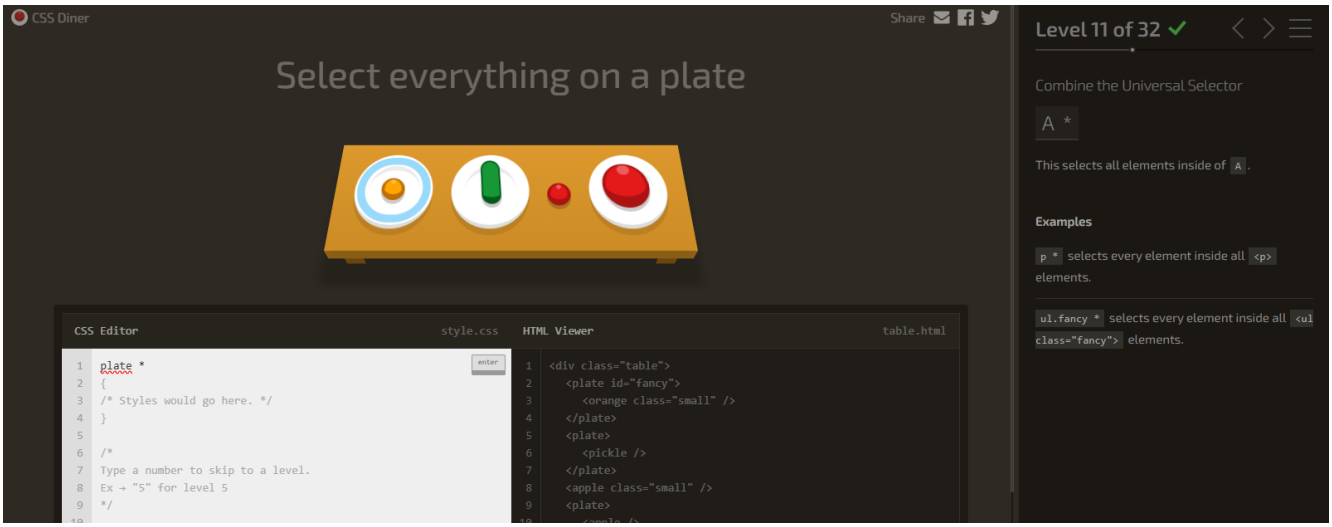

CSS Diner
Share
Select all the plates and bentos
CSS Editor
style.css
plate, bento
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

<pickle class="small" />
<pickle />
<plate>
<pickle />
</plate>
<bento>
<pickle />
</bento>
<plate>
Level 9 of 32
Comma Combinator
Combine, selectors, with... commas!
A, B
Thanks to Shatner technology, this selects all A and B elements. You can combine any selectors this way, and you can specify more than two.
Examples
p, .fun selects all <p> elements as well as all elements with class="fun"
a, p, div selects all <a>, <p> and elements

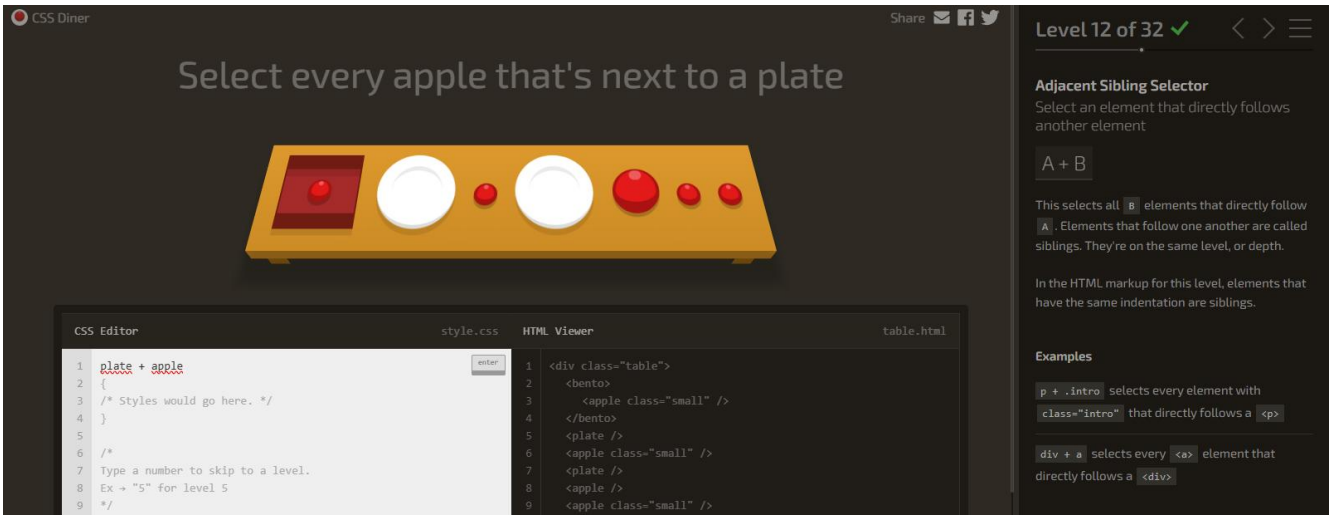
10.


CSS Diner
Share
Select all the things!
CSS Editor
style.css
HTML Viewer
table.html
Level 10 of 32
The Universal Selector
You can select everything!
*
You can select all elements with the universal selector!
Examples
p * selects any element inside all <p> elements.

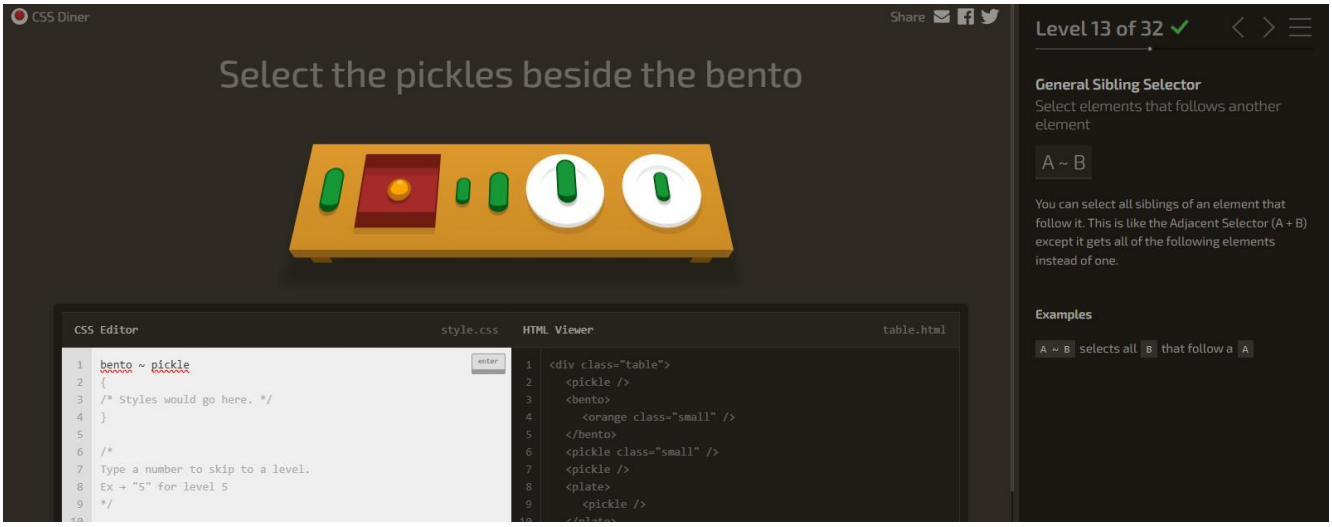
11.


CSS Diner
Share
Select everything on a plate
CSS Editor
style.css
HTML Viewer
table.html
Level 11 of 32
Combine the Universal Selector
A *
This selects all elements inside of A .
Examples
p * selects every element inside all <p> elements.
ul.fancy * selects every element inside all <ul class="fancy"> elements.

12.

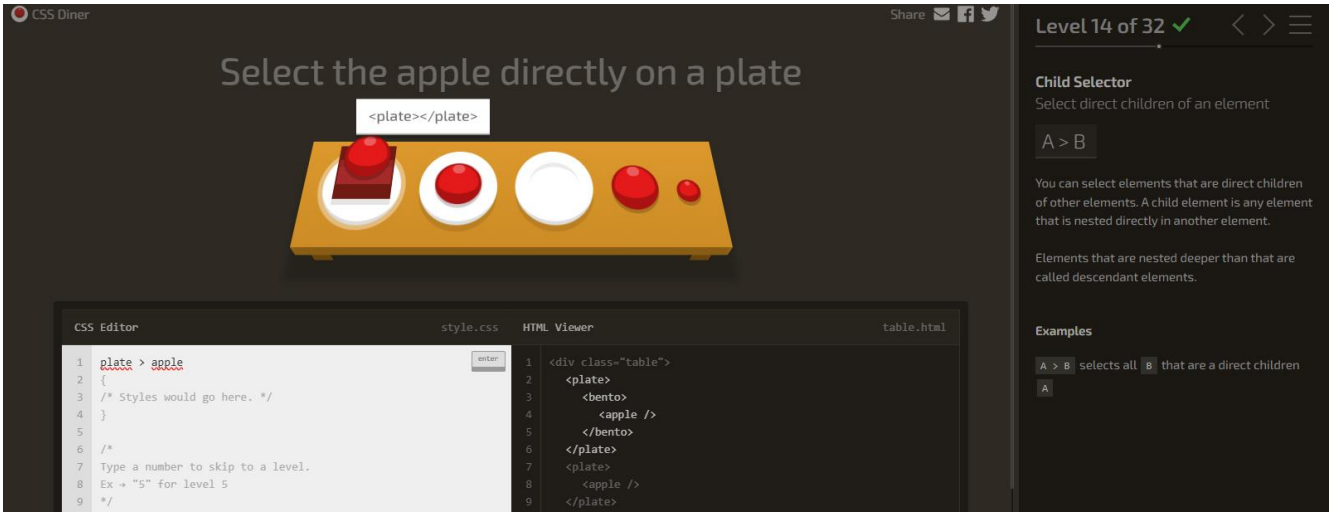

CSS Diner
Share
Select every apple that's next to a plate
CSS Editor
style.css
HTML Viewer
table.html
Level 12 of 32
Adjacent Sibling Selector
Select an element that directly follows another element
A + B
This selects all B elements that directly follow A . Elements that follow one another are called siblings. They're on the same level, or depth.
In the HTML markup for this level, elements that have the same indentation are siblings.
Examples
p + .intro selects every element with class="intro" that directly follows a <p>
div + a selects every <a> element that directly follows a

13.


CSS Diner
Share
Select the pickles beside the bento
CSS Editor
style.css
HTML Viewer
table.html
bento ~ pickle
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

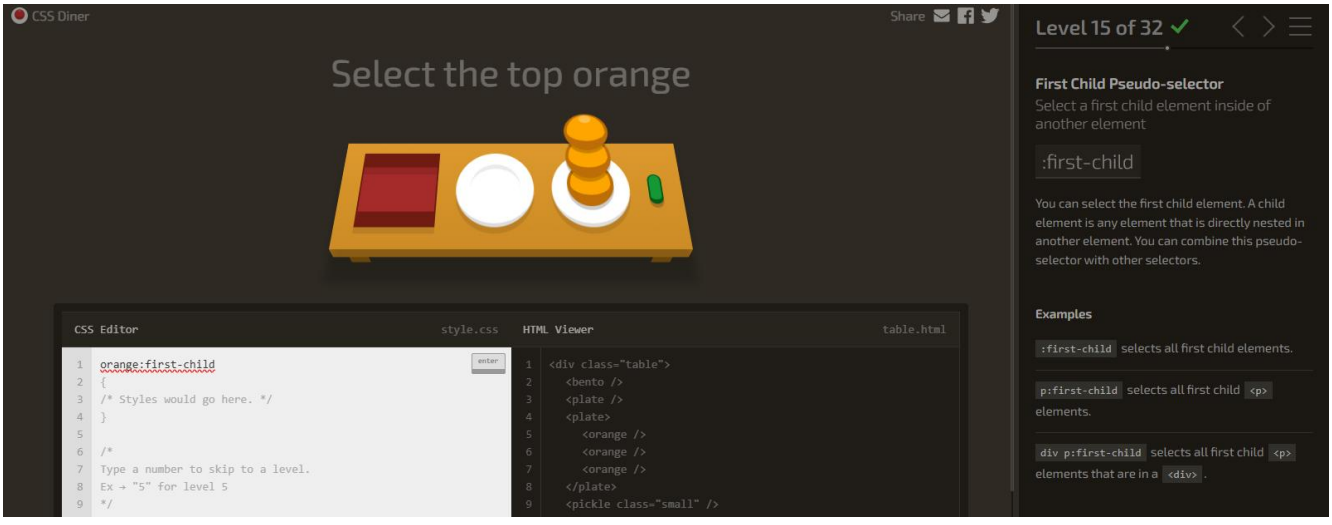
<pickle />
<bento>
<orange class="small" />
</bento>
<pickle class="small" />
<pickle />
<plate>
<pickle />
Level 13 of 32
General Sibling Selector
Select elements that follows another element
A ~ B
You can select all siblings of an element that follow it. This is like the Adjacent Selector (A + B) except it gets all of the following elements instead of one.
Examples
A ~ B selects all B that follow a A

14.


CSS Diner
Share
Select the apple directly on a plate
<plate></plate>
CSS Editor
style.css
HTML Viewer
table.html
plate > apple
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

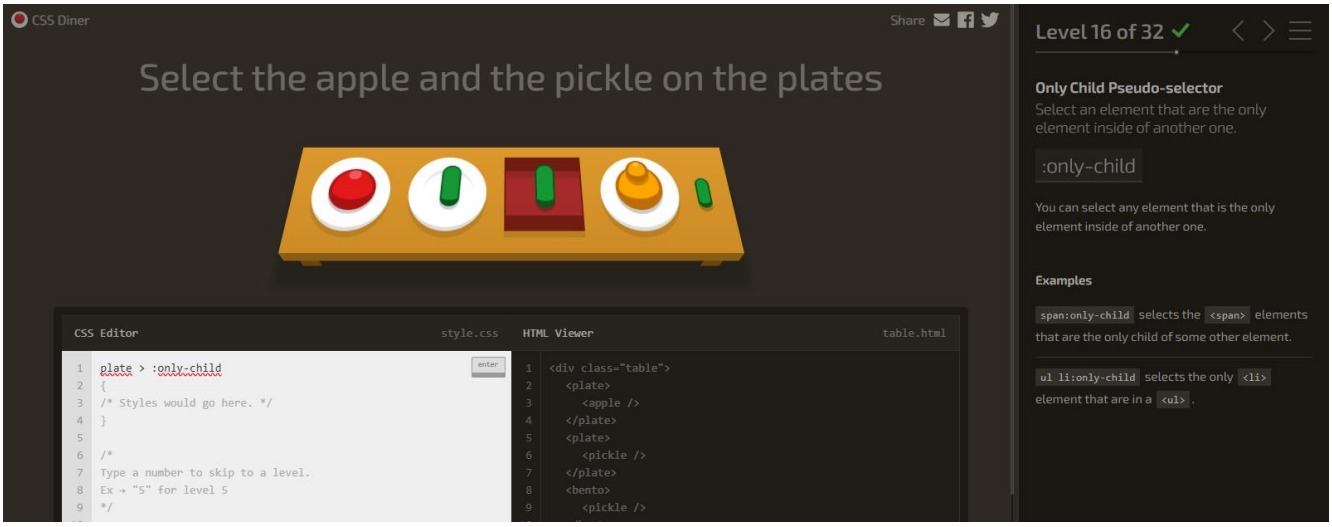
<plate>
<bento>
<apple />
</bento>
</plate>
<plate>
<apple />
</plate>
Level 14 of 32
Child Selector
Select direct children of an element
A > B
You can select elements that are direct children of other elements. A child element is any element that is nested directly in another element.
Elements that are nested deeper than that are called descendant elements.
Examples
A > B selects all B that are a direct children A

15.


CSS Diner
Share
Select the top orange
CSS Editor
style.css
HTML Viewer
table.html
orange:first-child
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

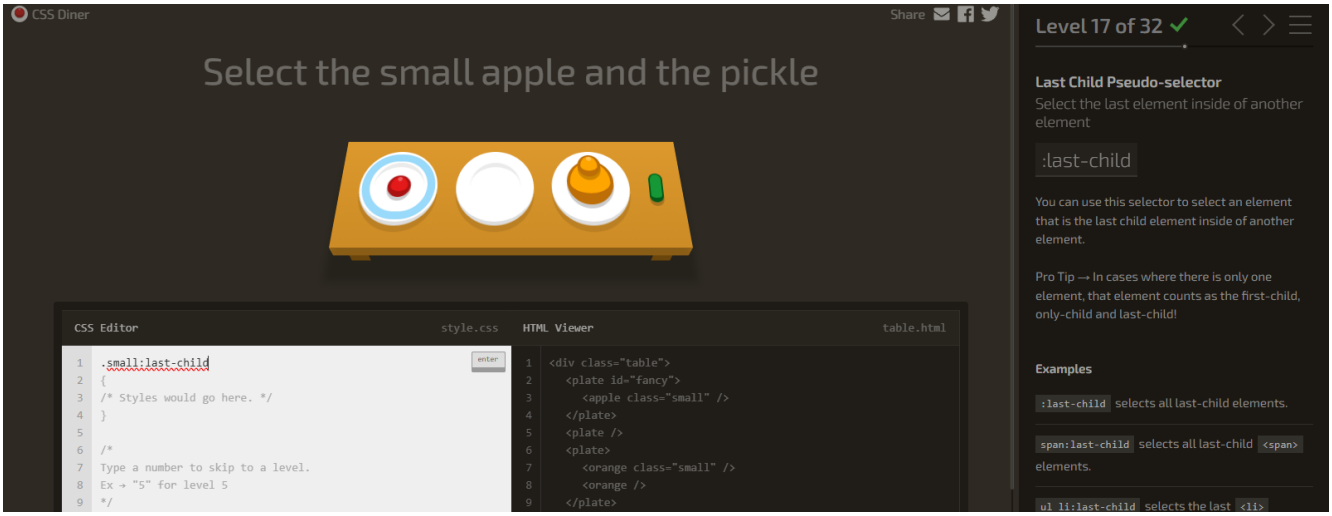
<bento />
<plate />
<plate>
<orange />
<orange />
<orange />
</plate>
<pickle class="small" />
Level 15 of 32
First Child Pseudo-selector
Select a first child element inside of another element
:first-child
You can select the first child element. A child element is any element that is directly nested in another element. You can combine this pseudo-selector with other selectors.
Examples
:first-child selects all first child elements.
p:first-child selects all first child <p> elements.
div p:first-child selects all first child <p> elements that are in a .

16.


CSS Diner
Share
Select the apple and the pickle on the plates
CSS Editor
style.css
plate > :only-child
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

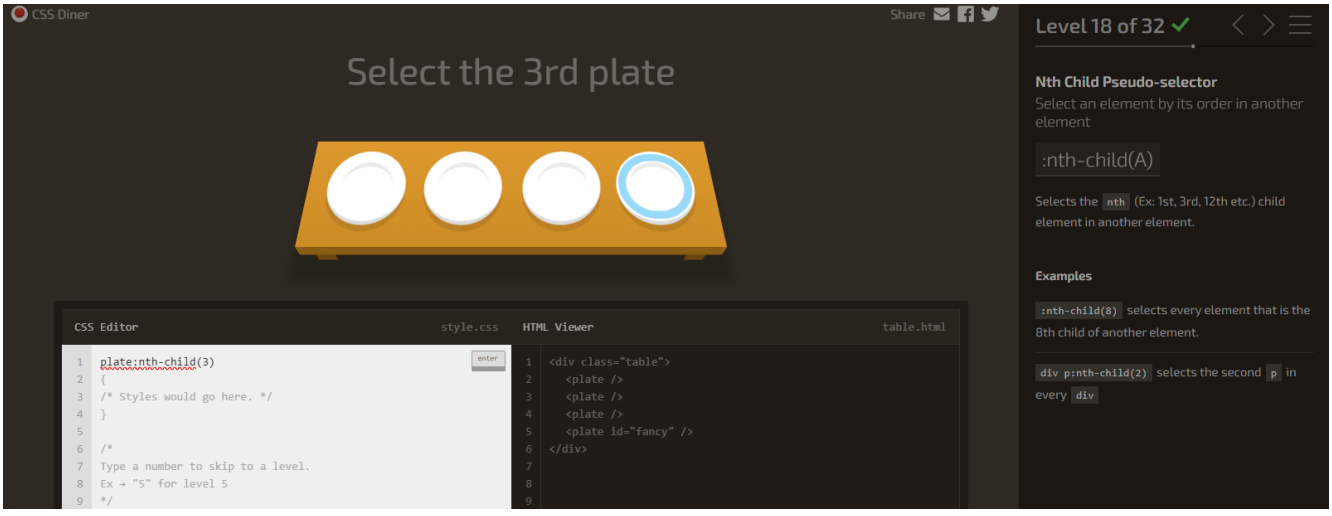
<plate>
<apple />
</plate>
<plate>
<pickle />
</plate>
<bento>
<pickle />
Level 16 of 32
Only Child Pseudo-selector
Select an element that are the only element inside of another one.
:only-child
You can select any element that is the only element inside of another one.
Examples
span:only-child selects the elements that are the only child of some other element.
ul li:only-child selects the only <li> element that are in a <ul>.

17.


CSS Diner
Share
Select the small apple and the pickle
CSS Editor
style.css
.small:last-child
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

<plate id="fancy">
<apple class="small" />
</plate>
<plate />
<plate>
<orange class="small" />
<orange />
</plate>
Level 17 of 32
Last Child Pseudo-selector
Select the last element inside of another element
:last-child
You can use this selector to select an element that is the last child element inside of another element.
Pro Tip → In cases where there is only one element, that element counts as the first-child, only-child and last-child!
Examples
:last-child selects all last-child elements.
span:last-child selects all last-child elements.
ul li:last-child selects the last

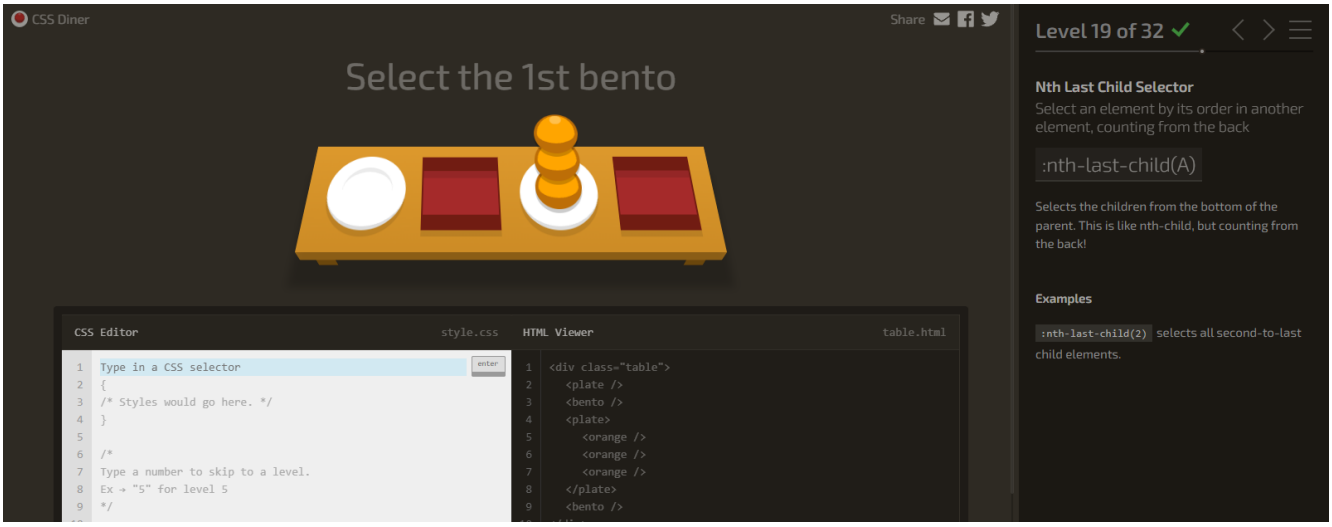
18.


CSS Diner
Share
Select the 3rd plate
CSS Editor
style.css
plate:nth-child(3)
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/
HTML Viewer
table.html

<plate />
<plate />
<plate />
<plate id="fancy" />

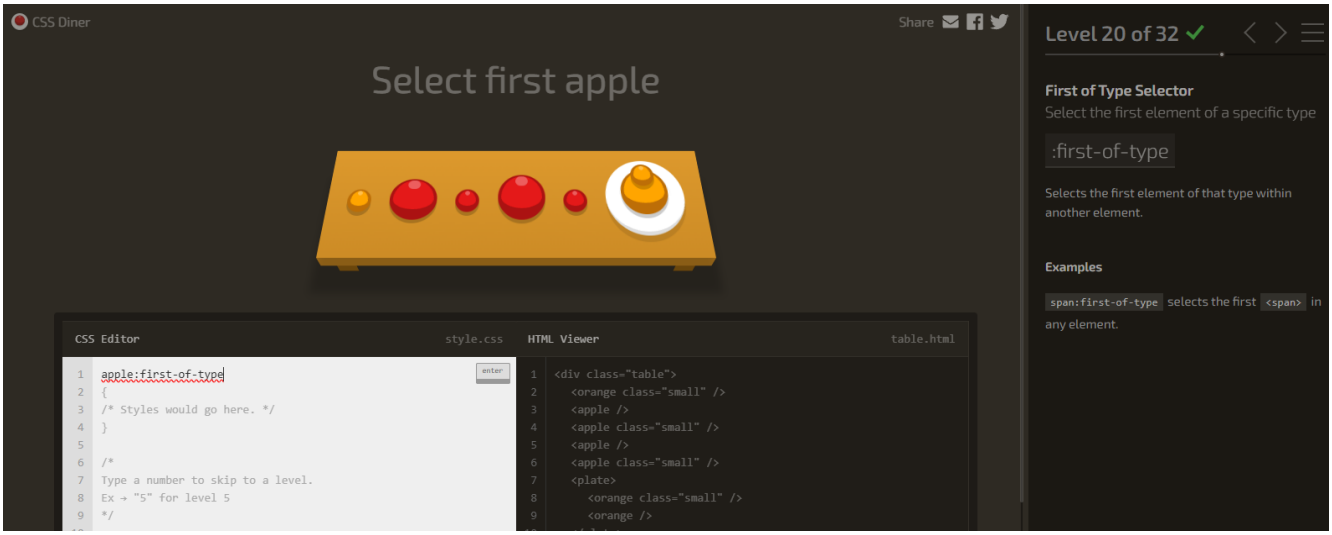
Level 18 of 32
Nth Child Pseudo-selector
Select an element by its order in another element
:nth-child(A)
Selects the nth (Ex: 1st, 3rd, 12th etc.) child element in another element.
Examples
:nth-child(8) selects every element that is the 8th child of another element.
div p:nth-child(2) selects the second p in every div

19.


CSS Diner
Share
Select the 1st bento
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

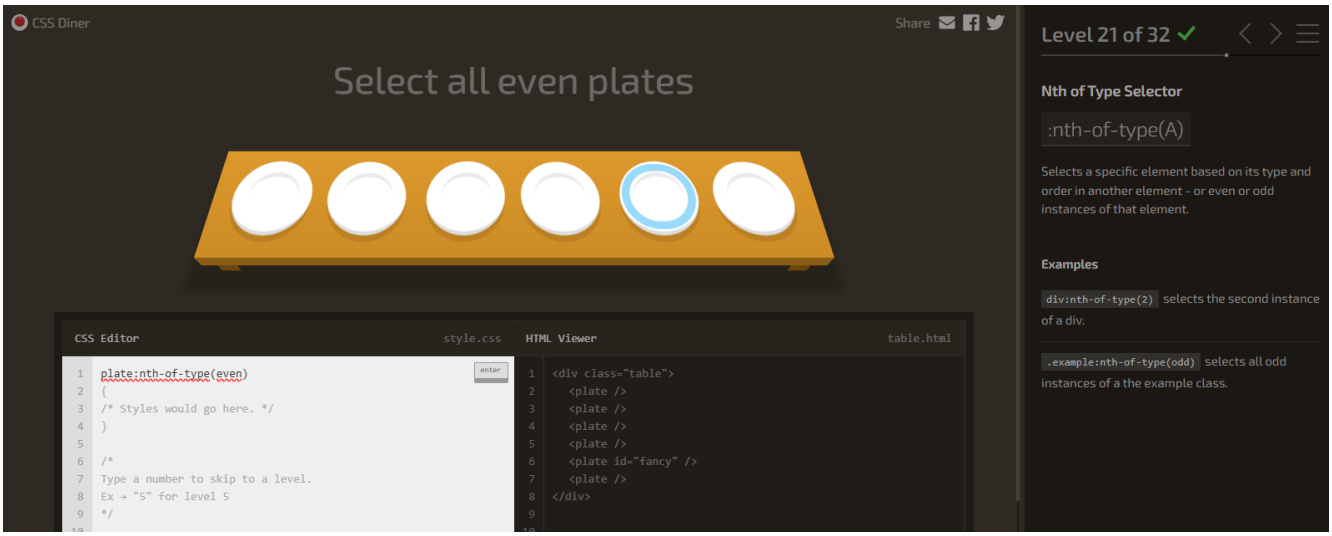
<plate />
<bento />
<plate>
<orange />
<orange />
<orange />
</plate>
<bento />
Level 19 of 32
Nth Last Child Selector
Select an element by its order in another element, counting from the back
:nth-last-child(A)
Selects the children from the bottom of the parent. This is like nth-child, but counting from the back!
Examples
:nth-last-child(2) selects all second-to-last child elements.

20.


CSS Diner
Share
Select first apple
CSS Editor
style.css
HTML Viewer
table.html
apple:first-of-type
enter
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

<orange class="small" />
<apple />
<apple class="small" />
<apple />
<apple class="small" />
<plate>
<orange class="small" />
<orange />
Level 20 of 32
First of Type Selector
Select the first element of a specific type
:first-of-type
Selects the first element of that type within another element.
Examples
span:first-of-type selects the first in any element.

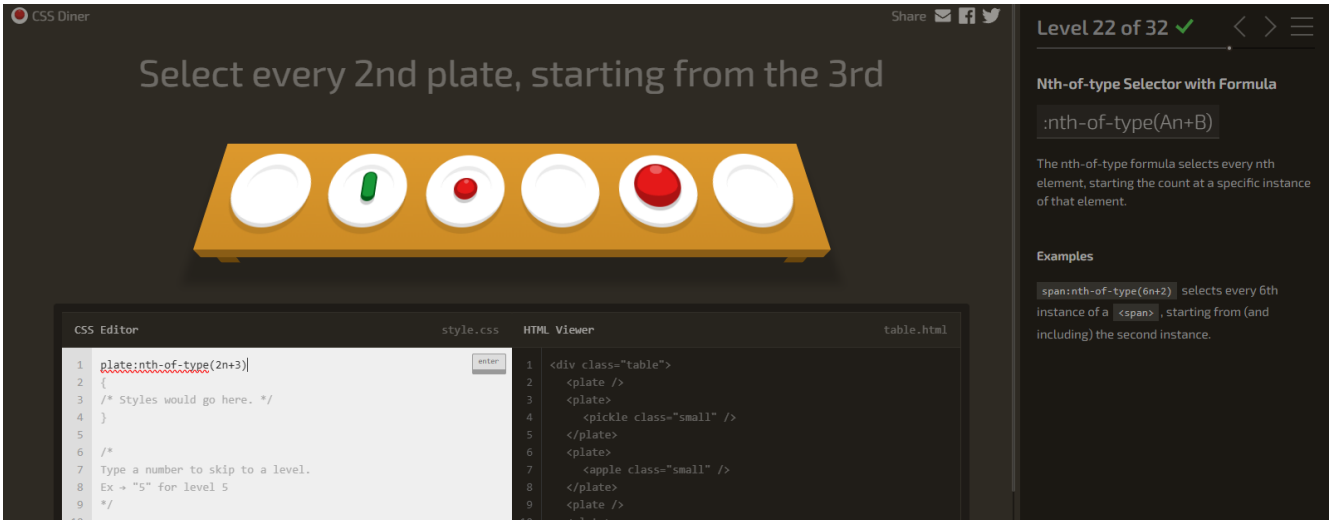
21.


CSS Diner
Share
Select all even plates
CSS Editor
style.css
HTML Viewer
table.html
plate:nth-of-type(even)
enter
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

<plate />
<plate />
<plate />
<plate />
<plate id="fancy" />
<plate />

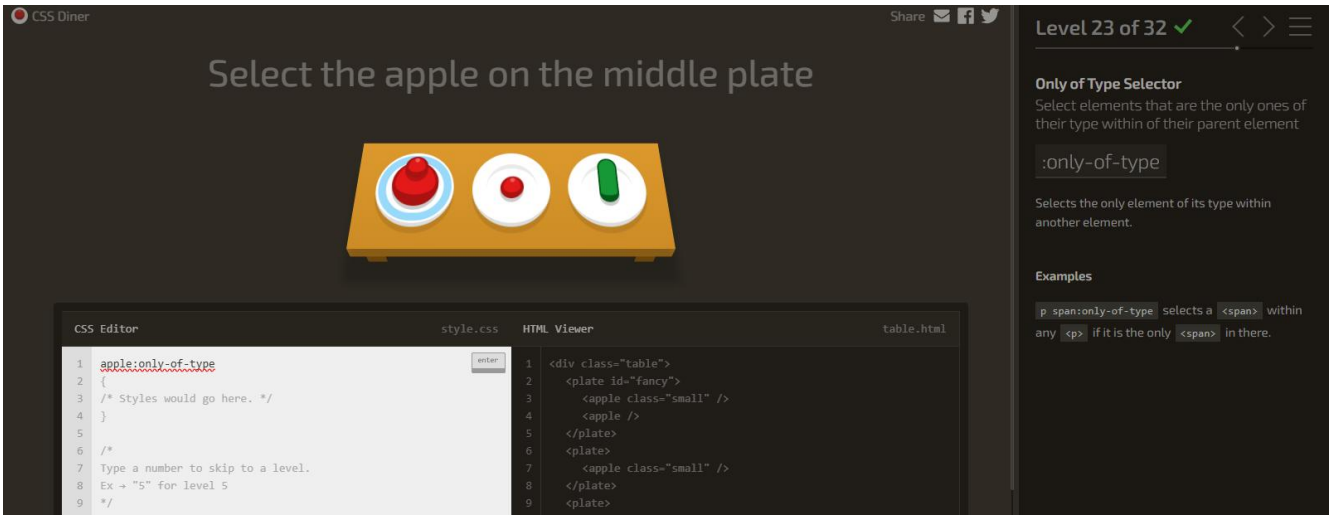
Level 21 of 32
Nth of Type Selector
:nth-of-type(A)
Selects a specific element based on its type and order in another element - or even or odd instances of that element.
Examples
div:nth-of-type(2) selects the second instance of a div.
.example:nth-of-type(odd) selects all odd instances of a the example class.

22.


CSS Diner
Share
Select every 2nd plate, starting from the 3rd
Level 22 of 32
Nth-of-type Selector with Formula
:nth-of-type(An+B)
The nth-of-type formula selects every nth element, starting the count at a specific instance of that element.
Examples
span:nth-of-type(6n+2) selects every 6th instance of a , starting from (and including) the second instance.
CSS Editor
style.css
HTML Viewer
table.html
plate:nth-of-type(2n+3)
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

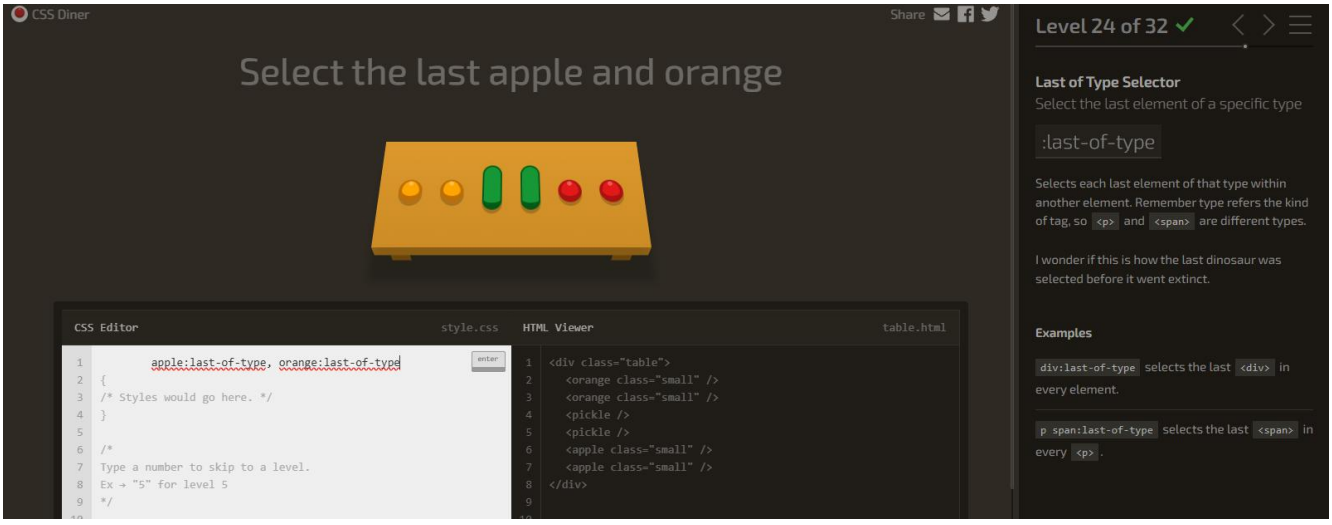
<plate />
<plate>
<pickle class="small" />
<apple class="small" />
<plate />
enter

23.


CSS Diner
Share
Select the apple on the middle plate
Level 23 of 32
Only of Type Selector
Select elements that are the only ones of their type within of their parent element
:only-of-type
Selects the only element of its type within another element.
Examples
p span:only-of-type selects a within any <p> if it is the only in there.
CSS Editor
style.css
HTML Viewer
table.html
apple:only-of-type
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

<plate id="fancy">
<apple class="small" />
<apple />
<plate />
enter

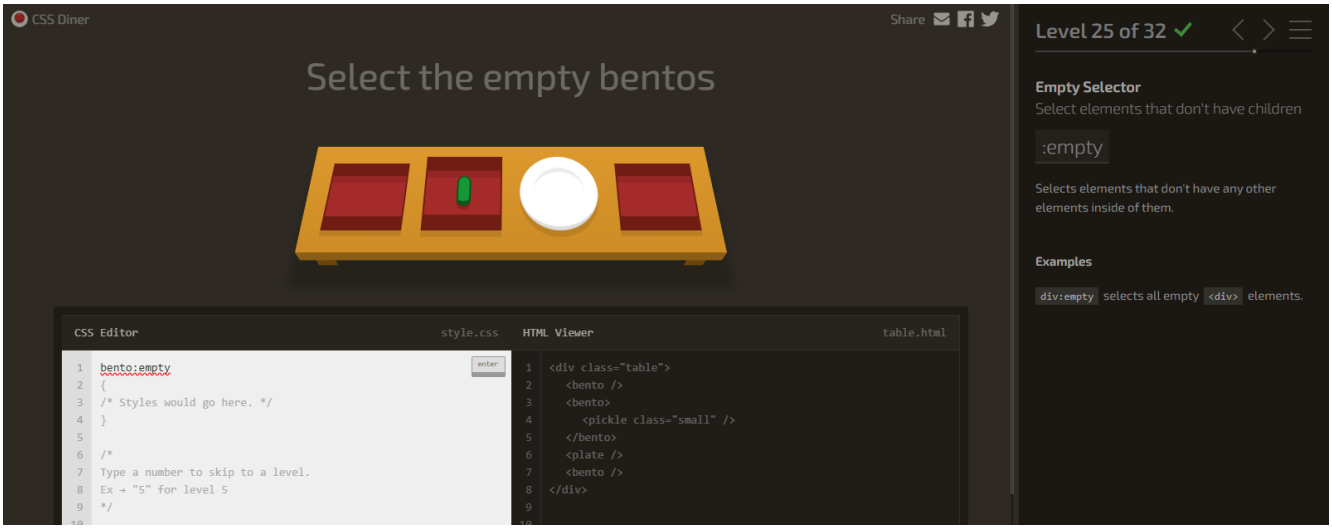
24.


CSS Diner
Share
Select the last apple and orange
Level 24 of 32
Last of Type Selector
Select the last element of a specific type
:last-of-type
Selects each last element of that type within another element. Remember type refers the kind of tag, so <p> and are different types.
I wonder if this is how the last dinosaur was selected before it went extinct.
Examples
div:last-of-type selects the last in every element.
p span:last-of-type selects the last in every <p>.
CSS Editor
style.css
HTML Viewer
table.html
apple:last-of-type, orange:last-of-type
/* Styles would go here. */
Type a number to skip to a level.
Ex → "5" for level 5

<orange class="small" />
<orange class="small" />
<pickle />
<pickle />
<apple class="small" />
<apple class="small" />

enter

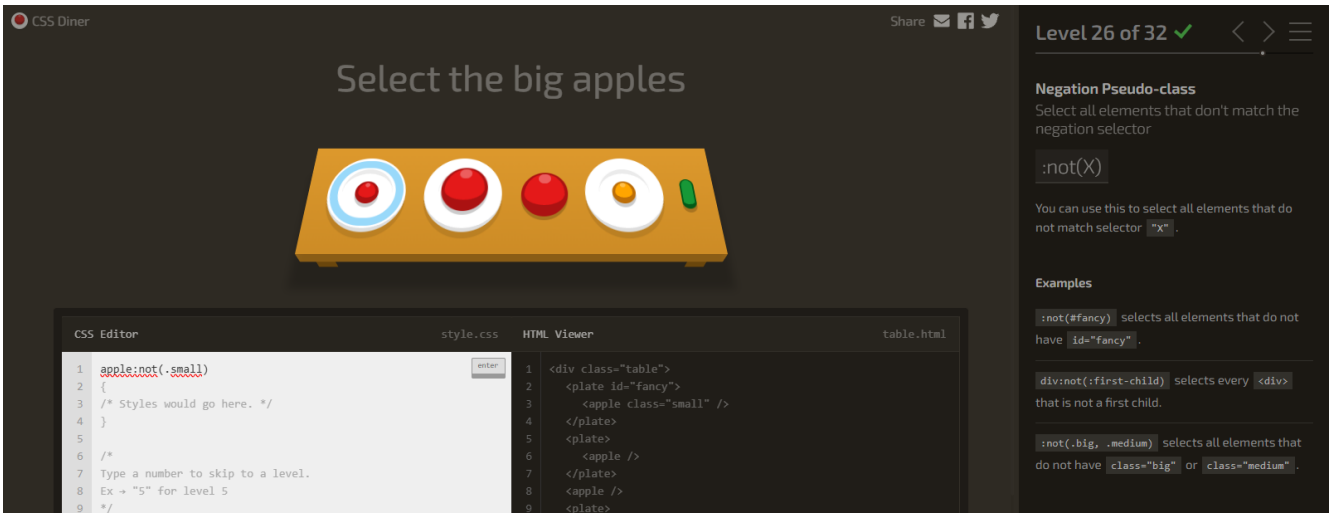
25.


CSS Diner
Share
Select the empty bentos
CSS Editor
style.css
HTML Viewer
table.html
bento:empty
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

<bento />
<bento>
<pickle class="small" />
</bento>
<plate />
<bento />

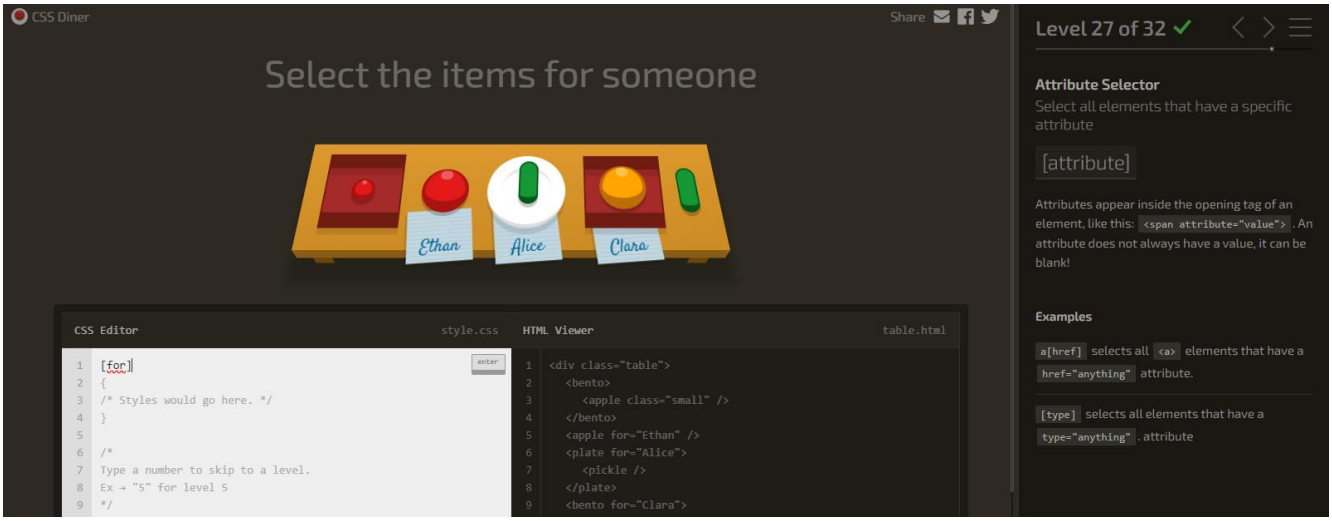
Level 25 of 32
Empty Selector
Select elements that don't have children
:empty
Selects elements that don't have any other elements inside of them.
Examples
div:empty selects all empty elements.

26.


CSS Diner
Share
Select the big apples
CSS Editor
style.css
HTML Viewer
table.html
apple:not(.small)
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

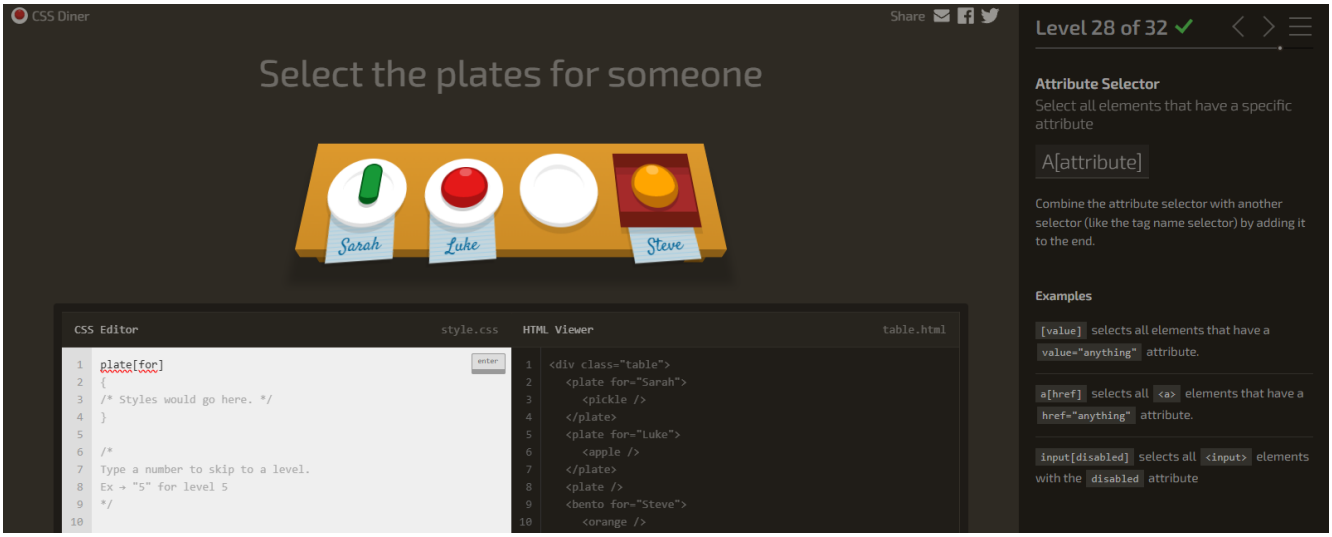
<plate id="fancy">
<apple class="small" />
</plate>
<plate>
<apple />
</plate>
<apple />
Level 26 of 32
Negation Pseudo-class
Select all elements that don't match the negation selector
:not(X)
You can use this to select all elements that do not match selector "X".
Examples
:not(#fancy) selects all elements that do not have id="fancy".
div:not(:first-child) selects every that is not a first child.
:not(.big, .medium) selects all elements that do not have class="big" or class="medium".

27.


CSS Diner
Share
Select the items for someone
Ethan
Alice
Clara
CSS Editor
style.css
HTML Viewer
table.html
[for]
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

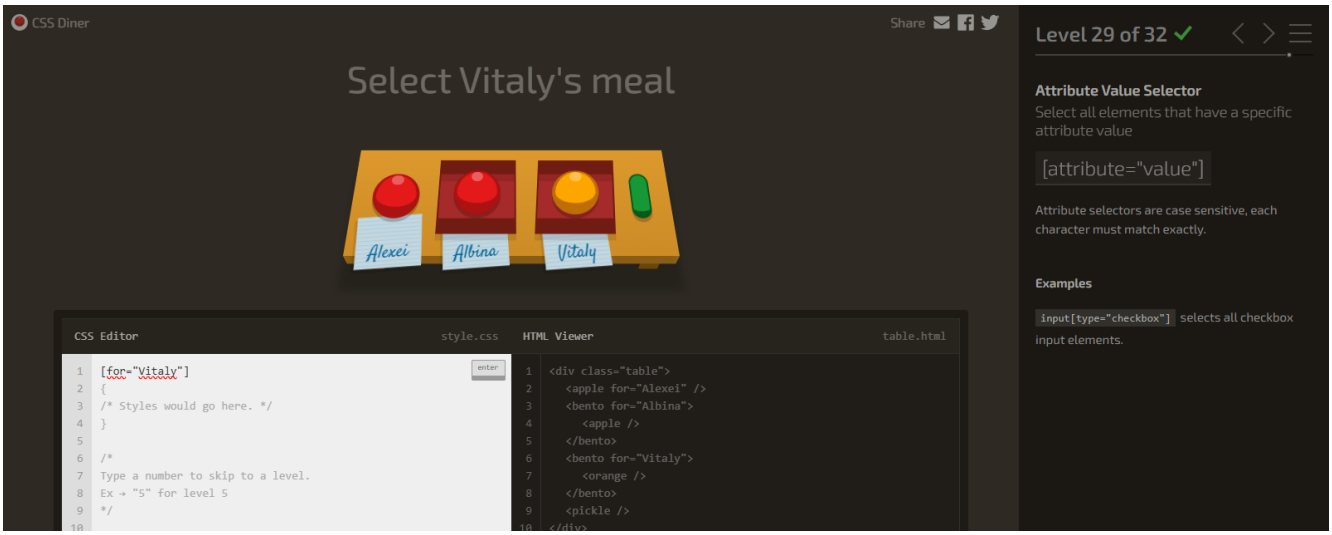
<bento>
<apple class="small" />
</bento>
<apple for="Ethan" />
<plate for="Alice">
<pickle />
</plate>
<bento for="Clara">
Level 27 of 32
Attribute Selector
Select all elements that have a specific attribute
[attribute]
Attributes appear inside the opening tag of an element, like this: . An attribute does not always have a value, it can be blank!
Examples
a[href] selects all <a> elements that have a href="anything" attribute.
[type] selects all elements that have a type="anything". attribute

28.


CSS Diner
Share
Select the plates for someone
Sarah
Luke
Steve
CSS Editor
style.css
HTML Viewer
table.html
plate[for]
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

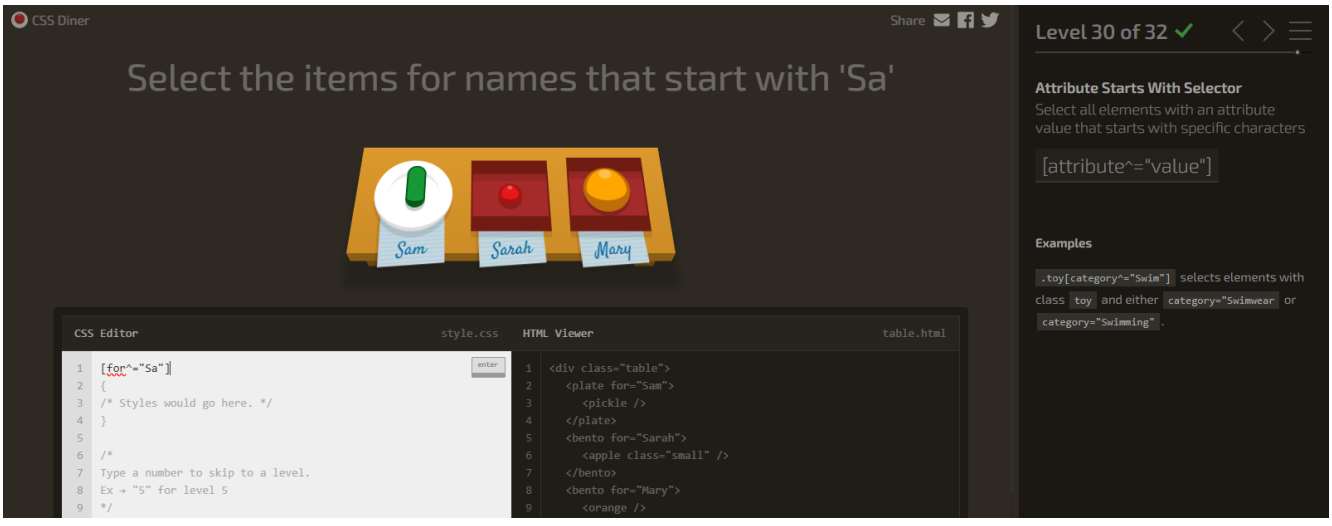
<plate for="Sarah">
<pickle />
</plate>
<plate for="Luke">
<apple />
</plate>
<plate />
<bento for="Steve">
<orange />
Level 28 of 32
Attribute Selector
Select all elements that have a specific attribute
A[attribute]
Combine the attribute selector with another selector (like the tag name selector) by adding it to the end.
Examples
[value] selects all elements that have a value="anything" attribute.
a[href] selects all <a> elements that have a href="anything" attribute.
input[disabled] selects all <input> elements with the disabled attribute

29.


CSS Diner
Share
Select Vitaly's meal
Alexei
Albina
Vitaly
CSS Editor
style.css
HTML Viewer
table.html
[for="Vitaly"]
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

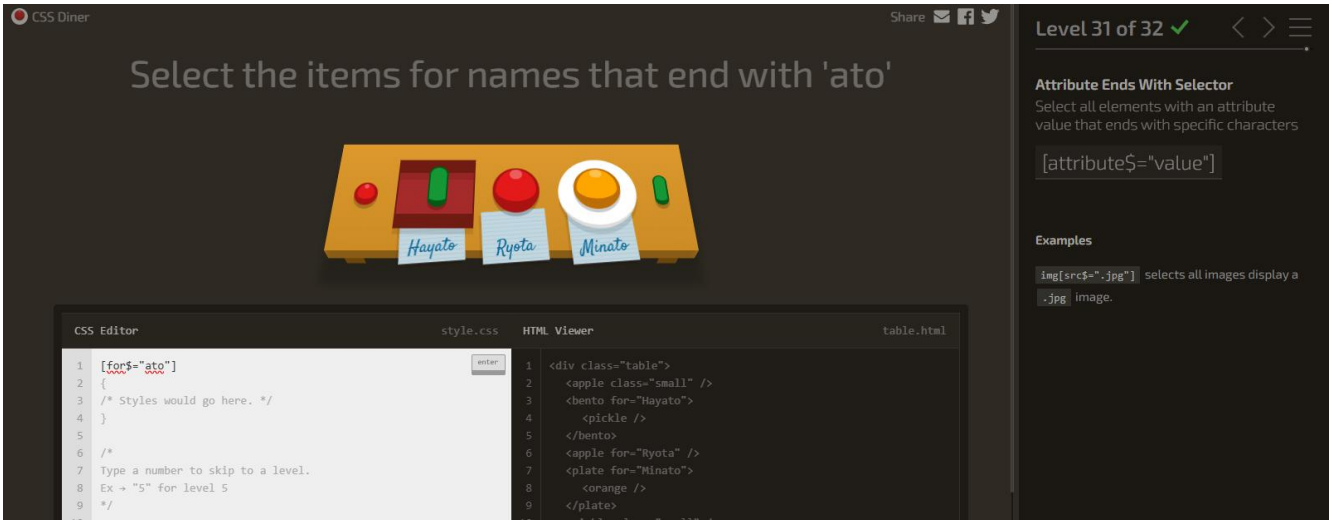
<apple for="Alexei" />
<bento for="Albina">
<apple />
</bento>
<bento for="Vitaly">
<orange />
</bento>
<pickle />
Level 29 of 32
Attribute Value Selector
Select all elements that have a specific attribute value
[attribute="value"]
Attribute selectors are case sensitive, each character must match exactly.
Examples
input[type="checkbox"] selects all checkbox input elements.

30.


CSS Diner
Share
Select the items for names that start with 'Sa'
Sam
Sarah
Mary
CSS Editor
style.css
HTML Viewer
table.html
[for^="Sa"]
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

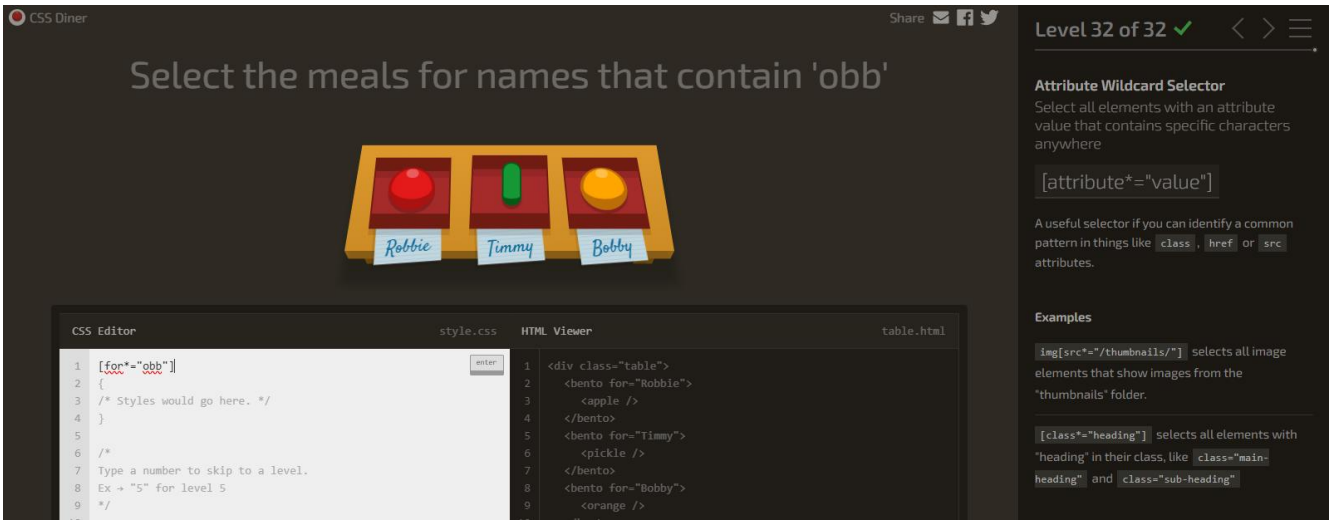
<plate for="Sam">
<pickle />
</plate>
<bento for="Sarah">
<apple class="small" />
</bento>
<bento for="Mary">
<orange />
Level 30 of 32
Attribute Starts With Selector
Select all elements with an attribute value that starts with specific characters
[attribute^="value"]
Examples
.toy[category^="Swim"] selects elements with class toy and either category="Swimwear" or category="Swimming".

31.


CSS Diner
Share
Select the items for names that end with 'ato'
Hayato
Ryota
Minato
Level 31 of 32
Attribute Ends With Selector
Select all elements with an attribute value that ends with specific characters
[attribute$="value"]
Examples
img[src$=".jpg"] selects all images display a .jpg image.
CSS Editor
style.css
HTML Viewer
table.html
[for$="ato"]
/* Styles would go here. */
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

<apple class="small" />
<bento for="Hayato">
<pickle />
</bento>
<apple for="Ryota" />
<plate for="Minato">
<orange />
</plate>

32.


CSS Diner
Share
Select the meals for names that contain 'obb'
Robbie
Timmy
Bobby
Level 32 of 32
Attribute Wildcard Selector
Select all elements with an attribute value that contains specific characters anywhere
[attribute*="value"]
A useful selector if you can identify a common pattern in things like class, href or src attributes.
Examples
img[src*="/thumbnails/"] selects all image elements that show images from the "thumbnails" folder.
[class*="heading"] selects all elements with "heading" in their class, like class="main-heading" and class="sub-heading"
CSS Editor
style.css
HTML Viewer
table.html
[for*="obb"]
/* Styles would go here. */
/*
Type a number to skip to a level.
Ex → "5" for level 5
*/

<bento for="Robbie">
<apple />
</bento>
<bento for="Timmy">
<pickle />
</bento>
<bento for="Bobby">
<orange />