


Walkthrough 9-3: Validate events


In this walkthrough, you use a validator to check if a query parameter called code with a value of SFO, LAX, CLE, PDX, or PDF is sent with a request and to throw an error if it is not. You will:

- Add the Validation module to a project.
- Use an Is true validator to check if a query parameter called code with a value of SFO, LAX, CLE, PDX, or PDF is sent with a request.
- Return a custom error message is the condition is not met.

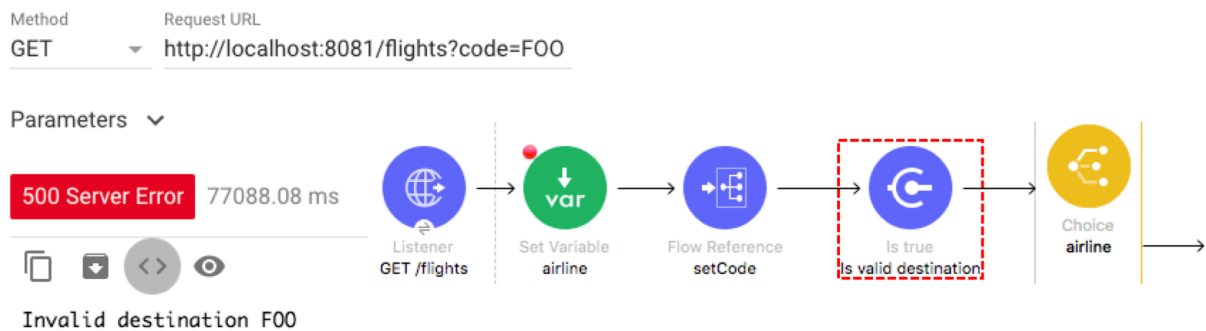


Add the Validation module to the project

1. Return to implementation.xml.
2. In the Mule Palette, select Add Modules.
3. Select the Validation module in the right side of the Mule Palette and drag and drop it into the left side.
4. If you get a Select module version dialog box, select the latest version and click Add.

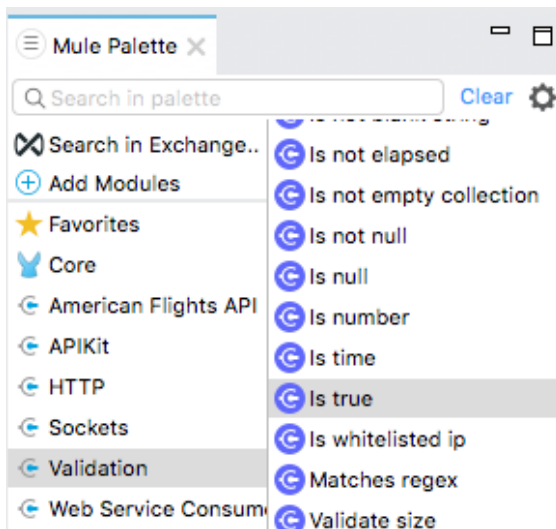

Use the Is true validator to check for a valid destination code

5. Locate the Is true validator in the right side of the Mule Palette.
6. Drag and drop the Is true validator after the setCode Flow Reference in the getFlights flow.

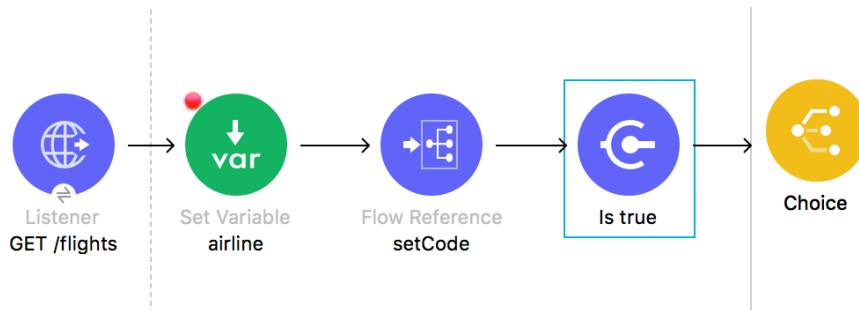

7. In the Is true properties view, set the display name to: Is valid destination.
8. Change the expression from False (Default) to Expression.
9. Add a DataWeave expression to check if the code variable is one of the five destination codes.


```
#[['SFO','LAX','CLE','PDX','PDF'] contains vars.code]
```

Note: You can copy this expression from the course snippets.txt file.

10. Set the error message to Invalid destination followed by the provided code.

```
#['Invalid destination' ++ ' ' ++ (vars.code default ' ')]
```

Note: You can copy this expression from the course snippets.txt file.

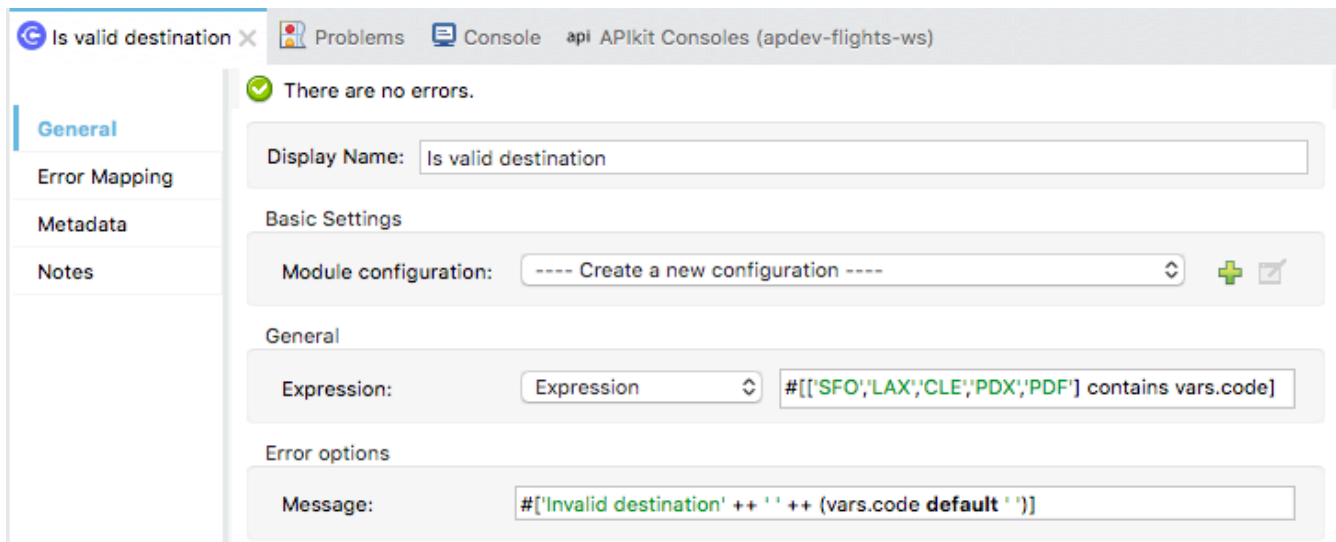


Debug the application

11. Save the file to redeploy the project in debug mode.

12. In Advanced REST Client, change the code to make a request to

<http://localhost:8081/flights?code=CLE>.

13. In the Mule Debugger, step past the validator; you should see the code is valid and application execution steps to the Choice router.

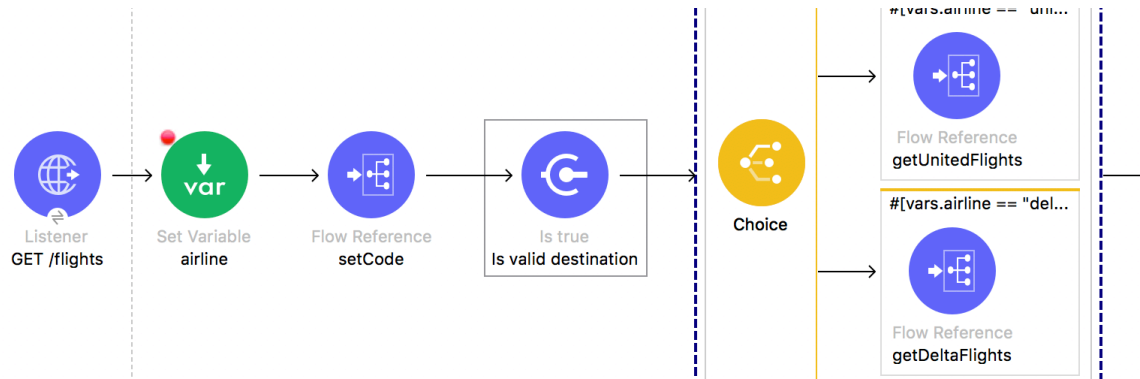

14. Resume through the rest of the application.


15. In Advanced REST Client, you should see flights.

```
200 OK 65605.62 ms

[Array[8]]
-0: {
  "airline": "American",
  "flightCode": "eefd0123",
  "fromAirportCode": "MUA",
  "toAirportCode": "CLE",
  "departureDate": "2016-01-25T00:00:00",
  "emptySeats": 7,
```

16. Change the code and make a request to <http://localhost:8081/flights?code=FOO>.

17. In the Mule Debugger, step to the validator; you should see an error.

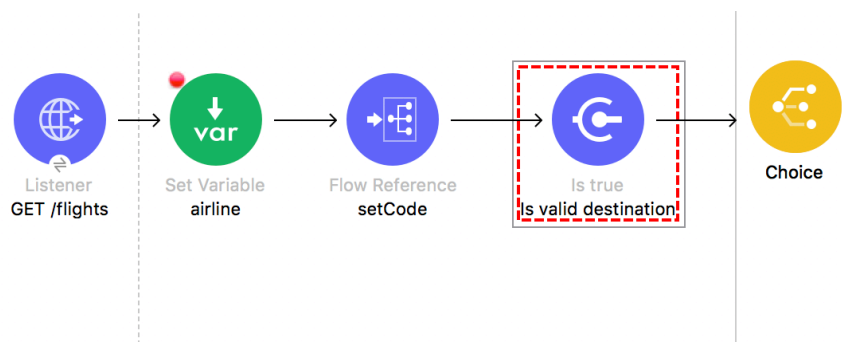


18. Step again; you should see your Invalid destination message in the console.

```
ERROR 2018-04-20 11:55:44,836 [[MuleRuntime].cpuLight.15: [apdev-flights-ws].getFlights.CPU_LITE @65ffdf1] [event: 0-48
bd68f0-44cc-11e8-a62a-8c8590da7e5] org.mule.runtime.core.internal.exception.OnErrorPropagateHandler:
*****
Message          : Invalid destination F00.
Error type       : VALIDATION:INVALID_BOOLEAN
Element         : getFlights/processors/2 @ apdev-flights-ws:implementation.xml:15 (Is valid destination)
Element XML     : <validation:is-true doc:name="Is valid destination" doc:id="e6d96ea1-71ee-45f1-9661-9048ce5382c9
" expression="#[['SFO','LAX','CLE','PDX','PDF'] contains vars.code]" message="#['Invalid destination' ++ ' ' ++ vars.cod
e]"/></validation:is-true>
```

19. Resume through the rest of the application.


20. Return to Advanced REST Client; you should get a 500 Server Error with your Invalid destination message.

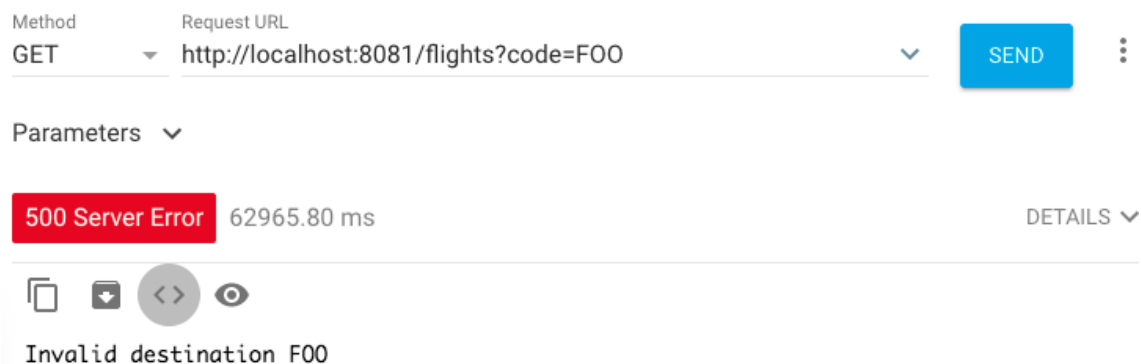

Note: You will catch this error and send a JSON response with a different status code in the next module.

21. Remove the code and make a request to <http://localhost:8081/flights>.

22. In the Mule Debugger, step through the application; you should not get any errors.

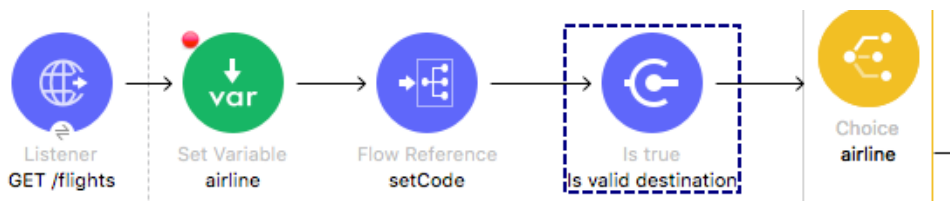

23. Resume through the rest of the application.

24. Return to Advanced REST Client; you should get a 200 response with all airline flights to SFO.

```
200 OK 9674.62 ms
[
  {
    "price": 142.0,
    "flightCode": "rree1093",
    "availableSeats": 1,
    "planeType": "Boeing 737",
    "departureDate": "2016-02-11T00:00:00",
    "origination": "MUA",
    "airlineName": "American",
    "destination": "SFO"
  },

```

25. Return to Anypoint Studio and switch to the Mule Design perspective.

Remove the default destination

26. Locate the setCode subflow.

27. In the Set Variable properties view, review the default value.

Settings

Name:	code
Value:	<code>#[attributes.queryParams.code default 'SFO']</code>

28. Remove the default value from the value.

Settings


Name:	code
Value:	<code>#[attributes.queryParams.code]</code>

Debug the application


29. Save the file to redeploy the project.

30. In Advanced REST Client, make another request to <http://localhost:8081/flights>.

31. In the Mule Debugger, step to the validator; you should now get an error.

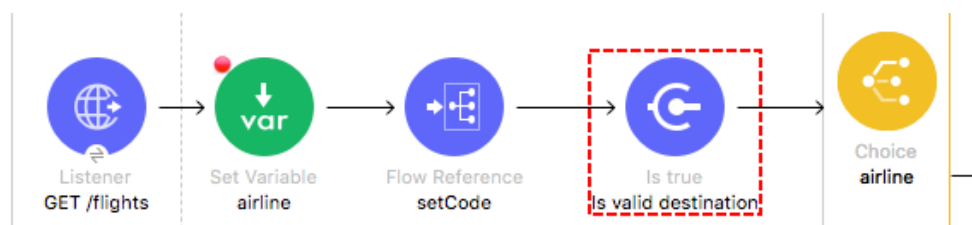

32. Resume through the rest of the application.
33. Return to Advanced REST Client; you should get a 500 Server Error with your Invalid destination message.

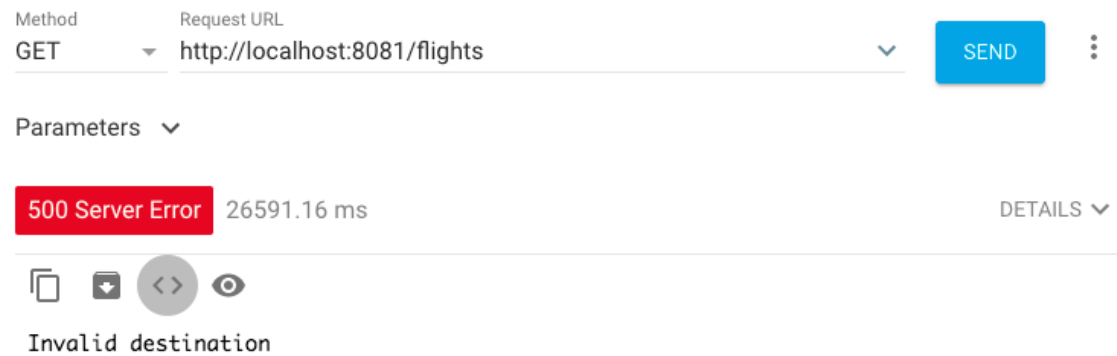

Note: You will catch this error and send a JSON response with a different status code in the next module.

34. Return to Anypoint Studio and stop the project.