

SOFTWARE DESIGN DOCUMENT (SDD)

PRESENTED BY:
ANMI Tech Sdn Bhd

PRESENTED TO:
Malaysian Communications
and Multimedia Commission
(MCMC)

DATE:
15 JUNE 2025

TEAM MEMBERS

Chief Executive
Officer



MUHAMAD ADLI
FARRIZ BIN AZLI

Student ID: CB23086

Chief Business
Analyst



NUR LIYANA
ATHIRAH BINTI
ZAILANI

Student ID: CB23017


Chief Developer



MEOR MUHAMMAD
ANUAR FIRDAUS
BIN AINOL SALLEH

Student ID: CB23092

Software Quality
Assurance

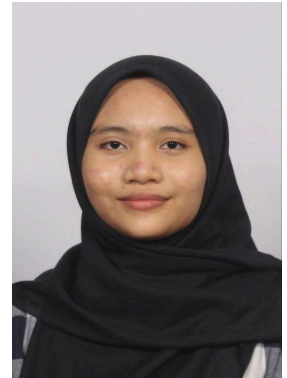


NUR IZZAH
DANIA BINTI
HIPNI SHAHLIZAL

Student ID: CB23035

Submitted to the Software Design Workshop (BCS2343)
Bachelor of Computer Science (Software Engineering) with Honours
Faculty of Computing, Universiti Malaysia Pahang Al-Sultan Abdullah (UMPSA)

DOCUMENT APPROVAL

	Name	Date
Authenticated by:  Project Leader	MUHAMAD ADLI FARRIZ BIN AZLI	15 JUNE 2025
Approved by: Project Manager	TS. AZMA ABDULLAH	15 JUNE 2025
Approved by: Client	SITI RAFIDAH BINTI AHMAD FUAD	15 JUNE 2025

Software : Adobe Acrobat Portable Document Format (PDF)

Archiving Place :  SDD

Copies Available : 2

SDD_MS_1.0

TABLE OF CONTENT

TABLE OF CONTENT	2
LIST OF FIGURES	5
LIST OF ABBREVIATIONS	6
1. INTRODUCTION	7
1.1 Purpose	7
1.2 System Identification	9
1.3 System Overview	12
1.4 References	17
2. DATA DESIGN	18
2.1 ENTITY RELATIONSHIP DIAGRAM (ERD)	18
2.2 DATA DICTIONARY	19
2.2.1 PublicUser Table	19
2.2.2 Agency Table	20
2.2.3 MCMCstaff Table	21
2.2.4 Report Table	21
3. GENERAL ARCHITECTURE	23
3.1 APPLICATION LAYER	23
3.1.1 auth [MS_PKG_100]	23
3.1.2 mcmc [MS_PKG_200]	24
3.1.3 agency [MS_PKG_300]	25
3.1.4 profile [MS_PKG_400]	25
3.1.5 dashboard [MS_PKG_500]	25
3.1.6 layouts [MS_PKG_600]	26
3.1.7 inquiry [MS_PKG_700]	26
3.1.8 inquiries [MS_PKG_800]	27
3.1.9 process [MS_PKG_900]	27
3.1.10 users [MS_PKG_1000]	27
3.1.11 inquiries [MS_PKG_1100]	28

SDD_MS_1.0

3.1.12 views [MS_PKG_1200]	28
3.2 BUSINESS SERVICES LAYER	29
3.2.1 Controllers [MS_PKG_1300]	29
3.2.2 Agency [MS_PKG_1400]	30
3.2.3 MCMC [MS_PKG_1500]	31
3.2.4 Auth [MS_PKG_1600]	31
3.2.5 Models [MS_PKG_1700]	32
3.2.6 Notifications [MS_PKG_1800]	32
3.3 MIDDLEWARE LAYER	33
3.3.1 Middleware [MS_PKG_1900]	33
3.4 PACKAGE RELATIONSHIP	34
4. DETAIL DESIGN	35
4.1 auth [MS_PKG_100]	35
4.1.1 login [MS_PKG_101]	35
4.1.2 register [MS_PKG_102]	36
4.1.3 reset-password [MS_PKG_103]	38
4.1.4 forgot-password [MS_PKG_104]	39
4.1.5 verify_notice [MS_PKG_105]	40
4.1.6 verify [MS_PKG_106]	41
4.2 mcmc [MS_PKG_200]	42
4.2.1 dashboard [MS_PKG_201]	42
4.3 agency [MS_PKG_300]	44
4.3.1 first-login [MS_PKG_301]	44
4.3.2 dashboard [MS_PKG_302]	45
4.4 profile [MS_PKG_400]	46
4.4.1 edit [MS_PKG_401]	46
4.4.2 index [MS_PKG_402]	48
4.5 dashboard [MS_PKG_500]	49
4.5.1 public [MS_PKG_501]	49

4.6 layouts [MS_PKG_600]	51
4.6.1 app [MS_PKG_601]	51
4.6.2 dashboard [MS_PKG_602]	53
4.7 users [MS_PKG_1000]	54
4.7.1 create-account [MS_PKG_1001]	54
4.7.2 index [MS_PKG_1002]	56
4.7.3 pdf [MS_PKG_1003]	57
4.8 Controllers [MS_PKG_1300]	59
4.8.1 Controller [MS_PKG_1301]	59
4.8.2 AgencyFirstLoginController [MS_PKG_1302]	60
4.8.3 DashboardRedirectController [MS_PKG_1303]	61
4.8.4 UserManagementController [MS_PKG_1306]	62
4.8.5 ProfileController [MS_PKG_1307]	64
4.9 Auth [SDD_PKG_1600]	65
4.9.1 LoginController [MS_PKG_1601]	65
4.9.2 RegisterController [MS_PKG_1602]	66
4.9.3 ForgotPasswordController [MS_PKG_1603]	67
4.9.4 ResetPasswordController [MS_PKG_1604]	67
4.10 Models [SDD_PKG_1700]	68
4.10.1 User [MS_PKG_1701]	68
5. REQUIREMENT TRACEABILITY	70
5.1 Register and Login [MS_REQ_100]	70
5.2 Manage User Profile [MS_REQ_200]	71
5.3 User Directory [MS_REQ_300]	72

LIST OF FIGURES

- Figure 2.1** Entity Relationship Diagram (ERD) for MySebenarnya System
- Figure 3.1** Application Layer for MySebenarnya Systems
- Figure 3.2** Business Services Layer for MySebenarnya Systems
- Figure 3.3** Middleware Layer for MySebenarnya Systems
- Figure 3.4** Model View Controller (MVC) Package Relationship for My Sebenarnya Systems

LIST OF ABBREVIATIONS

SDD	Software Design Document
MCMC	Malaysian Communications and Multimedia Commission
MS	MySebenarnya
PKG	Package abbreviation
CLS	Class abbreviation
ERD	Entity Relationship Diagram
PK	Primary Key
FK	Foreign Key

1. INTRODUCTION

1.1 Purpose

The Software Design Document (SDD) for the MySebenarnya system provides a comprehensive foundation for developing a user-friendly web platform designed to assist the public in verifying the authenticity of news and information. This MySebenarnya system is developed for the Malaysian Communications and Multimedia Commission (MCMC), this system aims to promote the responsible sharing of accurate content online by allowing users to report potentially false or misleading information for verification. The SDD outlines the purpose and scope of the system, ensuring that all the stakeholders have a shared understanding of the system's goals.

This document details the system-wide design decisions and describes the selected interactive architecture, which enables dynamic communication between the system's core components. The architectural structure is based on the Model-View-Controller (MVC) pattern, promoting separation of concerns, scalability, and easier maintenance. Additionally, the Facade design pattern is applied in the detailed design phase to encapsulate complex subsystem interactions, providing a simplified interface for external modules and enhancing the modularity and manageability of the software.

The SDD covers essential modules that drive the overall functionality of the MySebenarnya system. These include the Manage User Module, which supports registration, login, and profile management for Public User, MCMC Staff, and Agency Staff, Manage Inquiry Form Submission Module, which allows users to submit reports for verification, Inquiry Assignment Module, which assigns cases to the appropriate agency, and the Inquiry Progress Tracking Module, which allows users to monitor the status of their submitted inquiries. Each module is designed to align with the system's goal of facilitating accurate and efficient news verification.

In summary, the SDD also functions as a binding contract between the development team, MCMC, and all involved stakeholders. It ensures alignment on the development direction, system functionality, and design principles. Additionally, the SDD acts as a reference document that stakeholders can consult to understand the system's architecture, design, and module responsibilities. This promotes clear communication, minimizes ambiguity, and supports consistent, collaborative development throughout the software lifecycle.

1.2 System Identification

The system identification section provides a standardized naming convention for the system, documents, use cases, packages, and classes developed within the Web-Based Inquiry Management System, known as MySebenarnya (MS). This structure ensures consistency, traceability, and easier reference throughout the development life cycle. The following table outlines the identifiers used for this system:

System ID	MS_2025_1.0	
System ID Description	MS	My Sebenarnya (name of system)
	2025	The system development year
	1.0	The initial version of the system

<System abbreviation>_<Year>_<Version>. The system identification for the MySebenarnya System is MS_2025_1.0. "MS" is the system abbreviation representing "MySebenarnya," "2025" is the year of development, and "1.0" is the version number.

Document ID	SDD_MS_1.0	
Document ID Description	SDD	Software Design Document
	MS	My Sebenarnya (name of system)
	1.0	The initial version of the system

<Document abbreviation>_<System abbreviation>_<Version>. The document identification for this Software Design Document is SDD_MS_1.0.

SDD_MS_1.0

Use Case ID	MS_REQ_100 MS_REQ_200 MS_REQ_300 MS_REQ_400	
Use Case ID Description	MS	My Sebenarnya (name of system)
	REQ	Requirement abbreviation
	*00	Use Case Number

<System abbreviation>_REQ_<Use case number>. The use case identification for the system is MS_REQ_100.

Requirement ID	MS_REQ_101 MS_REQ_102 MS_REQ_103 MS_REQ_104	
Requirement ID Description	MS	My Sebenarnya (name of system)
	REQ	Requirement abbreviation
	10*	Requirement Number

<System abbreviation>_REQ_<Requirement number>. The requirement identification for the system is MS_REQ_101.

Package ID	MS_PKG_100 MS_PKG_200 MS_PKG_300 MS_PKG_400 MS_PKG_500	
Package ID Description	MS	My Sebenarnya (name of system)
	PKG	Package abbreviation
	*00	Package Number

<Document abbreviation>_PKG_<Package Number>. Package identification for a major group or module within the system.

Class ID	MS_PKG_101 MS_PKG_102 MS_PKG_102 MS_PKG_103	
Class ID Description	MS	My Sebenarnya (name of system)
	PKG	Package abbreviation
	10*	Class number

<System abbreviation>_PKG_<Class Number>. Class identification for different classes in the system.

1.3 System Overview

MySebenarnya system is a web-based system developed to help MCMC manage public inquiries related to news authenticity. The system is designed to support multiple user roles, including public users, agency staff, and MCMC staff. Each user has access to specific features depending on their role. The platform is built to improve the workflow of inquiry handling by providing tools for registration, submission, validation, assignment, progress tracking, and reporting.

The system is divided into several main modules, each responsible for different parts of the process. These include Manage Users, Manage Inquiry Form Submission, Inquiry Assignment, and Inquiry Progress Tracking. Each module is documented in this SDD in its own subsection.

Modules	Description
Manage Users	The Manage Users module handles all user-related activities in the system. It allows Public User to register via an online form, while MCMC Staff can create accounts for Agency Staff. User accounts are secured with proper authentication, including email and password login, password recovery, and first-time login password changes for Agency Staff. Each user role has access to different parts of the system based on their permissions. The module provides profile view and edit features for all

	users. MCMC Staff can also view, filter, including generating user reports and exporting them in formats such as PDF. These functions help ensure that user data is properly managed, secure, and accessible according to the role and responsibilities of each user group.
Manage Inquiry Form Submission	The Manage Inquiry Form Submission module supports the end-to-end handling of inquiries submitted by public users. Users can submit inquiries with detailed descriptions and supporting materials (documents, images, links) to verify the authenticity of news. Each inquiry is stored with its submission details and tracked using status updates. MCMC staff review and filter all incoming inquiries, determining whether they are genuine or non-serious. Valid inquiries are forwarded to the relevant agency, while others are marked accordingly with a system-generated update. This module also allows MCMC and agencies to access both current and past inquiries. Users can search and filter inquiries based on status, date range, agency, or subject matter. Agencies only

	view inquiries assigned to them and can track each inquiry's history, including status changes and communications with MCMC. Additionally, MCMC staff can generate detailed inquiry reports, which can be filtered by various criteria. Reports are exportable in PDF or Excel formats and can include charts and graphs for better data visualization.
Manage Inquiry Form Assignment	The Manage Inquiry Assignment module manages the process of assigning public user inquiries to the appropriate agency for further action. Once an inquiry is submitted by a public user and reviewed by MCMC staff, this module allows staff to submit inquiries to the appropriate agency based on the content of the inquiry. The system provides a list of registered agencies for easy selection, and MCMC staff can enter comments or notes before submitting the inquiry to the agency. This module displays to the public user the name of the assigned agency and the date of assignment. Once the inquiry is assigned, the agency must review the inquiry to determine if the inquiry falls within their jurisdiction. If the inquiry is outside their

	scope, they can reject it through the system with the stated reasons and notify MCMC. If accepted, the agency proceeds with the verification process using the details and supporting evidence provided. This module also enables MCMC staff to generate detailed reports on the number of inquiries assigned to each agency. These reports can be filtered by date range and agency, and are available in downloadable formats such as PDF and Excel. The system also provides visual analysis including charts and graphs to identify trends in investigation distribution.
Manage Form Progress Tracking	The Manage Form Progress Tracking module facilitates the end-to-end monitoring and coordination of inquiries submitted by public users regarding news verification. Once an inquiry is submitted, users can view real-time status updates such as Under Investigation, Verified as True, Identified as Fake, or Rejected. Each update is logged with a timestamp and supporting notes, ensuring full transparency. MCMC staff are responsible for monitoring the investigation progress of inquiries assigned to various agencies. They can view

	detailed updates, add progress notes, and track performance metrics such as inquiry resolution time and the number of pending cases. Inquiries deemed outside the agency's jurisdiction are marked as Rejected and rerouted accordingly. Agencies are granted access only to the inquiries assigned to them. They must update the inquiry status, provide investigation details, and communicate directly with MCMC within the system. Each action is recorded with reviewer details and timestamps to maintain accountability. The module also features a performance reporting function where MCMC can generate inquiry reports filtered by date range, agency, or inquiry type. Reports can be exported in PDF or Excel formats and include visual analytics such as graphs and charts to highlight trends and agency performance.
--	--

1.4 References

- a. Universiti Malaysia Pahang. (n.d.). *Appendix 1: Request for proposal (RFP)*. Retrieved December 14, 2024, from https://kalam.ump.edu.my/pluginfile.php/94651/mod_resource/content/1/Appendix%201%20Request%20for%20Proposal.pdf
- b. Universiti Malaysia Pahang. (n.d.). *Appendix 6: Project requirements*. Retrieved April 14, 2025, from <https://kalam.ump.edu.my/mod/resource/view.php?id=49585>
- c. Visual Paradigm. (n.d.). *What is package diagram?* Visual Paradigm. <https://www.visual-paradigm.com/guide/uml-unified-modeling-language/what-is-package-diagram/>
- d. Universiti Malaysia Pahang. (n.d.). *Appendix 2: SDD Template Document*. Retrieved April 14, 2025, from <https://kalam.ump.edu.my/mod/resource/view.php?id=49581>

2. DATA DESIGN

2.1 ENTITY RELATIONSHIP DIAGRAM (ERD)

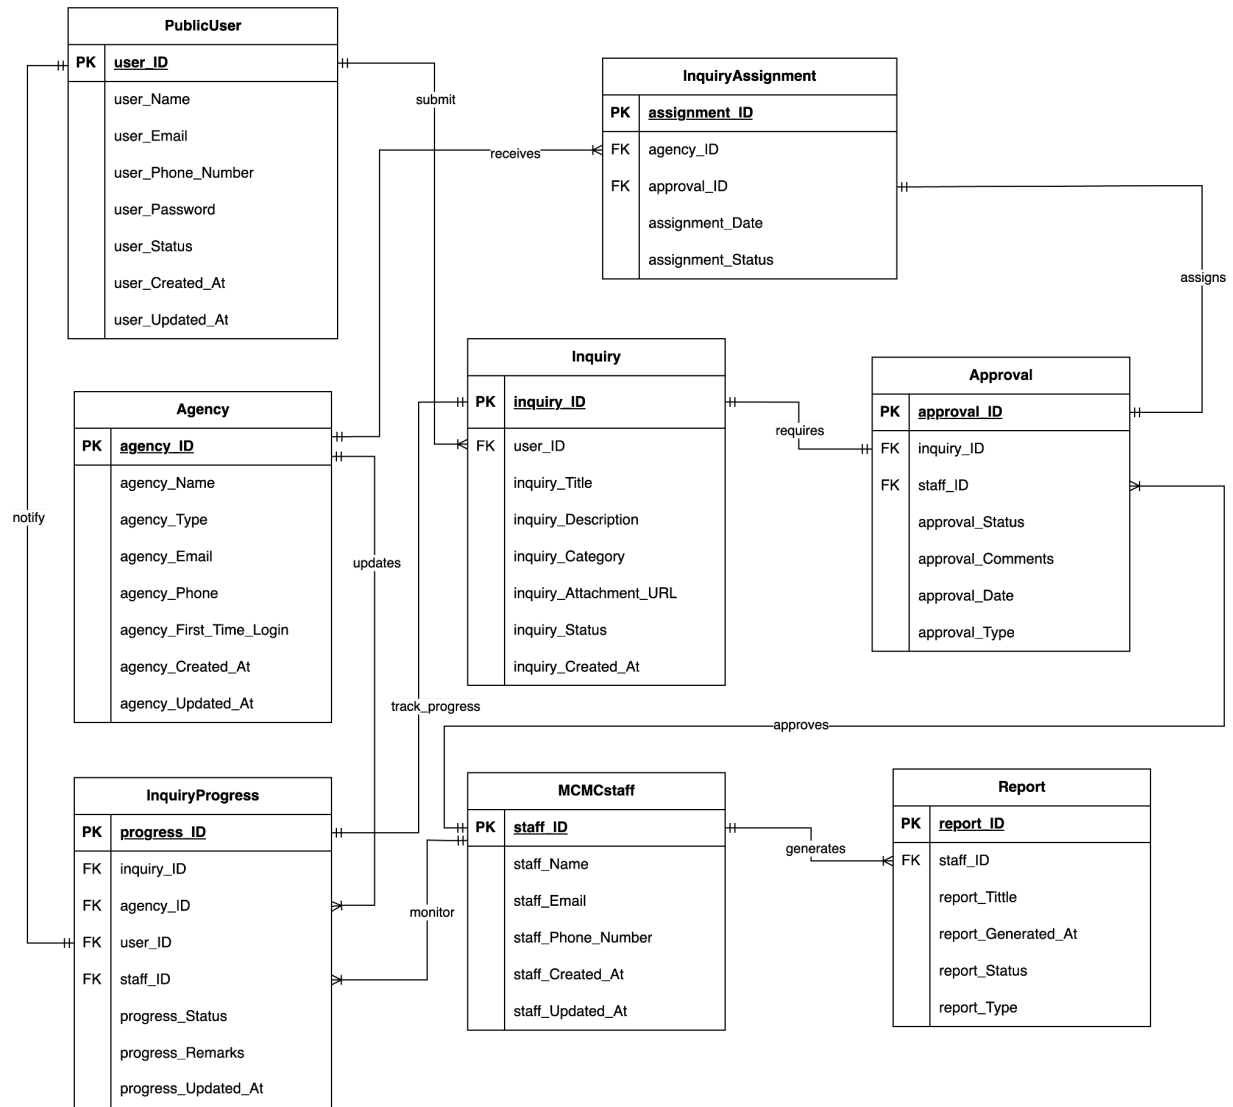


Figure 2.1 Entity Relationship Diagram (ERD) for MySebenarnya System

2.2 DATA DICTIONARY

2.2.1 PublicUser Table

Field Name	Description	Data Type	Constraint
user_ID	User identification number	INT	PK
user_Name	User full name	VARCHAR2(100)	NOT NULL
user_Email	User email address	VARCHAR2(100)	UNIQUE, NOT NULL
user_Phone	User phone number	VARCHAR2(20)	
user_Password	User password (encrypted)	VARCHAR2(255)	NOT NULL
user_Status	User account status (Active/Inactive)	VARCHAR2(10)	DEFAULT 'Active'
user_Created_At	Account creation timestamp	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP
user_Updated_At	Last updated timestamp	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP

2.2.2 Agency Table

Field Name	Description	Data Type	Constraint
agency_ID	Agency identification number	INT	PK
agency_Name	Name of the agency	VARCHAR2(100)	NOT NULL
agency_Type	Type of agency (JPJ, KKM, PDRM)	VARCHAR2(50)	NOT NULL
agency_Email	Agency contact email	VARCHAR2(100)	UNIQUE
agency_Phone	Agency contact number	VARCHAR2(20)	
agency_First_Time_Login	Flag for first time login	BOOLEAN	DEFAULT TRUE
agency_Created_At	Timestamp of agency creation	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP
agency_Updated_At	Timestamp of last update	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP

2.2.3 MCMCstaff Table

Field Name	Description	Data Type	Constraint
staff_ID	Staff identification number	INT	PK
staff_Name	Full name of MCMC staff	VARCHAR2(100)	NOT NULL
staff_Email	Email address of staff	VARCHAR2(100)	UNIQUE, NOT NULL
staff_Phone	Phone number	VARCHAR2(20)	
staff_Role	Role of the staff	VARCHAR2(50)	NOT NULL
staff_Department	Department name	VARCHAR2(100)	
staff_Created_At	Account creation timestamp	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP
staff_Updated_At	Last updated timestamp	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP

2.2.4 Report Table

Field Name	Description	Data Type	Constraint
report_ID	Report identification number	INT	PK
staff_ID	MCMC staff who generated the report	INT	FK

SDD_MS_1.0

report_Title	Title of the report	VARCHAR2(200)	NOT NULL
report_Generated_At	Timestamp when report was generated	TIMESTAMP	DEFAULT CURRENT_TIMESTAMP
report_Status	Status of the report (Generated, Finalized)	VARCHAR2(50)	DEFAULT 'Generated'
report_Type	Type of the report	VARCHAR2(50)	

3. GENERAL ARCHITECTURE

3.1 APPLICATION LAYER

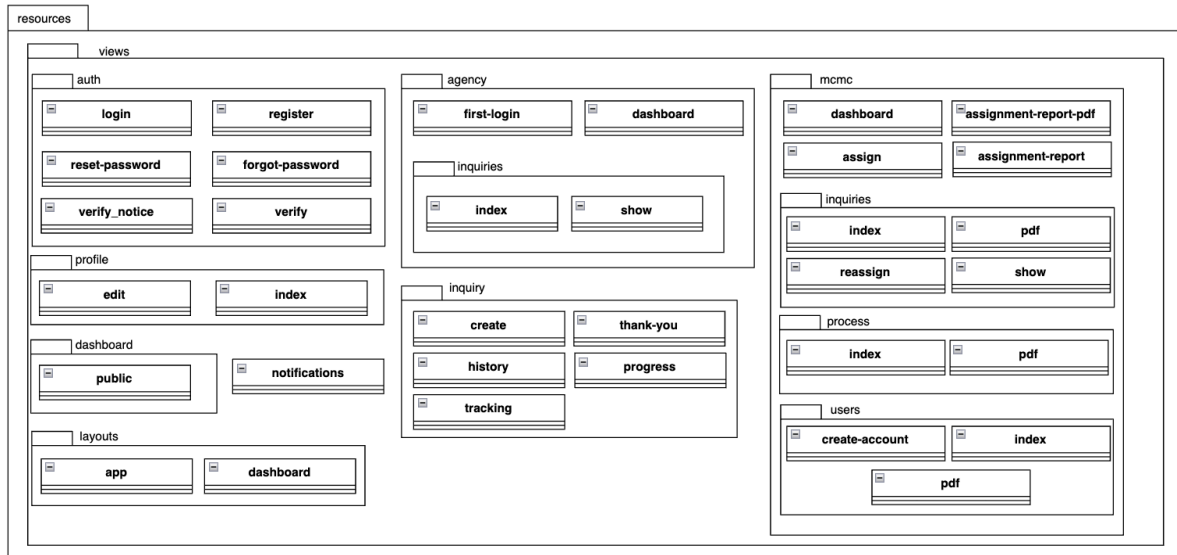


Figure 3.1 Application Layer for MySebenarnya Systems

3.1.1 auth [MS_PKG_100]

Class Name	Description
login	Provides the user interface for logging in. Validates credentials and redirects based on authentication status.
register	Displays the registration form for new users. Handles input, role detection by email, and initiates email verification.
reset-password	Allows users to set a new password after verifying their identity through email.

forgot-password	Enables users to request a password reset link by entering their email address.
verify_notice	Notifies the user to check their email for the verification code after registration.
verify	Accepts email and verification code input from users to complete email verification.

3.1.2 mcmc [MS_PKG_200]

Class Name	Description
dashboard	Dashboard for MCMC staff showing overall statistics, assigned inquiries, and staff options.
assignment-report-pdf	PDF version of the agency assignment report for download.
assignment-report	Web version of the agency assignment performance summary.
assign	Interface for MCMC staff to assign inquiries to relevant agencies.

3.1.3 agency [MS_PKG_300]

Class Name	Description
first-login	Forces agency staff to change their default password on first login before proceeding to dashboard.
dashboard	Dashboard view for agency users, displaying inquiries assigned for review and processing.

3.1.4 profile [MS_PKG_400]

Class Name	Description
edit	Displays the form to update profile details such as name, email, contact, avatar, and password.
index	Shows the user's profile with account information and recent activity.

3.1.5 dashboard [MS_PKG_500]

Class Name	Description
public	Home view for public users after login, displaying inquiry submissions and summaries.

3.1.6 layouts [MS_PKG_600]

Class Name	Description
app	Main HTML layout structure used by auth pages (login, register, etc.).
dashboard	Dashboard layout template used for authenticated views across roles.

3.1.7 inquiry [MS_PKG_700]

Class Name	Description
create	Public user form for submitting a new inquiry, including fields for name, subject, source, and attachment.
thank-you	Confirmation page shown after a successful inquiry submission.
history	Displays the list of past inquiries submitted by the current user.
progress	Shows tracking information on the progress of each inquiry for public users.
tracking	View to display agency or public side tracking logs for submitted inquiries.

3.1.8 inquiries [MS_PKG_800]

Class Name	Description
index	Shows a list of inquiries assigned to the agency for filtering and review.
show	Displays full inquiry details for agency to read, comment, and update.

3.1.9 process [MS_PKG_900]

Class Name	Description
index	Displays inquiries submitted by users, including sorting/filtering for staff.
pdf	Generates a PDF of filtered inquiries for archival or reporting use.

3.1.10 users [MS_PKG_1000]

Class Name	Description
create-account	Allows MCMC staff to create new agency accounts by filling in agency details and credentials.
index	View for listing all registered users (filtered by role or date).

pdf	PDF export view of the current user directory list, generated with filters and date sorting.
-----	--

3.1.11 inquiries [MS_PKG_1100]

Class Name	Description
reassign	Allows MCMC staff to reassign a rejected inquiry to another agency.
show	Shows full details of a submitted inquiry to the MCMC team.
index	MCMC staff interface for monitoring resolution status and average resolution time for agencies.
pdf	Downloads a PDF summary of agency performance (average resolution times, status stats).

3.1.12 views [MS_PKG_1200]

Class Name	Description
notifications	Displays real-time or stored notifications to authenticated users (inquiry updates, status changes).

3.2 BUSINESS SERVICES LAYER

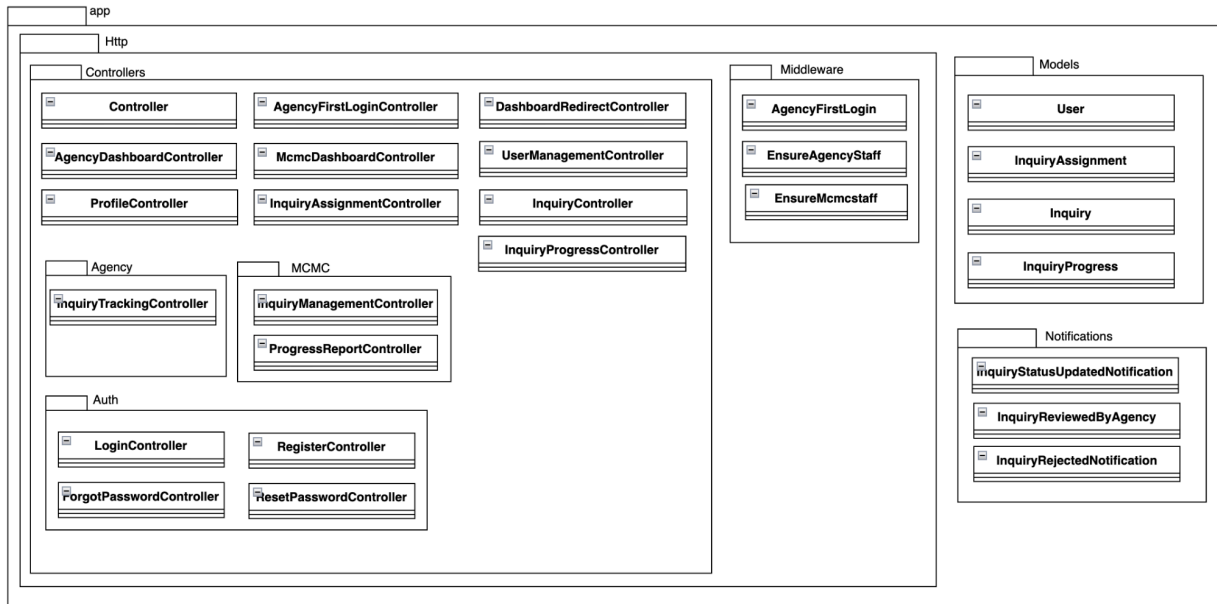


Figure 3.2 Business Services Layer for MySebenarnya Systems

3.2.1 Controllers [MS_PKG_1300]

Class Name	Description
Controller	The base class inherited by all application controllers. It centralizes shared logic such as middleware registration and standardizes the controller structure across the MySebenarnya system.
AgencyFirstLoginController	Forces agency staff to change their password during first-time login for account security.
DashboardRedirectController	Automatically redirects users to their respective dashboards based on role and login status.

AgencyDashboardController	Renders the dashboard interface for agency staff users. Provides navigation to tracking and inquiry review modules.
McmcDashboardController	Displays system-level metrics and inquiry progress to MCMC staff on login.
UserManagementController	Allows MCMC staff to manage user accounts, view directory, and export user data in PDF.
ProfileController	Handles editing and updating of user profile information across all user types.
InquiryAssignmentController	Manages the assignment and reassignment of inquiries to agency staff. Used by MCMC for task delegation.
InquiryController	Accepts inquiries submitted by public users and stores them in the database. Provides history view and handles file attachments.
InquiryProgressController	Records progress updates related to inquiries. Adds status logs and timestamps submitted by agencies.

3.2.2 Agency [MS_PKG_1400]

Class Name	Description
InquiryTrackingController	Displays all assigned inquiries for agency users. Supports filtering, sorting, and navigation to inquiry detail.

3.2.3 MCMC [MS_PKG_1500]

Class Name	Description
InquiryManagementController	Enables MCMC Staff to view, filter, update, and export all inquiries submitted by the public.
ProgressReportController	Generates agency performance reports based on inquiry resolution, delay metrics, and filtering.

3.2.4 Auth [MS_PKG_1600]

Class Name	Description
LoginController	Handles public and staff login authentication. Validates credentials and redirects users based on their role (Public User, Agency Staff, MCMC Staff).
RegisterController	Manages new user registration for public users. Stores user details and enforces validation rules.
ForgotPasswordController	Sends reset password links to registered emails. Initiates Laravel's secure password reset workflow.
ResetPasswordController	Handles the submission of new passwords and finalizes the reset process securely.

3.2.5 Models [MS_PKG_1700]

Class Name	Description
User	Represents users in the system including public users, agency staff, and MCMC staff. Stores name, email, password, role, and verification status.
Inquiry	Core model representing an inquiry submitted by a Public User. Includes details like subject, message, source, file, status, and assignment metadata.
InquiryAssignment	Represents the assignment of an inquiry to a specific agency. Includes assignment date, agency ID, and assigned by (MCMC Staff).
InquiryProgress	Stores the status update logs for inquiries. Each progress entry includes a status, timestamp, and optional remark or explanation.

3.2.6 Notifications [MS_PKG_1800]

Class Name	Description
InquiryStatusUpdatedNotification	Sent to public users when their inquiry is reviewed and updated.
InquiryReviewedByAgency	Notifies MCMC when an agency submits a final review.
InquiryRejectedNotification	Triggers when an agency rejects an inquiry; alerts MCMC for reassignment.

3.3 MIDDLEWARE LAYER

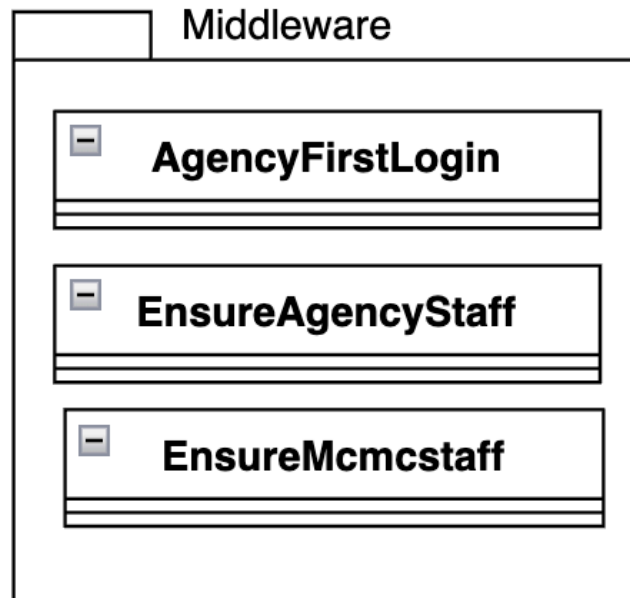


Figure 3.3 Middleware Layer for MySebenarnya Systems

3.3.1 Middleware [MS_PKG_1900]

Package Name	Description
AgencyFirstLogin	Redirects newly created agency staff to a first-time password setup screen.
EnsureAgencyStaff	Ensures that only users with the agency_staff role can access specific routes.
EnsureMcmstaff	Restricts access to MCMC-only routes, allowing only users with mcmc_staff role.

3.4 PACKAGE RELATIONSHIP


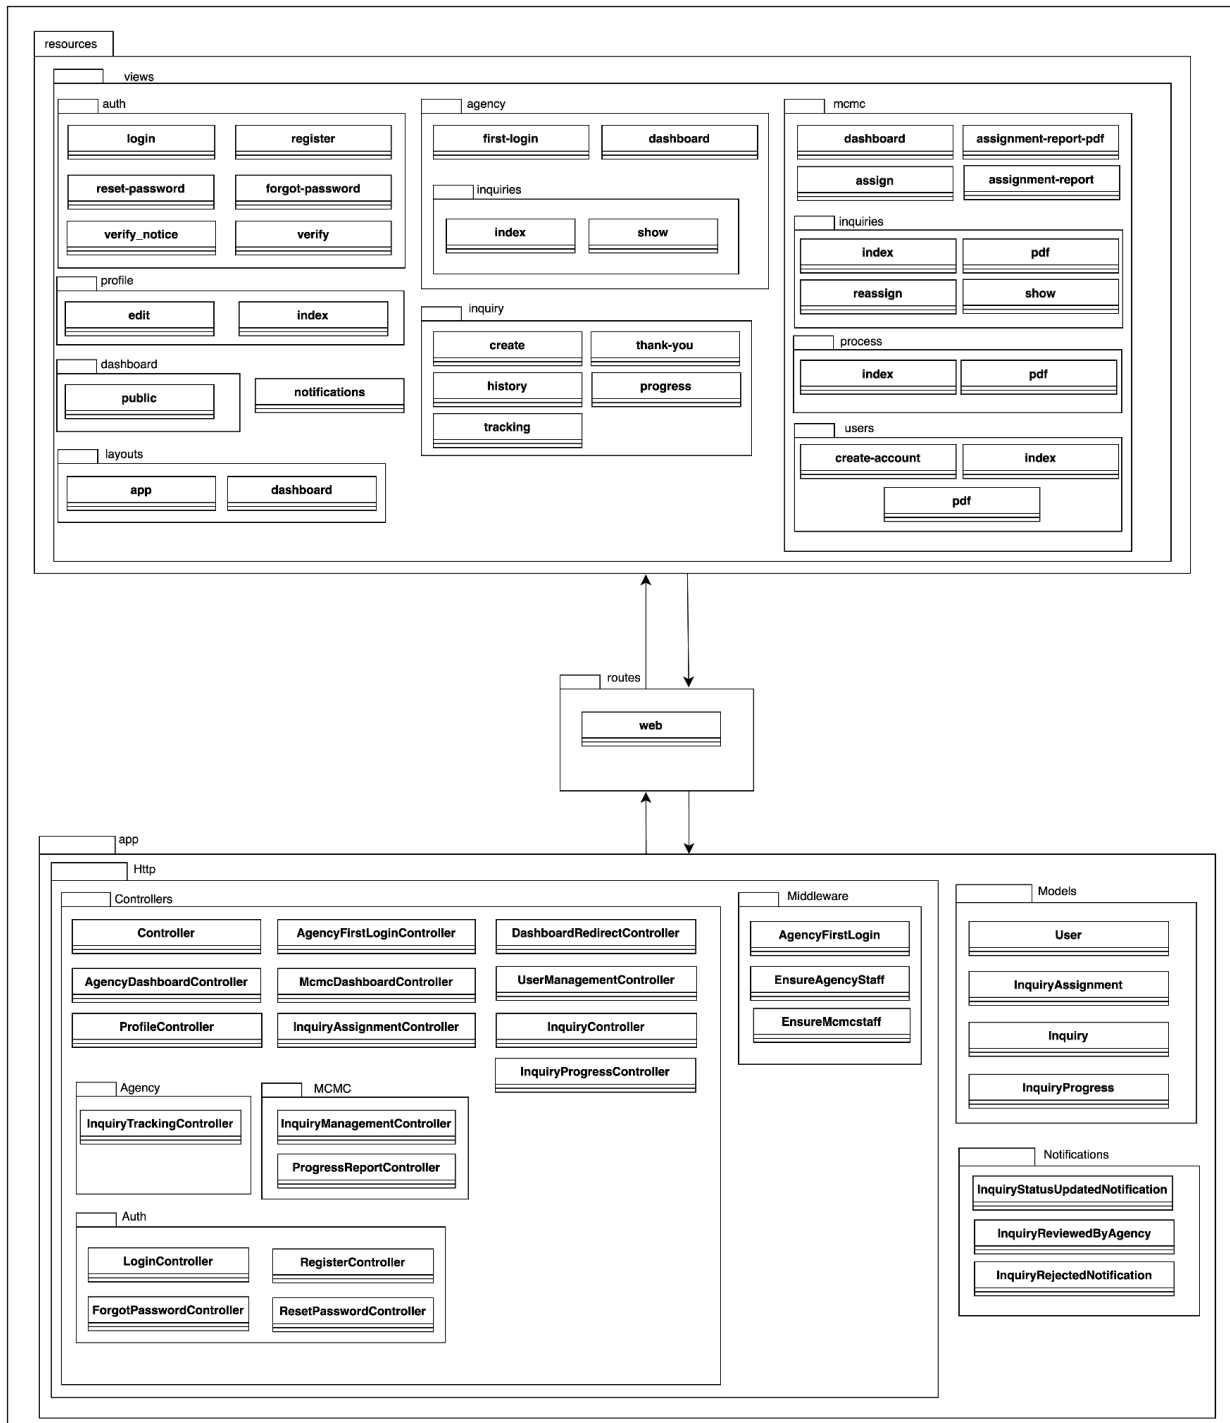


Figure 3.4 Model View Controller (MVC) Package Relationship for My Sebenarnya Systems

4. DETAIL DESIGN

4.1 auth [MS_PKG_100]

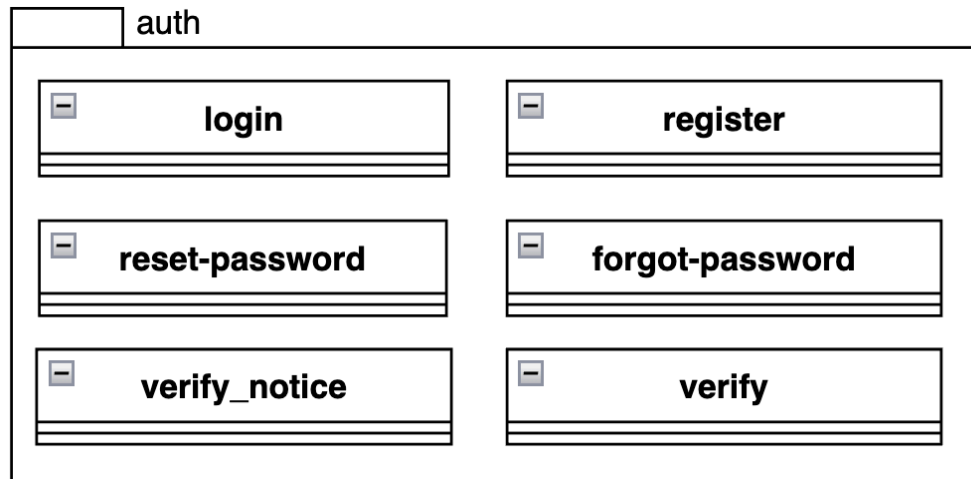

4.1.1 login [MS_PKG_101]

Class Type	Boundary class	
Responsibility	An interface to display the login form for public users, validate input, process authentication requests and redirect users based on their roles.	
Attributes	Attributes Name	Attributes Type
	email	String
	password	String
	remember	Boolean
	error_message	String
	status	String
Methods	Method Name	Description
	validateInput()	Validates the email and password input fields.
	displayErrors()	Displays validation or session errors on the form.
	rememberUser()	Saves login session if 'Remember Me' is checked.

	redirectToDashboard()	Redirects user to the correct dashboard after successful login.
Algorithm	1. Display login form with email, password, and remember fields. 2. User submits the form with credentials. 3. System validates inputs: ○ email must be a valid format. ○ password must not be empty. 4. If validation fails, show error messages. 5. If validation passes, authenticate credentials using backend (LoginController). 6. If login is successful: ○ Start session. ○ If remember is checked, enable long-lived session. ○ Redirect user to the dashboard based on their role. 7. If login fails, display appropriate error message.	

4.1.2 register [MS_PKG_102]

Class Type	Boundary class	
Responsibility	An interface to display the registration form for public users, collect their information (name, email, password), validate input, and submit the data to the system for account creation and email verification.	
Attributes	Attributes Name	Attributes Type
	name email password password_confirmation error_message	String String String String String

Methods	Method Name	Description
	register()	Submits the form data to the system for account creation
	validateForm()	Validates that all input fields meet required formats and constraints
	checkEmailUniqueness()	Ensures the email is not already in use
	validatePasswordStrength()	Ensures the password meets minimum strength rules
	displayErrors()	Shows validation or system errors below the corresponding fields
Algorithm	1. Display a registration form with the following input fields: name, email, password, and confirm password. 2. User fills in the form and clicks the Register button. 3. The system validates all fields: • name must not be empty and meet text length/format requirements. • email must be in valid format and unique in the system. • password must meet strength criteria (e.g., minimum 8 characters). • password_confirmation must match the password field. 4. If any field fails validation, display the relevant error message next to the input. 5. If all fields pass validation, the system processes registration via the RegisterController. 6. A unique email verification token is generated and sent to the provided email. 7. Show success message and redirect the user to the email verification page.	

4.1.3 reset-password [MS_PKG_103]

Class Type	Boundary class	
Responsibility	An interface to allow users to reset their password using a secure token sent via email. This view collects the user's email, new password, and confirmation, validates the inputs, and submits the request to update the account password securely.	
Attributes	Attributes Name	Attributes Type
	email	String
	password	String
	password_confirmation	String
	token	String
	error_message	String
Methods	Method Name	Description
	resetPassword()	Submits the new password to the backend along with the reset token.
	validateInput()	Validates the required fields for format, length, and match
	displayErrors()	Shows validation or system errors next to the input fields.
Algorithm	1. Display a form with the following fields: email, new password, confirm password, and hidden token. 2. When the user submits the form, the system: a. Verifies the token is valid and matches the email. b. Validates the new password format and that both password fields match. 3. If any field fails validation, display the relevant error message next to the field. 4. If validation succeeds, the system updates the user's password in the database.	

	- Invalidate the used token to prevent reuse. - Redirect the user to the login page with a success message like: <i>“Password has been successfully reset.”</i>
--	---

4.1.4 forgot-password [MS_PKG_104]

Class Type	Boundary class	
Responsibility	An interface that collects the user’s email address and sends a password reset link if the email exists in the system. This page supports error display and status confirmation for successful requests.	
Attributes	Attributes Name	Attributes Type
	email	String
	password	String
	remember	Boolean
	error_message	String
	status	String
Methods	Method Name	Description
	sendResetLink()	Submits email to request a password reset link
	validateInput() displayErrors()	Validates the email field format Shows validation or session status messages to the user
Algorithm	- Display a form with one input field: email. - User enters their email address and clicks Send Password Reset Link. - System checks: - Email format is valid. - Email exists in the database. - If validation fails, show error message.	

	5. If valid: a. Generate a reset token. b. Send email to the user with a secure reset link. 6. Show success message (status) saying: “Reset link has been sent.”
--	---


4.1.5 verify_notice [MS_PKG_105]

Class Type	Boundary class	
Responsibility	An interface that informs users to check their email for a verification code after registering. It guides the user to proceed to the code input page to complete account activation.	
Attributes	Attributes Name	Attributes Type
	verification_status message	String String
Methods	Method Name	Description
	goToVerificationForm() displayVerificationInfo()	Redirects the user to the verification input form. Shows instructions and messages related to email verification.
Algorithm	1. Display a success message indicating that a verification code has been sent. 2. Provide a button labeled “Enter Verification Code”. 3. When the user clicks the button: a. Redirect to verification.form route where the user can manually enter their code. 4. Ensure user is not allowed access to the system until the verification is completed.	

4.1.6 verify [MS_PKG_106]

Class Type	Boundary class	
Responsibility	Provides the interface for users to manually verify their email by entering their email and a 6-digit code sent during registration. The system validates and activates the account if successful.	
Attributes	Attributes Name	Attributes Type
	email	String
	verification_code	String
	error_message	String
Methods	Method Name	Description
	verifyCode()	Submits the code and email for verification
	validateInput()	Ensures both fields are filled and
	displayErrors()	Shows any errors during validation or verification attempt Shows validation or session status messages to the user
Algorithm	1. Display input fields for email and verification_code. 2. User fills in the form and clicks Verify Email. 3. The system: a. Checks if the verification code is correct and not expired. b. Confirms the email matches the code. 4. If validation fails, show error message. 5. If successful: a. Mark the user account as verified. b. Redirect to login or dashboard with success message.	

4.2 mcmc [MS_PKG_200]

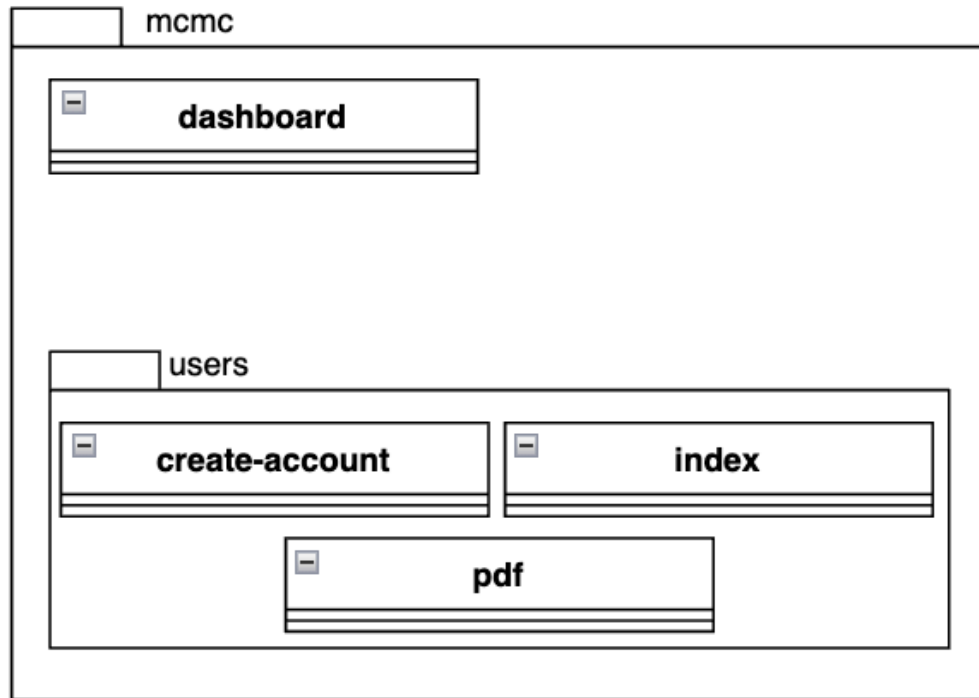

4.2.1 dashboard [MS_PKG_201]

Class Type	Boundary Class	
Responsibility	Displays a dashboard for MCMC staff to monitor the progress of inquiries, including subject, agency assignments, status, review notes, and timestamps.	
Attributes	Attributes Name	Attributes Type
	inquiries inquiry.subject inquiry.full_name inquiry.assignment.agency.agency_name inquiry.status inquiry.jurisdiction_notes inquiry.status_updated_at	Collection<Inquiry> String String String String Text DateTime

	statusColor	String
Methods	Method Name	Description
	loadDashboard()	Loads all inquiries viewable by MCMC staff
	styleStatusBadge()	Determines status badge color based on status value
	renderInquiryTable()	Renders inquiry summary table for MCMC
	formatUpdateTimestamp()	Formats status_updated_at with Carbon
	checkAssignment()	Displays assigned agency name or fallback
Algorithm	1. MCMC staff logs in and is routed to dashboard.mcmc. 2. System queries inquiries table to fetch inquiries that are assigned to any agency. 3. System checks if any assigned inquiries exist: 4. If none: a. Display message: "No inquiries assigned to agencies yet." 5. If records found: a. Display inquiry data in a table with: i. ID (auto-indexed) ii. Subject iii. Submitted By (Full Name) iv. Assigned Agency Name v. Status (color-coded badge) vi. Jurisdiction Notes (if any) vii. Last Status Update Time (formatted) 6. End.	

4.3 agency [MS_PKG_300]



4.3.1 first-login [MS_PKG_301]

Class Type	Boundary Class	
Responsibility	This view handles the first-time password setup screen for Agency Staff. It ensures the user sets a secure password before accessing the system.	
Attributes	Attributes Name	Attributes Type
	password	String
	password_confirmation	String
	errors	String
Methods	Method Name	Description
	showForm()	Displays the first login password setup form
	validateForm()	Checks for matching passwords and Laravel validation
	submitPassword()	Sends POST to agency.first-login.update route to save new password and mark is_first_login = false
Algorithm	- Displays heading: “First-Time Password Setup” - If validation fails, error list is shown - User inputs: - new password - confirm password	


	- On submit, POST is sent to agency.first-login.update route - Backend checks password rules, saves new hashed password, and allows dashboard access
--	---

4.3.2 dashboard [MS_PKG_302]

Class Type	Boundary Class	
Responsibility	Displays the agency staff's landing page after login, providing guidance and a welcome message. Styled with a green agency theme and uses the dashboard layout structure.	
Attributes	Attributes Name	Attributes Type
	user	User
	homeRoute	String
	is_first_login	Boolean
	headerThemeColor	String
	sidebarColor	String
	messageText	String
Methods	Method Name	Description
	loadDashboard()	Displays the personalized dashboard content for agency staff
	renderWelcomeText()	Displays the title and instructions
	applyThemeStyles()	Renders layout styling with agency green branding (handled in layout)
	redirectLinks()	Includes sidebar navigation like Home, Profile, and Settings (in layout)
Algorithm	- Agency user logs in successfully. - System checks the role and redirects to dashboard.agency. - Display a welcome message with the user's name. - Render a card containing sample interaction (like "Agency Action" button).	

	5. Button is non-functional for demo but shows potential agency-related actions. 6. End.
--	--

4.4 profile [MS_PKG_400]

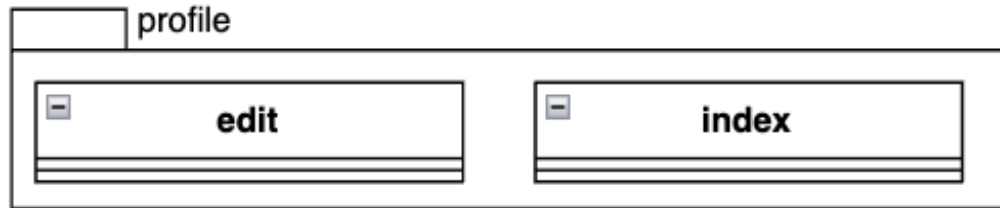

4.4.1 edit [MS_PKG_401]

Class Type	Boundary Class	
Responsibility	This class provides an editable profile interface for all user types (Public User, Agency Staff, MCMC Staff). It allows users to update their name, email, contact, agency (if available), avatar image, and password	
Attributes	Attributes Name	Attributes Type
	name	String
	email	String
	contact	String
	agency_name	String
	avatar	File
	password	String
	password_confirmation	String
Methods	Method Name	Description
	determineRoute()	Sets the correct form action route based on the user's role
	displayErrors()	Shows validation error messages for each input field


	displayOldValues() uploadAvatar() updatePassword()	Fills form with old input or existing user data Handles avatar image upload if a new file is provided Allows user to update password (if a new one is entered)
Algorithm	1. When user accesses the Edit Profile page: a. Their current data is auto-filled into the form b. The correct update route is selected based on user role 2. User may update the following fields: a. Name, Email, Contact, Avatar, Password b. Agency Name (Agency staff only) 3. If user uploads a new avatar, system saves it and replaces the old one. 4. If password fields are filled: a. System checks that confirmation matches b. Password is hashed and updated 5. Form submission uses PUT method and CSRF token for security 6. System displays: a. Success message if update is complete b. Error messages for any validation failures	

4.4.2 index [MS_PKG_402]

Class Type	Boundary Class	
Responsibility	Displays a detailed profile page for the authenticated user, including avatar, personal info, and recent activities. Includes a button to navigate to the profile editing form.	
Attributes	Attributes Name	Attributes Type
	user	Object
	user.name	String
	user.email	String
	user.contact	String
	user.agency_name	String (nullable)
	user.avatar	String (file path)
	user.created_at	Timestamp
Methods	Method Name	Description
	displayProfile()	Shows user's name, email, joined date, contact, and agency (if available)
	displayAvatar()	Displays current user avatar or fallback if not available
	showActivities()	Lists recent static activity records
	routeToEditProfile()	Dynamically generates correct route to edit profile based on user role
Algorithm	- The view retrieves the currently authenticated user via Auth::user(). - Displays a card layout with: - Left section: Avatar (or placeholder) - Right section: Name, Email, Contact, Agency Name, Joined Date - Section at bottom shows dummy "Recent Activities". - Detects the user's role and chooses the correct profile edit route: - agency_staff → agency.profile.edit	

	b. mcmc_staff → mcmc.profile.edit c. default → profile.edit 5. Button labeled "Edit Profile" links to the appropriate edit form.
--	---

4.5 dashboard [MS_PKG_500]

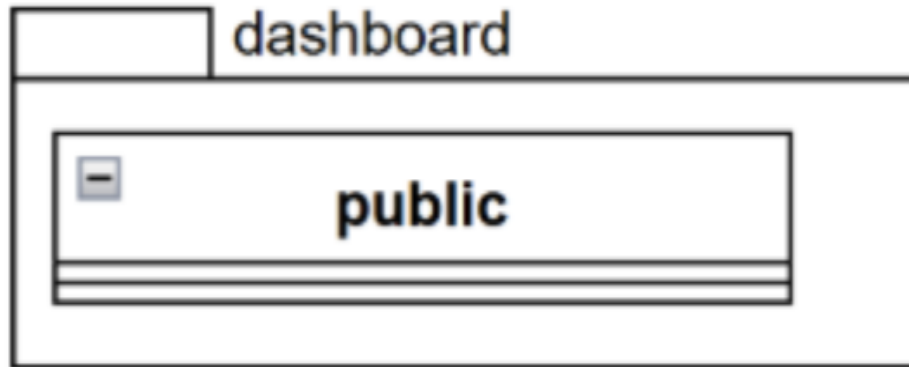


4.5.1 public [MS_PKG_501]

Class Type	Boundary class	
Responsibility	Displays the public user's dashboard with a list of submitted inquiries, assigned agencies, current statuses, and links to view full inquiry history.	
Attributes	Attributes Name	Attributes Type
	user	User
	inquiries	Collection<Inquiry>
	assignment.agency_name	String
	assignment.assigned_at	DateTime
	Status	String
Methods	badgeColor	String
	Method Name	Description
	loadDashboard()	Loads the dashboard for the authenticated public user

	renderInquiryTable() checkAssignmentStatus() styleStatusBadge() redirectToHistory()	Displays a list of inquiries with subject, agency, date, and status Verifies if an agency has been assigned to the inquiry Applies color classes based on inquiry status Redirects to the inquiry's detailed history page
Algorithm	- Public User logs into the system using valid credentials. - System authenticates the user and identifies their role as "Public User". - User is redirected to the route dashboard.public. - System queries the inquiries table to retrieve all records with user_id = Auth::id(). - Display a welcome message: "Welcome, {username}! You're on the public dashboard." - System checks whether any inquiry records exist: - If inquiries exist: - Display a table with the following headers: - Subject - Assigned Agency (or "Not assigned yet" if null) - Date Assigned (formatted using Carbon) - Status (color-coded badge) - Action ("View" button) - Status badge color is determined by: "Approved" → Green "Fake" → Yellow "Rejected" → Red "Pending" → Indigo	

	x. All other values ("Pending") → Grey • If no inquiries exist: a. Display the message: "You haven't submitted any inquiries yet." 7. When the user clicks the "View" button: • System redirects to the inquiry.history route with the corresponding inquiry ID. 8. End.
--	--

4.6 layouts [MS_PKG_600]

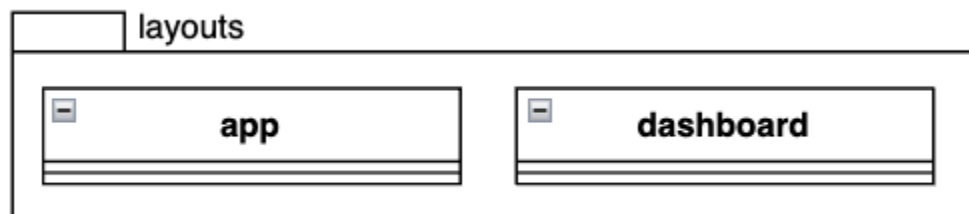

4.6.1 app [MS_PKG_601]

Class Type	Boundary Class	
Responsibility	Provides a public-facing layout with a top navigation bar and role-based theming for users visiting routes like login, register, and inquiry submission.	
Attributes	Attributes Name	Attributes Type
	user role headerClass currentRoute isInquiryPage content	User String String String Boolean BladeSection
Methods	Method Name	Description


	renderNavbar() renderGuestLinks() renderAuthLinks() injectContent()	Dynamically renders header with role-specific colors Shows login/register links for unauthenticated users Shows logout button for logged-in users Injects dynamic content into @yield('content') section
Algorithm	1. All public pages inherit from layouts.app. 2. The layout renders standard HTML with Tailwind CSS styling. 3. The <head> section includes: • Title (customizable with @section) • Meta tags and fonts 4. The <body> section uses a responsive flexbox: • Centered card design for login, registration, and password views • Includes error and status message slots 5. The @yield('content') directive outputs child page content 6. Layout is styled for readability and user interaction. 7. End.	

4.6.2 dashboard [MS_PKG_602]

Class Type	Boundary Class	
Responsibility	Provides the complete dashboard layout for all user roles (MCMC, agency, public), including dynamic headers, role-based sidebar navigation, and main content section.	
Attributes	Attributes Name	Attributes Type
	user	User
	role	String
	homeRoute	String
	isFirstLogin	Boolean
	sidebarLinks	Array
	headerColor	String
	sidebarColor	String
	content	BladeSection
	notifications	Icon (placeholder)
Methods	Method Name	Description
	renderHeader()	Displays a fixed top header with app title and notification icon
	resolveHomeRoute()	Determines correct dashboard route by role
	renderSidebar()	Displays dynamic sidebar with nav links filtered by role
	renderSidebarLinks()	Includes MCMC-only items like User Directory, Assign Inquiry
	renderContent()	Injects page content into the main section (@yield('content'))
	handleLogout()	Displays logout button in sidebar footer

Algorithm	1. All dashboard pages inherit from layouts.dashboard. 2. Layout includes a sidebar, header, and main content section. 3. Header and sidebar colors are theme-based and adjustable via <code>@section('head')</code>. 4. Sidebar includes navigation links: a. Varies based on user role (public, agency, MCMC) 5. Header shows app name and logout link. 6. Content area uses <code>@yield('content')</code> to display view-specific content. 7. Layout uses Tailwind CSS for styling and responsiveness. 8. End.
-----------	---

4.7 users [MS_PKG_1000]

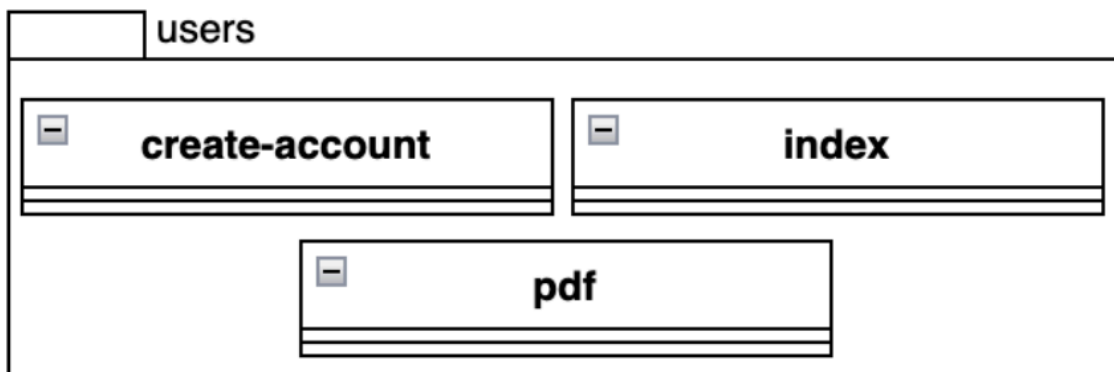

4.7.1 create-account [MS_PKG_1001]

Class Type	Boundary Class
Responsibility	Interface for MCMC staff to register new agency users by filling in required data. Validates inputs and submits them to create new user records in the system.

Attributes	Attributes Name	Attributes Type
	name	String
	email	String
	agency_name	String
	password	String
	password_confirmation	String
	status	String
	error_message	String
Methods	Method Name	Description
	createAccount()	Submits the new agency user info to the system.
	validateForm()	Ensures inputs are filled and follow format rules.
	displayErrors()	Shows form validation errors below fields.
	displayStatus()	Displays account creation success message using session flash.
Algorithm	1. MCMC staff fills out full name, email, agency name, password, and password confirmation. 2. System validates: a. Required fields are not empty. b. Email is unique and valid. c. Password matches confirmation. 3. If errors exist, they're shown below the relevant input. 4. If validation passes, account is created and assigned role = agency_staff. 5. A success message appears to confirm the account was created.	

4.7.2 index [MS_PKG_1002]

Class Type	Boundary Class	
Responsibility	This class displays the interactive User Directory page for MCMC Staff, allowing filtering, sorting, and exporting of registered users (Public, Agency Staff, MCMC Staff). It also includes pagination and visual table styling.	
Attributes	Attributes Name	Attributes Type
	users filterRole sortOrder deleteModalVisible deleteFormAction status	Collection String String Boolean String String
Methods	Method Name	Description
	applyFilterSort() displayUserTable() downloadPdf() openModal() closeModal()	Applies role and date sort filters based on selected values Renders the user list in table format Redirects to route that triggers PDF download of the user list. Shows the delete confirmation modal with dynamic form action. Hides the delete confirmation modal.
Algorithm	- MCMC staff accesses the user directory view via route mcmc.users. - System loads: - All users with optional filter and sort. - Filter values: public_user, agency_staff, mcmc_staff. - Sort values: asc (Oldest), desc (Newest). - Users are listed in a table with columns: - Name, Email, Role, Agency, Joined Date.	


	- If the logged-in user is not the same as the row, a “Delete” button is shown. - Clicking Delete opens a confirmation modal with DELETE form submission. - A “Download PDF” button links to mcmc.users.pdf route to export the user list. - Success status messages (like account created or deleted) are displayed using session('status').
--	--

4.7.3 pdf [MS_PKG_1003]

Class Type	Boundary Class	
Responsibility	Generates a downloadable PDF version of the user directory for MCMC Staff. Applies current filter and sort settings, and displays the list of users with key details such as name, email, role, agency, and join date.	
Attributes	Attributes Name	Attributes Type
	users	Collection
	filterRole	String
	sortOrder	String
Methods	Method Name	Description
	displayFilters()	Shows the current filter and sort order at the top of the document
	renderTable()	Iterates and renders each user record in a table row
	formatRole()	Converts role value into readable format (agency_staff → label)
	formatDate()	Formats created_at into M d, Y
	printTimestamp()	Displays the generated timestamp at the top of the document

Algorithm	1. Receive user data, role filter, and sort order from controller. 2. Show current filter: a. If no role selected → All Roles b. Else → Show selected role (formatted) 3. Show sort order: a. asc → Oldest First b. desc → Newest First 4. Render a table with the following columns: a. #, Name, Email, Role, Agency, Joined 5. Loop through each user: a. Format role using if-else b. Format date to M d, Y 6. Output current timestamp (PDF generation time)
-----------	--

4.8 Controllers [MS_PKG_1300]

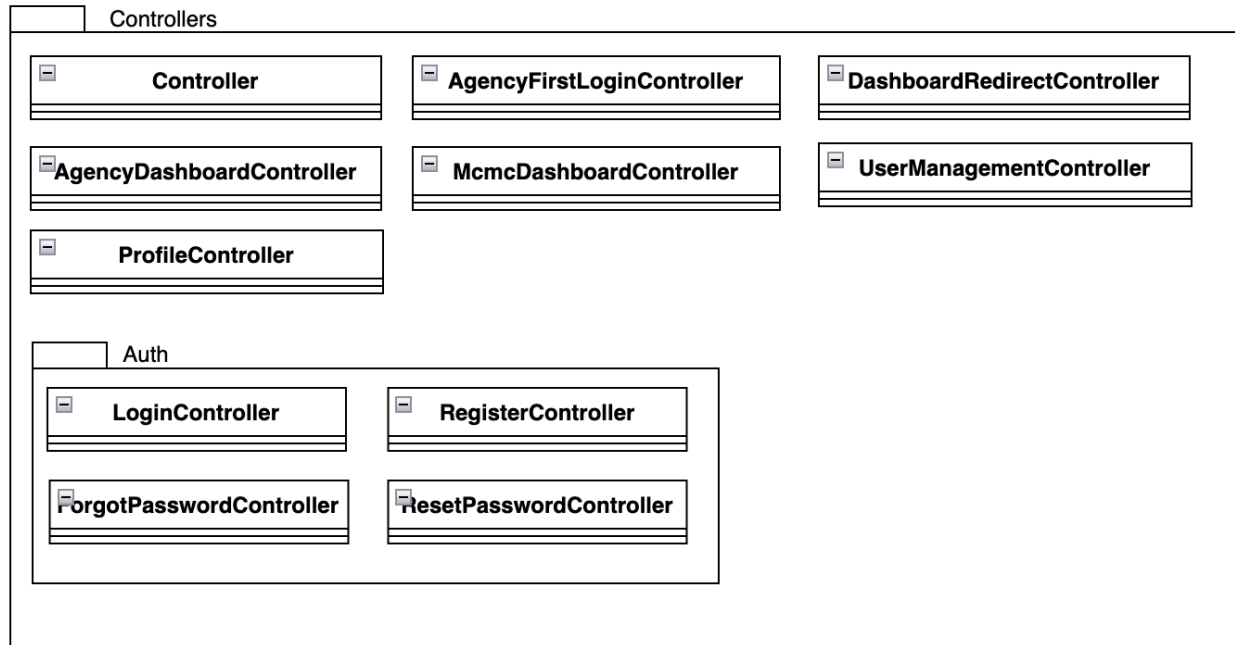

4.8.1 Controller [MS_PKG_1301]

Class Type	Control Class	
Responsibility	Provides a structural base for all controller classes in the system. It defines a common inheritance point and supports shared logic, middleware registration, and consistent application control flow across the application.	
Attributes	Attributes Name	Attributes Type
	(none)	(none)
Methods	Method Name	Description
	(none)	(none)
Algorithm	1. Declared as abstract class Controller under App\Http\Controllers. 2. Does not implement any logic directly. 3. Other controller classes like UserController, DashboardRedirectController, AgencyDashboardController, etc., extend this class.	

	4. Shared methods (if any) can later be added to this file and will be inherited by all child controllers.
--	--

4.8.2 AgencyFirstLoginController [MS_PKG_1302]

Class Type	Control Class	
Responsibility	Handles the first-time login process for agency staff by showing the password setup form, validating input, updating credentials, and redirecting to the dashboard.	
Attributes	Attributes Name	Attributes Type
	request	Request
	user	User
	user->password	String
	user->is_first_login	Boolean
Methods	Method Name	Description
	showChangeForm()	Displays the password setup form for first-time login.
	updatePassword()	Validates password input, updates user record, and redirects to the agency dashboard.
Algorithm	1. User logs in with default password. 2. System detects is_first_login = true. 3. Controller routes user to showChangeForm() to enter a new password. 4. User submits new password and confirmation. 5. updatePassword() is triggered: a. Validates password (min 8 characters and matches confirmation). b. Hashes and saves new password. c. Sets is_first_login = false.	

	6. Redirects to dashboard.agency with a success message.
--	--

4.8.3 DashboardRedirectController [MS_PKG_1303]

Class Type	Control Class	
Responsibility	Handles post-login redirection for all users based on their role. Also provides dashboard data for public users and displays inquiry history.	
Attributes	Attributes Name	Attributes Type
	user	Object (User)
	user->role	String
	user->is_first_login	Boolean
	inquiries	Collection (Inquiry)
Methods	Method Name	Description
	index()	Checks authenticated user's role and redirects to the appropriate dashboard. Handles first-login redirection for agency staff.
	publicDashboard()	Retrieves inquiries submitted by the currently logged-in public user, with related agency info.
	history()	Fetches and displays the full list of submitted inquiries for the current public user.
Algorithm	1. index(): a. Get the currently authenticated user. b. If role is agency_staff: i. If is_first_login is true, redirect to the password setup page. ii. Else, redirect to the agency dashboard. c. If role is mcmc_staff, redirect to the MCMC dashboard. d. Otherwise, redirect to the public dashboard.	

	2. publicDashboard(): a. Query all inquiries where user_id equals the current user. b. Load related assignment and agency data. c. Pass the data to dashboard.public view. 3. history(): a. Retrieve all inquiries where user_id equals the current user. b. Pass them to the inquiry.history view.
--	---

4.8.4 UserManagementController [MS_PKG_1306]

Class Type	Control Class	
Responsibility	Manages user listings, PDF generation, and creation of new agency staff accounts for MCMC staff. Handles filtering, sorting, validation, and storage.	
Attributes	Attributes Name	Attributes Type
	request	Object (Request)
	users	Collection (User)
	allUsers	Collection (User)
	filterRole	String
	sortOrder	String
	id	Integer (for deletion)
	user	User Object
Methods	Method Name	Description
	index()	Displays a list of users with optional filtering and sorting.
	downloadPdf()	Generates a downloadable PDF based on current filter and sort options.
	showCreateForm()	Displays the user creation form for new agency staff accounts.

	storeNewAgency() destroy()	Validates form input and creates a new agency staff user with default login state. Deletes a user unless it's the currently logged-in user.
Algorithm	1. List Users (index) a. System receives request with optional query parameters: role and sort. b. Builds query to fetch users based on those filters. c. Paginates the result and passes to view with current filter/sort values. 2. Generate PDF (downloadPdf) a. Builds the same query with optional filter/sort as index(). b. Loads view mcmc.users.pdf with user list data. c. Generates a landscape PDF using DomPDF and returns for download. 3. Create Account Form (showCreateForm) a. Displays the agency registration form at mcmc.users.create-account. 4. Store Agency User (storeNewAgency) a. Validates input for name, email, password, and agency name. b. Creates user record with role set as agency_staff and is_first_login = 1. c. Redirects back to form with a success message. 5. Delete User (destroy) a. Finds user by ID. b. If the user ID matches the currently authenticated user, return error.	

	c. Otherwise, delete user and redirect with success message.
--	--

4.8.5 ProfileController [MS_PKG_1307]

Class Type	Control Class	
Responsibility	Handles viewing, editing, and updating of user profile data including name, email, contact, agency name, avatar image, and password. It supports role-based redirection after updates.	
Attributes	Attributes Name	Attributes Type
	request	Illuminate\Http\Request
	user	App\Models\User
	file	UploadedFile (nullable)
	filename	String
	path	String (avatar path)
Methods	Method Name	Description
	showProfile()	Returns the profile view with current authenticated user.
	edit()	Returns the edit profile form with current user data.
	update()	Validates and updates profile info, avatar, and password.
Algorithm	1. Retrieve the currently authenticated user. 2. Validate form inputs (name, email, contact, agency_name, avatar, password). 3. Update basic fields (name, email, contact, agency_name). 4. If a new avatar is uploaded: a. Delete old avatar file from storage (if any). b. Store the new avatar in public/avatars and save the file path. 5. If a new password is entered, hash and update it.	

	- Save all updated user data. - Redirect to the appropriate profile route with success message, based on the user's role.
--	--

4.9 Auth [SDD_PKG_1600]



4.9.1 LoginController [MS_PKG_1601]

Class Type	Control Class	
Responsibility	Handles user login and logout. It validates login credentials, manages sessions, and redirects users based on authentication status.	
Attributes	Attributes Name	Attributes Type
	request credentials	Illuminate\Http\Request Array
Methods	Method Name	Description
	showLoginForm() login(Request) logout(Request)	Show login page Authenticate user and redirect Logout user and clear session
Algorithm	- Validate email and password - Attempt login with Auth::attempt() - If success: regenerate session + redirect	

	4. If fail: return back with error
--	------------------------------------

4.9.2 RegisterController [MS_PKG_1602]

Class Type	Control Class	
Responsibility	Manages user registration and email verification. It handles input validation, assigns roles based on email domains, sends verification codes, and processes code-based email verification before allowing login.	
Attributes	Attributes Name	Attributes Type
	request	Illuminate\Http\Request
	verification_code	String
	emailVerifiedAt	`Carbon
	role	String
	user	App\Models\User
Methods	Method Name	Description
	showRegistrationForm()	Show registration form view
	register(Request)	Handle user registration, assign role, send code
	showVerificationNotice()	Display notice after registration
	showVerificationForm()	Show form for code input
	verifyCode(Request)	Validate and confirm user's verification code
Algorithm	1. Validate name, email, and password 2. Generate 6-char verification code 3. Determine role by email domain 4. Create user with hashed password 5. Send code via email (if needed) 6. Redirect to code verification notice	

4.9.3 ForgotPasswordController [MS_PKG_1603]


Class Type	Control Class	
Responsibility	Manages the "Forgot Password" flow by showing the reset form and handling requests to send password reset emails.	
Attributes	Attributes Name	Attributes Type
	request status	Illuminate\Http\Request String
Methods	Method Name	Description
	showLinkRequestForm() sendResetLinkEmail()	Show the form to request password reset Validate email and send reset link
Algorithm	1. Validate that the email exists in the users table 2. Use Laravel's Password broker to send a reset link 3. Return back with success message or error	

4.9.4 ResetPasswordController [MS_PKG_1604]

Class Type	Control Class	
Responsibility	Handles the full logic of password resetting including validating the token, verifying the user email, and updating the user's password.	
Attributes	Attributes Name	Attributes Type
	request token status	Illuminate\Http\Request String String
Methods	Method Name	Description
	showResetForm() reset()	Show the password reset form with token Validate input, reset password, redirect user
Algorithm	1. showResetForm() a. Receive the password reset token from the URL	

	b. Pass the token to the reset form view 2. reset() a. Validate required fields (token, email, new password) b. Attempt to reset the user's password via Laravel's Password broker c. If successful, hash new password and save user d. Redirect to login with success or return error
--	--

4.10 Models [SDD_PKG_1700]

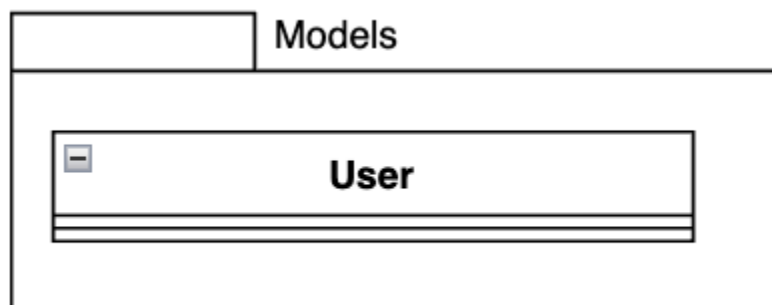

4.10.1 User [MS_PKG_1701]

Class Type	Entity Class	
Responsibility	This class represents all registered users in the system and is responsible for handling user attributes, role-based access, authentication, email verification, and user relationships such as inquiry progress updates. It also manages visibility of sensitive fields and type casting.	
Attributes	Attributes Name	Attributes Type
	name email password verification_code	Illuminate\Http\Request String String String

	is_first_login role agency_name email_verified_at remember_token	Boolean String String or Null Date Time String
Methods	Method Name	Description
	progressUpdates()	Defines a one-to-many relationship to InquiryProgress, indicating this user has submitted multiple updates.
Algorithm	N/A – This is an Eloquent model class with no procedural algorithm. Logic is handled via Eloquent relationships and Laravel internal mechanisms.	

5. REQUIREMENT TRACEABILITY

5.1 Register and Login [MS_REQ_100]

Requirement ID	Description	Design ID(s)
MS_REQ_101	Public User submits registration form with required details	MS_PKG_1602 (RegisterController), MS_PKG_1701 (User), MS_PKG_102 (register)
MS_REQ_102	Public User enters email verification code	MS_PKG_1602 (RegisterController), MS_PKG_1701 (User), MS_PKG_106 (verify)
MS_REQ_103	All users log in using email and password	MS_PKG_1601 (LoginController), MS_PKG_1701 (User), MS_PKG_101 (login)
MS_REQ_104	“Forgot password” triggers reset link	MS_PKG_1603 (ForgotPasswordController), MS_PKG_1701 (User), MS_PKG_104 (forgot-password)
MS_REQ_105	User resets password via reset form	MS_PKG_1604 (ResetPasswordController), MS_PKG_1701 (User), MS_PKG_103 (reset-password)

MS_REQ_106	Agency staff redirected to set new password on first login	MS_PKG_1302 (AgencyFirstLoginController), MS_PKG_1701 (User), MS_PKG_301 (first-login)
-------------------	--	---

5.2 Manage User Profile [MS_REQ_200]

Requirement ID	Description	Design ID(s)
MS_REQ_201	User views personal profile details	MS_PKG_1307 (ProfileController), MS_PKG_1701 (User), MS_PKG_402 (index)
MS_REQ_202	User updates name and agency name (if applicable)	MS_PKG_1307 (ProfileController), MS_PKG_1701 (User), MS_PKG_401 (edit)
MS_REQ_203	System displays current user avatar or placeholder	MS_PKG_1307 (ProfileController), MS_PKG_1701 (User), MS_PKG_402 (index)
MS_REQ_204	User uploads new profile picture	MS_PKG_1307 (ProfileController), MS_PKG_1701 (User), MS_PKG_401 (edit)
MS_REQ_205	System validates and stores updated profile data	MS_PKG_1307 (ProfileController),

		MS_PKG_1701 (User), MS_PKG_401 (edit)
MS_REQ_206	Changes reflected immediately after update	MS_PKG_1307 (ProfileController), MS_PKG_1701 (User), MS_PKG_402 (index)

5.3 User Directory [MS_REQ_300]

Requirement ID	Description	Design ID(s)
MS_REQ_401	MCMC Staff can view the full list of users	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User), MS_PKG_1002 (index)
MS_REQ_402	MCMC Staff can filter users by role (Public User, Agency Staff, MCMC Staff)	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User), MS_PKG_1002 (index)
MS_REQ_403	MCMC Staff can sort user list by registration date	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User), MS_PKG_1002 (index)
MS_REQ_404	MCMC Staff can delete user accounts (except their own)	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User),

SDD_MS_1.0

		MS_PKG_1002 (index)
MS_REQ_405	MCMC Staff can download the user directory as a PDF	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User), MS_PKG_1003 (pdf)
MS_REQ_406	Confirmation modal shown before deletion	MS_PKG_1306 (UserManagementController), MS_PKG_1701 (User), MS_PKG_1002 (index)