

Chapter – 1 Part:2 [Bootstrap Basics]

Introduction:

☺ What Is Bootstrap?

- Bootstrap is an open source product from Mark Otto and Jacob Thornton.
- Bootstrap is a free front-end framework for faster and easier web development
- Bootstrap includes HTML and CSS based design templates for typography, forms, buttons, tables, navigation, modals, image carousels and many other, as well as optional JavaScript plugins.
- Bootstrap also gives you the ability to easily create responsive designs.
- Since Bootstrap launched in August 2011, it has taken off in popularity.
- It has evolved from being an entirely CSS-driven project to include a host of JavaScript plugins and icons that go hand in hand with forms and buttons. At its base, it allows for responsive web design and features a robust 12-column, 940px-wide grid.

☺ File Structure:

Within the download you'll find the following file structure and contents, logically

Once downloaded, unzip the compressed folder to see the structure of (the compiled) Bootstrap. You'll see something like this:

```
bootstrap/  
├── css/  
│   ├── bootstrap.css  
│   └── bootstrap.min.css  
├── js/  
│   ├── bootstrap.js  
│   └── bootstrap.min.js  
└── img/  
    ├── glyphs-halflings.png  
    └── glyphs-halflings-white.png
```

This is the most basic form of Bootstrap: compiled files for quick drop-in usage in nearly any web project. The Bootstrap download includes three folders: `css`, `js`, and `img`. We provide compiled CSS and JS (`bootstrap.*`), as well as compiled and minified CSS and JS (`bootstrap.min.*`). The image files are compressed using [ImageOptim](#), a Mac app for compressing PNGs.

Please note that all JavaScript plugins require jQuery to be included.

😊 Basic HTML Templates:

With a brief intro into the contents out of the way, we can focus on putting Bootstrap to use. To do that, we'll utilize a basic HTML template that includes everything we mentioned in the File structure.

Now, here's a look at a **typical HTML file**:

```
<!DOCTYPE html>
<html>
<head>

<title>Bootstrap 101 Template</title>

<meta name="viewport" content="width=device-width, initial-
scale=1.0">

</head>
<body>

<h1>Hello, world!</h1>
<scriptsrc="http://code.jquery.com/jquery.js"></script>

</body>
</html>
```

To make this a **Bootstrapped template**, just include the appropriate CSS and JS files:

```
<!DOCTYPE html>
<html>

<head>
<title>Bootstrap 101 Template</title>

<meta name="viewport" content="width=device-width, initial-
scale=1.0">

<!-- Bootstrap -->

<link href="css/bootstrap.min.css" rel="stylesheet"
media="screen">

<scriptsrc="http://code.jquery.com/jquery.js"></script>
<scriptsrc="js/bootstrap.min.js"></script>

</head>

<body>
<h1>Hello, world!</h1>

</body>

</html>
```

And you're set! With those two files added, you can begin to develop any site or application with Bootstrap.

☺ Global Styles:

Requires HTML5 doctype

Bootstrap makes use of certain HTML elements and CSS properties that require the use of the HTML5 doctype. Include it at the beginning of all your projects.

```
<!DOCTYPE html>

<html lang="en">
...
</html>
```

Typography and links

Bootstrap sets basic global display, typography, and link styles. Specifically, we:

- Remove `margin` on the `body`
- Set `background-color: white;` on the `body`
- Use the `@baseFontFamily`, `@baseFontSize`, and `@baseLineHeight` attributes as our typographic base
- Set the global link color via `@linkColor` and apply link underlines only on `:hover`

These styles can be found within **scaffolding.less**.

Reset via Normalize

With Bootstrap 2, the old reset block has been dropped in favor of [Normalize.css](#), a project by [Nicolas Gallagher](#) and [Jonathan Neal](#) that also powers the [HTML5 Boilerplate](#). While we use much of Normalize within our **reset.less**, we have removed some elements specifically for Bootstrap.

☺ Default Grid System:

The default Bootstrap grid system utilizes 12 columns, making for a 940px-wide container without responsive features enabled. With the responsive CSS file added, the grid adapts to be 724px or 1170px wide, depending on your viewport. Below 767px viewports, such as the ones on tablets and smaller devices, the columns become fluid and stack vertically. At the default width, each column is 60 pixels wide and offset 20 pixels to the left. An example of the 12 possible columns is in [Figure 1-1](#).

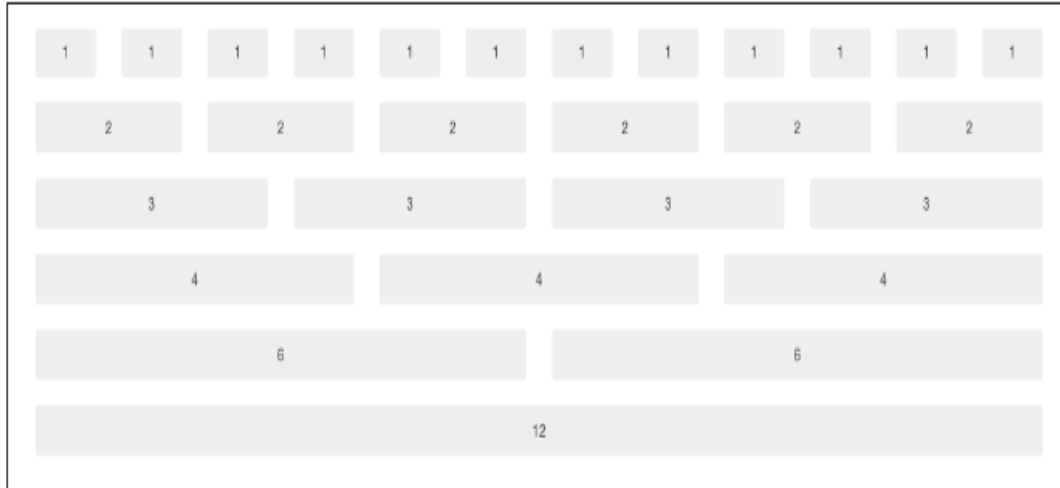


Figure 1-1. Default grid

Live grid example

With the responsive CSS file added, the grid adapts to be 724px and 1170px wide depending on your viewport. Below 767px viewports, the columns become fluid and stack vertically.



☺ Basic Grid HTML:

For a simple two column layout, create a `.row` and add the appropriate number of `.span*` columns. As this is a 12-column grid, each `.span*` spans a number of those 12 columns, and should always add up to 12 for each row (or the number of columns in the parent).

```
<div class="row">
  <div class="col-sm-4">...</div>
  <div class="col-sm-8">...</div>
</div>
```

Or

```
<div class="row">
  <div class="span-4">...</div>
  <div class="span-8">...</div>
</div>
```

Given this example, we have `.span4` and `.span8`, making for 12 total columns and a complete row.


Grid Classes

The Bootstrap grid system has four classes:

- xs (for phones)
- sm (for tablets)
- md (for desktops)
- lg (for larger desktops)

☺ Offsetting Columns:

Move columns to the right using `offset*` classes. Each class increases the left margin of a column by a whole column. For example, `.offset4` moves `.span4` over four columns.

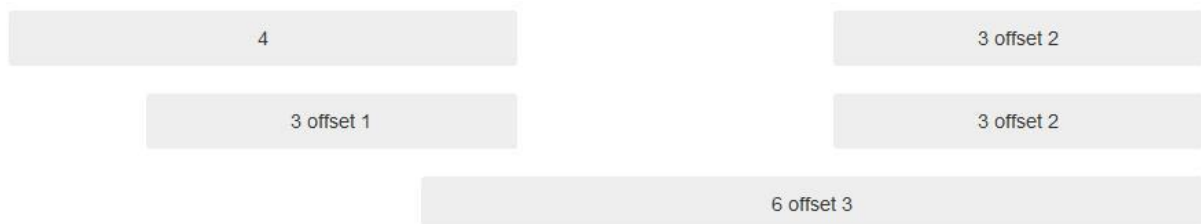


```
<div class="row">
  <div class="col-sm-4">...</div>

<div class="col-sm-3 col-sm-offset-2 ">...</div>

</div>
```

☺ Nesting Columns:

To nest your content with the default grid, add a new `.row` and set of `.span*` columns within an existing `.span*` column. Nested rows should include a set of columns that add up to the number of columns of its parent.



```
<div class="row">
  <div class="col-sm-9">
    Level 1 column

    <div class="row">
      <div class="col-sm-6">Level 2</div>


      <div class="col-sm-3">Level 2</div>
    </div>
  </div>
</div>
```

☺ Fluid Grid System:

The fluid grid system uses percentages instead of pixels for column widths. It has the same responsive capabilities as our fixed grid system, ensuring proper proportions for key screen resolutions and devices. You can make any row “fluid” by changing `.row` to `.row-fluid`. The column classes stay exactly the same, making it easy to flip between fixed and fluid grids.

Live fluid grid example

The fluid grid system uses percents instead of pixels for column widths. It has the same responsive capabilities as our fixed grid system, ensuring proper proportions for key screen resolutions and devices.

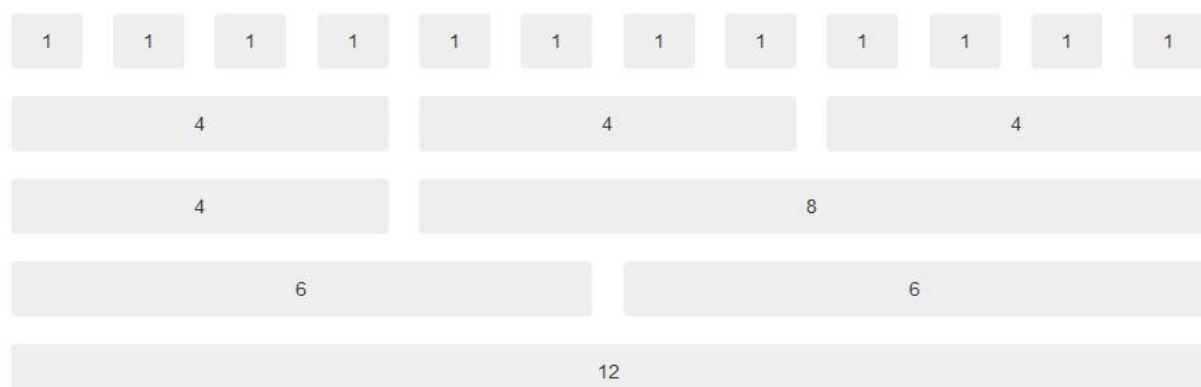

Basic fluid grid HTML

Make any row "fluid" by changing `.row` to `.row-fluid`. The column classes stay the exact same, making it easy to flip between fixed and fluid grids.

```
<div class="row-fluid">
<div class="col-sm-4">...</div>

<div class="col-sm-8">...</div>
</div>
```

Fluid offsetting

Operates the same way as the fixed grid system offsetting: add `.offset*` to any column to offset by that many columns.




```
<div class="row-fluid">

<div class="col-sm-4">...</div>
<div class="col-sm-4 col-sm-offset-2">...</div>

</div>
```

Fluid nesting

Fluid grids utilize nesting differently: each nested level of columns should add up to 12 columns. This is because the fluid grid uses percentages, not pixels, for setting widths.

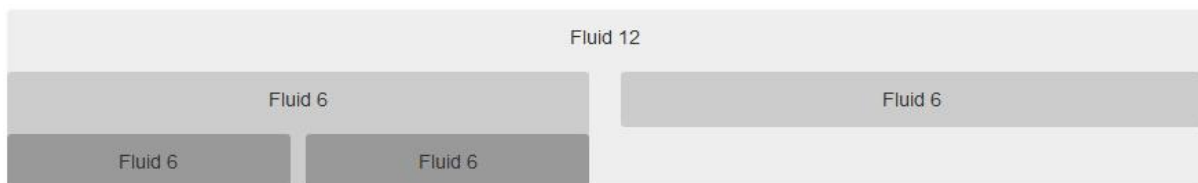

```
<div class="row-fluid">
<div class="col-sm-12">
  Fluid 12

  <div class="row-fluid">
    <div class="col-sm-6">

      Fluid 6
      <div class="row-fluid">
        <div class="col-sm-6">Fluid 6</div>

        <div class="col-sm-6">Fluid 6</div>
      </div>
    </div>
  </div>
</div>
```

```
</div>
<div class=" col-sm-6">Fluid 6</div>
</div>

</div>
</div>
```

☺ Container Layouts:

To add a fixed-width, centered layout to your page, simply wrap the content in `<div class="container">...</div>`. If you would like to use a fluid layout but want to wrap everything in a container, use the following: `<div class="container-fluid">...</div>`. Using a fluid layout is great when you are building applications, administration screens, and other related projects.

Fixed layout

Provides a common fixed-width (and optionally responsive) layout with only `<div class="container">` required.



```
<body>
<div class="container">
    ...
</div>
</body>
```

For Example:

```
<div class="container">


    <h1>Container</h1>

    <p>container content</p>
```


</div>

Fluid layout

Create a fluid, two-column page with `<div class="container-fluid">`—great for applications and docs.

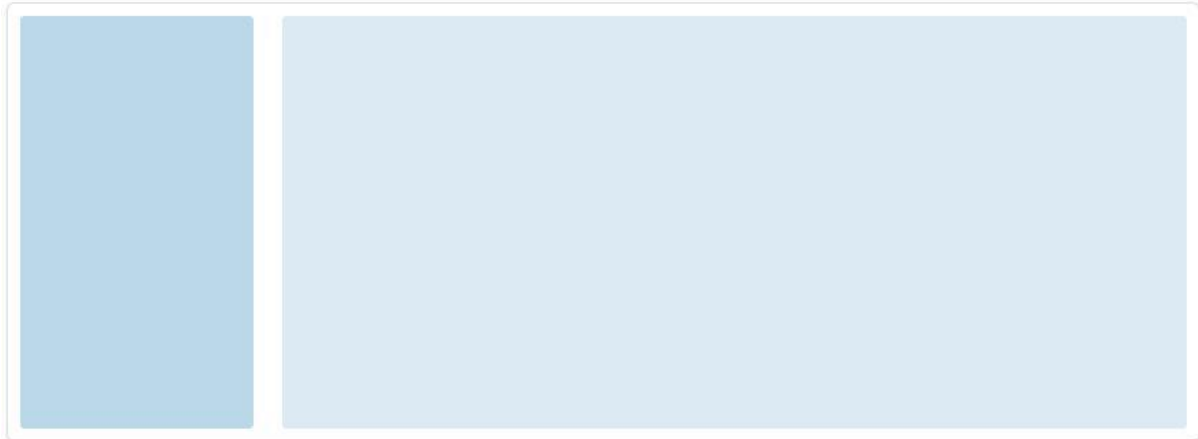

```
<div class="container-fluid">

  <div class="row-fluid">

    <div class=" col-sm-2">
    <!--Sidebar content-->
  </div>
  <div class=" col-sm-10">
  <!--Body content-->
</div>
</div>

</div>
```

😊 Responsive Design: Or

What is Responsive design

Responsive design is a method for taking all of the existing content that is on the page and optimizing it for the device that is viewing it. For example, the desktop not only gets the normal version of the website, but it might also get a widescreen layout, optimized for the larger displays that many people have attached to their computers. Tablets get an optimized layout, taking advantage of their portrait or landscape layouts. And then with phones, you can target their much narrower width. To target these different widths, Bootstrap uses CSS media queries to measure the width of the browser viewport and then, using conditionals, changes which parts of the stylesheets are loaded. Using the width of the browser viewport, Bootstrap can then optimize the content using a combination of

ratios or widths, but it mostly relies on *min-width* and *max-width* properties.

Enabling responsive features

Turn on responsive CSS in your project by including the proper meta tag and additional stylesheet within the `<head>` of your document. If you've compiled Bootstrap from the Customize page, you need only include the meta tag.

1. `<meta name="viewport" content="width=device-width, initial-scale=1.0">`
2. `<link href="assets/css/bootstrap-responsive.css" rel="stylesheet">`

Heads up! Bootstrap doesn't include responsive features by default at this time as not everything needs to be responsive. Instead of encouraging developers to remove this feature, we figure it best to enable it as needed.

About responsive Bootstrap



Media queries allow for custom CSS based on a number of conditions—ratios, widths, display type, etc—but usually focuses around *min-width* and *max-width*.

- Modify the width of column in our grid
- Stack elements instead of float wherever necessary
- Resize headings and text to be more appropriate for devices

Use media queries responsibly and only as a start to your mobile audiences. For larger projects, do consider dedicated code bases and not layers of media queries.

Supported devices

Bootstrap supports a handful of media queries in a single file to help make your projects more appropriate on different devices and screen resolutions. Here's what's included:

Label	Layout width	Column width	Gutter width
Large display	1200px and up	70px	30px
Default	980px and up	60px	20px

Portrait tablets	768px and above	42px	20px
Phones to tablets	767px and below	Fluid columns, no fixed widths	
Phones	480px and below	Fluid columns, no fixed widths	

```
/* Large desktop */
```

```
@media (min-width: 1200px) { ... }
```

```
/* Portrait tablet to landscape and desktop */
```

```
@media (min-width: 768px) and (max-width: 979px) { ... }
```

```
/* Landscape phone to portrait tablet */
```

```
@media (max-width: 767px) { ... }
```

```
/* Landscape phones and down */
```

```
@media (max-width: 480px) { ... }
```

Responsive utility classes / Helper classes

For faster mobile-friendly development, use these utility classes for showing and hiding content by device. Below is a table of the available classes and their effect on a given media query layout (labeled by device). They can be found in responsive.less.

Class	Phones 767px and below	Tablets 979px to 768px	Desktops Default
.visible-phone	Visible	Hidden	Hidden
.visible-tablet	Hidden	Visible	Hidden
.visible-desktop	Hidden	Hidden	Visible
.hidden-phone	Hidden	Visible	Visible
.hidden-tablet	Visible	Hidden	Visible
.hidden-desktop	Visible	Visible	Hidden

When to use

Use on a limited basis and avoid creating entirely different versions of the same site. Instead, use them to complement each device's presentation. Responsive utilities should not be used with tables, and as such are not supported.

Responsive utilities test case

Resize your browser or load on different devices to test the above classes.


Visible on...

Green checkmarks indicate that class is visible in your current viewport.

Phone	Tablet	✓ Desktop
-------	--------	-----------

Hidden on...

Here, green checkmarks indicate that class is hidden in your current viewpor



Implementation:

Typography

Starting with typography, Bootstrap uses Helvetica Neue, Helvetica, Arial, and sans-serif in its default font stack. These are all standard fonts and are included as default on all major computers. If by chance these fonts don't exist, they fall back to sans-serif (the catchall) to tell the browser to use the default font for the browser. All body copy has the font-size set at 14 pixels, with the line-height set at 20 pixels. The `<p>` tag has a margin-bottom of 10 pixels, or half the line-height.

Headings

All HTML headings, `<h1>` through `<h6>` are available. All six standard heading levels have been styled in Bootstrap, with the `<h1>` at 36 pixels tall, and the `<h6>` down to 12 pixels.

```
<h1> Heading 1 </h1>
<h2> Heading 2 </h2>
<h3> Heading 3 </h3>
<h4> Heading 4 </h4>
<h5> Heading 5 </h5>
<h6> Heading 6 </h6>
```

Heading 1

Heading 2

Heading 3

Heading 4

Heading 5

Heading 6

In addition, to add an inline subheading to any of the headings, simply add `<small>` around any of the elements and you will get smaller text in a lighter color. In the case of the `<h1>`, the small text is 24 pixels tall, normal font weight and gray instead of black:

```
<h1>h1 heading <small>secondary text</small></h1>
```

h1 heading secondary text

Lead Body Copy

To add some emphasis to a paragraph, add `class="lead"`. This will give you larger font size, lighter weight, and a taller line height. This is generally used for the first few paragraphs in a section, but it can really be used anywhere:

```
<p class="lead">
```

Bacon ipsum dolor sit amet tri-tip pork loin ball tip frankfurter swine boudin meatloaf shoulder short ribs cow drumstick beef jowl. Meatball chicken sausage tail, kielbasa strip steak turducken venison prosciutto. Chuck filet mignon tri-tip ribeye, flank brisket leberkas. Swine turducken turkey shank, hamburger beef ribs bresaola pastrami venison rump.

</p>

Lead Example

Bacon ipsum dolor sit amet tri-tip pork loin ball tip frankfurter swine boudin meatloaf shoulder short ribs cow drumstick beef jowl. Meatball chicken sausage tail, kielbasa strip steak turducken venison prosciutto. Chuck filet mignon tri-tip ribeye, flank brisket leberkas. Swine turducken turkey shank, hamburger beef ribs bresaola pastrami venison rump.

Figure 2-2. Lead body copy classes

Emphasis

In addition to using the `<small>` tag within headings, as discussed above, you can also use it with body copy. When `<small>` is applied to body text, the font shrinks to 85% of its original size.

Bold

To add emphasis to text, simply wrap it in a `<strong>` tag. This will add font weight: bold: to the selected text.

Ex: `<p>This is <strong>bold</strong></p>`

Italics

For italics, wrap your content in the `<em>` tag. The term “em” derives from the word “emphasis” and is meant to add stress to your text.

Ex: `<p>This content has <em>emphasis</em></p>`

Emphasis Classes

Along with `<strong>` and `<em>`, Bootstrap offers a few other classes that can be used to provide emphasis (see Figure 2-3). These could be applied to paragraphs or spans. Use the contextual classes to provide “meaning through colors”:

```
<p class="muted">This content is muted</p>
<p class="text-warning">This content carries a warning class</p>
<p class="text-danger">This content carries an error class</p>
<p class="text-info">This content carries an info class</p>
<p class="text-success">This content carries a success class</p>
<p>This content has <em>emphasis</em>, and can be <strong>bold</strong></p>
```

Bootstrap Emphasis Classes

This content is muted

This content carries a warning class

This content carries an error class

This content carries an info class

This content carries a success class


This content has *emphasis*, and can be **bold**

Figure 2-3. Emphasis classes

Abbreviations

The HTML `<abbr>` element provides markup for abbreviations or acronyms, like WWW or HTTP. By marking up abbreviations, you can give useful information to browsers, spell checkers, translation systems, or search engines. Bootstrap styles `<abbr>` elements with a light dotted border along the bottom and reveals the full text on hover :

```
<abbr title="Real Simple Syndication">RSS</abbr>
```

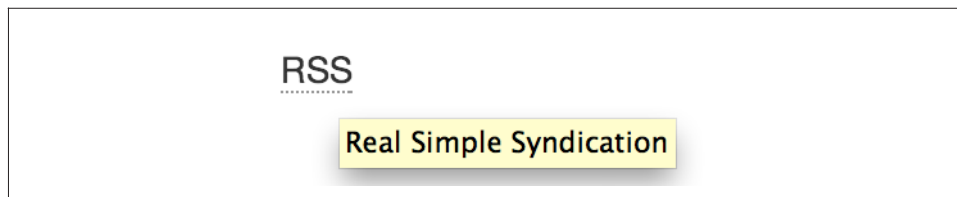

Addresses

Adding `<address>` elements to your page can help screen readers and search engines locate any physical addresses and phone numbers in the text (see Figure 2-6). It can also be used to mark up email addresses.

```
<address>
```

```
<strong>O'Reilly Media, Inc.</strong><br>
```

```
1005 Gravenstein HWY North<br>
```

```
Sebastopol, CA 95472<br>
```

```
<abbr title="Phone">P:</abbr><a href="tel:+17078277000">(707) 827-7000</a>
```

```
</address>
```

```
<address>
```

```
<strong>Jake Spurlock</strong><br>
```

```
<a href="mailto:#">flast@oreilly.com</a>
```

```
</address>
```

O'Reilly Media, Inc.
1005 Gravenstein HWY North
Sebastopol, CA 95472
P: (707) 827-7000

Jake Spurlock
flast@oreilly.com


Figure 2-6. Address tag

Blockquotes

To add blocks of quoted text to your document or for any quotation that you want to set apart from the main text flow add the `<blockquote>` tag around the text. For best results, and for line breaks, wrap each subsection in a `<p>` tag. Bootstrap's default styling indents the text and adds a thick gray border along the left side. To identify the source of the quote, add the `<small>` tag, then add the source's name wrapped in a `<cite>` tag before closing the `</small>` tag:

```
<blockquote>
  <p>That this is needed, desperately needed, is indicated by the incredible uptake of
  Bootstrap. I use it in all the server software I'm working on. And it shows through in the
  templating language I'm developing, so everyone who uses it will find it's "just there" and
  works, any time you want to do a Bootstrap technique. Nothing to do, no libraries to
  include. It's as if it were part of the hardware. Same approach that Apple took with the
  Mac OS in 1984.</p>
  <small>Developer of RSS, <cite title="Source Title">Dave Winer</cite>
</small>
</blockquote>
```

When you put it all together, you get something that looks like [Figure 2-7](#).

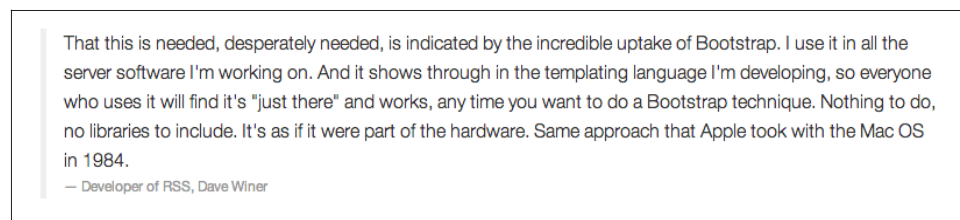**Lists**

Bootstrap offers support and styling for the three main list types that HTML offers:

1. Ordered list
2. Unordered list
3. Definition list.

1. Unordered list

An unordered list is a list that doesn't have any particular order and is traditionally styled with bullets. If you have an ordered list that you would like to remove the bullets from, add `class="unstyled"` to the opening `<ul>` tag.

```
<h3>Favorite Outdoor Activities</h3>
<ul>
  <li>Backpacking in Yosemite</li>
  <li>Hiking in Arches
    <ul>
      <li>Delicate Arch</li>
      <li>Park Avenue</li>
    </ul>
  </li>
  <li>Biking the Flintstones Trail</li>
</ul>
```


Favorite Outdoor Activities

- Backpacking in Yosemite
- Hiking in Arches
 - Delicate Arch
 - Park Avenue
- Biking the Flintstones Trail

2. Ordered list

An ordered list is a list that falls in some sort of sequential order and is prefaced by numbers rather than bullets. This is handy when you want to build a list of numbered items like a task list, guide items, or even a list of comments on a blog post:

Self-Referential Task List

```
<ol>
  <li>Turn off the internet.</li>
  <li>Write the book.</li>
  <li>... Profit?</li>
</ol>
```

Self-Referential Task List

1. Turn off the internet.
2. Right the book
3. ... Profit?

3. Definition list

The third type of list you get with Bootstrap is the definition list. The definition list differs from the ordered and unordered list in that instead of just having a block-level `<li>` element, each list item can consist of both the `<dt>` and the `<dd>` elements. `<dt>` stands for “definition term,” and the `<dd>` is the definition of the `<dt>`.

Common Electronics Parts

```
<dl>
  <dt>LED</dt>
  <dd>A light-emitting diode (LED) is a semiconductor light source.</dd>
  <dt>Servo</dt>
  <dd>Servos are small, cheap, mass-produced actuators used for radio control and small
  robotics.</dd>
</dl>
```

Common Electronics Parts

LED

A light-emitting diode (LED) is a semiconductor light source.

Servo

Servos are small, cheap, mass-produced actuators used for radio control and small robotics.

To change the `<dl>` to a horizontal layout, with the `<dt>` on the left side and the `<dd>` on the right, simply add `class="dl-horizontal"` to the opening tag (see Figure 2-12).

Common Electronics Parts

```
<dl class="dl-horizontal">
  <dt>LED</dt>
```

```

<dd>A light-emitting diode (LED) is a semiconductor light source.</dd>
<dt>Servo</dt>
<dd>Servos are small,cheap,mass-produced actuators used for radio control and small
robotics.</dd>
</dl>

```

Common Electronics Parts

LED	A light-emitting diode (LED) is a semiconductor light source.
Servo	Servos are small, cheap, mass-produced actuators used for radio control and small robotics.

Figure 2-12. Horizontal definition list

☺ Code or

☺ Code and pre

There are two different key ways to display code with Bootstrap. The first is the `<code>` tag and the second is the `<pre>` tag. Generally, if you are going to be displaying code inline, you should use the `<code>` tag. But if the code needs to be displayed as a standalone block element or if it has multiple lines, then you should use the `<pre>` tag:

`<p>` Instead of always using `divs`, in HTML5, you can use new elements like `<code><section></code>`, `<code><header></code>`, and `<code><footer></code>`. The html should look something like this:
`<pre>`
`<article>`
`<h1>Article Heading</h1>`
`</article>`
`</pre>`

```

<article>
<h1>Article Heading</h1>
</article>

```

☺ Tables:

One of my favorite parts of Bootstrap is the nice way that tables are handled. I do a lot of work looking at and building tables, and the clean layout is a great feature that's included in Bootstrap right off the bat. **Table 2-1** lists the various elements supported by Bootstrap.

Table 2-1. Table elements supported by Bootstrap

Tag	Description
<i>Table 2-1. Table elements supported by Bootstrap</i>	
<code><table></code>	Wrapping element for displaying data in a tabular format
<code><thead></code>	Container element for table header rows (<code><tr></code>) to label table columns
<code><tbody></code>	Container element for table rows (<code><tr></code>) in the body of the table
<code><tr></code>	Container element for a set of table cells (<code><td></code> or <code><th></code>) that appears on a single row
<code><td></code>	Default table cell

`<th>`Special table cell for column (or row, depending on scope and placement) labels. Must be used within a `<thead>`

`<caption>`Description or summary of what the table holds, especially useful for screen readers

If you want a nice, basic table style with just some light padding and horizontal dividers, add the base class of `table` to any table (see Figure 2-13). The basic layout has a top border on all of the `<td>` elements:

```
<table class="table">
  <caption>...</caption>
  <thead>
    <tr>
      <th>...</th>
      <th>...</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>...</td>
      <td>...</td>
    </tr>
  </tbody>
</table>
```

Name	Phone Number	Rank
Kyle West	707-827-7001	Eagle
Davey Preston	707-827-7003	Eagle
Taylor Lemmon	707-827-7005	Eagle

Figure 2-13. Basic table class

```
<table class="table">
  <caption>...</caption>
  <thead>
    <tr>
      <th>Name</th>
      <th>PhoneNumber</th>
      <th>Rank</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>KyleWest</td>
      <td>707-827-7001</td>
      <td>Eagle</td>
    </tr>
    <tr>
      <td>DaveyPreston</td>
      <td>707-827-7003</td>
      <td>Eagle</td>
    </tr>
    <tr>
      <td>TaylorLemmon</td>
```

```
<td>707-827-7005</td>
<td>Eagle</td>
</tr>
</tbody>
</table>
```

Optional Table Classes

Along with the base table markup and the `table` class, there are a few additional classes that you can use to style the markup. These four classes are: `.table-striped`, `.table-bordered`, `.table-hover`, and `.table-condensed`.

Striped table

By adding the `.table-striped` class, you will get stripes on rows within the `<tbody>` (see [Figure 2-14](#)). This is done via the CSS `:nth-child` selector.

```
<table class="table table-striped">
.....
```

```
</table>
```

Name	Phone Number	Rank
Kyle West	707-827-7001	Eagle
Davey Preston	707-827-7003	Eagle
Taylor Lemmon	707-827-7005	Eagle

Figure 2-14. Striped table class

Bordered table

If you add the `.table-bordered` class, you will get borders surrounding every element and rounded corners around the entire table, as shown in [Figure 2-15](#).

```
<table class="table table-bordered">
.....
</table>
```

Name	Phone Number	Rank
Kyle West	707-827-7001	Eagle
Davey Preston	707-827-7003	Eagle
Taylor Lemmon	707-827-7005	Eagle

Figure 2-15. Bordered table class

Hover table

[Figure 2-16](#) shows the `.table-hover` class. A light gray background will be added to rows while the cursor hovers over them.

```
<table class="table table-hover">
```

```
.....
</table>
```

Name	Phone Number	Rank
Kyle West	707-827-7001	Eagle
Davey Preston	707-827-7003	Eagle
Taylor Lemmon	707-827-7005	Eagle

Figure 2-16. Hover table class

Condensed table

If you add the `.table-condensed` class, as shown in Figure 2-17, row padding is cut in half to condense the table. This is useful if you want denser information.

```
<table class="table table-condensed">
```

```
.....
</table>
```

Name	Phone Number	Rank
Kyle West	707-827-7001	Eagle
Davey Preston	707-827-7003	Eagle
Taylor Lemmon	707-827-7005	Eagle

Figure 2-17. Condensed table class

Table Row Classes

The classes shown in Table 2-2 will allow you to change the background color of your rows (see Figure 2-18)

.

Class	Description	Backgroundcolor
-------	-------------	-----------------

Table 2-2. Optional table row classes

<code>.success</code>	Indicates a successful or positive action.	Green
<code>.error</code>	Indicates a dangerous or potentially negative action.	Red
<code>.warning</code>	Indicates a warning that might need attention.	Yellow
<code>.info</code>	Used as an alternative to the default styles.	Blue

It can be used like this: `<tr class="success">`, `<tr class="warning">`

#	Product	Payment Taken	Status
1	TB - Monthly	01/04/2012	Approved
2	TB - Monthly	02/04/2012	Declined
3	TB - Monthly	03/04/2012	Pending
4	TB - Monthly	04/04/2012	Call in to confirm

Figure 2-18. Table row classes

```

<table class="table">

  <thead>

    <tr>

      <th></th>

      <th>Product</th>

      <th>PaymentsTaken</th>

      <th>Status</th>

    </tr>

  </thead>

  <tbody>

    <tr class="success">

      <td>1</td>

      <td>TB-Monthly</td>

      <td>01/04/2014</td>

      <td>Approved</td>

    </tr>

    <tr class="danger">

      <td>2</td>

      <td>TB-Monthly</td>

      <td>02/04/2014</td>

      <td>Declined</td>

    </tr>

```

```
<tr class="info">

<td>3</td>

<td>TB-Monthly</td>

<td>03/04/2014</td>

<td>Padding</td>

</tr>

<tr class="warning">

<td>4</td>

<td>TB-Monthly</td>

<td>04/04/2014</td>

<td>Call in to confirm</td>

</tr>

</tbody>

</table>
```