



JONAS.IO
SCHMEDTMANN

Subscribe here

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

Follow me here

SLIDES FOR THEORY LECTURES

(DON'T SKIP THEM, THEY ARE SUPER
IMPORTANT 😎)

JS



TABLE OF CONTENTS: THEORY LECTURES (CLICK THE TITLES)

- [1 Watch before you start!](#)
- [2 A Brief Introduction to JavaScript](#)
- [3 Data Types](#)
- [4 Boolean Logic](#)
- [5 JavaScript Releases: ES5, ES6+ and ESNext](#)
- [6 Functions Calling Other Functions](#)
- [7 Reviewing Functions](#)
- [8 Learning How to Code](#)
- [9 How to Think Like a Developer](#)
- [10 Debugging \(Fixing Errors\)](#)
- [11 The Rise of AI Tools \(ChatGPT, Copilot, Cursor AI\)](#)
- [12 What's the DOM and DOM Manipulation](#)
- [13 An high-level Overview of JavaScript](#)
- [14 The JavaScript Engine and Runtime](#)
- [15 Execution Contexts and The Call Stack](#)
- [16 Scope and The Scope Chain](#)
- [17 Variable environment: Hoisting and The TDZ](#)
- [18 The this Keyword](#)
- [19 Memory Management: Primitives vs. Objects](#)
- [20 Memory Management: Garbage Collection](#)
- [21 Summary: Which Data Structure to Use?](#)
- [22 First-Class and Higher-Order Functions](#)
- [23 Closures](#)
- [24 Data Transformations: map, filter, reduce](#)
- [25 Summary: Which Array Method to Use?](#)
- [26 How the DOM Really Works](#)
- [27 Event Propagation: Bubbling and Capturing](#)
- [28 Efficient Script Loading: defer and async](#)
- [29 What is Object-Oriented Programming?](#)
- [30 OOP in JavaScript](#)
- [31 Prototypal Inheritance and The Prototype Chain](#)
- [32 Object.create](#)
- [33 Inheritance Between "Classes": Constructor Functions](#)
- [34 Inheritance Between "Classes": Object.create](#)
- [35 ES6 Classes summary](#)
- [36 Mappy Project: How to Plan a Web Project](#)
- [37 Mappy Project: Final Considerations](#)
- [38 Asynchronous JavaScript, AJAX and APIs](#)
- [39 How the Web Works: Requests and Responses](#)
- [40 Promises and the Fetch API](#)
- [41 Asynchronous Behind the Scenes: The Event Loop](#)
- [42 An Overview of Modern JavaScript Development](#)
- [43 An Overview of Modules in JavaScript](#)
- [44 Modern, Clean and Declarative JavaScript Programming](#)
- [45 Forkify: Project Overview and Planning](#)
- [46 The MVC Architecture](#)
- [47 Event Handlers in MVC: Publisher-Subscriber Pattern](#)
- [48 Forkify Project: Final Considerations](#)

WELCOME, WELCOME,
WELCOME!



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

WELCOME, WELCOME, WELCOME!


LECTURE

WATCH BEFORE YOU START!

JS

SOME QUICK CONSIDERATIONS BEFORE WE START...

✌️ This course is for all of you! So please don't write a bad review right away if the course is too easy, or too hard, or progressing too slow, or too fast for you. To make it perfect for YOU, you can rewatch lectures, jump to other sections, watch the course with slower or faster playback speed, or ask questions.

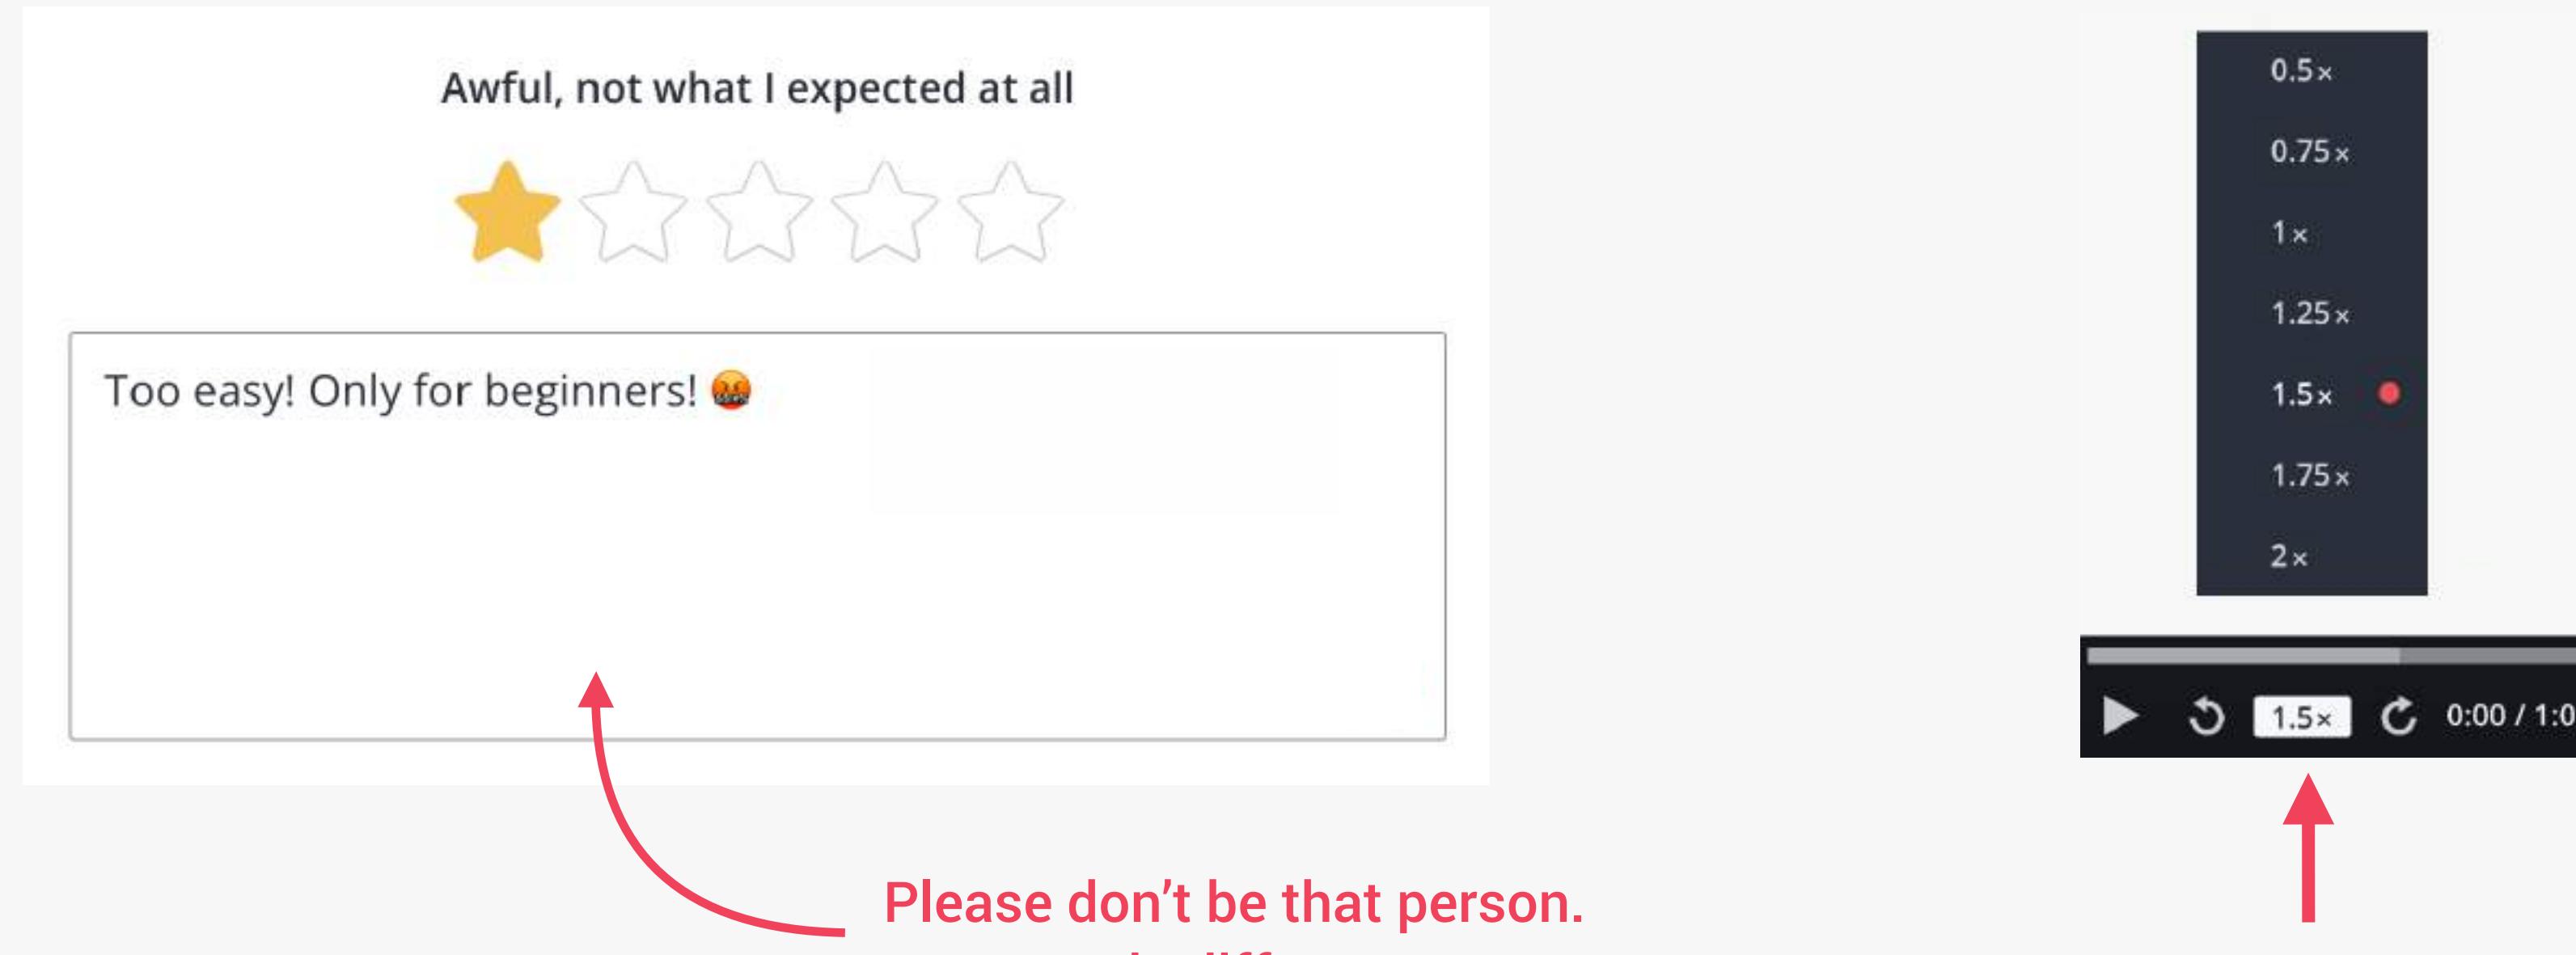

SOME QUICK CONSIDERATIONS BEFORE WE START...



You need to code along with me! You will learn **ZERO** JavaScript skills by just sitting and watching me code. You have to code **YOURSELF!**



SOME QUICK CONSIDERATIONS BEFORE WE START...

 **Try all the coding challenges!** Try to do your best, but if you get stuck for too long, watch the solution. **Don't beat yourself up if you can't figure it out!** Just rewatch the lectures that were covered in the challenge, try to understand them better, and move on.




Watch for this sign!

**PAUSE THE VIDEO
FOR CHALLENGE**

SOME QUICK CONSIDERATIONS BEFORE WE START...



If you want the course material to stick, take notes. Notes on code syntax, notes on theory concepts, notes on everything!

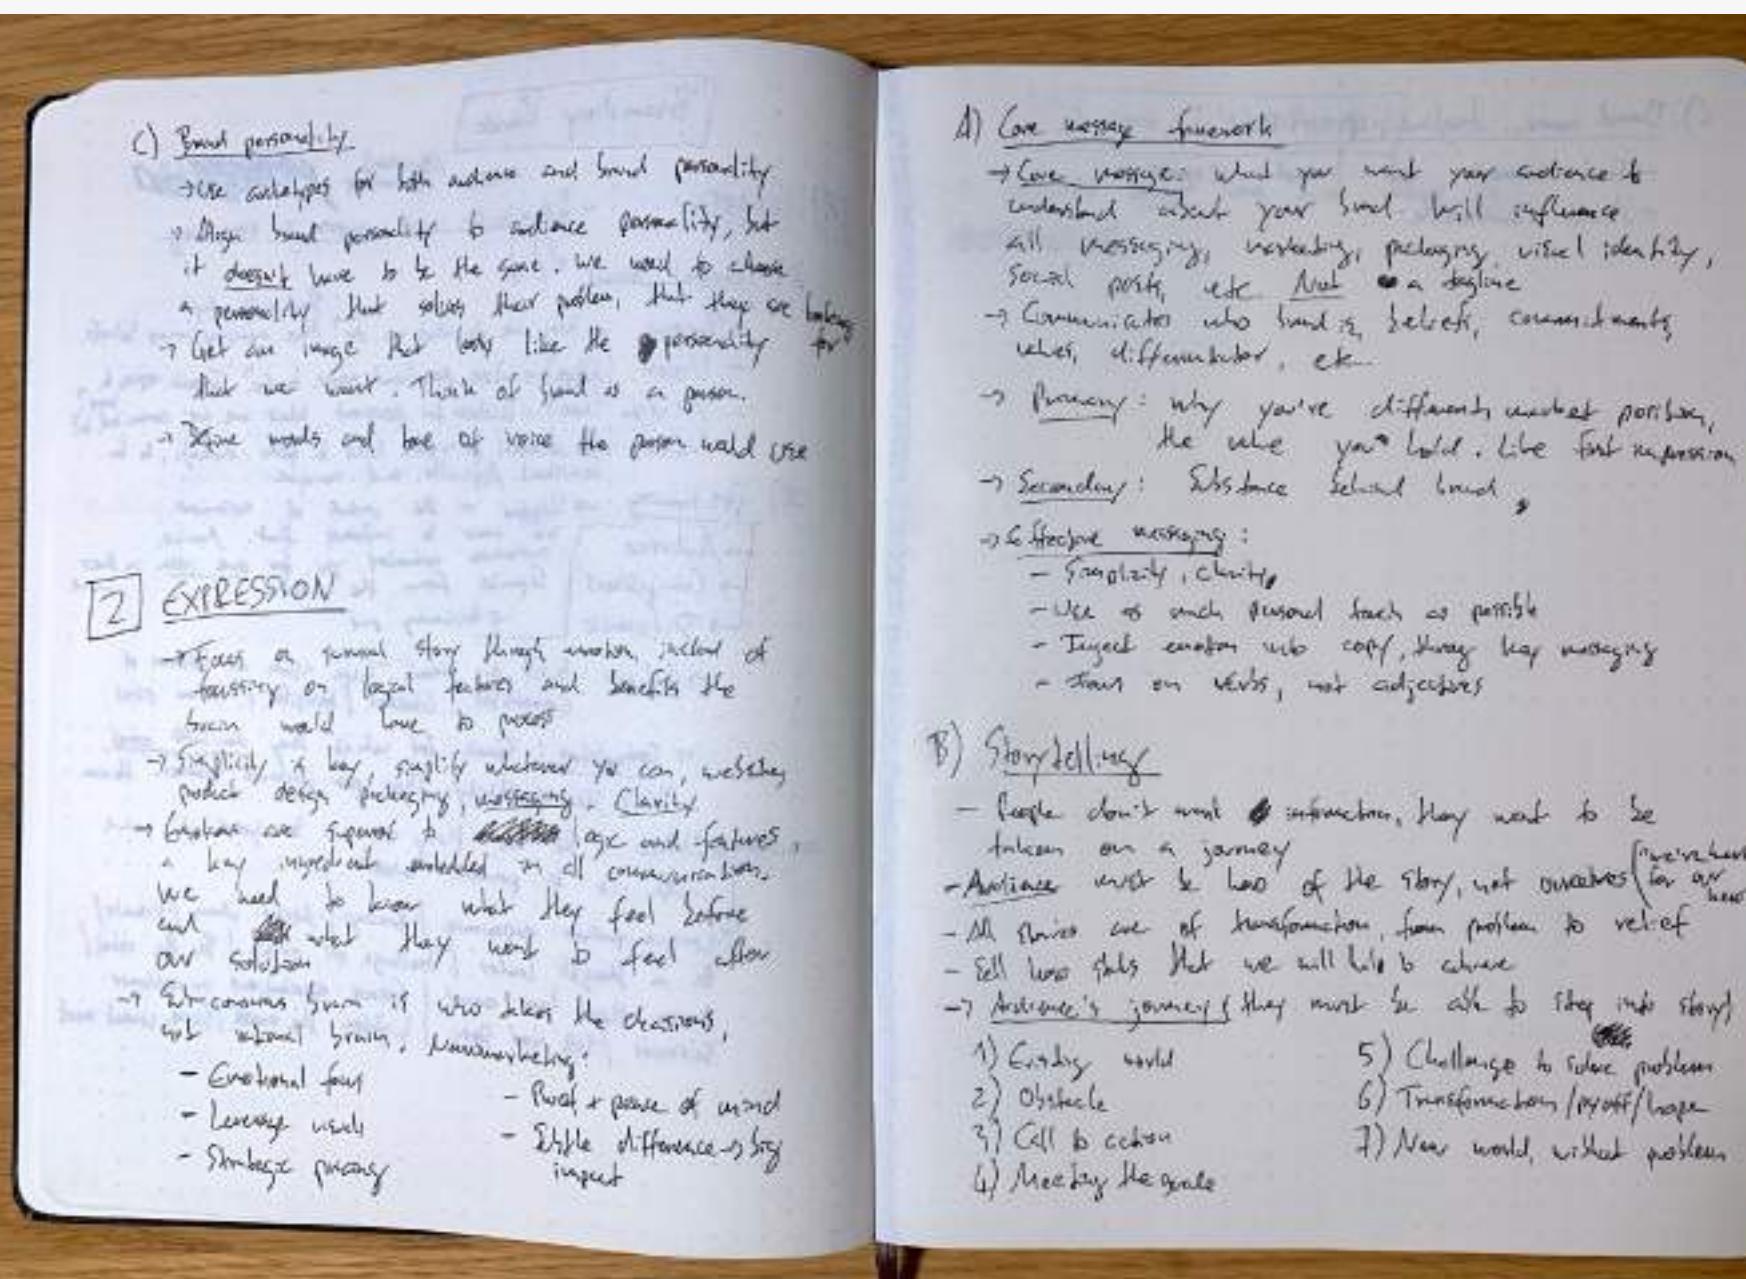

Totally non-coding... Try to understand a single word 😂



SOME QUICK CONSIDERATIONS BEFORE WE START...




If this is your first time ever programming, please don't get overwhelmed. It's 100% normal that you will not understand everything at the beginning. *Just don't think "I guess coding is not for me"!*



SOME QUICK CONSIDERATIONS BEFORE WE START...


😊 In the first sections of the course, don't bother understanding WHY things work the way they do in JavaScript. Also, don't stress about efficient code, or fast code, or clean code. While learning, we just want to make things WORK. We will understand the WHY later in the course.

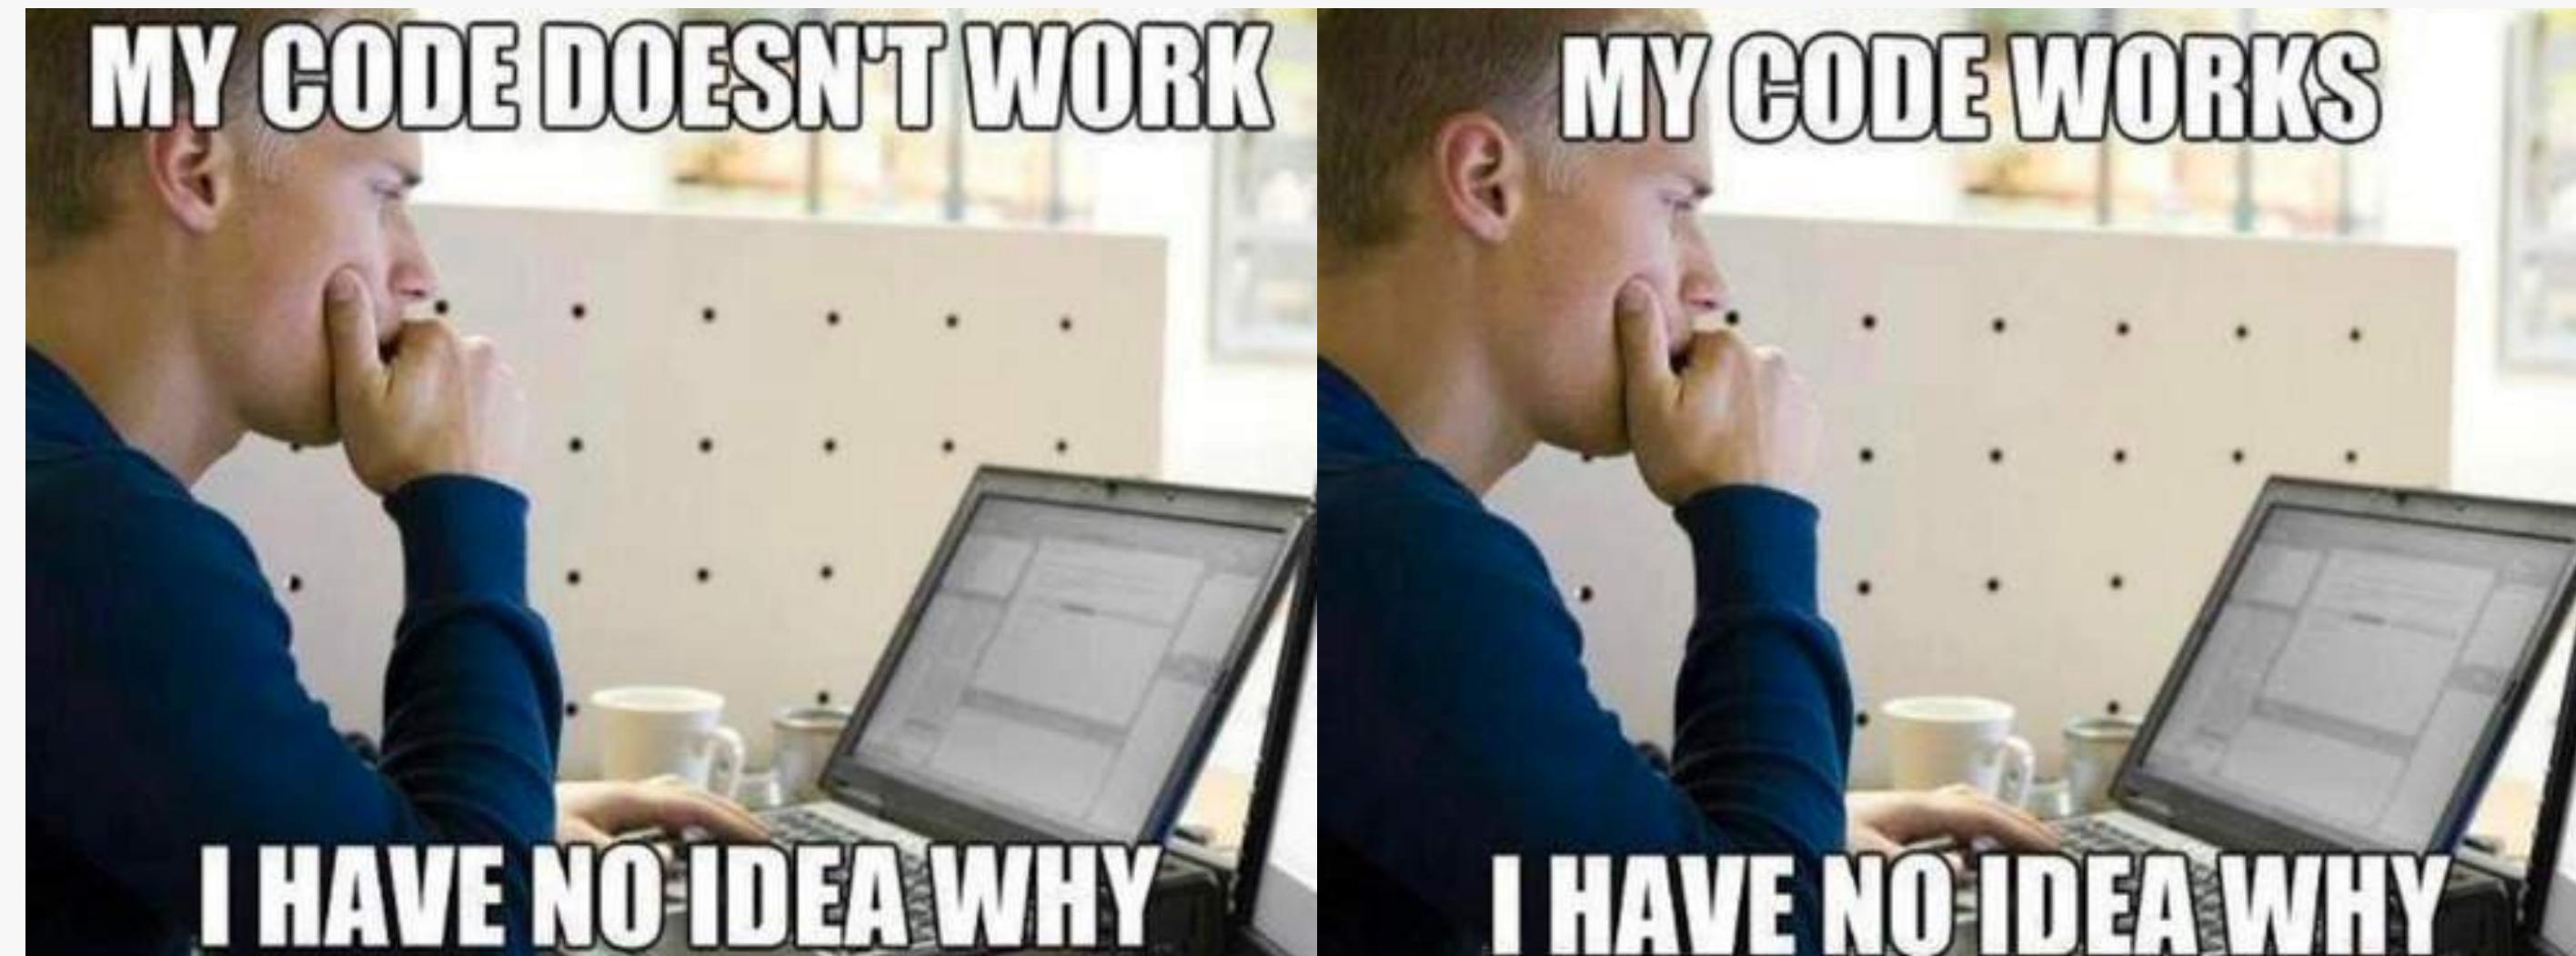

SOME QUICK CONSIDERATIONS BEFORE WE START...




Before moving on from a section, make sure that you understand exactly what was covered. Take a break, review the code we wrote, review your notes, review the projects we built, and maybe even write some code yourself.

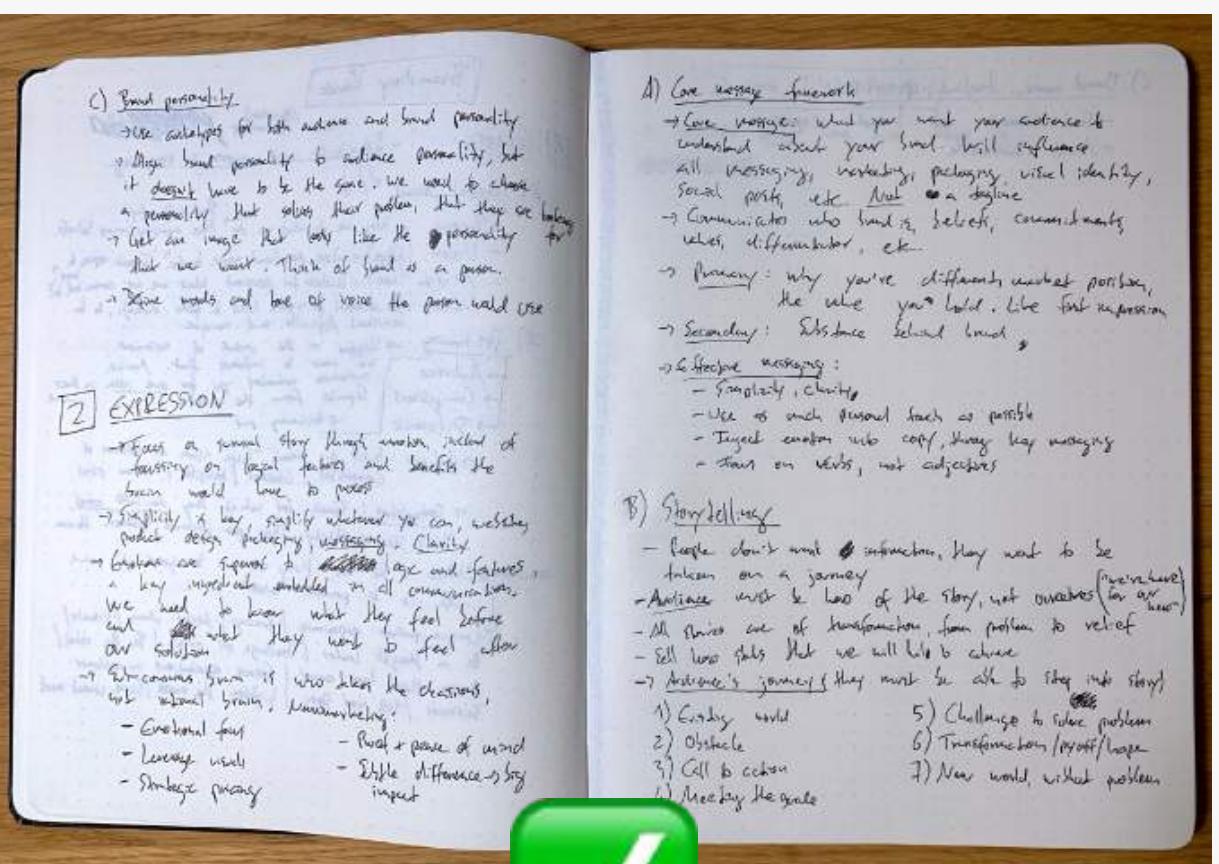

```
// We listen to the event on the button element, because this is where the click is supposed to happen
// Checking if number is correct
document.querySelector('.check').addEventListener('click', () => {
  const guess = Number(document.querySelector('.guess').value);


  if (guess) {
    document.querySelector('.message').textContent = '🔴 No number!';
  } else if (guess === number) {
    document.querySelector('.number').textContent = number;
    document.querySelector('.message').textContent = '▶ Correct number!';
  }

  // If new highscore, then display it
  if (score > highscore) {
    highscore = score;
    document.querySelector('.highscore').textContent = highscore;
  }
} else if (guess > number) {
  document.querySelector('.message').textContent = '🔴 Too high!';
  // Decrease score
  score -= score;
  document.querySelector('.score').textContent = score;
} else {
  document.querySelector('.message').textContent = '🔴 Too low!';
  score -= score;
  document.querySelector('.score').textContent = score;
}
```

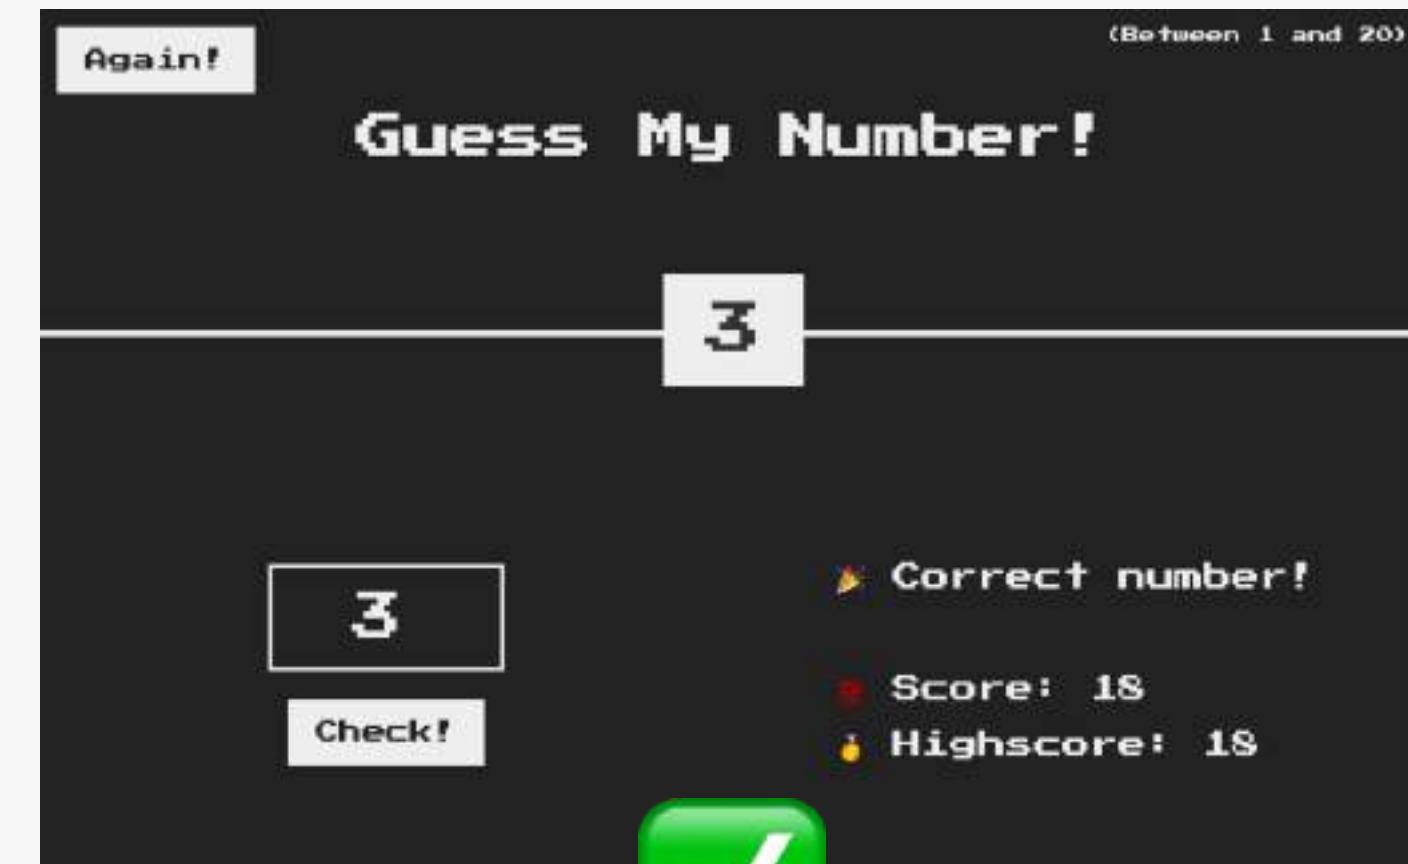


SOME QUICK CONSIDERATIONS BEFORE WE START...

!? If you have an error or a question, start by trying to solve it yourself! This is essential for your progress. If you can't solve it, check the Q&A section. If that doesn't help, just ask a new question. Use a short description, and post relevant code.

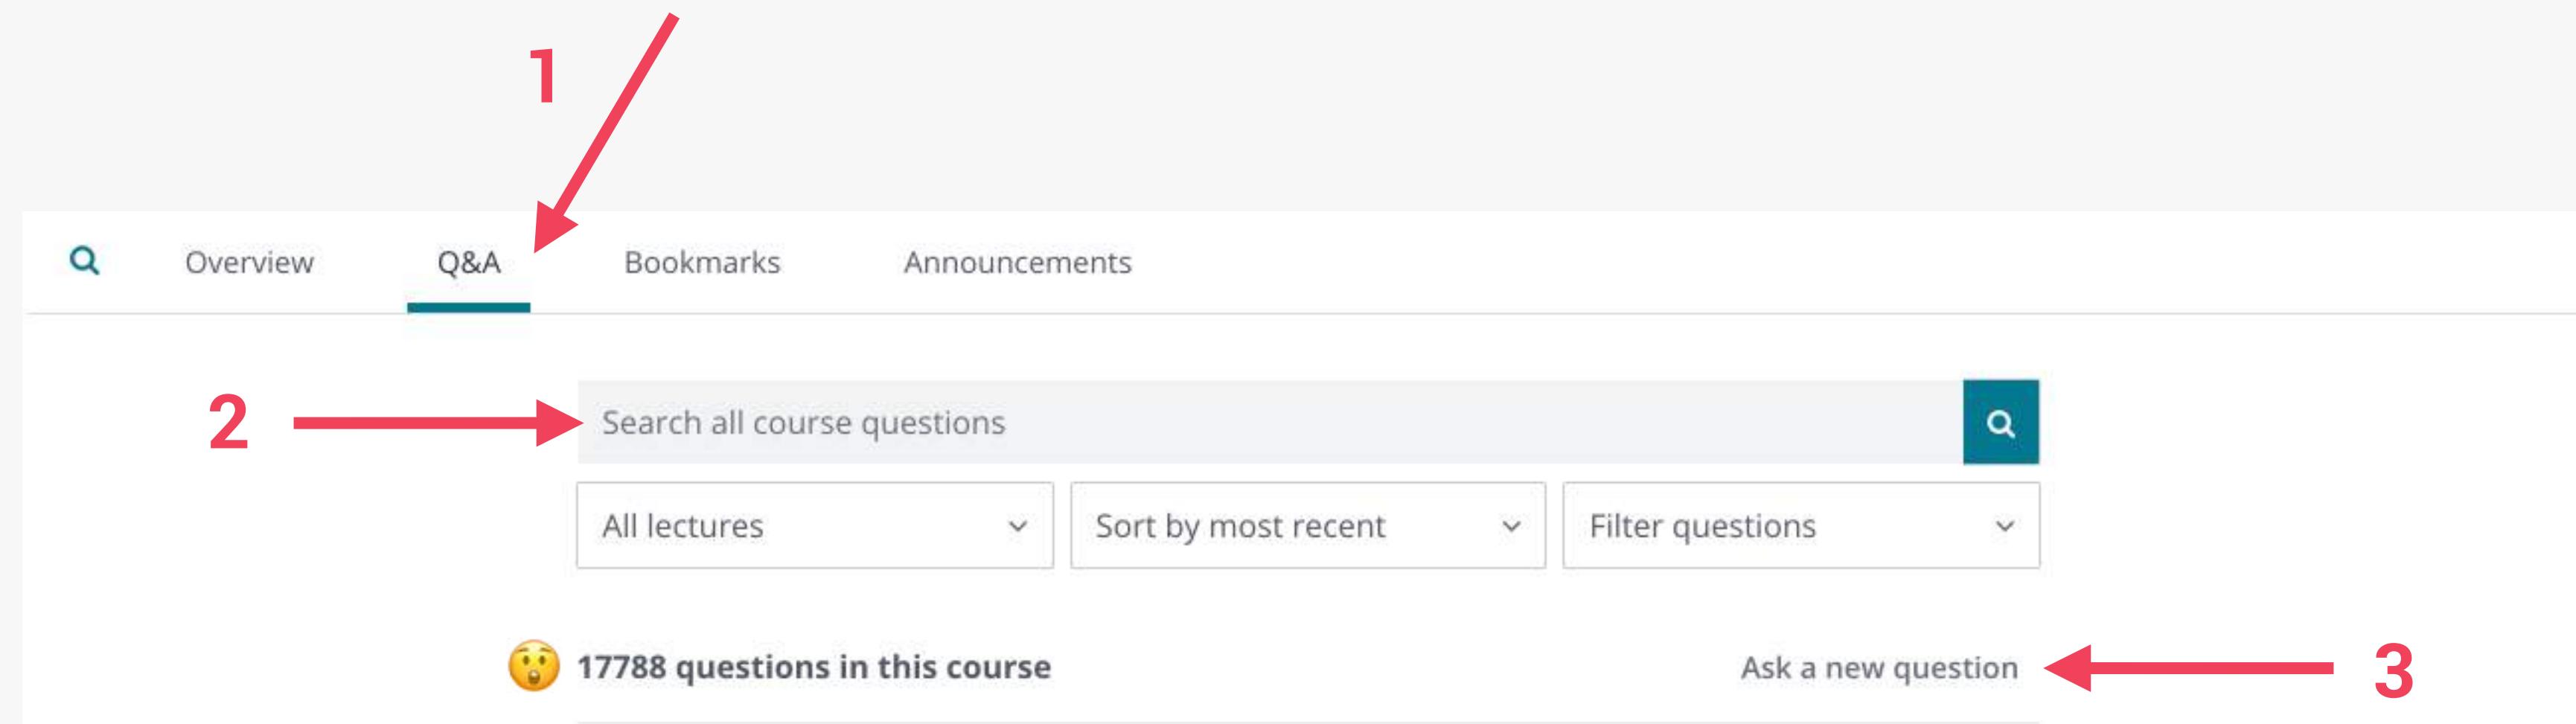


SOME QUICK CONSIDERATIONS BEFORE WE START...

-  I recorded this course on a Mac, but everything works the exact same way on Windows or Linux. If something doesn't work on your computer, it's NOT because you're using a different OS.

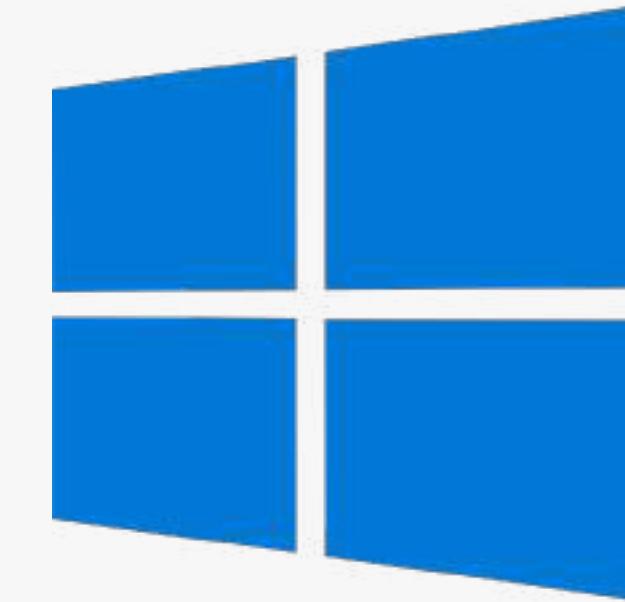

SOME QUICK CONSIDERATIONS BEFORE WE START...

😍 **Most importantly, have fun!** It's so rewarding to see something that **YOU** have built **YOURSELF!** So if you're feeling frustrated, stop whatever you're doing, and come back later!

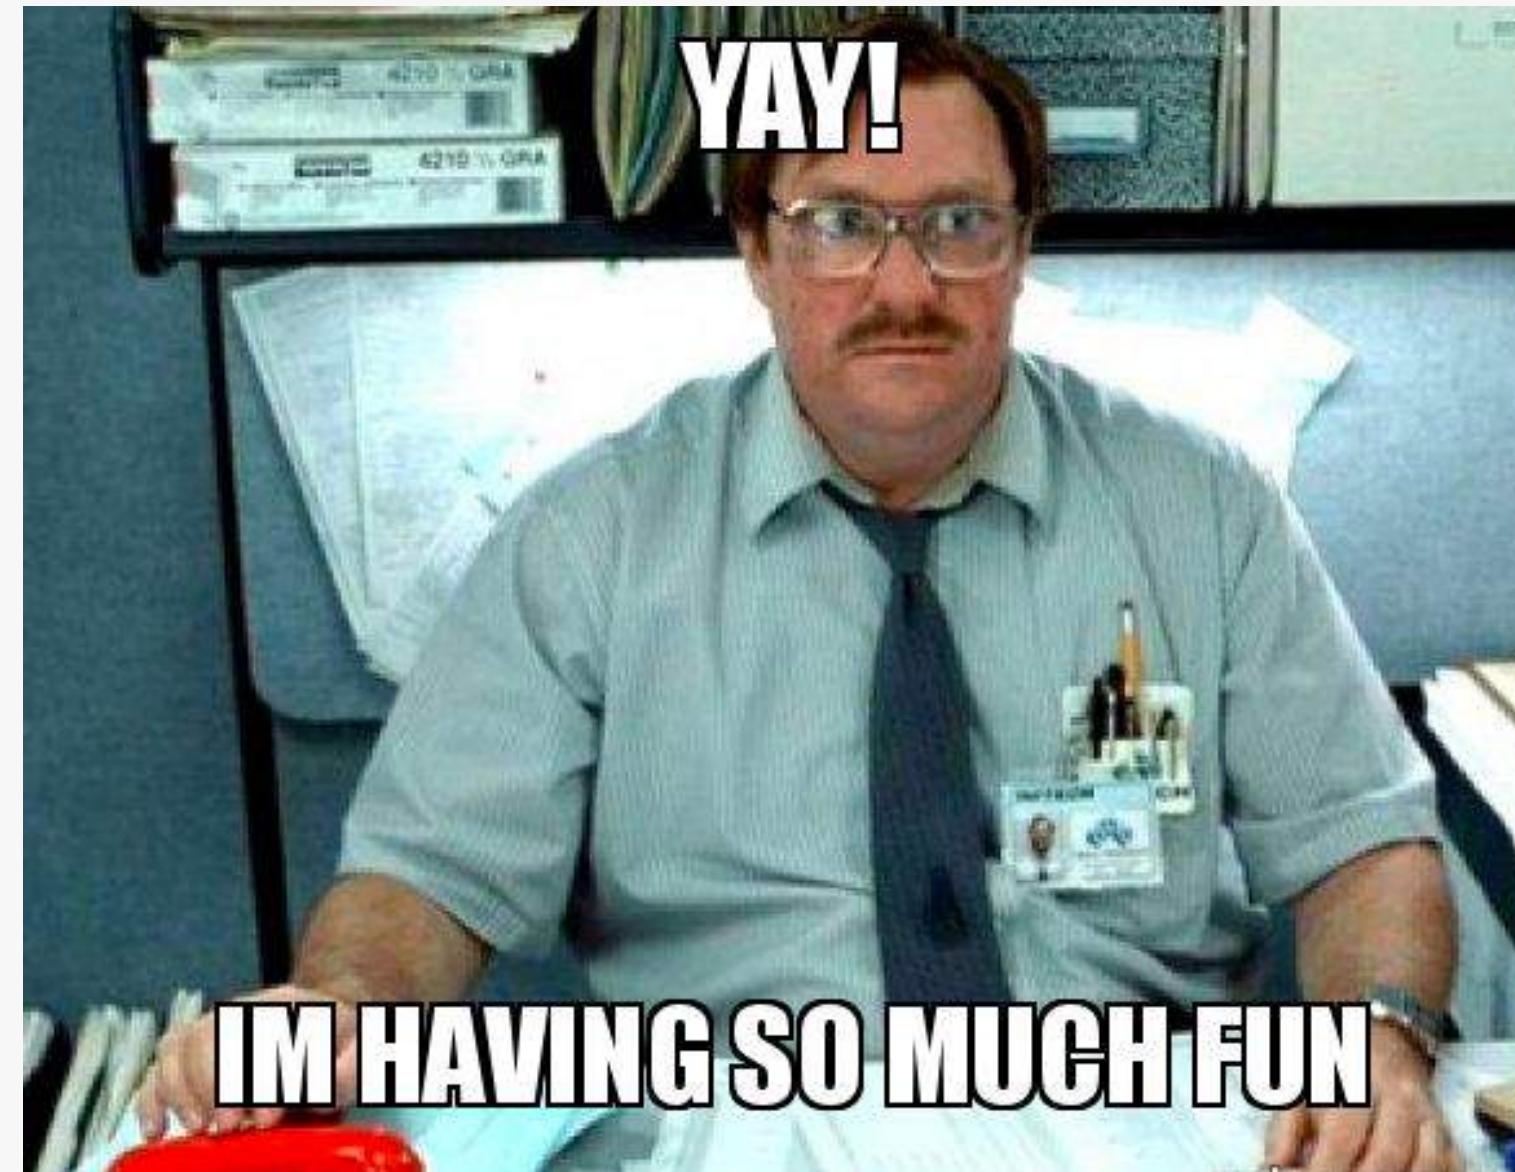

And I mean **REAL** fun 😊

JAVASCRIPT FUNDAMENTALS – PART 1



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

JAVASCRIPT FUNDAMENTALS - PART 1

LECTURE


A BRIEF INTRODUCTION TO
JAVASCRIPT

JS

WHAT IS JAVASCRIPT?



THE ROLE OF JAVASCRIPT IN WEB DEVELOPMENT

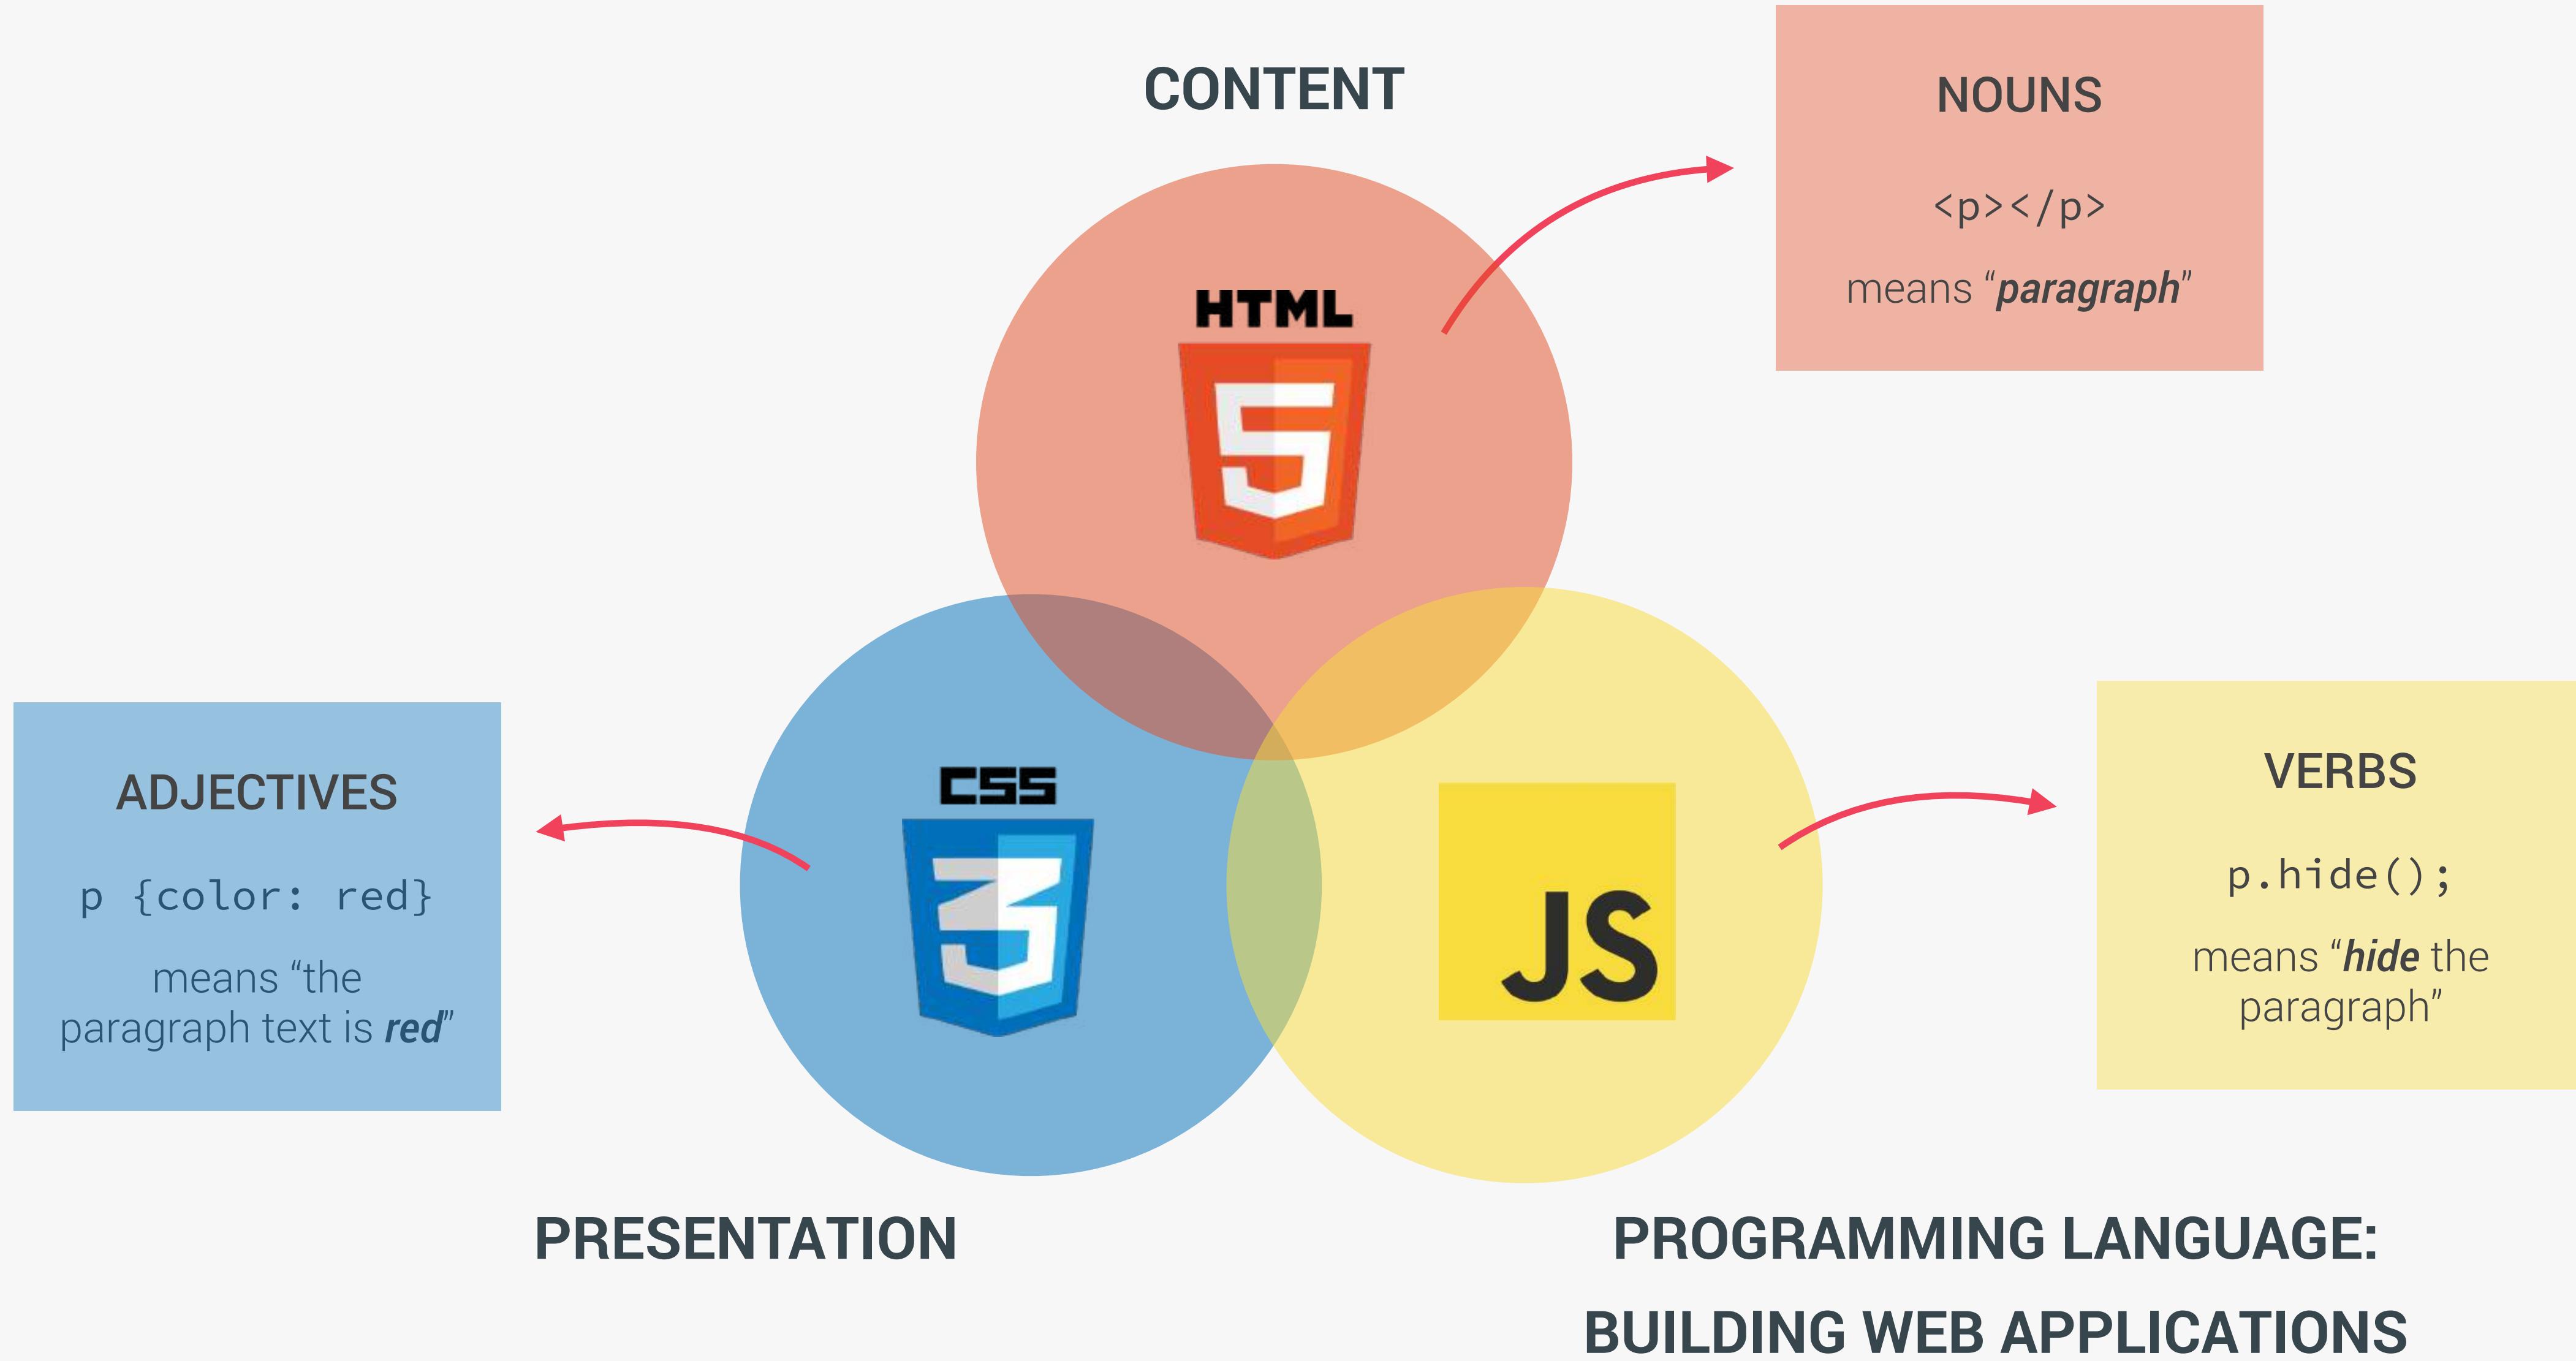


EXAMPLE OF DYNAMIC EFFECTS / WEB APPLICATION


The image displays three screenshots of the Twitter mobile application, each highlighting a different dynamic effect:

- Show spinner + loading data in the background:** This effect is demonstrated on the left screenshot, showing the navigation bar and a green tweet box with a loading indicator.
- Show tweet box after clicking:** This effect is shown in the middle screenshot, where a red arrow points from the "Tweet" button to a green tweet box.
- Display tweets after loading data:** This effect is shown in the middle screenshot, where a red arrow points from the bottom of the screen to the loaded tweets.
- Display user info on hover:** This effect is shown in the right screenshot, where a red arrow points to a user profile card with a "SUBMITTED FOR" section.
- Show spinner + loading data in the background:** This effect is shown in the right screenshot, where a red arrow points to a loading indicator in the background of a search results page.
- Show data after loading:** This effect is shown in the right screenshot, where a red arrow points to a footer element containing links like "Terms", "Privacy policy", and "Cookies".

THERE IS NOTHING YOU CAN'T DO WITH JAVASCRIPT (WELL, ALMOST...)

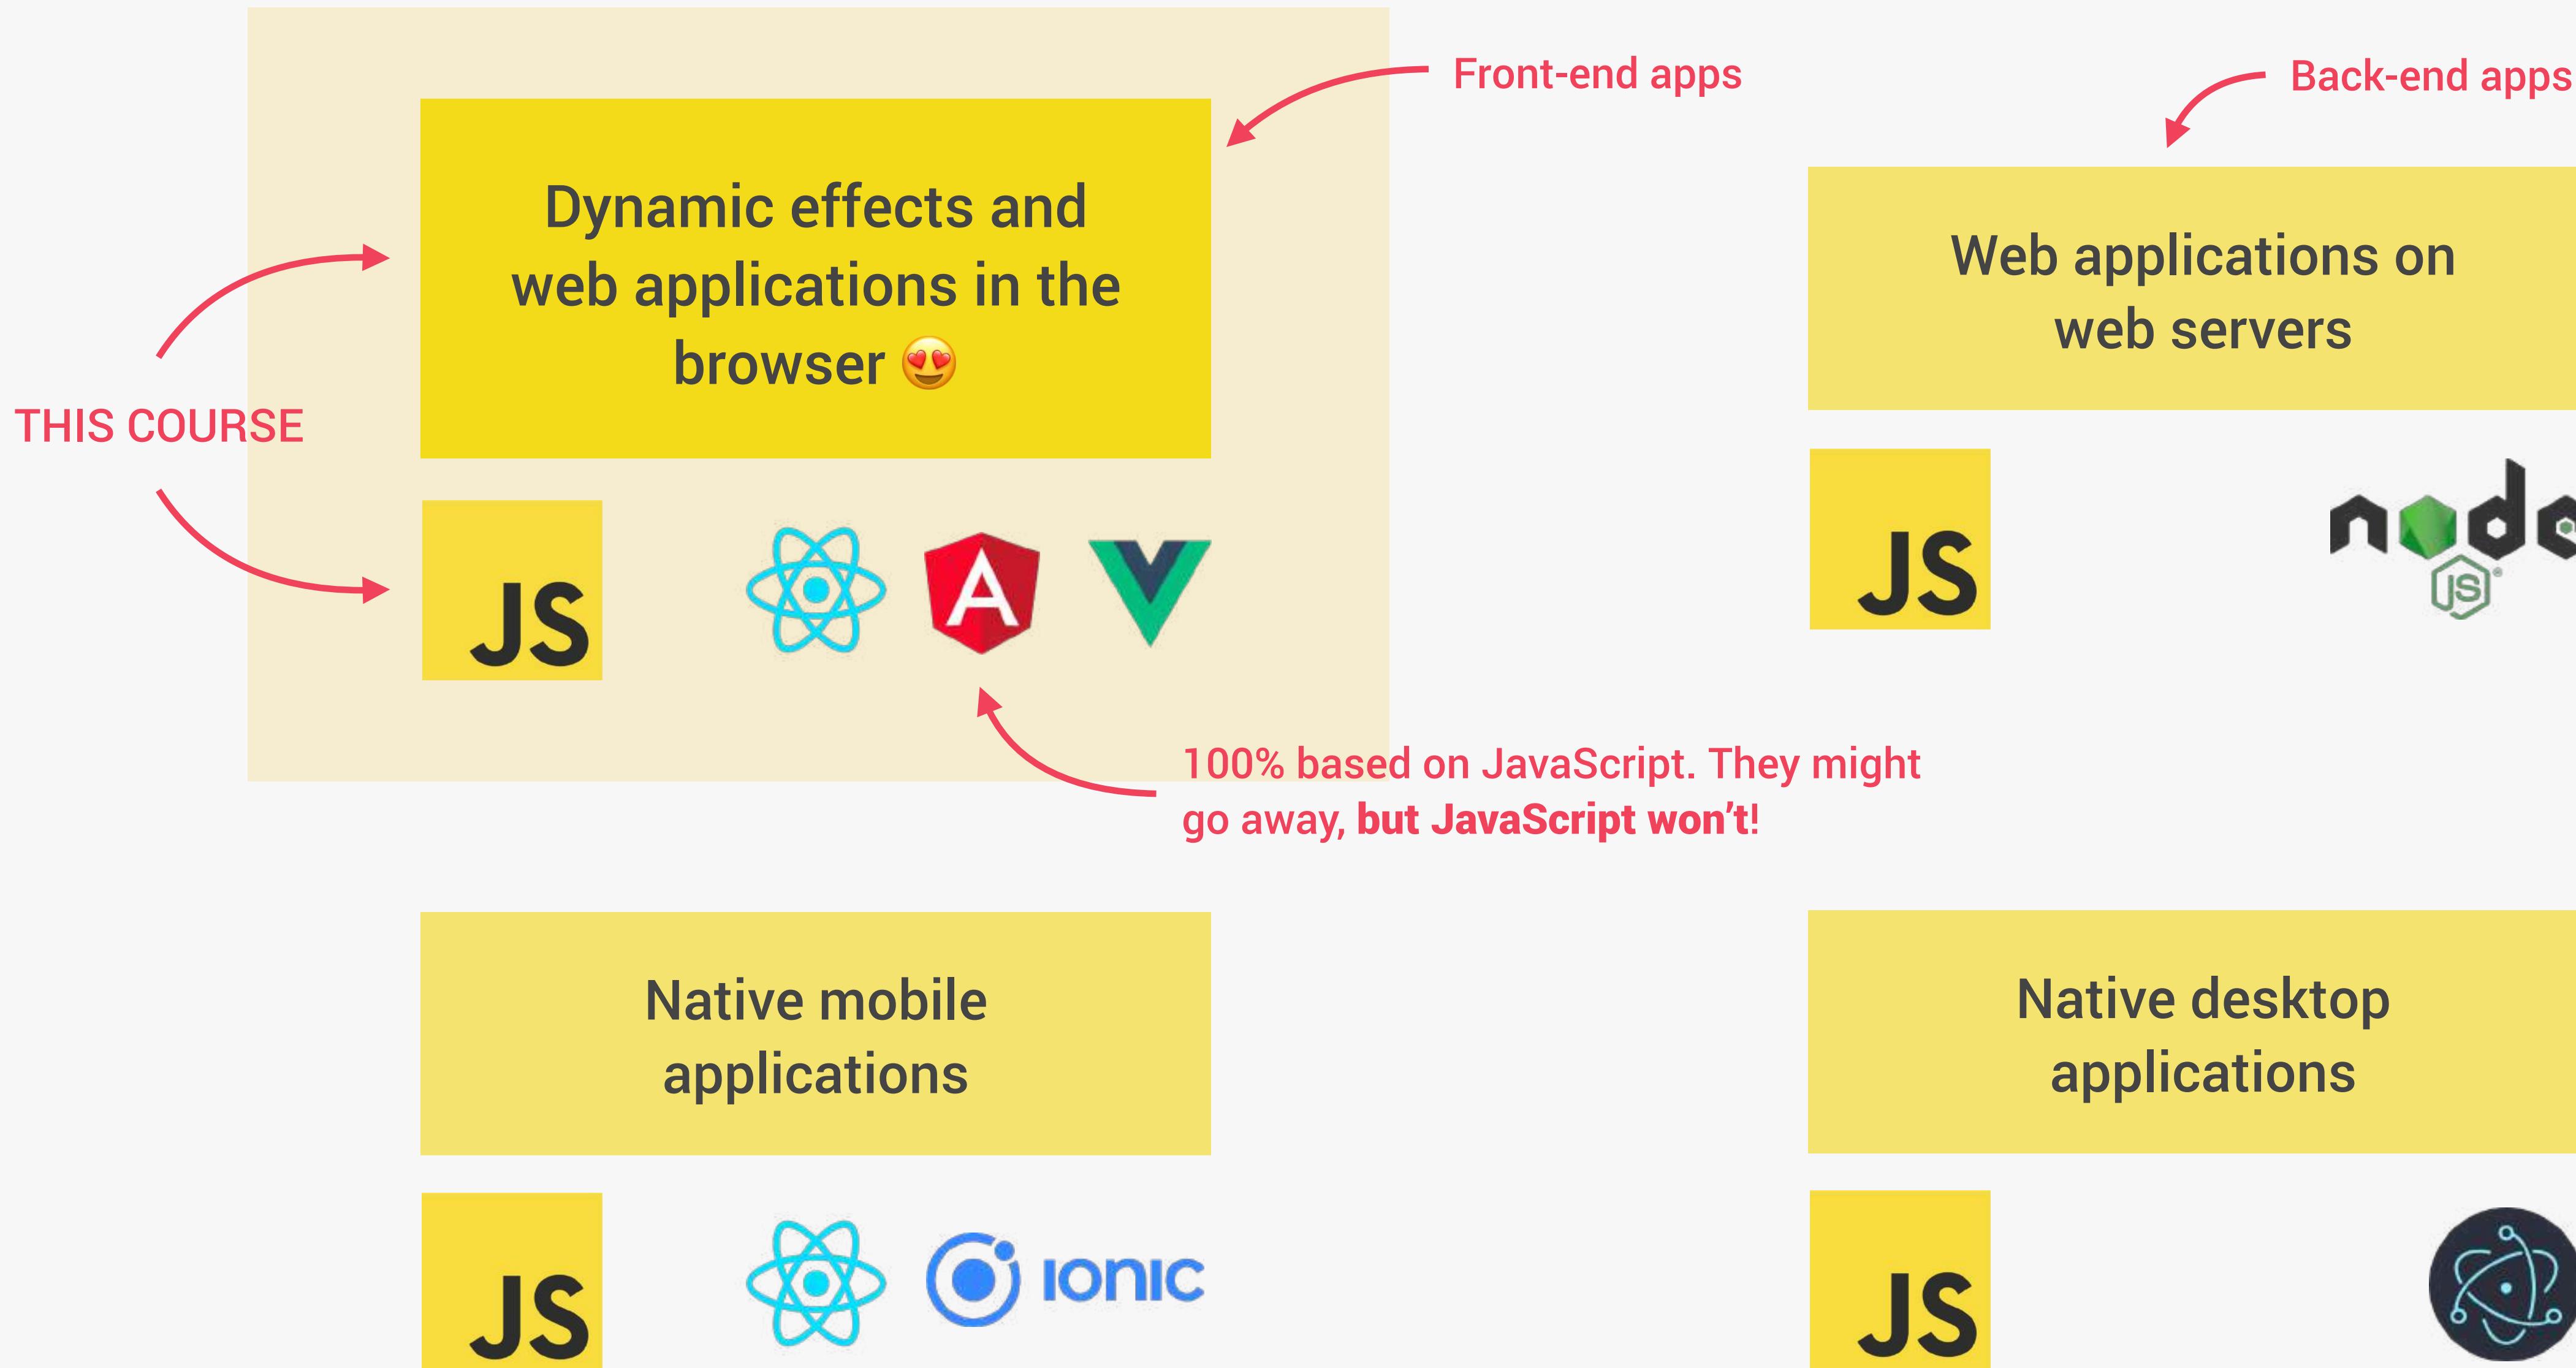

JAVASCRIPT RELEASES... (MORE ABOUT THIS LATER)

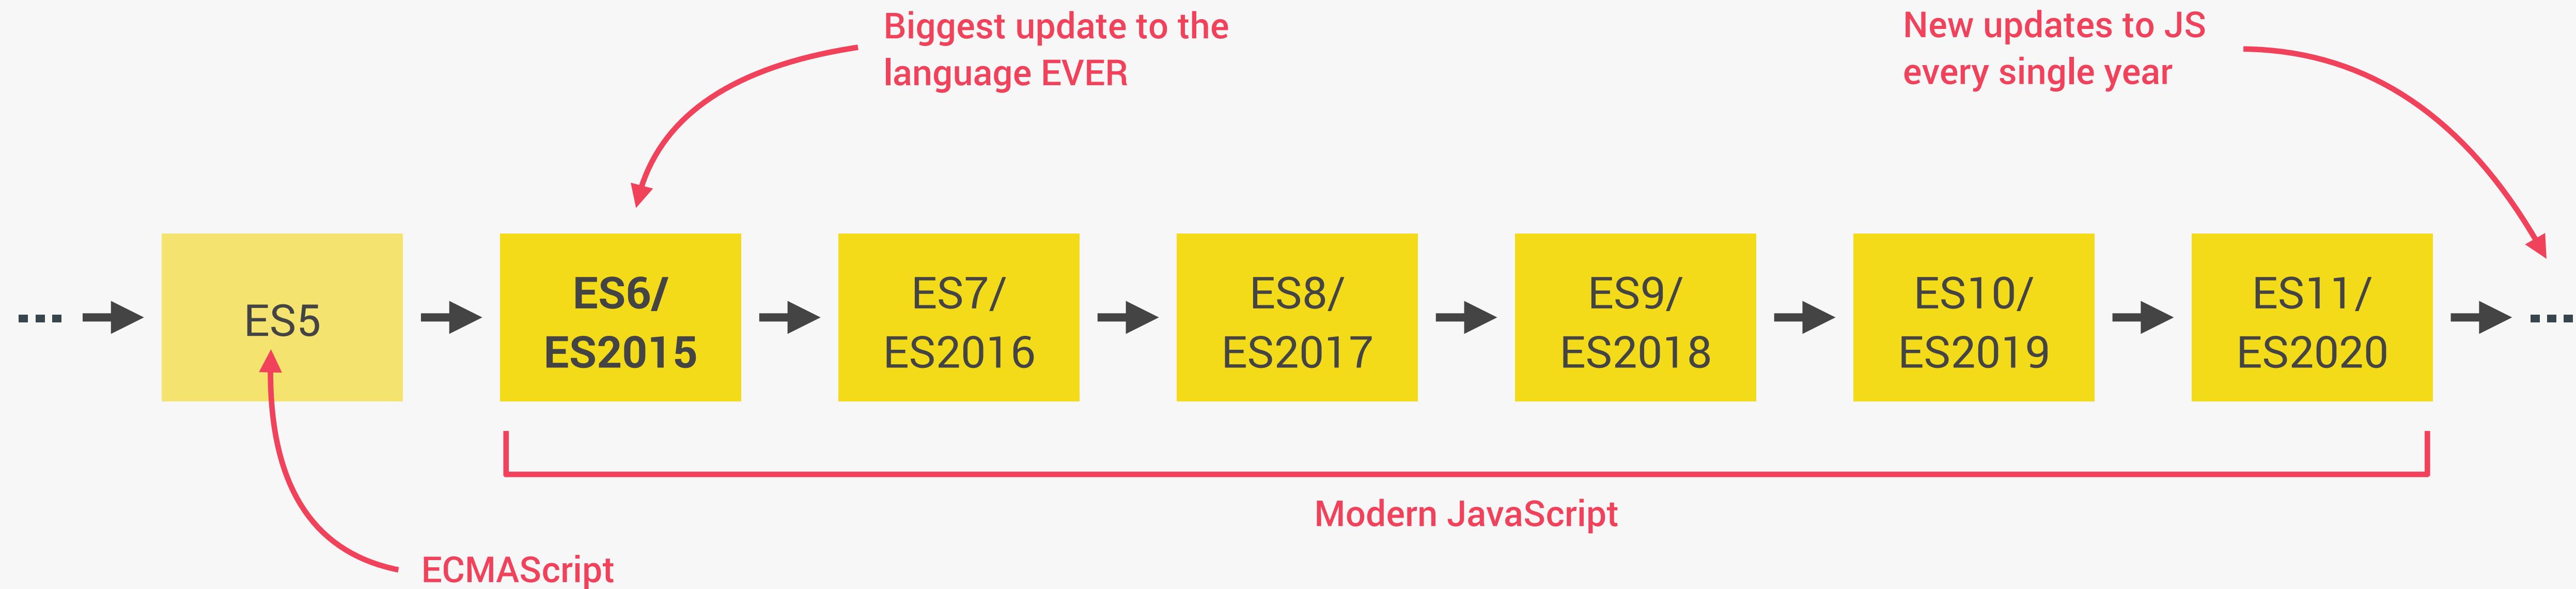

Learn **modern JavaScript from the beginning**, but without forgetting the older parts!



Let's finally get started!



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


JAVASCRIPT FUNDAMENTALS - PART 1

LECTURE

DATA TYPES

JS

OBJECTS AND PRIMITIVES

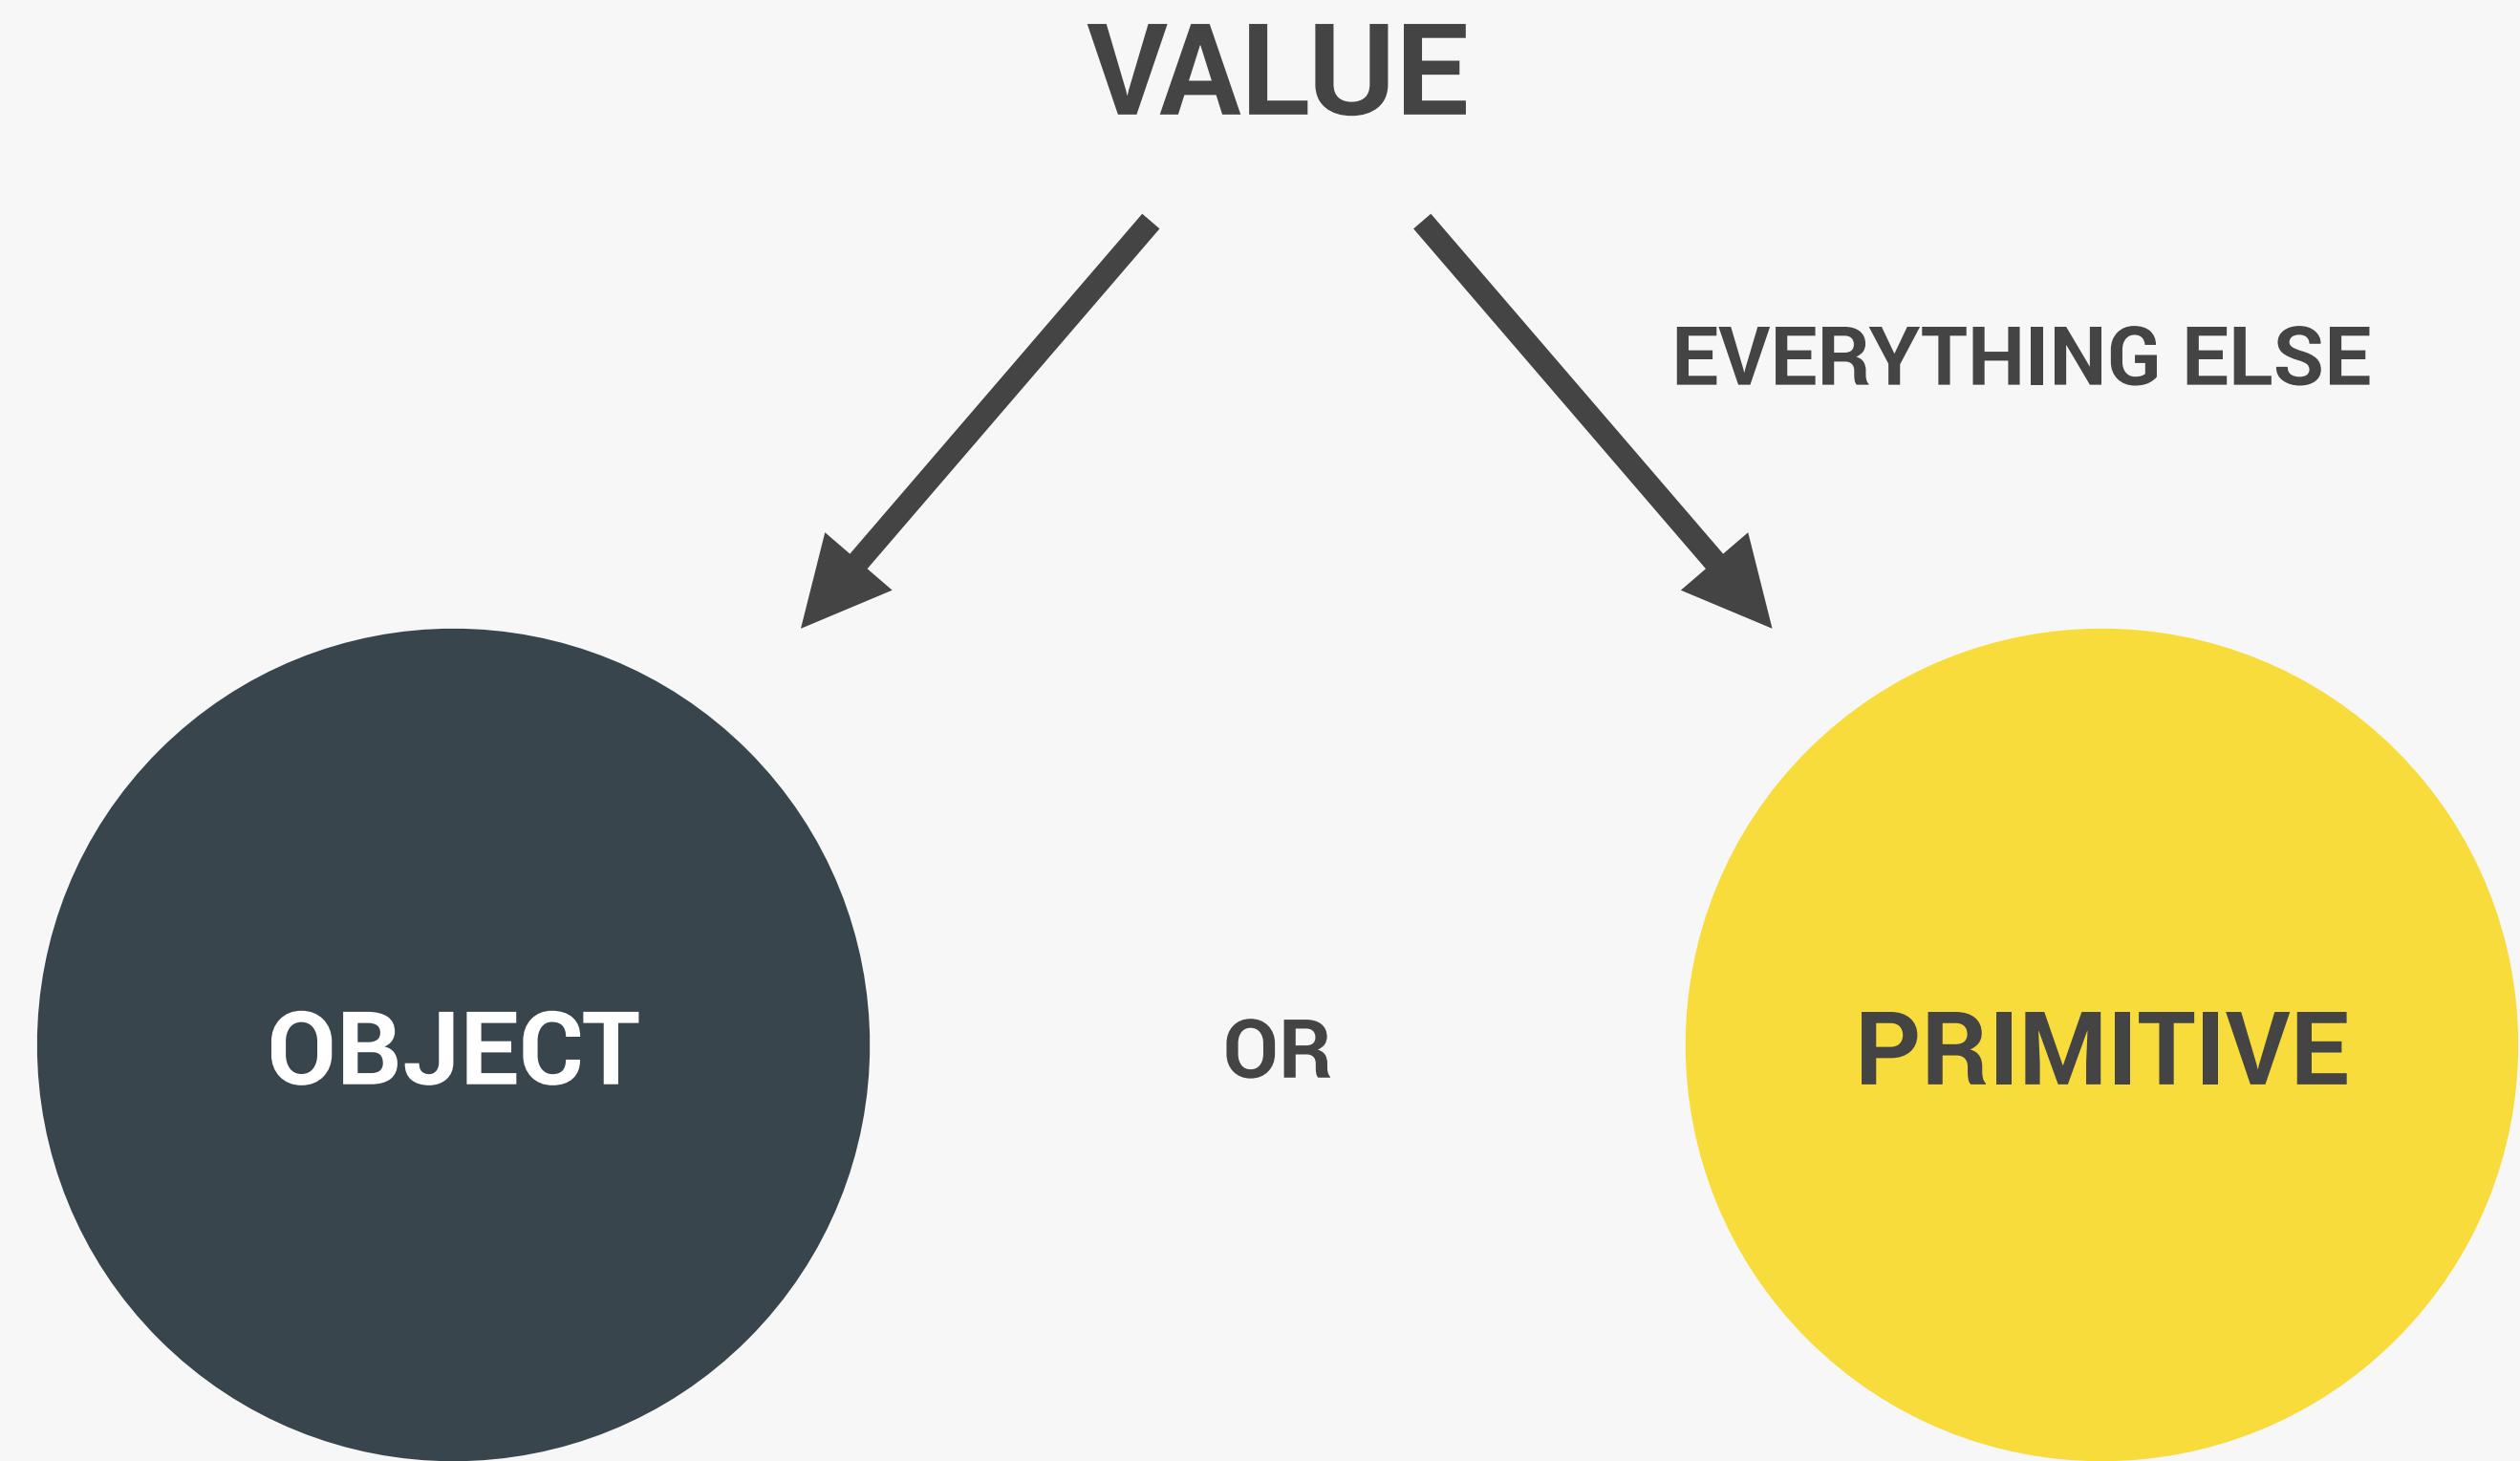

```
let me = {  
  name: 'Jonas'  
};
```

```
let firstName = 'Jonas';  
let age = 30;
```

THE 7 PRIMITIVE DATA TYPES

1. **Number:** Floating point numbers ➡ Used for decimals and integers

```
let age = 23;
```

2. **String:** Sequence of characters ➡ Used for text

```
let firstName = 'Jonas';
```

3. **Boolean:** Logical type that can only be true or false ➡ Used for taking decisions

```
let fullAge = true;
```

4. **Undefined:** Value taken by a variable that is not yet defined ('empty value')

```
let children;
```

5. **Null:** Also means 'empty value'

6. **Symbol (ES2015):** Value that is unique and cannot be changed [Not useful for now]

7. **BigInt (ES2020):** Larger integers than the Number type can hold



JavaScript has dynamic typing: We do **not** have to manually define the data type of the value stored in a variable. Instead, data types are determined **automatically**.



Value has type, NOT variable!



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

JAVASCRIPT FUNDAMENTALS - PART 1

LECTURE

BOOLEAN LOGIC

JS

BASIC BOOLEAN LOGIC: THE AND, OR & NOT OPERATORS

A AND B

"Sarah has a driver's license
AND good vision"

A Possible values

	A	
AND	TRUE	FALSE
B	TRUE	TRUE
	FALSE	FALSE

Results of operation, depending on 2 variables

true when **ALL** are true

No matter how many variables

A OR B

"Sarah has a driver's license
OR good vision"

A

	OR	TRUE	FALSE
B	TRUE	TRUE	TRUE
	FALSE	TRUE	FALSE

true when **ONE** is true

NOT A, NOT B



Inverts **true/false** value


👉 EXAMPLE:

A: Sarah has a driver's license

B: Sarah has good vision

Boolean variables that can be either TRUE or FALSE

AN EXAMPLE



BOOLEAN VARIABLES

- 👉 A: Age is greater or equal 20
- 👉 B: Age is less than 30

false

true

age = 16

LET'S USE OPERATORS!

- 👉 !A

true

false

- 👉 A AND B

false

false true

- 👉 A OR B

true

false true

- 👉 !A AND B

true

true true

- 👉 A OR !B

false

false false

A	TRUE	FALSE
AND	TRUE	FALSE
TRUE	TRUE	FALSE
FALSE	FALSE	FALSE

A	TRUE	FALSE
OR	TRUE	FALSE
TRUE	TRUE	TRUE
FALSE	TRUE	FALSE



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

JAVASCRIPT FUNDAMENTALS - PART 1

LECTURE

JAVASCRIPT RELEASES: ES5, ES6+
AND ESNEXT

JS

A BRIEF HISTORY OF JAVASCRIPT

1995

👉 Brendan Eich creates the **very first version of JavaScript in just 10 days**. It was called Mocha, but already had many fundamental features of modern JavaScript!



1996

👉 Mocha changes to LiveScript and then to JavaScript, in order to attract Java developers. However, **JavaScript has almost nothing to do with Java** 🤪

👉 Microsoft launches IE, **copying JavaScript from Netscape** and calling it JScript;



1997

👉 With a need to standardize the language, ECMA releases ECMAScript 1 (ES1), the first **official standard for JavaScript** (ECMAScript is the standard, JavaScript the language in practice);



2009

👉 ES5 (ECMAScript 5) is released with lots of great new features;

2015

👉 ES6/ES2015 (ECMAScript 2015) was released: **the biggest update to the language ever!**

👉 ECMAScript changes to an **annual release cycle** in order to ship less features per update 🙏

2016 – ∞

👉 Release of ES2016 / ES2017 / ES2018 / ES2019 / ES2020 / ES2021 / ... / ES2089 😅

BACKWARDS COMPATIBILITY: DON'T BREAK THE WEB!

```
// ES1 Code  
function add(n) {  
    var x = 5 + add.arguments[0];  
    return x;  
}
```

1997



BACKWARDS
COMPATIBLE

Modern JavaScript
Engine

2020

DON'T BREAK THE WEB!

- 👉 Old features are **never** removed;
- 👉 Not really new versions, just **incremental updates** (releases)
- 👉 Websites keep working **forever!**

Modern JavaScript
Engine

2020

NOT FORWARD
COMPATIBLE



```
// ES2089 Code 😂  
c int add n <=> int 5 + n
```

2089

HOW TO USE MODERN JAVASCRIPT TODAY



During development: Simply use the latest Google Chrome!



During production: Use Babel to transpile and polyfill your code (converting back to ES5 to ensure browser compatibility for all users).



The compatibility table shows a grid of browser icons (Chrome, Firefox, Safari, Edge, Internet Explorer) with colored cells indicating feature support. Most modern features are supported in all major browsers, while older ones like IE9 support only a subset.

<http://kangax.github.io/compat-table>

ES5

- 👉 Fully supported in all browsers (down to IE 9 from 2011);
- 👉 Ready to be used today 👍

BABEL

ES6/ES2015



ES2020

- 👉 **ES6+**: Well supported in all **modern** browsers;
- 👉 No support in **older** browsers;
- 👉 Can use **most** features in production with transpiling and polyfilling 😊

ES2021 – ∞

- 👉 **ESNext**: Future versions of the language (new feature proposals that reach Stage 4);
- 👉 Can already use **some** features in production with transpiling and polyfilling.

Will add new videos

(As of 2020)

MODERN JAVASCRIPT FROM THE BEGINNING



Learn **modern JavaScript from the beginning!**



But, also learn how some things used to be done **before** modern JavaScript (e.g. const & let vs var and function constructors vs ES6 class).

3 reasons why we should not forget the Good Ol' JavaScript:

- 👉 You will better understand how JavaScript actually works;
- 👉 Many tutorials and code you find online today are still in ES5;
- 👉 When working on old codebases, these will be written in ES5.

JAVASCRIPT FUNDAMENTALS – PART 2



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

JAVASCRIPT FUNDAMENTALS - PART 2

LECTURE

FUNCTIONS CALLING OTHER
FUNCTIONS

JS

CALLING A FUNCTION INSIDE A FUNCTION: DATA FLOW

```
const cutPieces = function (fruit) {  
    return fruit * 4;  
};  
  
const fruitProcessor = function (apples, oranges) {  
    const applePieces = cutPieces(apples);  
    const orangePieces = cutPieces(oranges);  
  
    const juice = `Juice with ${applePieces} pieces of  
apple and ${orangePieces} pieces of orange.`;  
    return juice;  
};  
  
console.log(fruitProcessor(2 [3]));
```

The diagram illustrates the data flow in the provided JavaScript code. It uses colored arrows to show the movement of values:

- Red arrows (representing internal function calls and assignments):**
 - An arrow points from the variable `fruit` to the multiplication operation `fruit * 4`.
 - Two arrows point from the variable `apples` to the call `cutPieces(apples)`.
 - Two arrows point from the variable `oranges` to the call `cutPieces(oranges)`.
 - Arrows point from the results of the `cutPieces` calls to the assignment of `applePieces` and `orangePieces`.
 - Arrows point from `applePieces` and `orangePieces` to their respective placeholders in the string template `juice`.
 - An arrow points from `juice` to its assignment in the `fruitProcessor` function.
 - An arrow points from the `return juice;` statement to the `console.log` call.
- Yellow arrow (representing the final output):**
 - A single yellow arrow originates from the `return juice;` statement and points upwards, representing the final output of the function.



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

JAVASCRIPT FUNDAMENTALS - PART 2

LECTURE

REVIEWING FUNCTIONS

JS

FUNCTIONS REVIEW: 3 DIFFERENT FUNCTION TYPES

👉 Function declaration


Function that can be used before it's declared

👉 Function expression

Essentially a function value stored in a variable

👉 Arrow function

Great for a quick one-line functions. Has no this keyword (more later...)

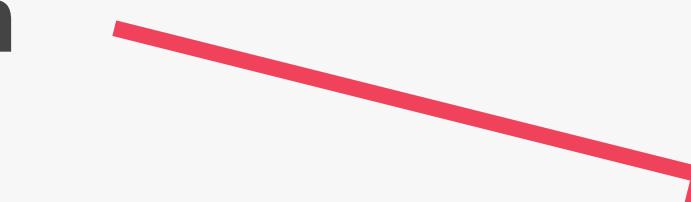

```
function calcAge(birthYear) {  
  return 2037 - birthYear;  
}
```

```
const calcAge = function (birthYear) {  
  return 2037 - birthYear;  
};
```

```
const calcAge = birthYear => 2037 - birthYear;
```

👉 Three different ways of writing functions, but they all work in a similar way: receive **input** data, **transform** data, and then **output** data.

FUNCTIONS REVIEW: ANATOMY OF A FUNCTION

Function name

Parameters: placeholders to receive input values. Like local variables of a function

return statement to output a value from the function and terminate execution

```
function calcAge(birthYear, firstName) {  
  const age = 2037 - birthYear;  
  console.log(`${firstName} is ${age} years old`);  
  return age;  
}
```

Function body: block of code that we want to reuse. Processes the function's input data

Variable to save returned value (function output)

Arguments: actual values of function parameters, to input data

Calling, running or invoking the function, using ()

DEVELOPER SKILLS & EDITOR SETUP



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


DEVELOPER SKILLS & EDITOR SETUP

LECTURE

LEARNING HOW TO CODE

JS

HOW TO FAIL 🤦 AT LEARNING HOW TO CODE

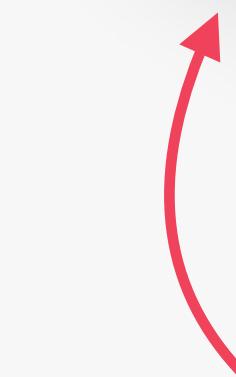

John
(not actually...)

- 💥 He **didn't have a clear goal** at the beginning of his journey
- 💥 He started by watching courses and reading tutorials, but he would just **copy the code without caring how it works**. Sometimes he would just copy and paste code!
- 💥 He **didn't reinforce** what he was learning by doing small challenges or taking notes
- 💥 He **didn't practice coding**, and didn't come up with his own project ideas
- 💥 He quickly became **frustrated** when his code was not perfectly clean or efficient
- 💥 He **lost motivation** because he thought he could never know everything
- 💥 He was **learning in isolation**
- 💥 After finishing a couple of courses, he **thought he now was a web developer** and could start applying to jobs. But he couldn't even build an app on his own!

HOW TO SUCCEED 🎉 AT LEARNING HOW TO CODE

💥 He didn't have a **clear goal** at the beginning of his journey

↓ **FIX**

- 👉 Set a **specific, measurable, realistic and time-based** goal
- 👉 Know exactly **why** you are learning to code: Switching careers? Finding a better job?
- 👉 **Imagine a big project** you want to be able to build!
- 👉 Research technologies you need and then learn them

💥 He would just **copy the code without caring how it works**. Sometimes he would just copy and paste code!


↓ **FIX**

- 👉 Understand the code that you're studying and typing
- 👉 **Always type the code**, don't copy-paste!

💥 He didn't reinforce what he was learning by doing small challenges or taking notes

↓ **FIX**

- 👉 After you learn a new feature or concept, **use it immediately**
- 👉 Take notes
- 👉 **Challenge yourself** and practice with small coding exercises and challenges
- 👉 Don't be in a hurry to complete the course fast!

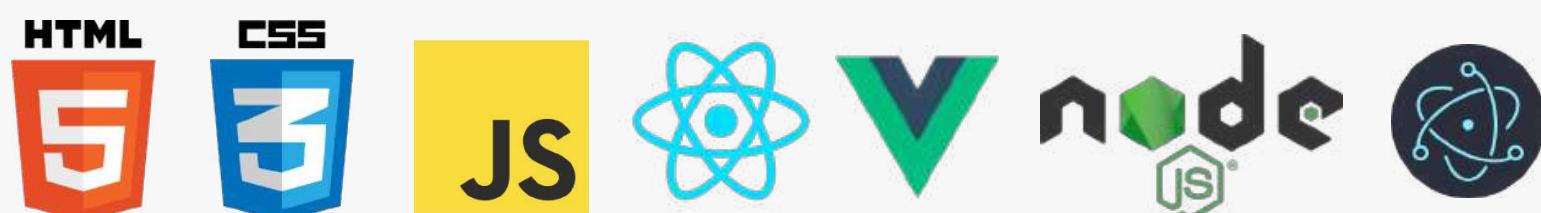

PAUSE THE VIDEO
FOR CHALLENGE

codewars 

HOW TO SUCCEED AT LEARNING HOW TO CODE

💥 He **didn't practice coding**, and didn't come up with his own project ideas

↓ **FIX**

👍 Practicing on your own is the most important thing to do

👍 **This is NOT optional!** Without **practice outside of courses**, you won't go anywhere!

👍 Come up with your own project ideas or copy popular sites or applications, or just parts of them in the beginning

👍 Don't be stuck in "tutorial hell"

💥 He **quickly became frustrated** when his code was not perfectly clean or efficient

↓ **FIX**

👍 **Don't get stuck** trying to write the perfect code!

👍 Just write tons of code, **no matter the quality!**

👍 Clean and efficient code will come with time

👍 You can always refactor code later

💥 He **lost motivation** because he thought he could never know everything

↓ **FIX**

👍 Embrace the fact that **you will never know everything**

👍 Just focus on what you need to achieve your goal!



getify
@getify

20+ yrs dev exp, 8 books w/ 100k+ copies sold, 300k+ hours watched of my videos, 4k+ taught in person...

And you know what? I still struggle to get my code to work and it's still a tedious slog. And my code still confuses me the next day.

You're not alone in these struggles.

1,601 3:33 PM - Mar 10, 2018



HOW TO SUCCEED 🎉 AT LEARNING HOW TO CODE

💥 He was **learning in isolation**

↓ FIX

👉 Explain new concepts to other people. If you can explain it, you truly understand it!

👉 Share your goals to make **yourself accountable**

👉 Share your learning progress with the web dev community (#100DaysOfCode,  #CodeNewbie, #webdev, etc.)

💥 After finishing a couple of courses, **he thought he now was a web developer** and could start applying to jobs

↓ FIX

👉 The **biggest misconception** that people have!

👉 Courses are an amazing starting point, but are only the **beginning of your journey!**

NEXT SLIDE →

LEARNING HOW TO CODE IS HARD, BUT YOU CAN DO IT!





JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

DEVELOPER SKILLS & EDITOR SETUP

LECTURE

HOW TO THINK LIKE A DEVELOPER:
BECOME A PROBLEM SOLVER!

JS

HOW TO FAIL 🤦 AT SOLVING PROBLEMS



John can
code now 😊

WHENEVER JOHN ENCOUNTERS A PROBLEM:

- 💥 He jumps at the problem **without much thinking**
- 💥 He implements his solution in an **unstructured way**
- 💥 He **gets stressed out** when things don't work
- 💥 He is **too proud to research** solutions

↓ FIX

- 👍 Stay calm and slow down, don't just jump at a problem without a plan
- 👍 Take a very **logical and rational approach** (programming is just logic, in the end...)
- 👍 Use my **4-step framework** to solve any problem

NEXT SLIDE →

👉 Example: *In an array of GPS coordinates, find the two closest points*

4 STEPS TO SOLVE ANY PROBLEM

1

Make sure you 100% understand the problem. Ask the right questions to get a clear picture of the problem

EXAMPLE

Project Manager: “We need a function that reverses whatever we pass into it”

1

- 👉 What does “whatever” even mean in this context?
What should be reversed? **Answer:** Only strings, numbers, and arrays make sense to reverse...
- 👉 What to do if something else is passed in?
- 👉 What should be returned? Should it always be a string, or should the type be the same as passed in?
- 👉 How to recognize whether the argument is a number, a string, or an array?
- 👉 How to reverse a number, a string, and an array?

4 STEPS TO SOLVE ANY PROBLEM

1

Make sure you 100% understand the problem. Ask the right questions to get a clear picture of the problem



2

Divide and conquer: Break a big problem into smaller sub-problems.

2

SUB-PROBLEMS:

- 👉 Check if argument is a number, a string, or an array
- 👉 Implement reversing a number
- 👉 Implement reversing a string
- 👉 Implement reversing an array
- 👉 Return reversed value



Looks like a task list that we need to implement

EXAMPLE

💬 Project Manager: “We need a function that reverses whatever we pass into it”

4 STEPS TO SOLVE ANY PROBLEM

1

Make sure you 100% understand the problem. Ask the right questions to get a clear picture of the problem



2

Divide and conquer: Break a big problem into smaller sub-problems.



3

Don't be afraid to do as much research as you have to

EXAMPLE

Project Manager: “*We need a function that reverses whatever we pass into it*”

3

- 👉 How to check if a value is a number in JavaScript?
- 👉 How to check if a value is a string in JavaScript?
- 👉 How to check if a value is an array in JavaScript?
- 👉 How to reverse a number in JavaScript?
- 👉 How to reverse a string in JavaScript?
- 👉 How to reverse an array in JavaScript?



4 STEPS TO SOLVE ANY PROBLEM

1

Make sure you 100% understand the problem. Ask the right questions to get a clear picture of the problem



2

Divide and conquer: Break a big problem into smaller sub-problems.



3

Don't be afraid to do as much research as you have to



4

For bigger problems, write pseudo-code before writing the actual code

EXAMPLE

Project Manager: "We need a function that reverses whatever we pass into it"

4

```
function reverse(value)
  if value type !string && !number && !array
    return value

  if value type == string
    reverse string
  if value type == number
    reverse number
  if value type == array
    reverse array

  return reversed value
```




JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

DEVELOPER SKILLS & EDITOR SETUP

LECTURE

DEBUGGING (FIXING ERRORS)

JS

WHAT IS A SOFTWARE BUG?

👉 **Software bug:** Defect or problem in a computer program.
Basically, any **unexpected or unintended behavior** of a computer program is a software bug.

👉 Bugs are **completely normal** in software development!

👉 Previous example: “We need a function that reverses whatever we pass into it”

```
reverse([1, 3, 5, 7])
```



```
[5, 1, 7, 3]
```



Unexpected result: the array is scrambled, NOT reversed.
So there is a **bug** in the **reverse function** 🐛


👉 Debugging: Process of finding, fixing and preventing bugs.

0800 Autan started
1000 .. stopped - autan ✓
13" UC (032) MP - MC { 1.2700 9.037 847 025
033 PRO 2 2.130476415
2.130676415
Relays 6-2 in 033 failed special speed test
in relay " 10.000 test .
Relays changed
1100 Started Cosine Tape (Sine check)
1525 Started Multi Adder Test.
1545 Relay #70 Panel F
(moth) in relay.
1600 First actual case of bug being found.
1700 Autan starts.
1700 close down.



A **real bug** which was causing an error in Harvard's computer in the 1940s

THE DEBUGGING PROCESS

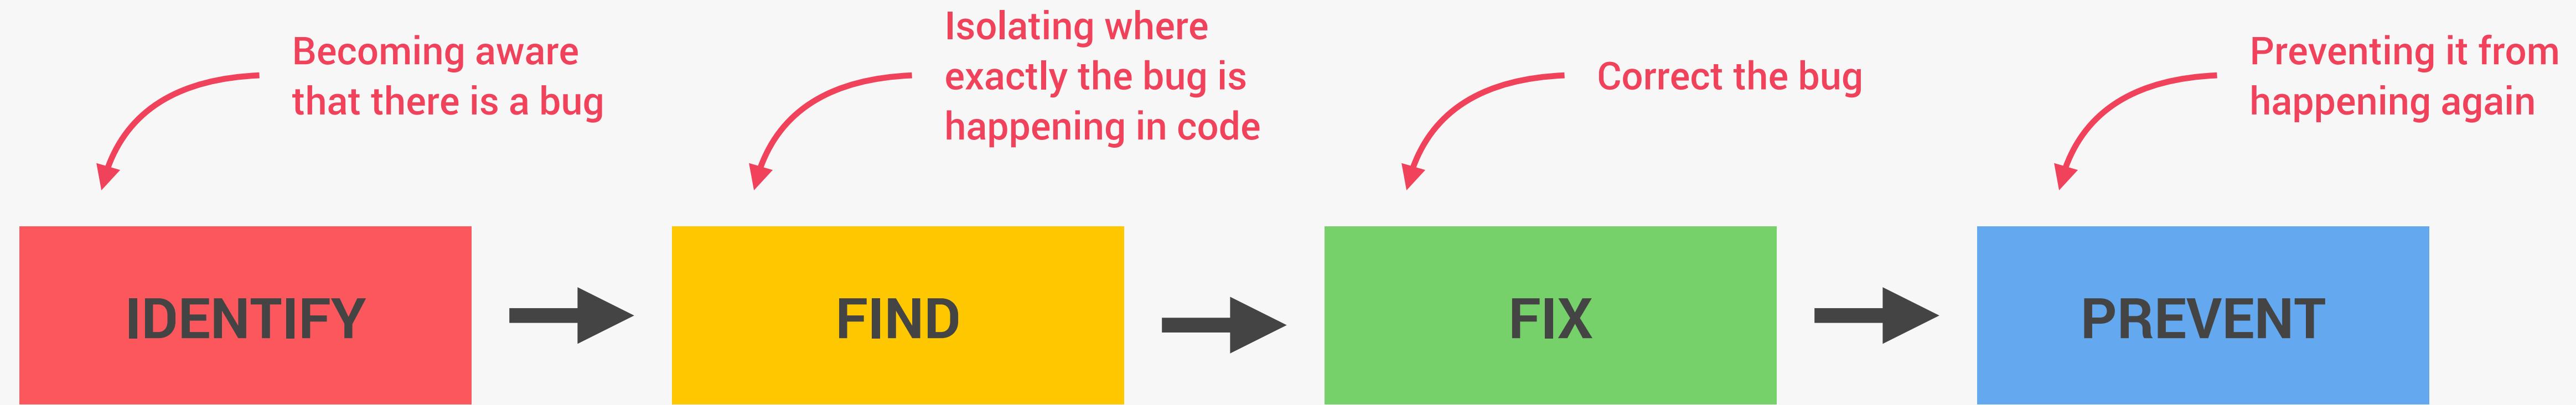

- 👉 During development
- 👉 Testing software
- 👉 User reports during production
- 👉 Context: browsers, users, etc.

- 👉 Developer console (*simple* code)
- 👉 Debugger (*complex* code)

- 👉 Replace wrong solution with new correct solution

- 👉 Searching for the same bug in similar code
- 👉 Writing tests using testing software



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

DEVELOPER SKILLS & EDITOR SETUP

LECTURE

THE RISE OF AI TOOLS (CHATGPT,
COPILOT, CURSOR AI, ETC.)

JS

THE WORKFLOW OF USING AI FOR CODING

Make sure you 100% understand the problem. **Ask questions** to get a clear picture

First step from lecture: “How to Think Like a Developer”



ChatGPT

Choose AI and give it a very specific prompt and enough context (language, style, etc.)

✨ AI generates the solution as code

Correct or improve the solution

GitHub Copilot



Review and test the output solution. Make sure you introduce no bugs into your app

Integrate the solution into your app

- 👉 Ask to write code snippets, functions, and even generate entire files
- 👉 Use code-aware autocomplete
- 👉 Chat with your codebase

GUIDELINES FOR SAFE USE OF AI

BEFORE YOU USE AI:

- 1 ... you need to know **how to code on your own**. Fundamental skills are 100% essential!
- 2 ... you need to be able to **solve problems on your own**
- 3 ... you need to have very **critical thinking** (AI code contains a surprising amount of **bugs or bad code**)
- 4 ... you need to have **curiosity and joy** while coding

INCORPORATE AI CODE:

- 1 ... when you could have **written the code yourself**
- 2 ... when you **truly understand** the generated code
- 3 ... when you have ensured the code is **100% correct**
- 4 ... when you're not using the code for **mission-critical parts** of your apps

👉 Don't just use AI without knowing what you're doing. Otherwise, AI will turn you into a terrible programmer!

INSTEAD

👉 Use AI as an **assistant, not a replacement!** Save time on repetitive and boring tasks. It's also great for learning!



WILL AI TAKE YOUR JOB?

- 👉 There is a lot of hype around AI right now! In the past, tools like Dreamweaver, Wordpress, or Wix were supposed to replace web developers...
- 👉 Things *will* change: a portion of apps will be written by AI. You might write less code in the future, but that's not a bad thing!
- 👉 You will still be needed! You're the one who maintains control and implements the app architecture. You are the one who asks AI to write the code in the first place, reviews it, corrects it, and integrates it into the app
- 👉 Software developers do a lot more than just writing code: maintain the bigger picture of huge projects / think about software / implement complex design principles / are creative / they collaborate with other developers and clients
- 👉 AI-generated code is still buggy, and AI is not very good at debugging
- 👉 The world needs more software than can be built by humans right now!
- 👉 AI will help us, *not* replace us!

JAVASCRIPT IN THE BROWSER: DOM AND EVENTS FUNDAMENTALS



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


JAVASCRIPT IN THE BROWSER: DOM
AND EVENTS FUNDAMENTALS

LECTURE

WHAT'S THE DOM AND DOM
MANIPULATION


JS

WHAT IS THE DOM?

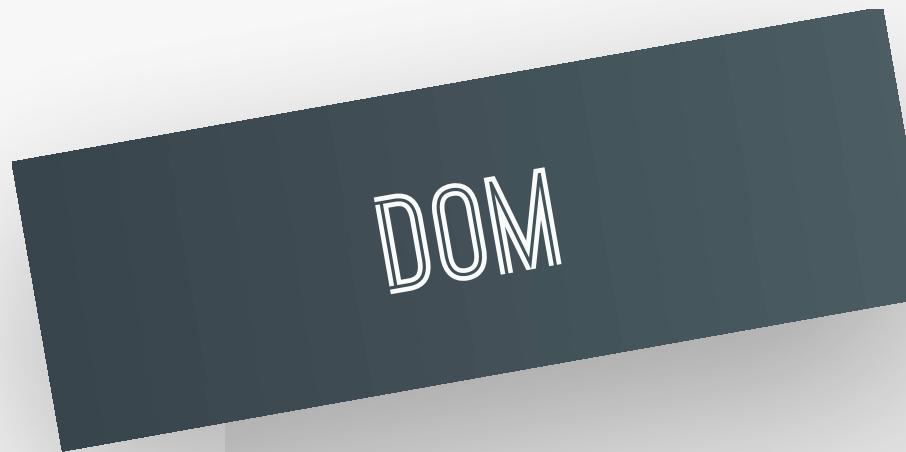


DOCUMENT OBJECT MODEL: STRUCTURED REPRESENTATION OF HTML DOCUMENTS. ALLOWS JAVASCRIPT TO ACCESS HTML ELEMENTS AND STYLES TO MANIPULATE THEM.

Tree structure, generated by browser on HTML load

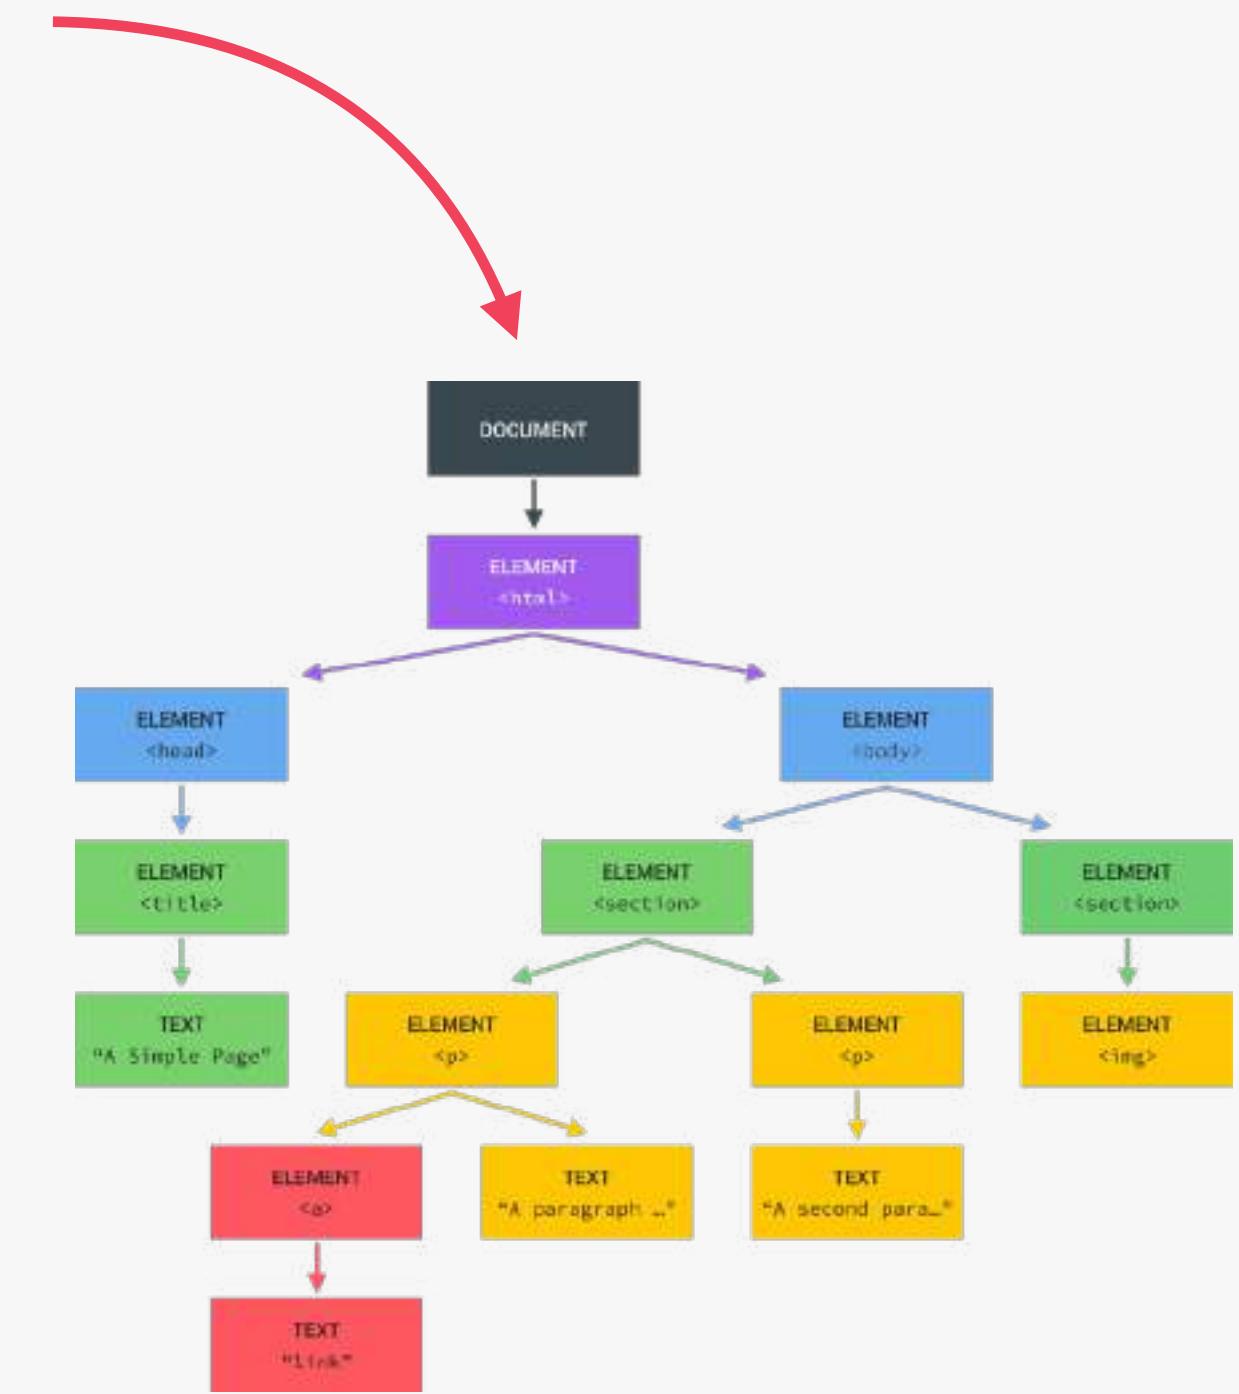

Change text, HTML attributes, and even CSS styles

THE DOM TREE STRUCTURE

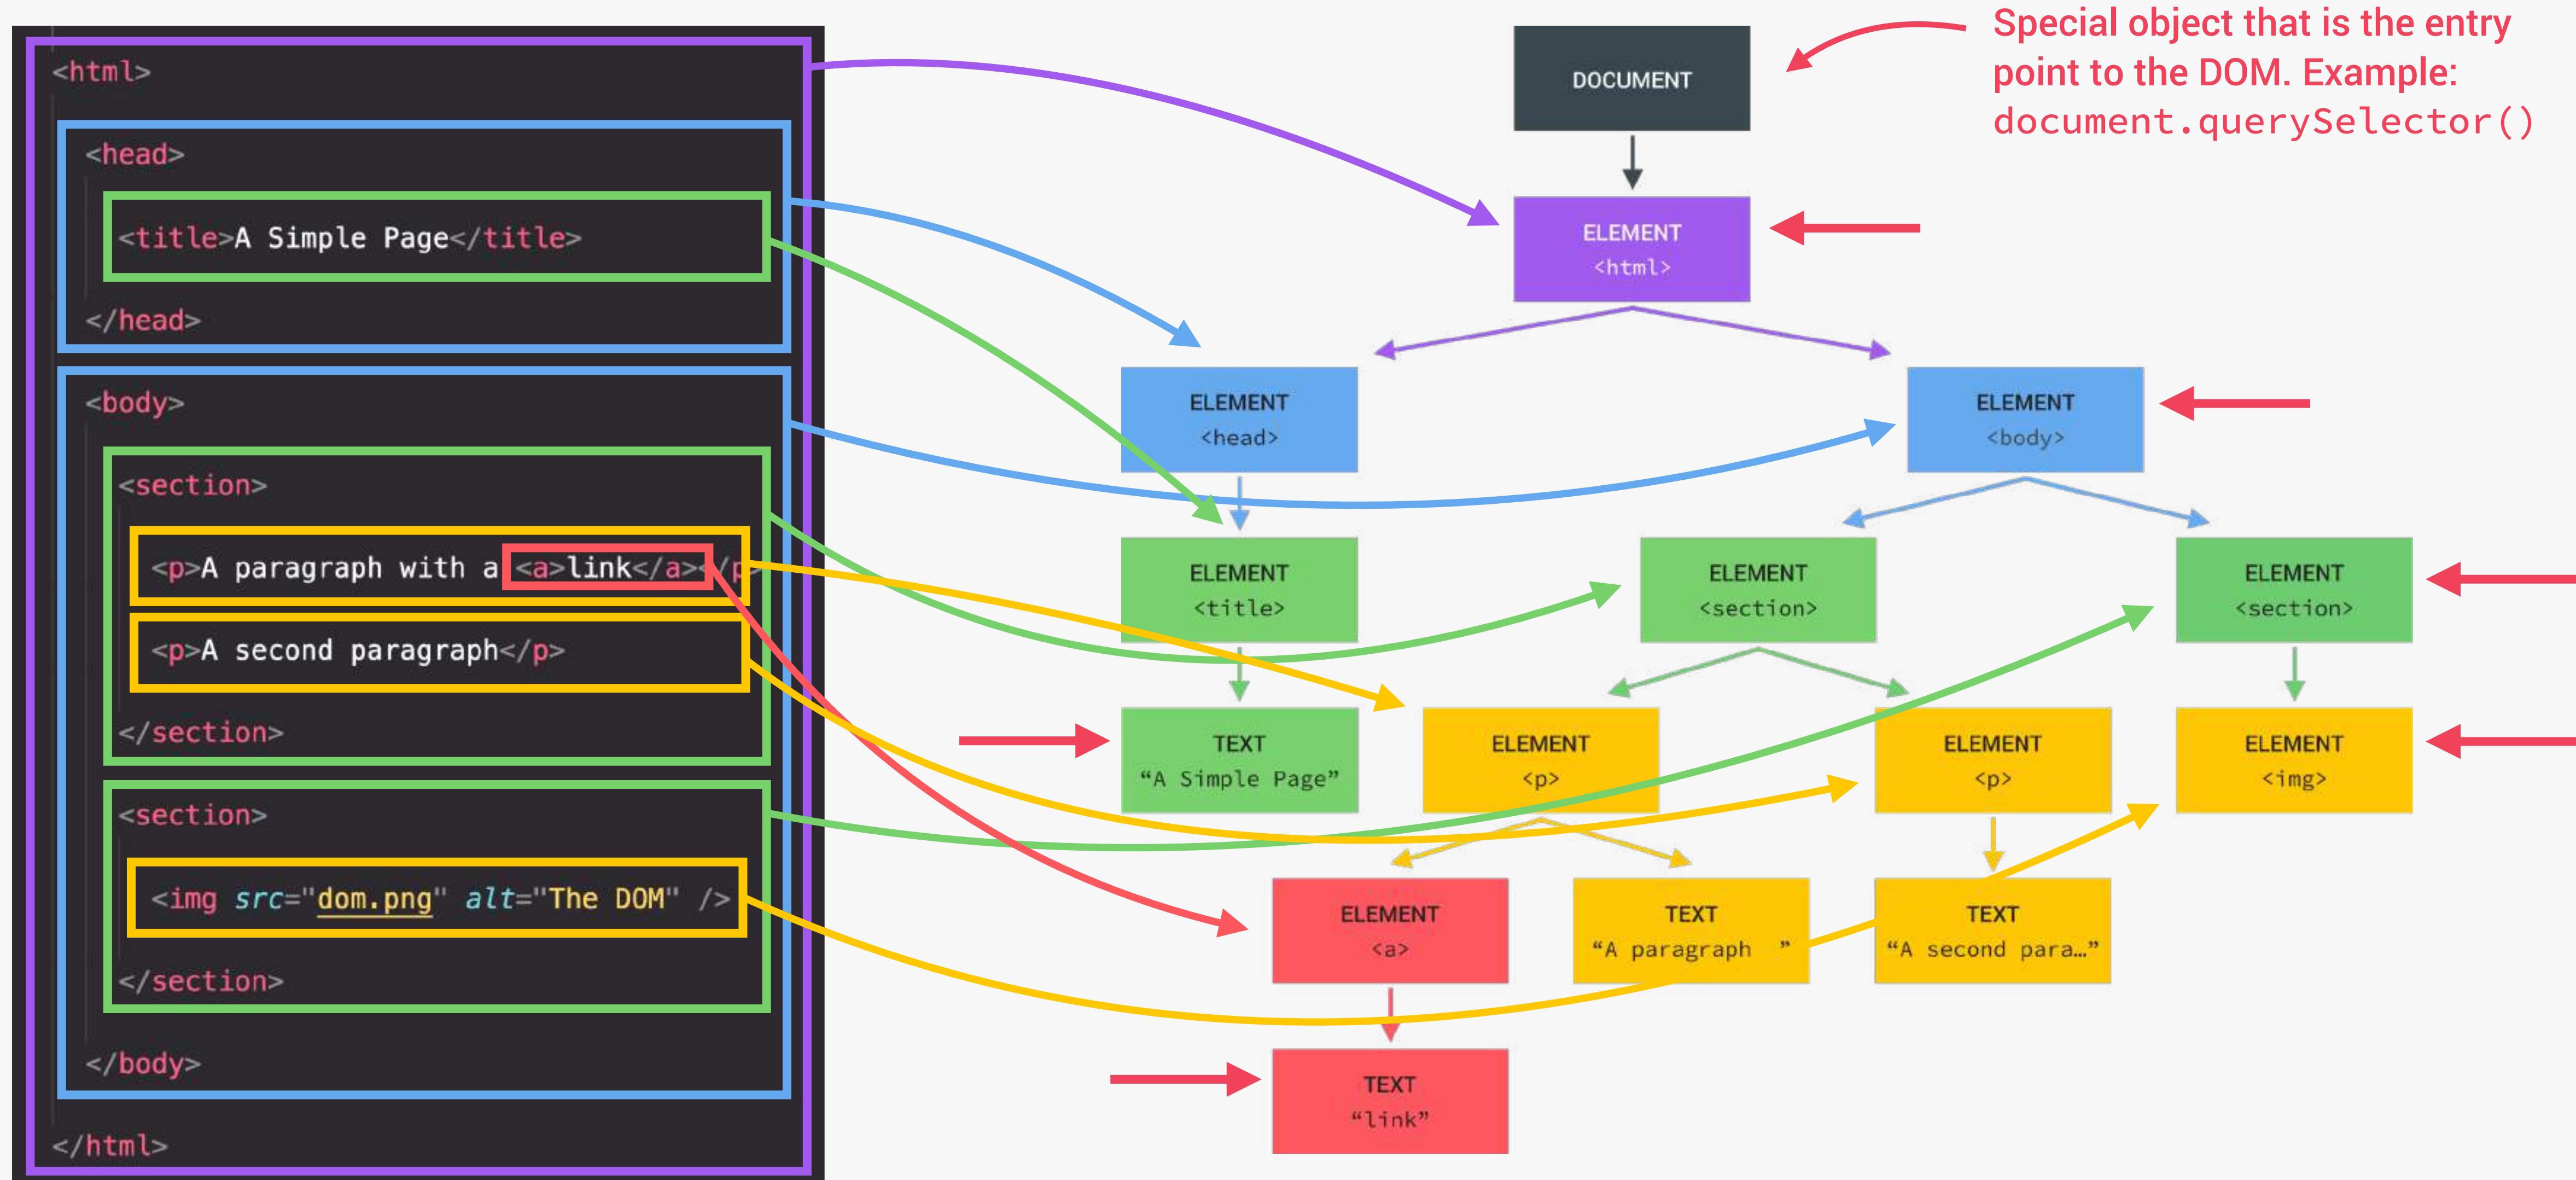

DOM != JAVASCRIPT





DOM Methods and
Properties for DOM
Manipulation



JS



For example
`document.querySelector()`

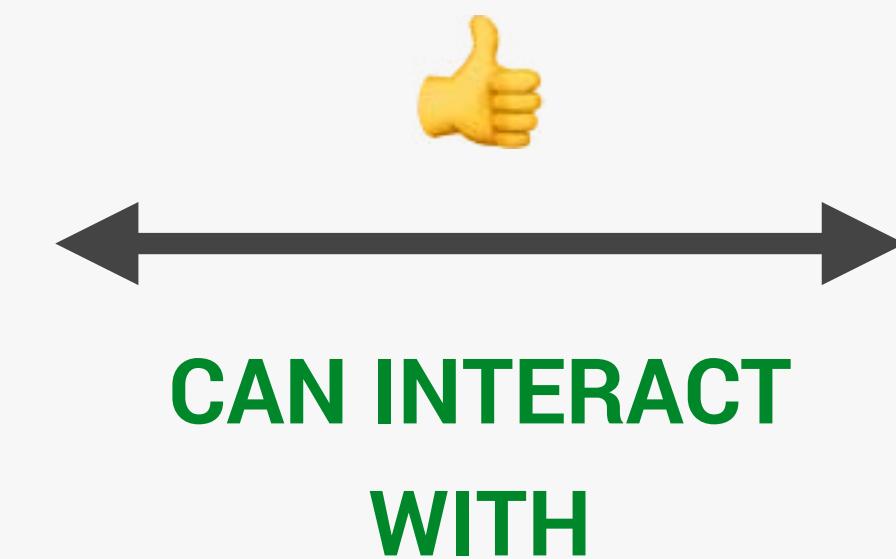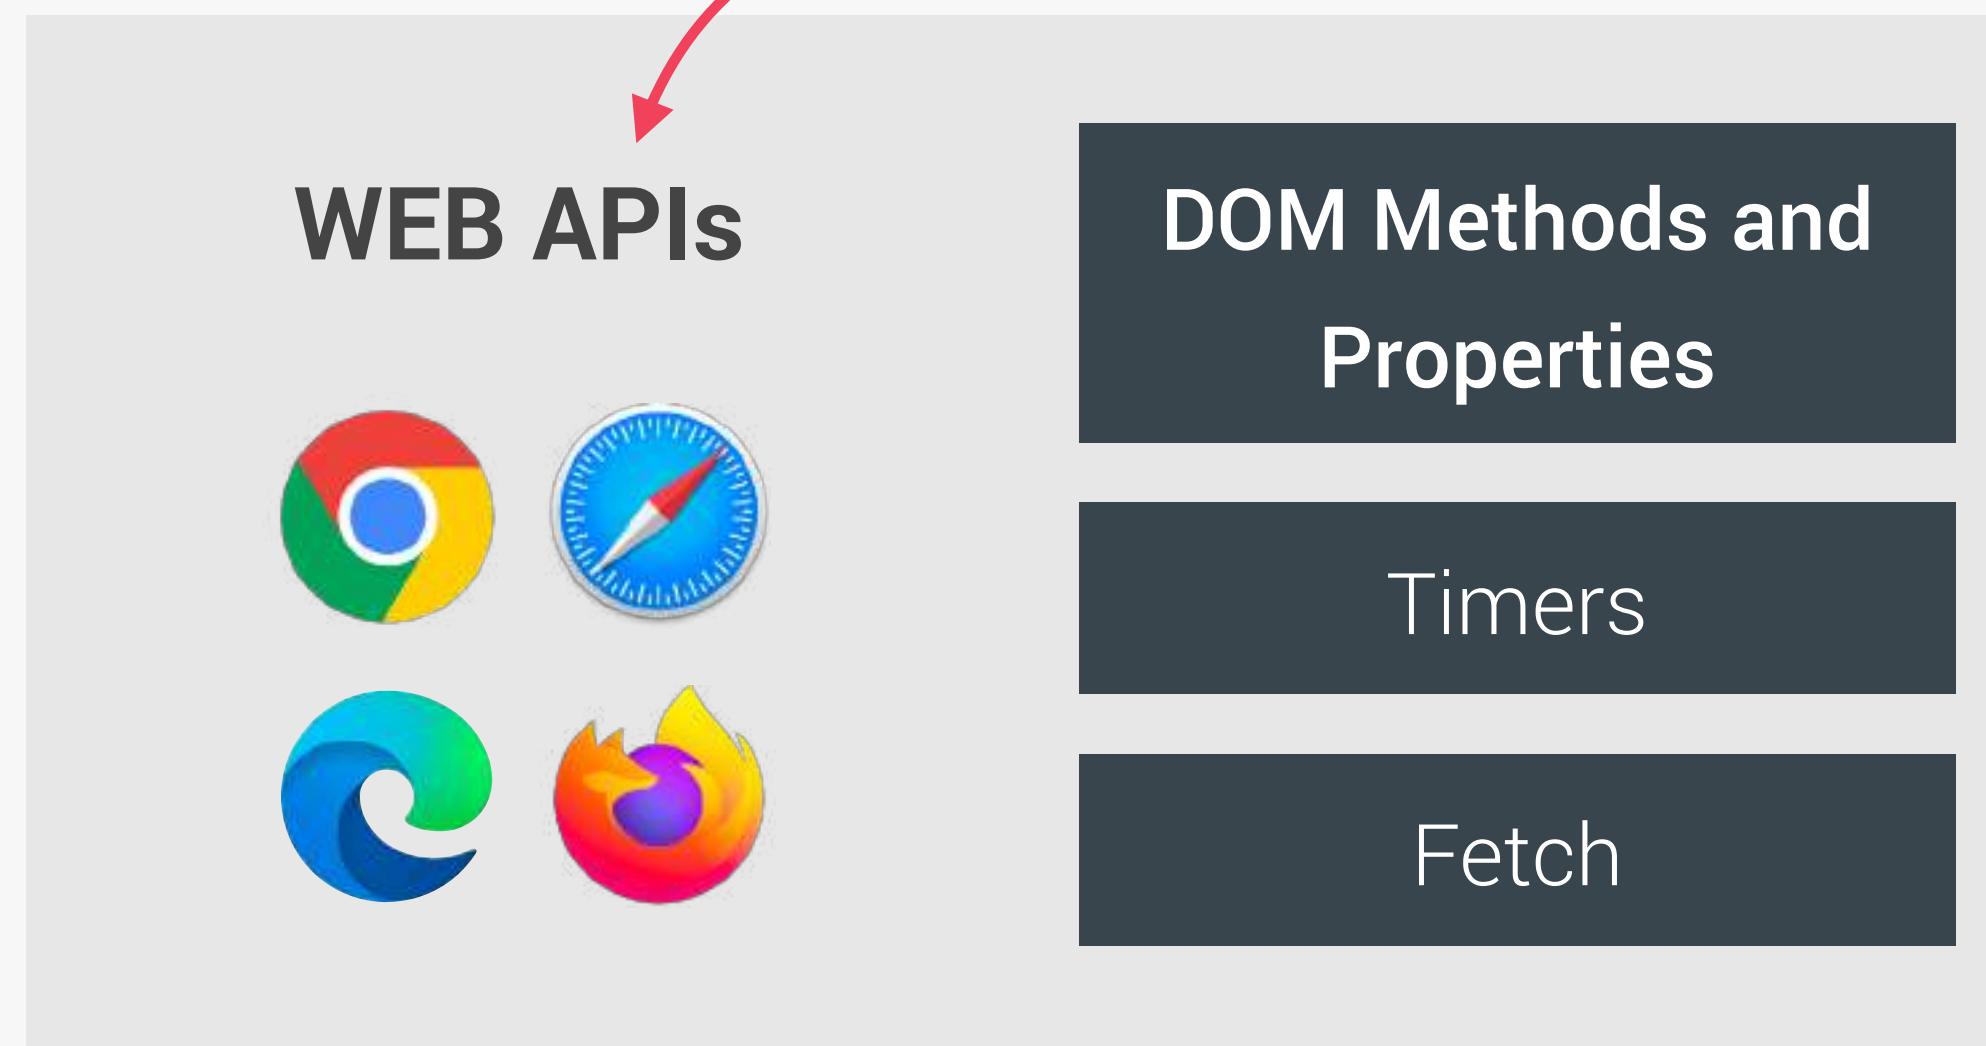

JS

HOW JAVASCRIPT
WORKS BEHIND THE
SCENES



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

AN HIGH-LEVEL OVERVIEW OF
JAVASCRIPT

JS

WHAT IS JAVASCRIPT: REVISITED

JAVASCRIPT

JAVASCRIPT IS A HIGH-LEVEL,
OBJECT-ORIENTED, MULTI-PARADIGM
PROGRAMMING LANGUAGE.



WHAT IS JAVASCRIPT: REVISITED

JAVASCRIPT

JAVASCRIPT IS A HIGH-LEVEL PROTOTYPE-BASED OBJECT-ORIENTED
MULTI-PARADIGM INTERPRETED OR JUST-IN-TIME COMPILED
DYNAMIC SINGLE-THREADED GARBAGE-COLLECTED PROGRAMMING
LANGUAGE WITH FIRST-CLASS FUNCTIONS AND A NON-BLOCKING
EVENT LOOP CONCURRENCY MODEL.



JS

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented


First-class functions

Dynamic

Single-threaded

Non-blocking event loop

👉 Any computer program needs resources:

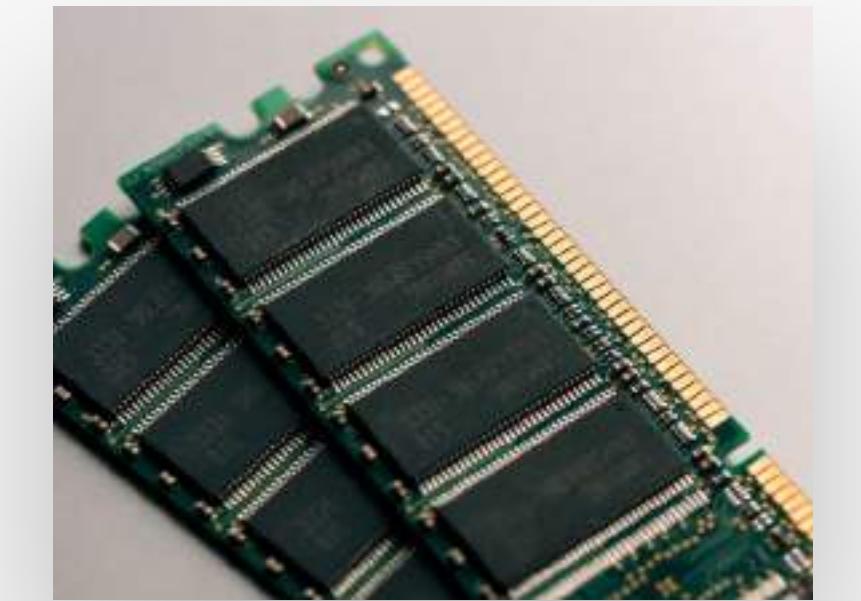

+



LOW-LEVEL



Developer has to manage
resources manually



HIGH-LEVEL



Developer does **NOT** have
to worry, everything
happens automatically

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm


Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

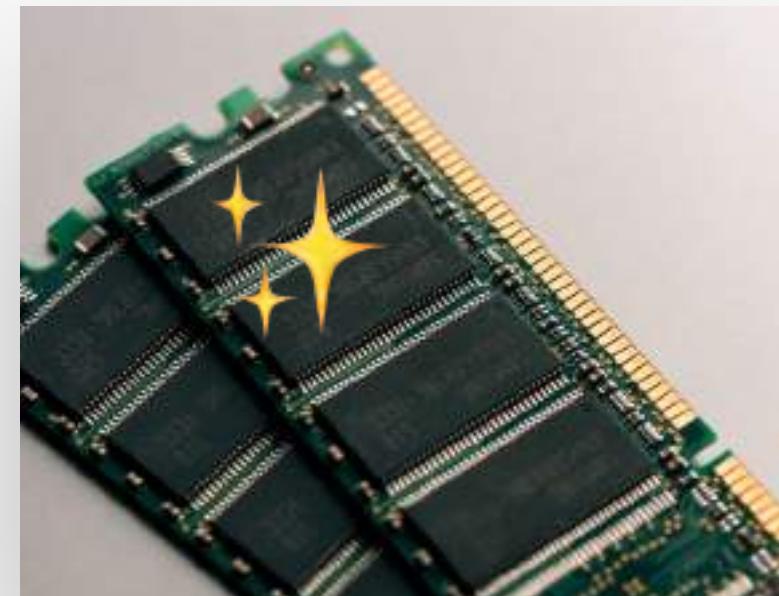

Cleaning the memory
so we don't have to

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

```
document.querySelector(".again").addEventListener("click", () => {
  document.querySelector(".message").textContent = "Start guessing...";
  document.querySelector(".number").textContent = "?";
  document.querySelector(".guess").value = "";
  score = 20;
  document.querySelector(".score").textContent = score;
  number = Math.floor(Math.random() * 20) + 1;
});
```

Abstraction over
0s and 1s

CONVERT TO MACHINE CODE = COMPILED

```
11010110101110101011101101011010101010111101010
01111010101110101001001110101110101011100010101100010
101001001111011101111001110000010110101011110111010
110100100001010010111010101101010111010101101010010
0000111010010011110101011101010101110010101111010
100101010010011110100111010001010101001011010100
11100100010001111010000101011100010100010101110101101
0101001010100010101000111010010010101110101001000101011
1110101001011101010001010111010101011101010100101001
11100101110101110101011101001010101010101010101010
01110101101010101010101011101010101011100111010
1110101001110101001110101010101010101010101010101010
```

Happens inside the
JavaScript engine

More about this **Later in this Section** 

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

👉 **Paradigm:** An approach and mindset of structuring code, which will direct your coding style and technique.

The one we've been
using so far

1

Procedural programming

2

Object-oriented programming (OOP)

3


Functional programming (FP)

👉 Imperative vs.
👉 Declarative

More about this later in **Multiple Sections** 👉

DECONSTRUCTING THE MONSTER DEFINITION

- High-level
- Garbage-collected
- Interpreted or just-in-time compiled
- Multi-paradigm
- Prototype-based object-oriented
- First-class functions
- Dynamic
- Single-threaded
- Non-blocking event loop

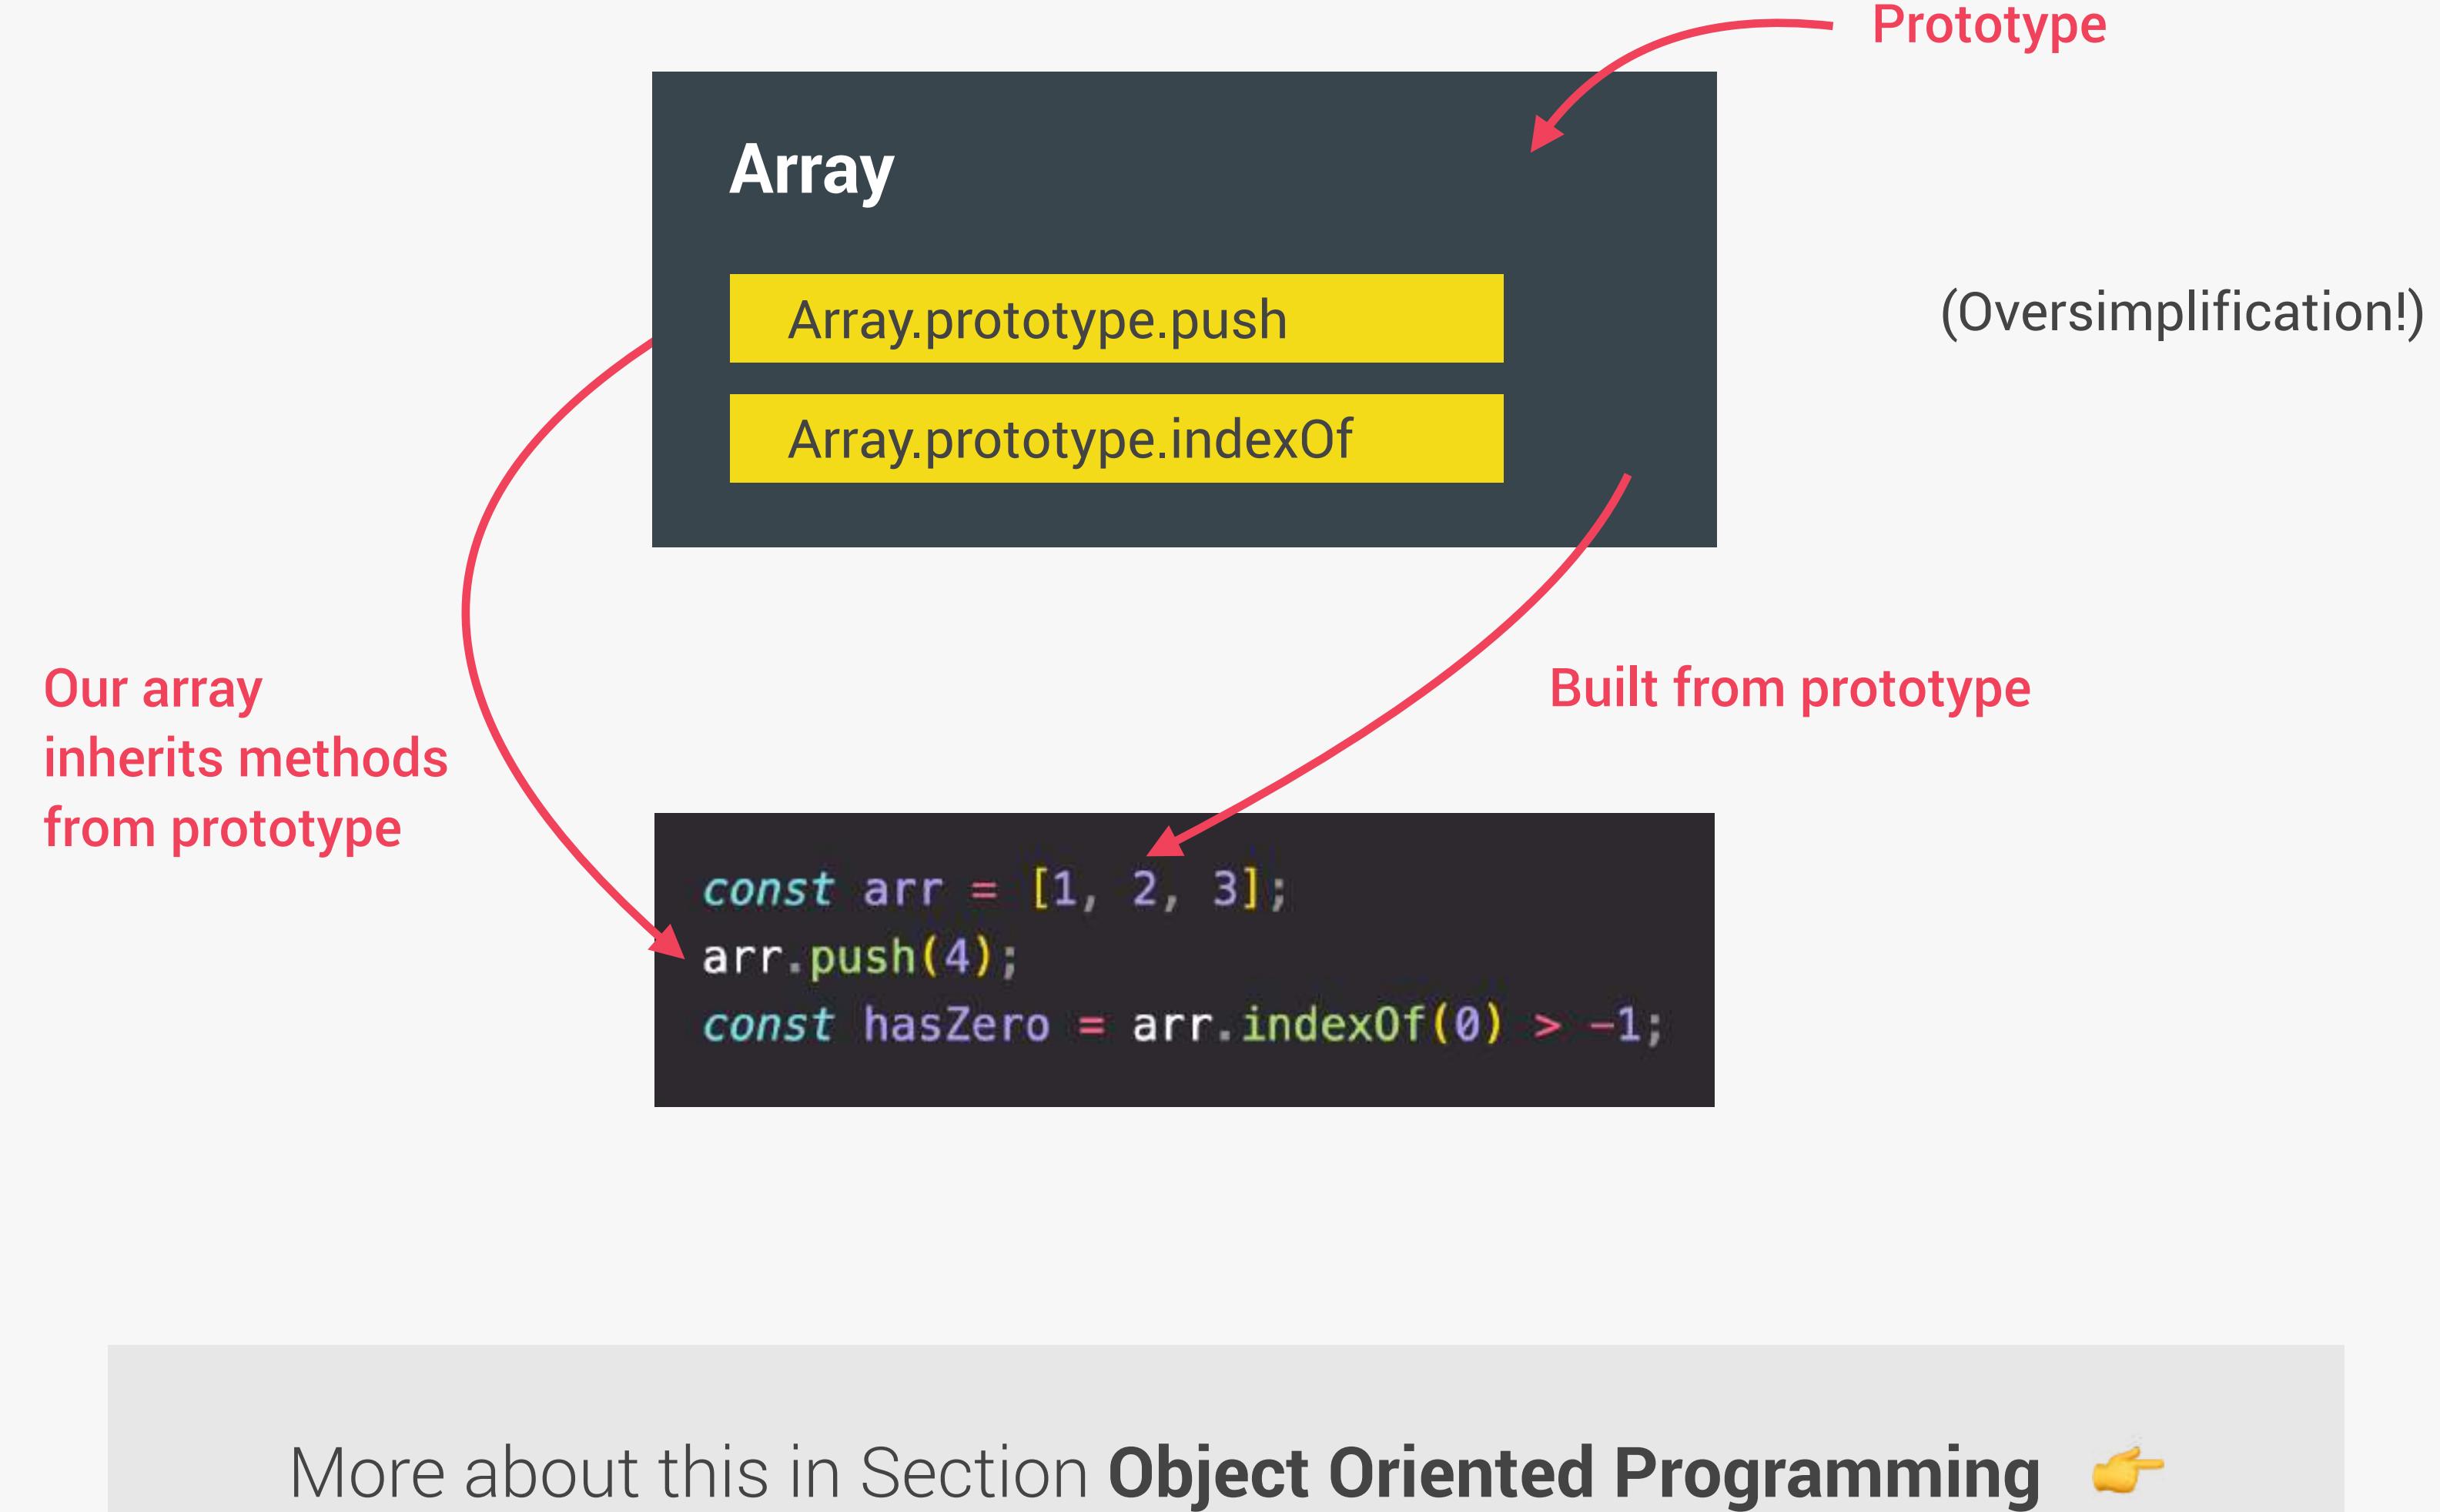

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

👉 In a language with **first-class functions**, functions are simply **treated as variables**. We can pass them into other functions, and return them from functions.

```
const closeModal = () => {  
  modal.classList.add("hidden");  
  overlay.classList.add("hidden");  
};  
  
overlay.addEventListener("click", closeModal);
```

Passing a function into another function as an argument:
First-class functions!

More about this in Section **A Closer Look at Functions** 👉

DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

👉 **Dynamically-typed language:**

No data type definitions. Types becomes known at runtime

Data type of variable is automatically changed

```
let x = 23;  
let y = 19;  
x = "Jonas";
```



DECONSTRUCTING THE MONSTER DEFINITION

High-level

Garbage-collected

Interpreted or just-in-time compiled

Multi-paradigm

Prototype-based object-oriented

First-class functions

Dynamic

Single-threaded

Non-blocking event loop

- 👉 **Concurrency model:** how the JavaScript engine handles multiple tasks happening at the same time.

↓ **Why do we need that?**

- 👉 JavaScript runs in one **single thread**, so it can only do one thing at a time.

↓ **So what about a long-running task?**

- 👉 Sounds like it would block the single thread. However, we want non-blocking behavior!

↓ **How do we achieve that?**

(Oversimplification!)

- 👉 By using an **event loop**: takes long running tasks, executes them in the “background”, and puts them back in the main thread once they are finished.

More about this **Later in this Section**





JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE



THE JAVASCRIPT ENGINE AND
RUNTIME

JS

WHAT IS A JAVASCRIPT ENGINE?




👉 Example: V8 Engine

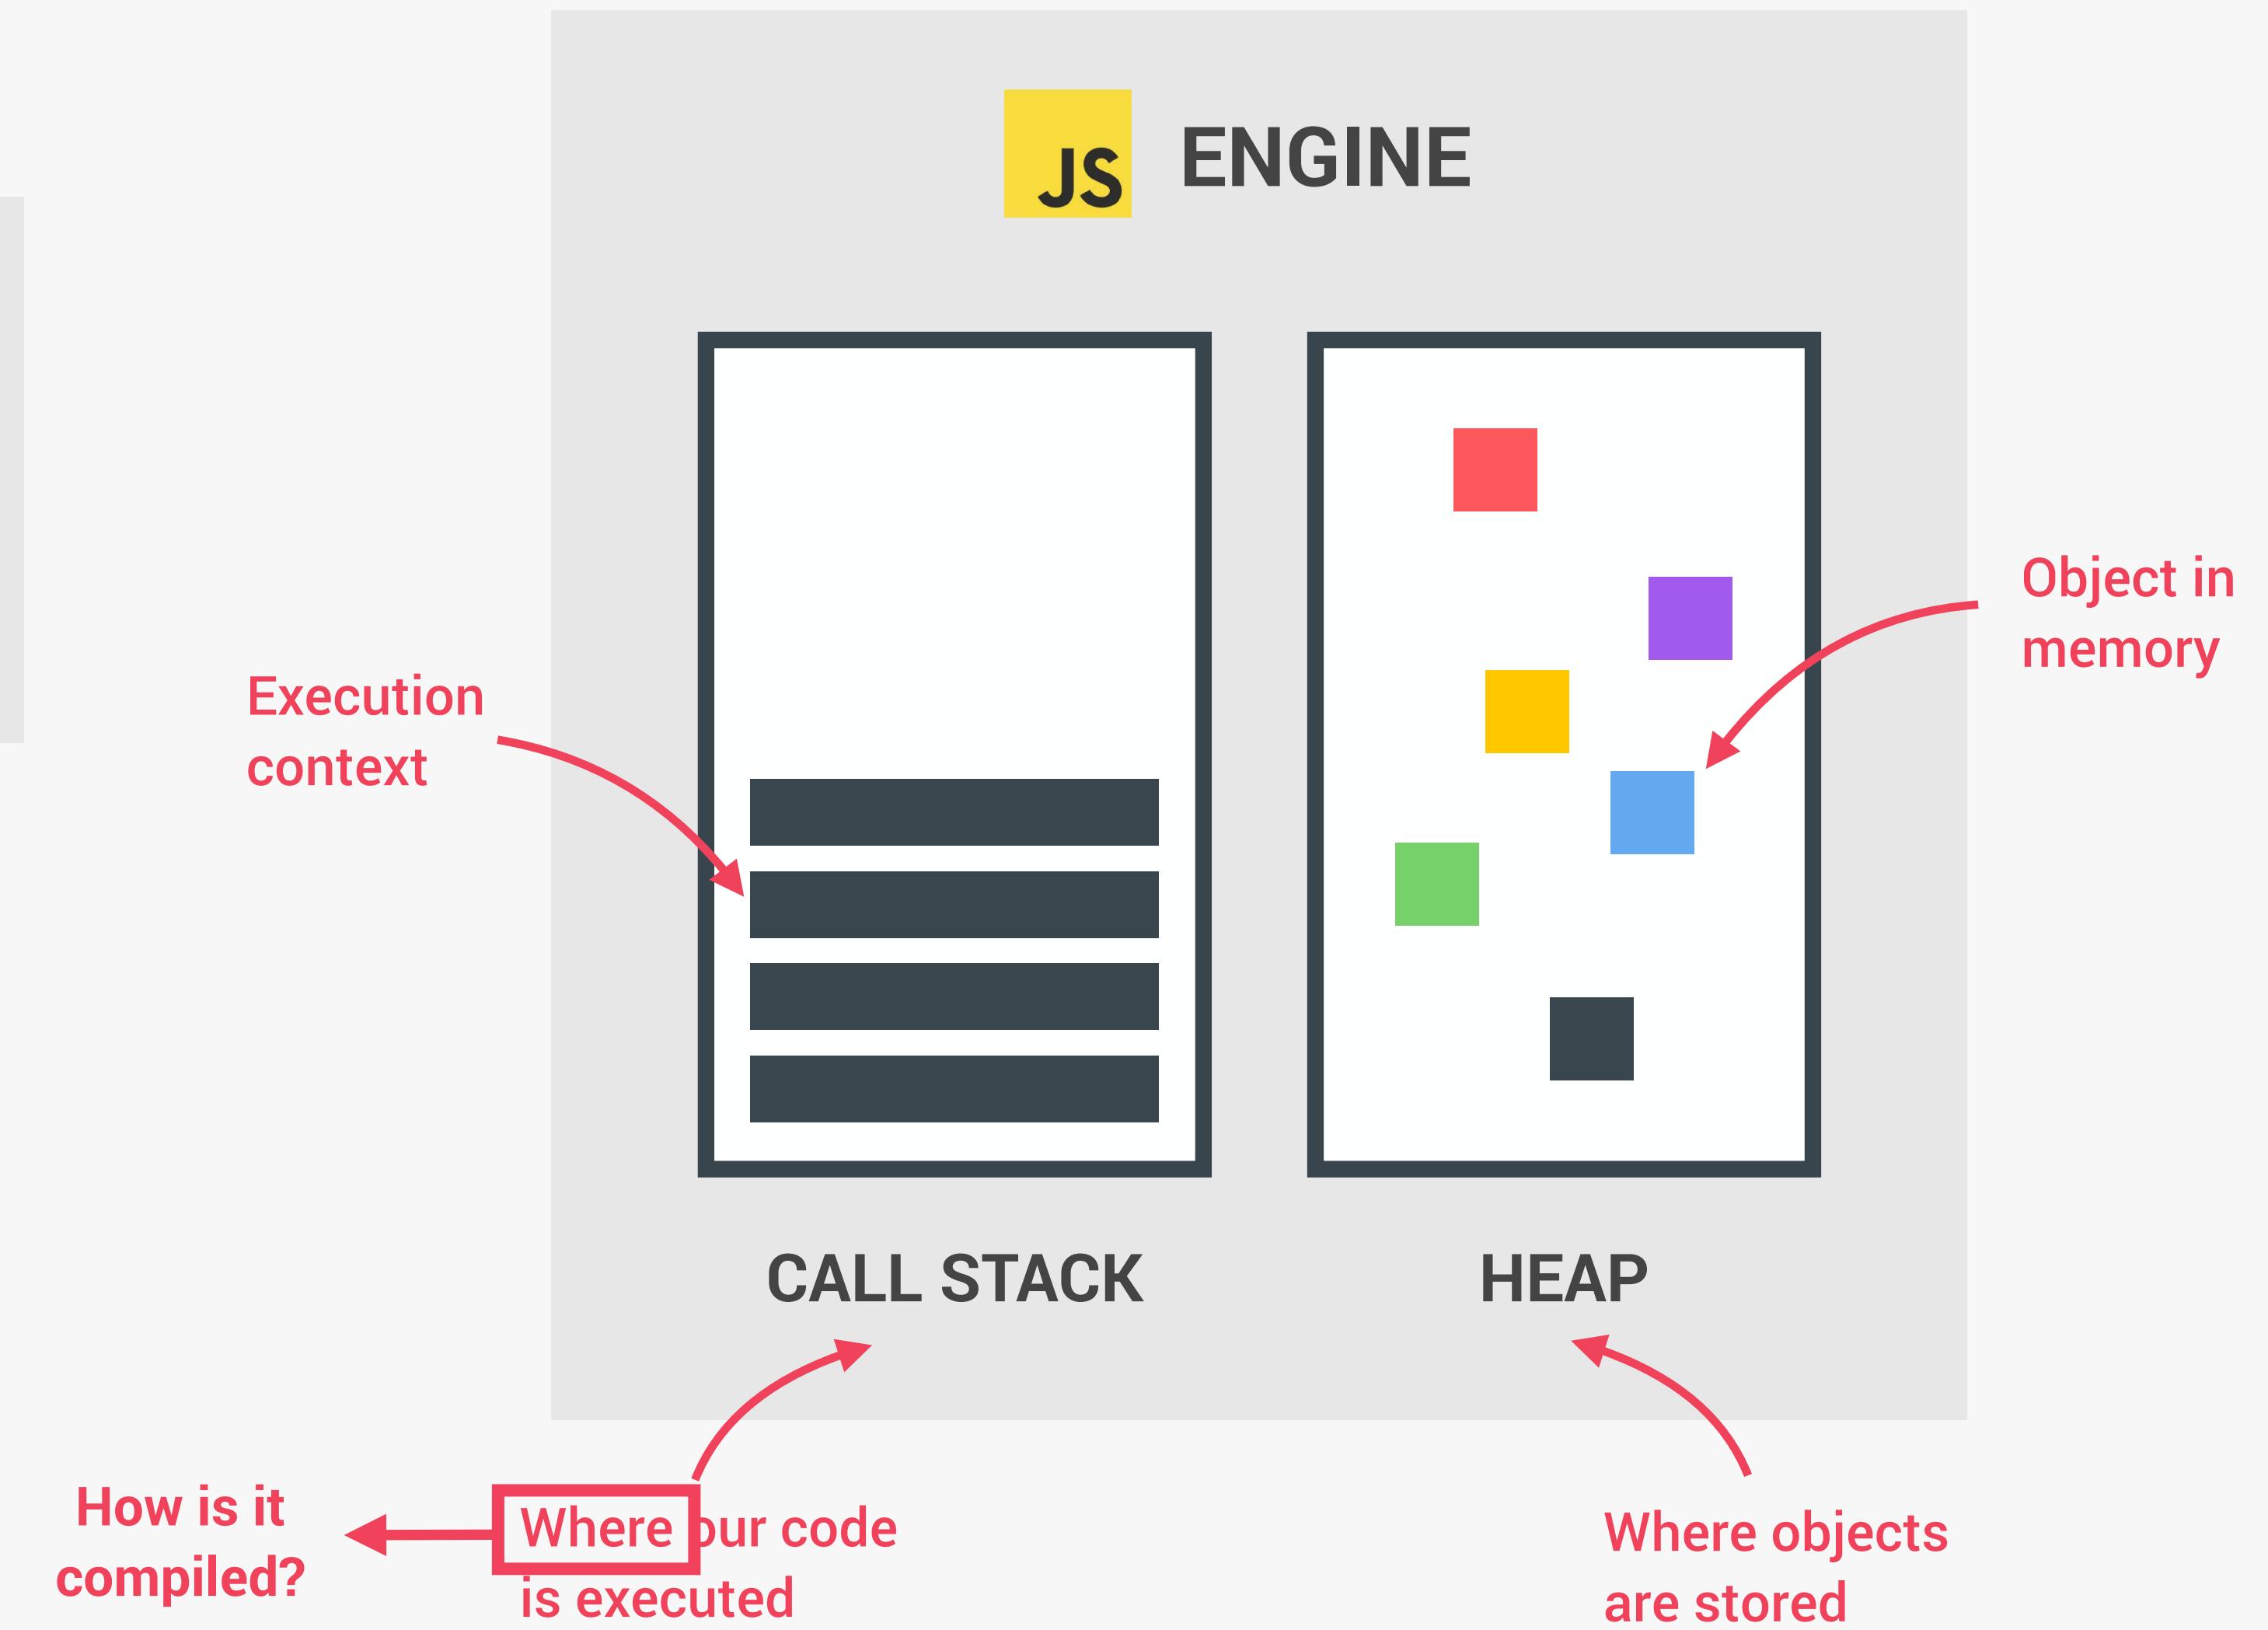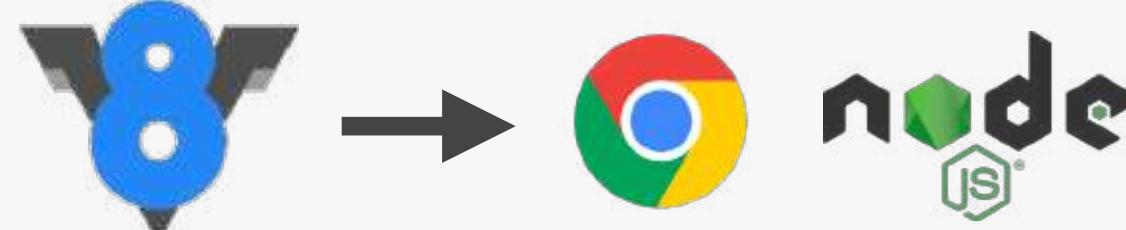


COMPUTER SCIENCE SIDENOTE: COMPIRATION VS. INTERPRETATION




- 👉 **Compilation:** Entire code is converted into machine code at once, and written to a binary file that can be executed by a computer.

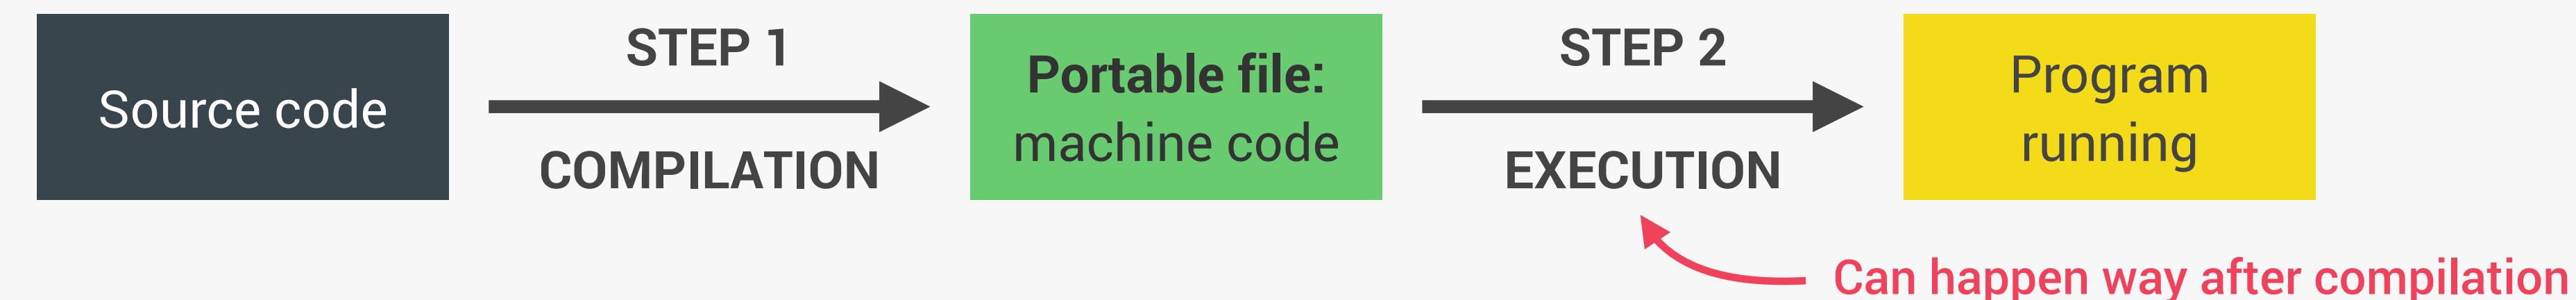


- 👉 **Interpretation:** Interpreter runs through the source code and executes it line by line.

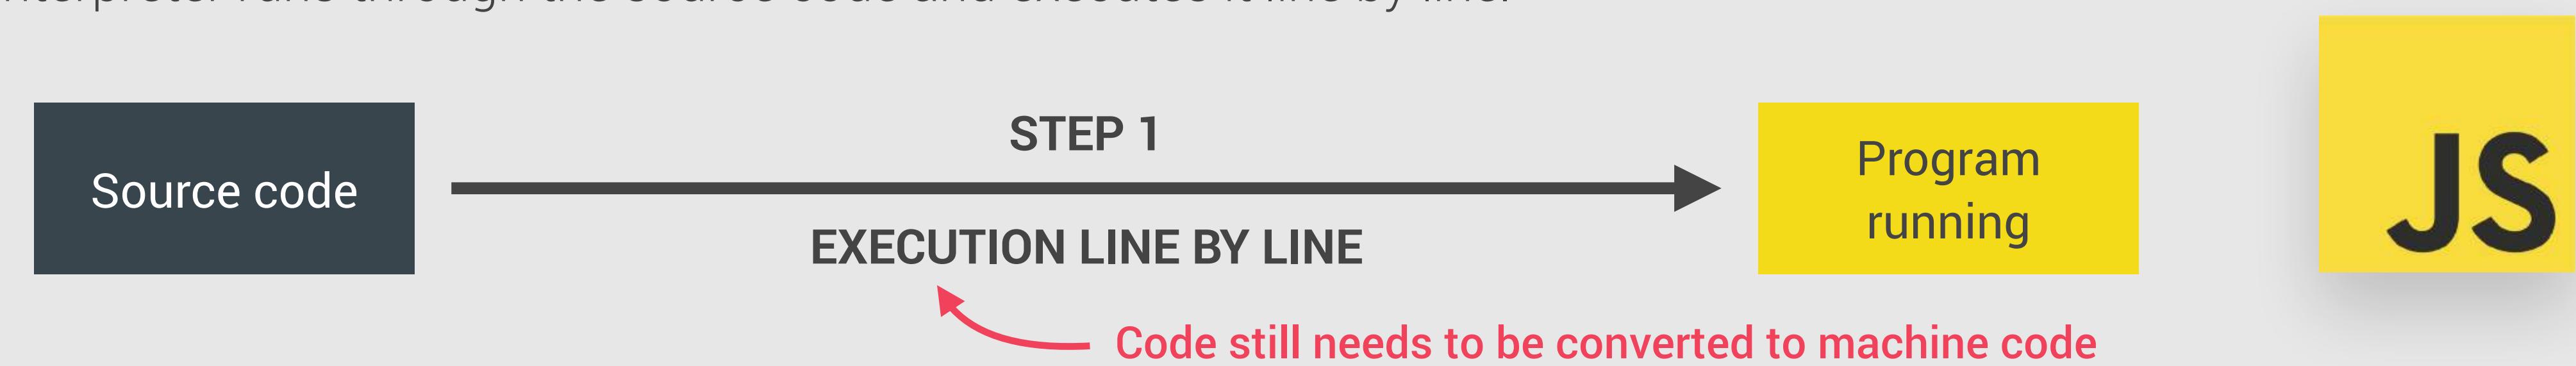


- 👉 **Just-in-time (JIT) compilation:** Entire code is converted into machine code at once, then executed immediately.

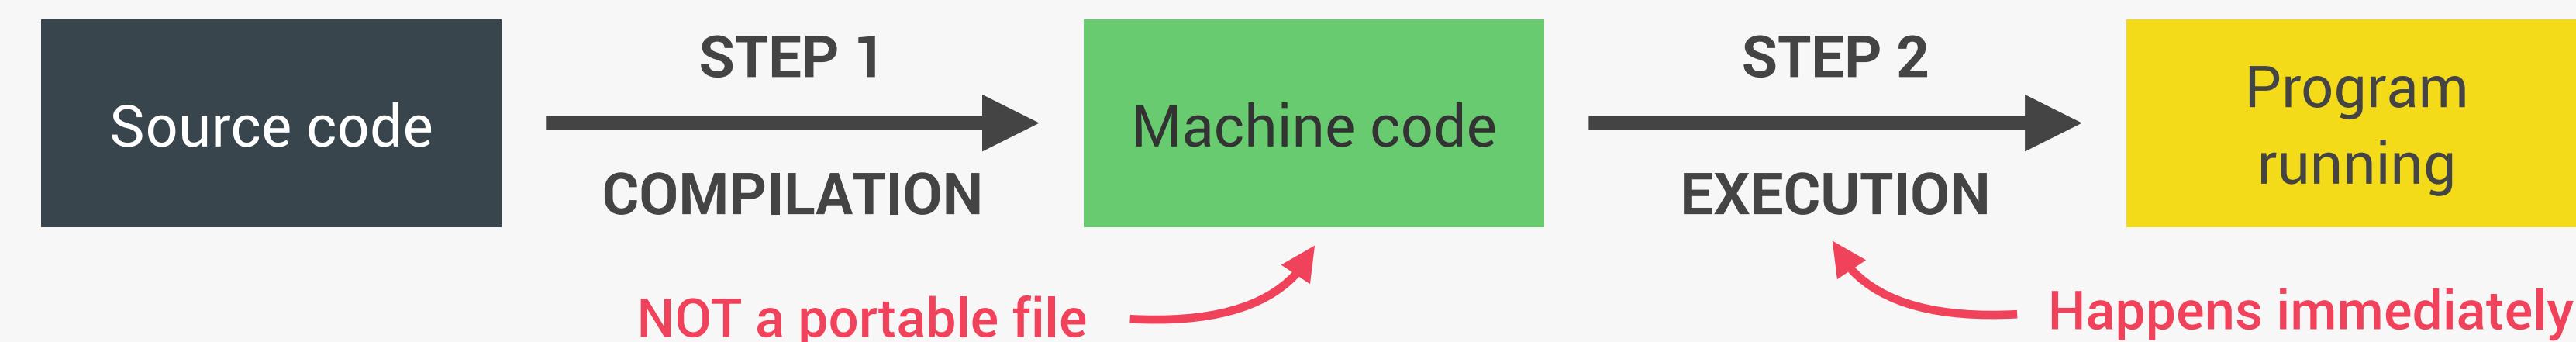


MODERN JUST-IN-TIME COMPIRATION OF JAVASCRIPT

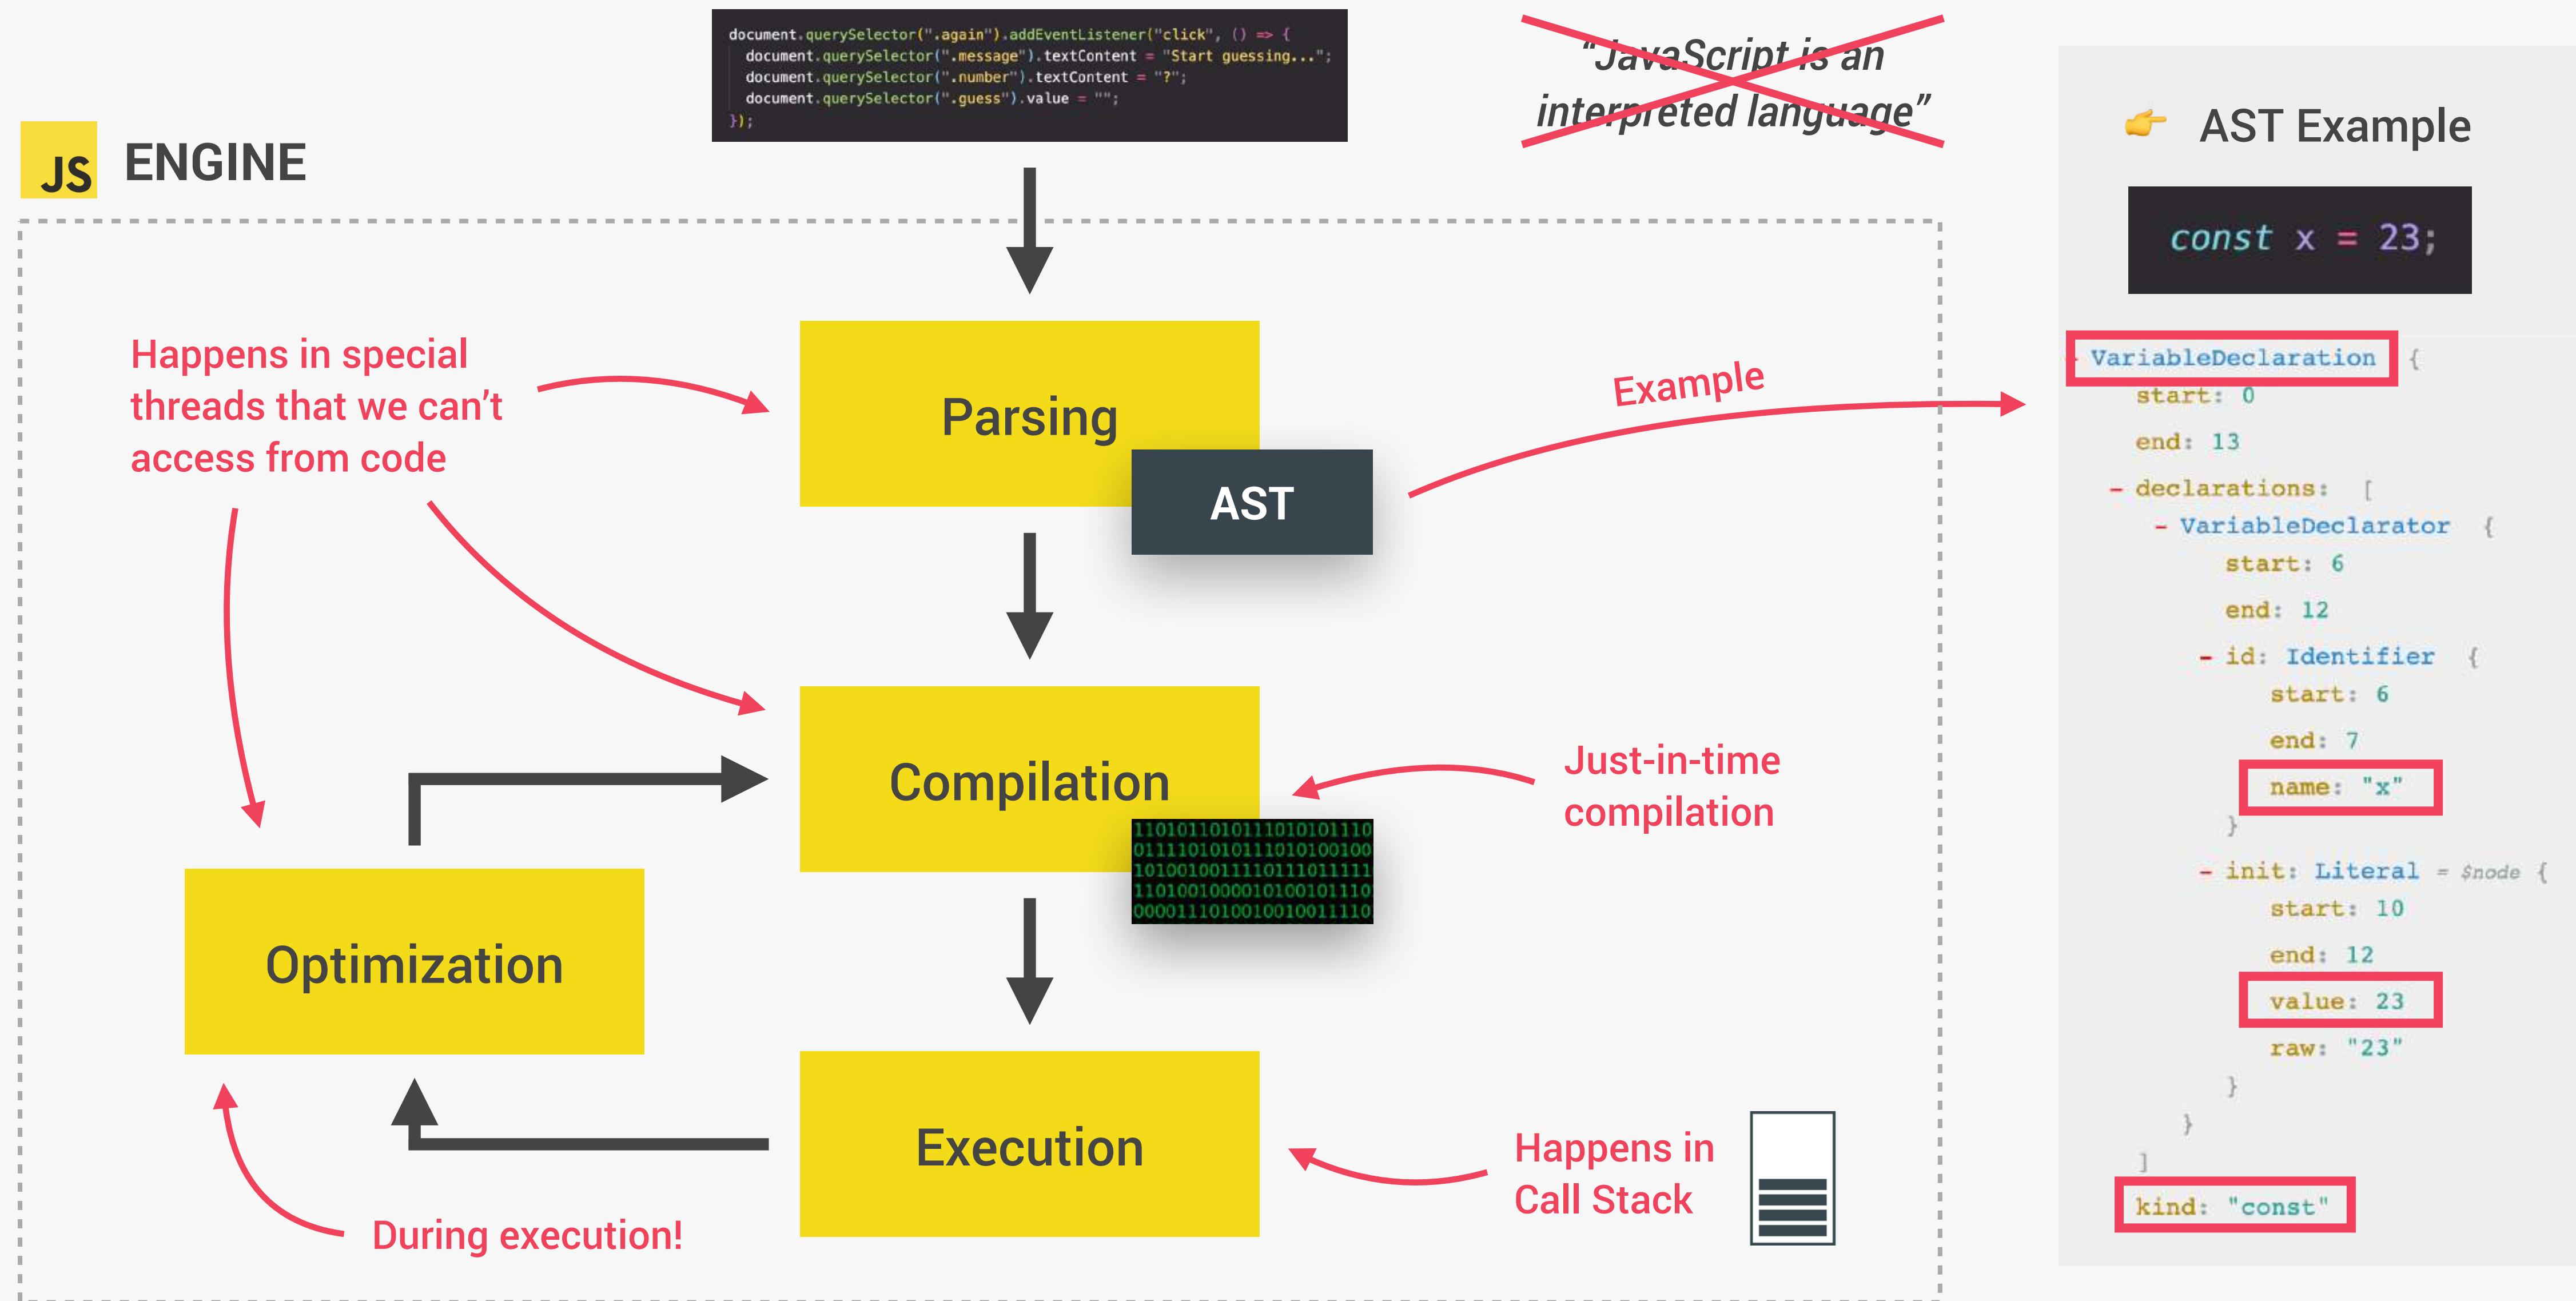

THE BIGGER PICTURE: JAVASCRIPT RUNTIME

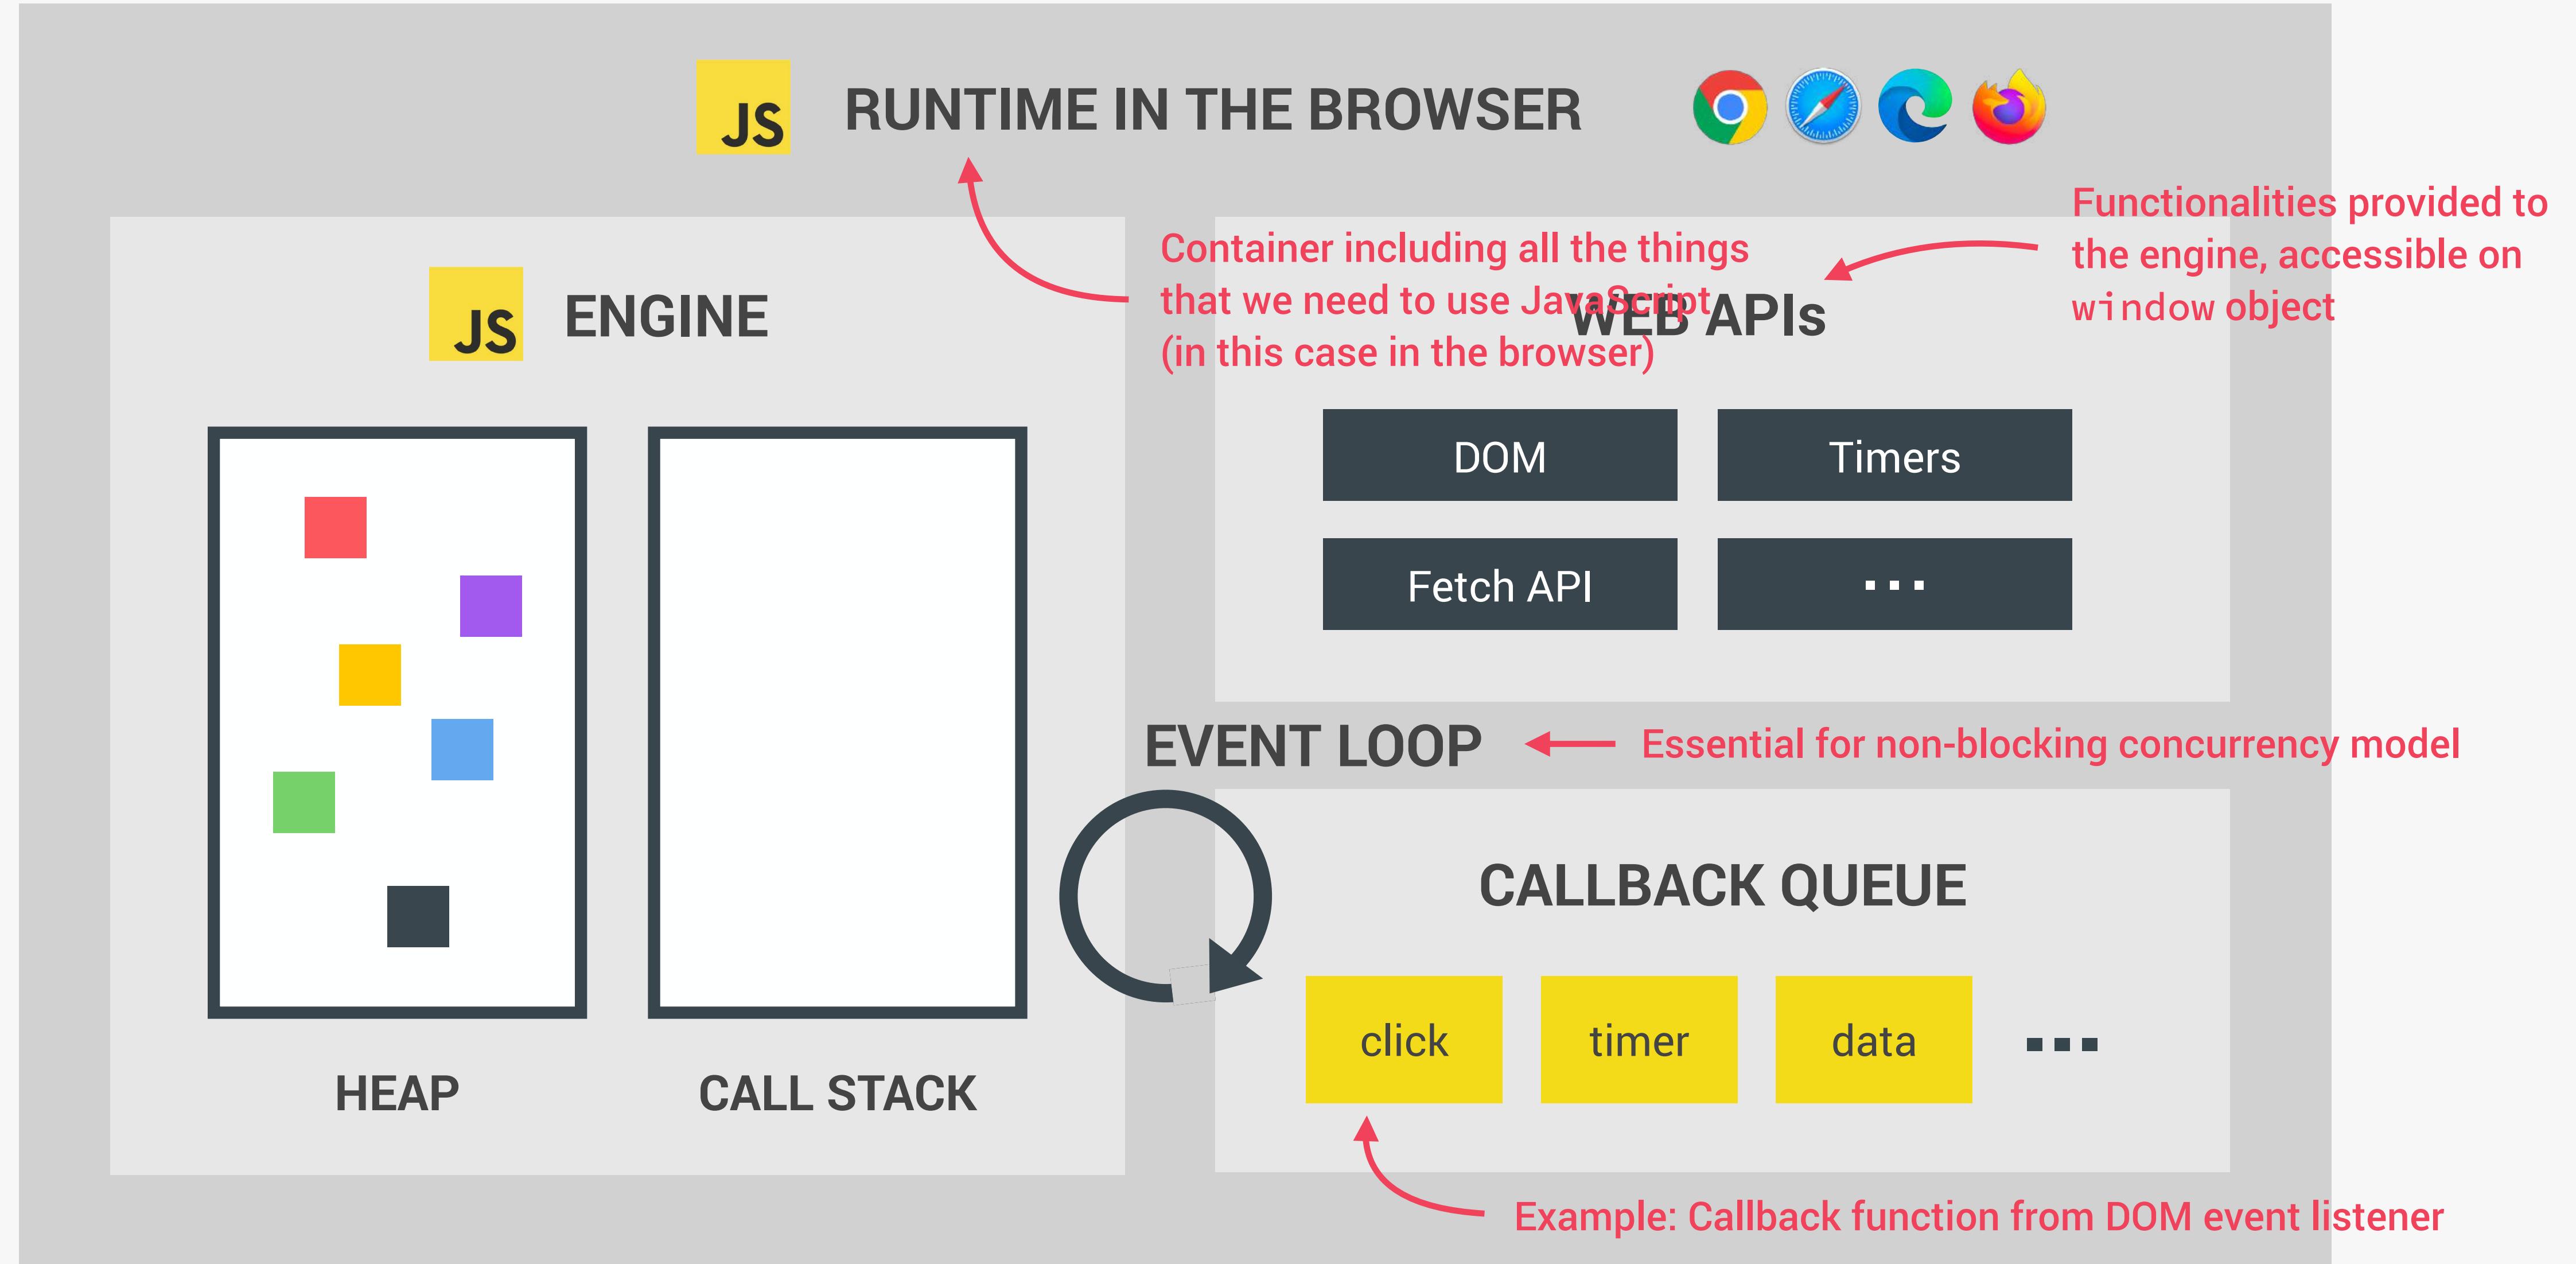

THE BIGGER PICTURE: JAVASCRIPT RUNTIME

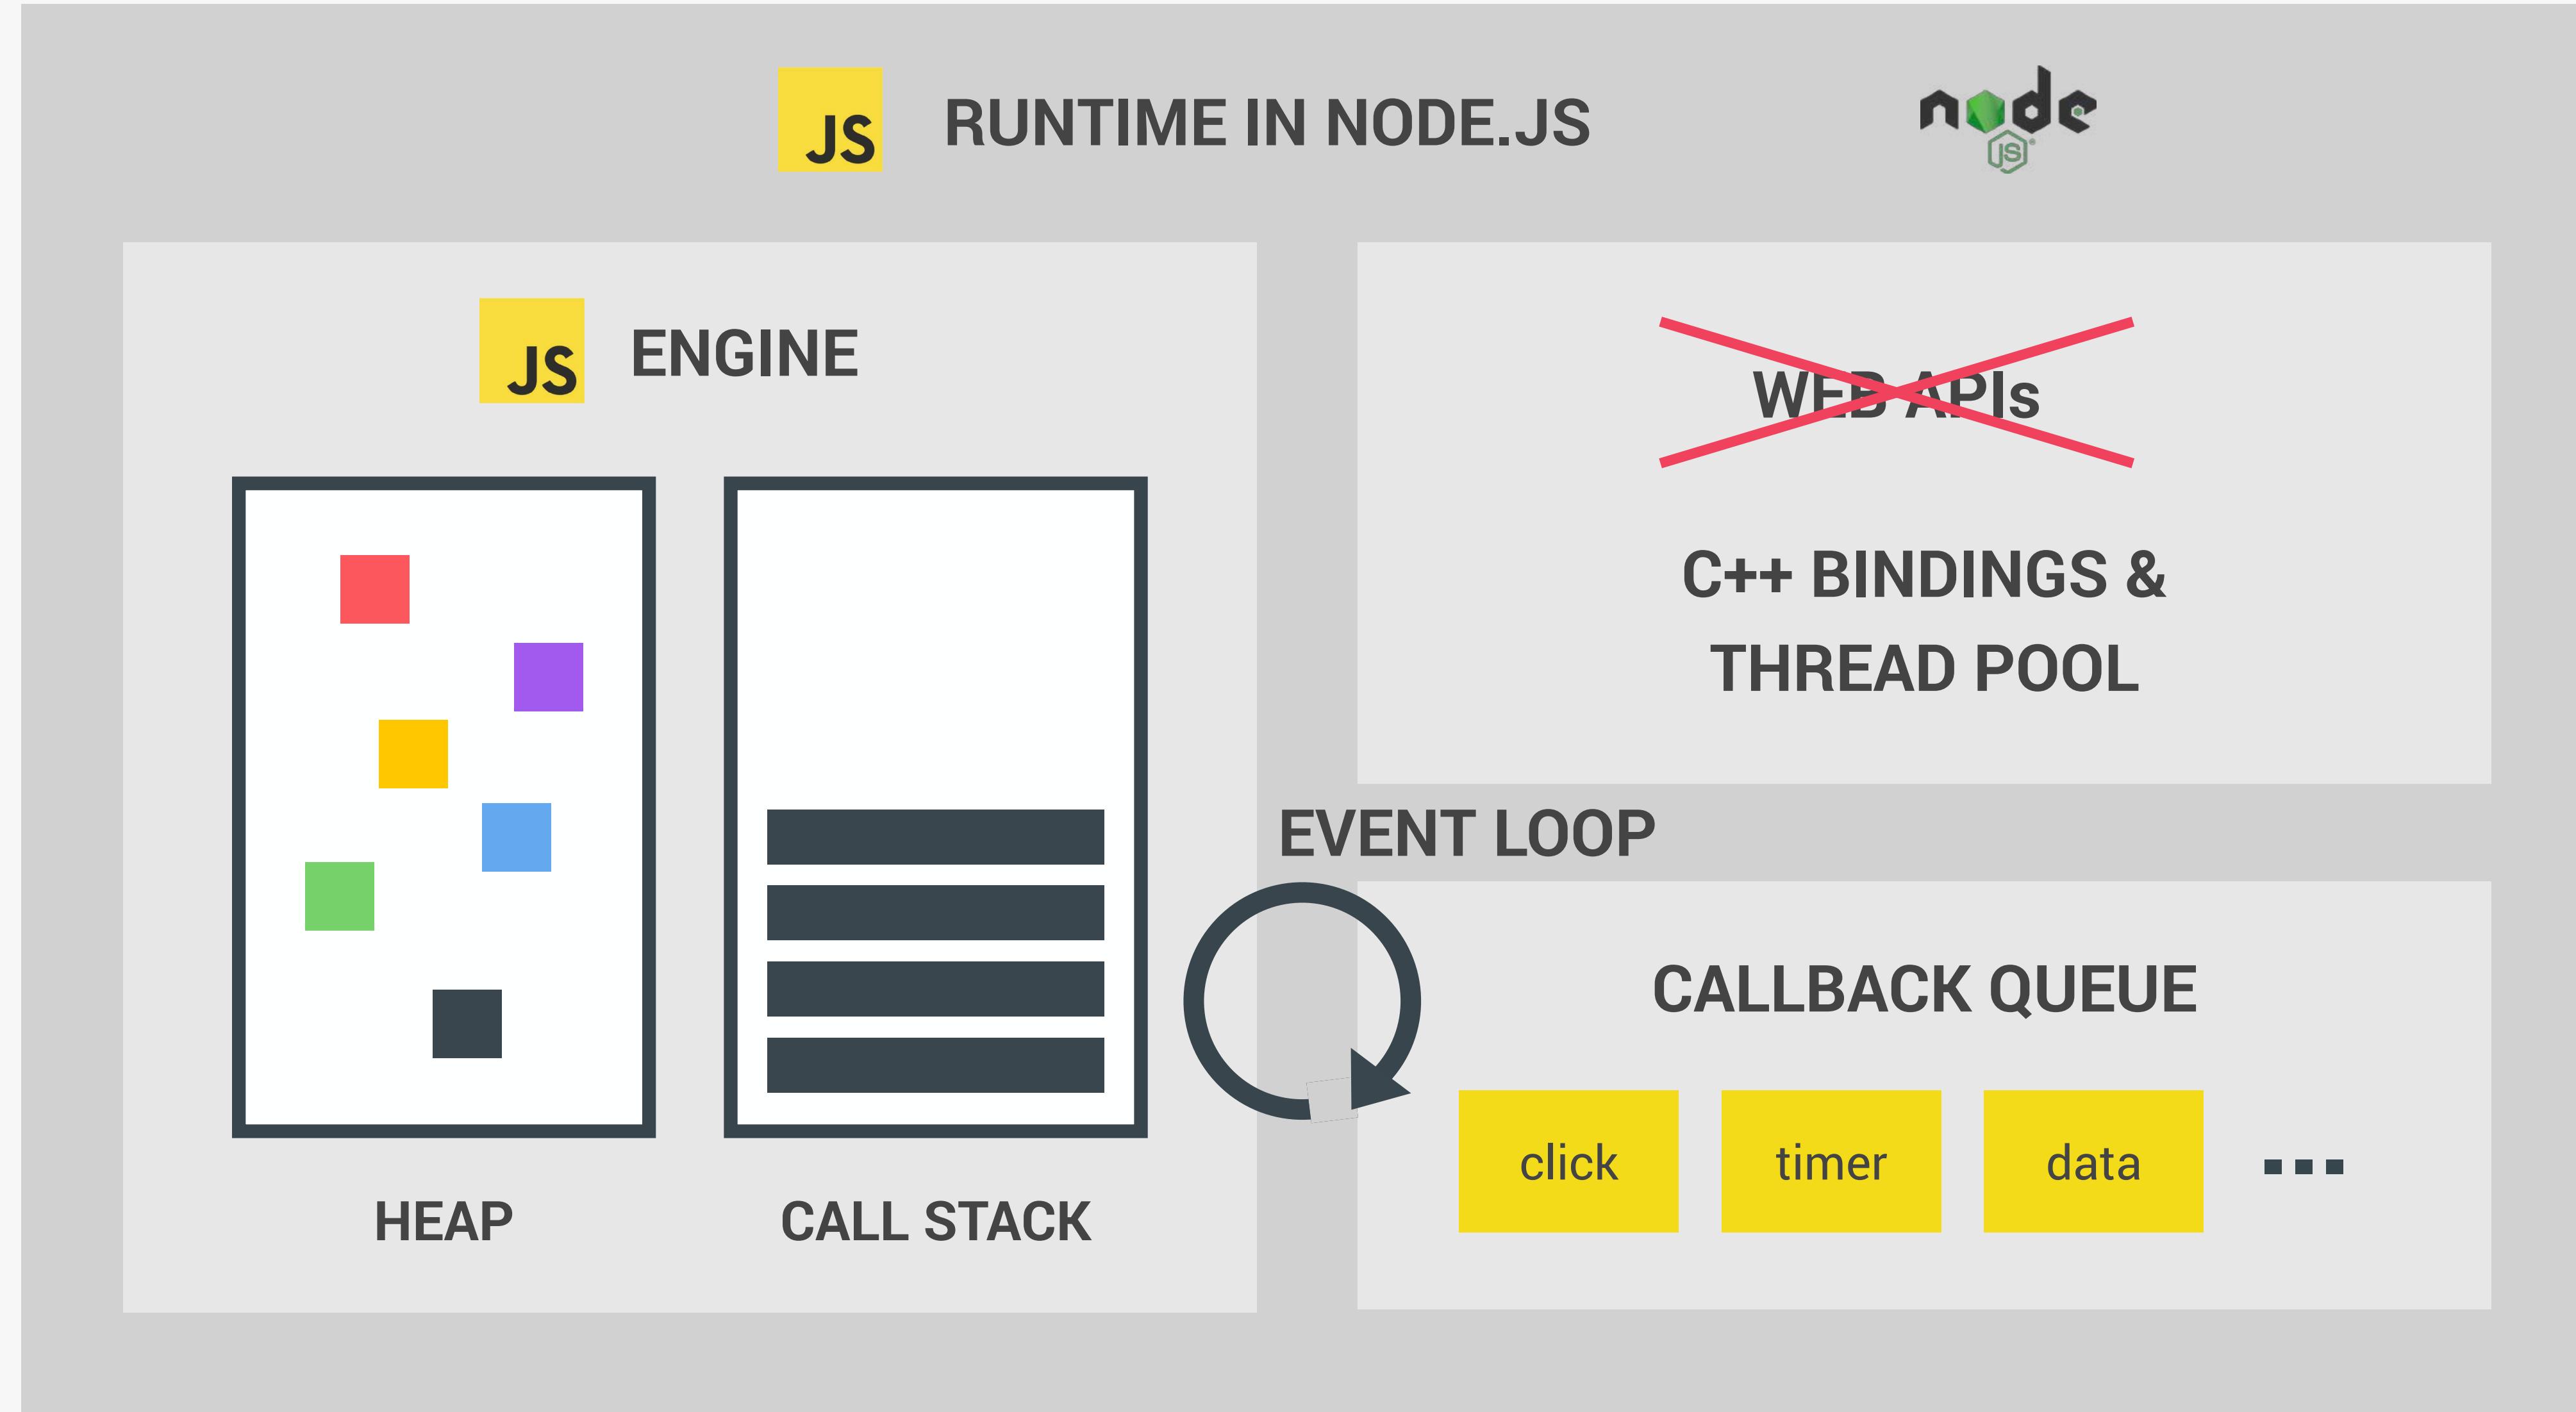



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

EXECUTION CONTEXTS AND THE
CALL STACK


JS

WHAT IS AN EXECUTION CONTEXT?

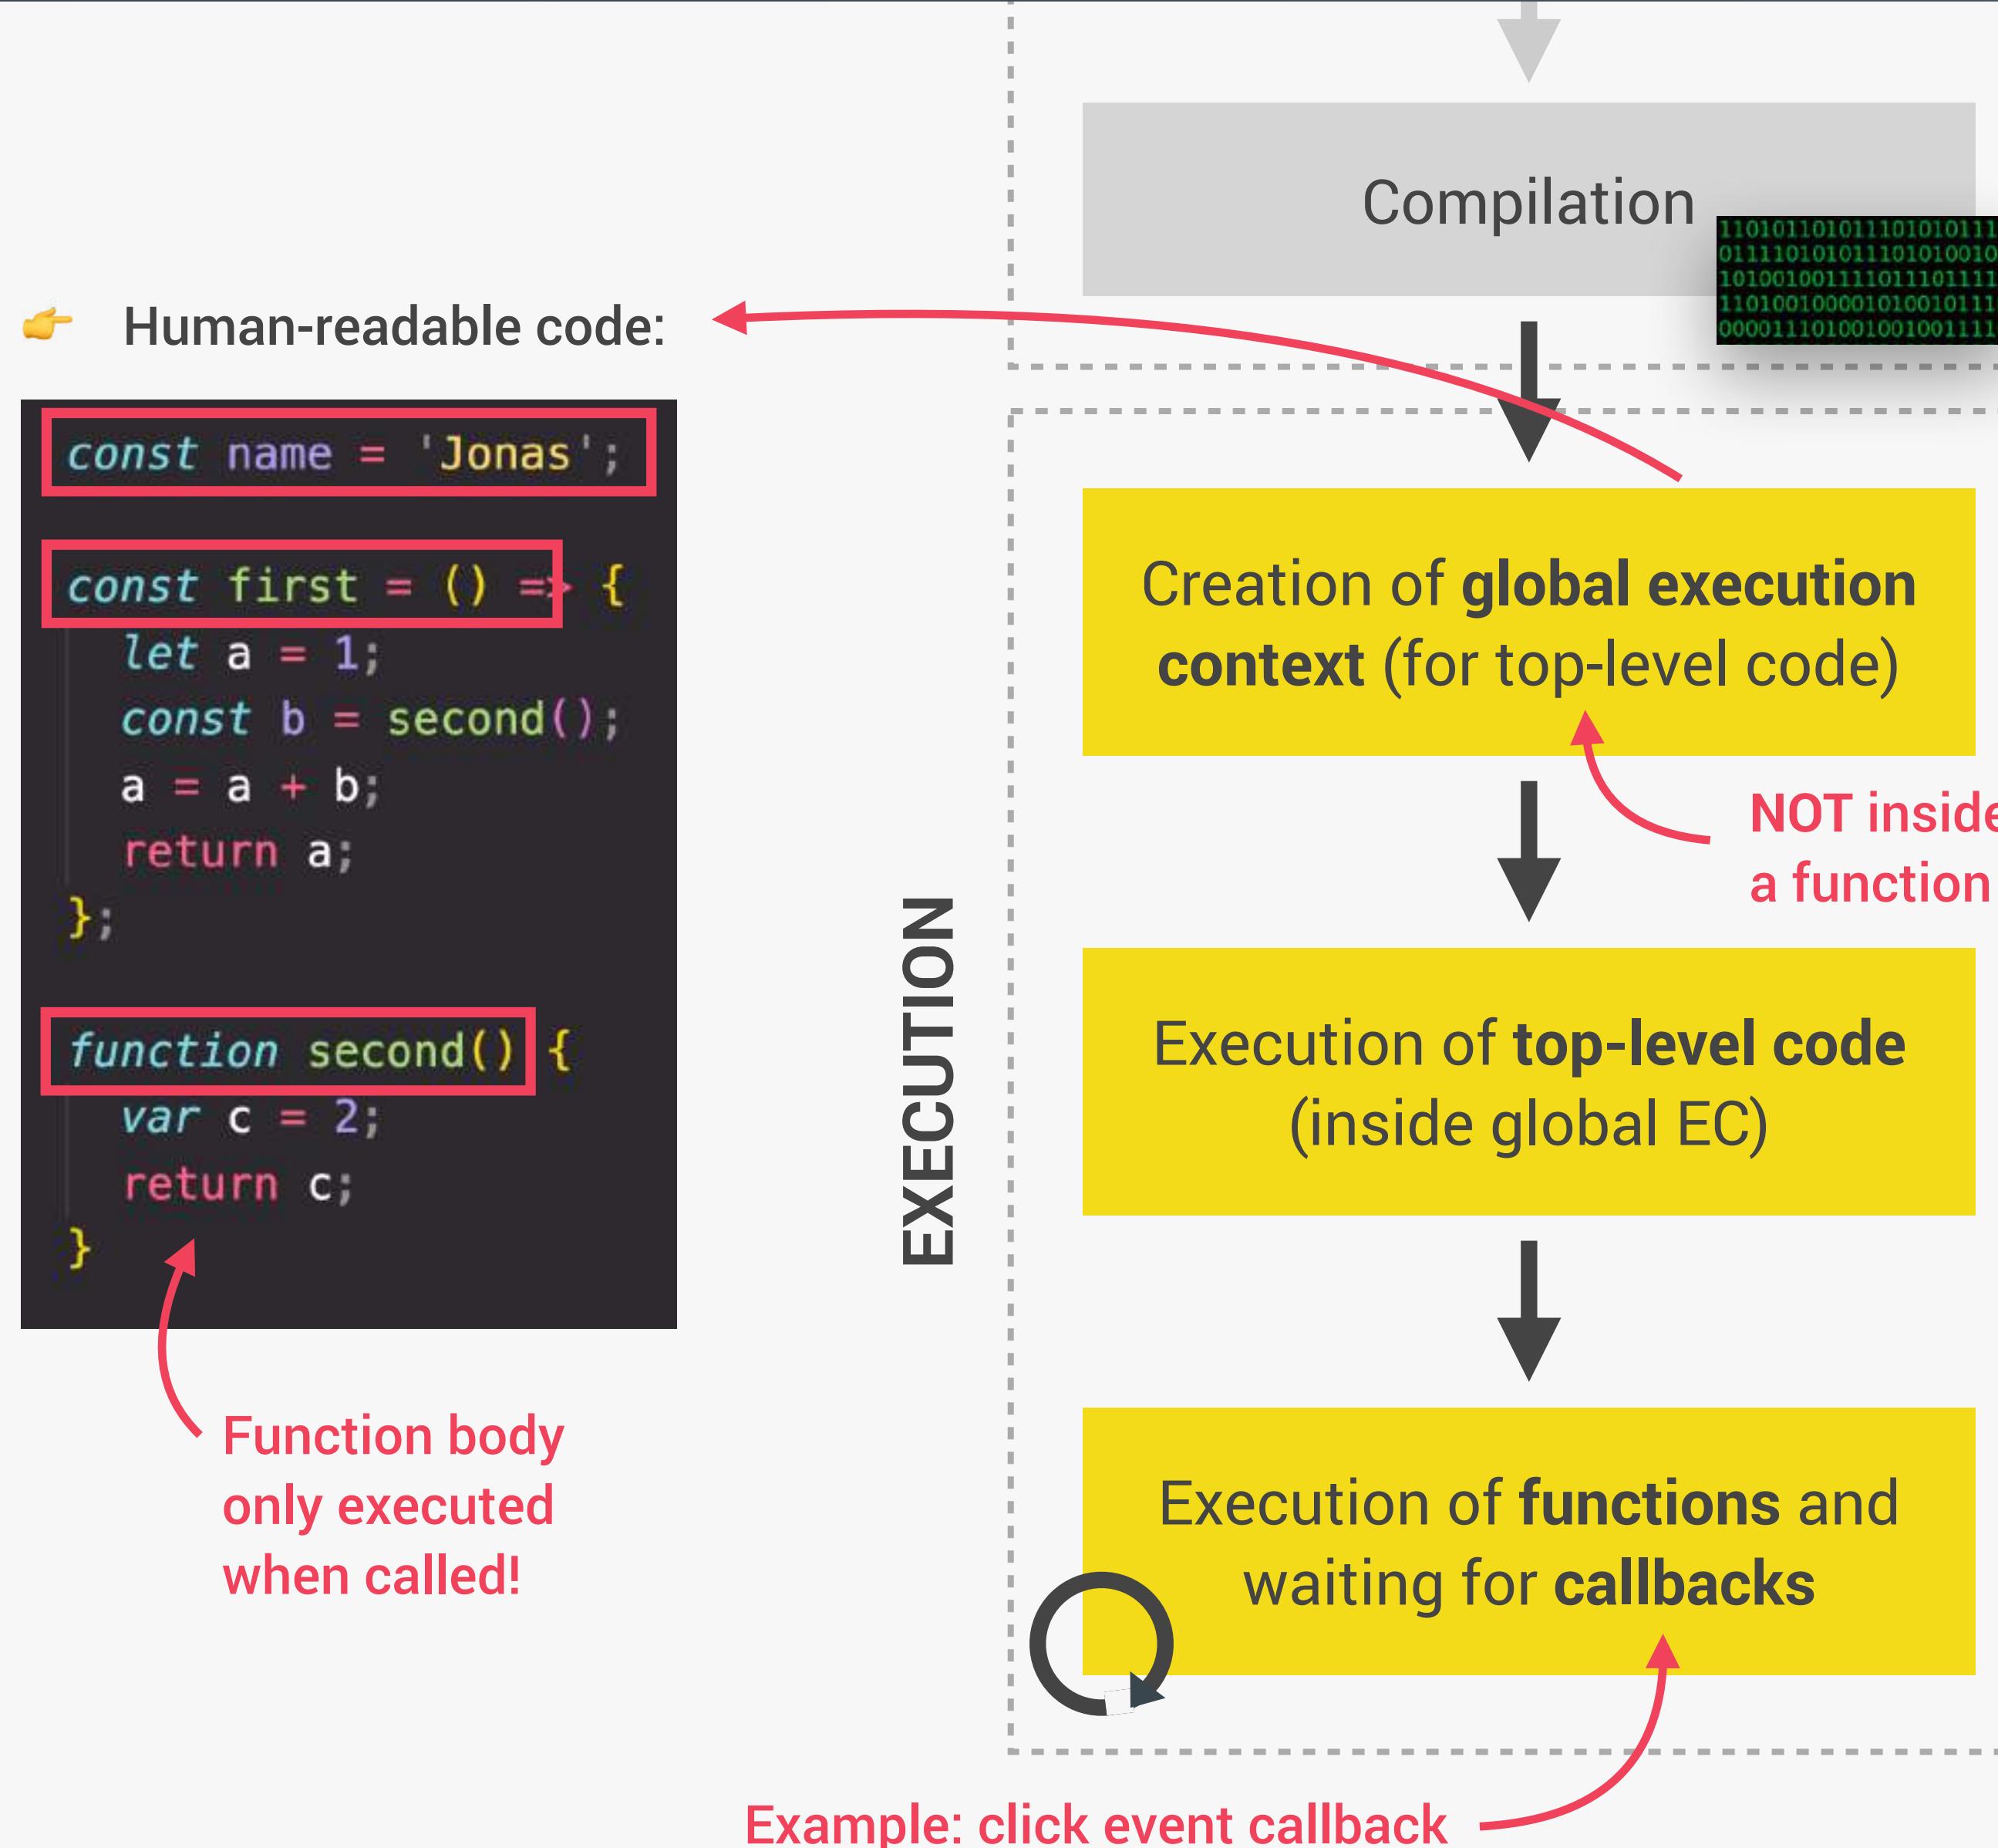

EXECUTION CONTEXT

Environment in which a piece of JavaScript is executed. Stores all the necessary information for some code to be executed.

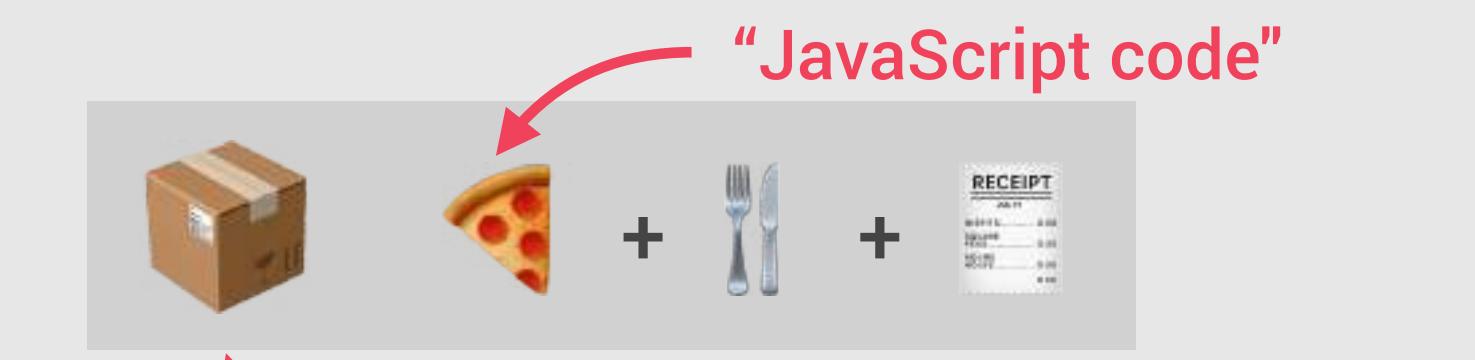

- 👉 **Exactly one global execution context (EC):** Default context, created for code that is not inside any function (top-level).
 - 👉 **One execution context per function:** For each function call, a new execution context is created.
- All together make the call stack**

EXECUTION CONTEXT IN DETAIL

WHAT'S INSIDE EXECUTION CONTEXT?

1 Variable Environment

- 👉 let, const and var declarations
- 👉 Functions
- 👉 ~~arguments~~ object

2 Scope chain

3 ~~this~~ keyword

NOT in arrow functions!

Generated during “creation phase”, right before execution

```
const name = 'Jonas';

const first = () => {
  let a = 1;
  const b = second(7, 9);
  a = a + b;
  return a;
};

function second(x, y) {
  var c = 2;
  return c;
}

const x = first();
```

Global

```
name = 'Jonas'
first = <function>
second = <function>
x = <unknown>
```

Literally the function code

first()

```
a = 1
b = <unknown>
```

Need to run first() first

second()

```
c = 2
arguments = [7, 9]
```

Need to run second() first

Array of passed arguments. Available in all “regular” functions (not arrow)

(Technically, values only become known during execution)

THE CALL STACK


👉 Compiled code starts execution

```
const name = 'Jonas';

const first = () => {
  let a = 1;
  const b = second(7, 9);
  a = a + b;
  return a;
};

function second(x, y) {
  var c = 2;
  return c;
}

const x = first();
```

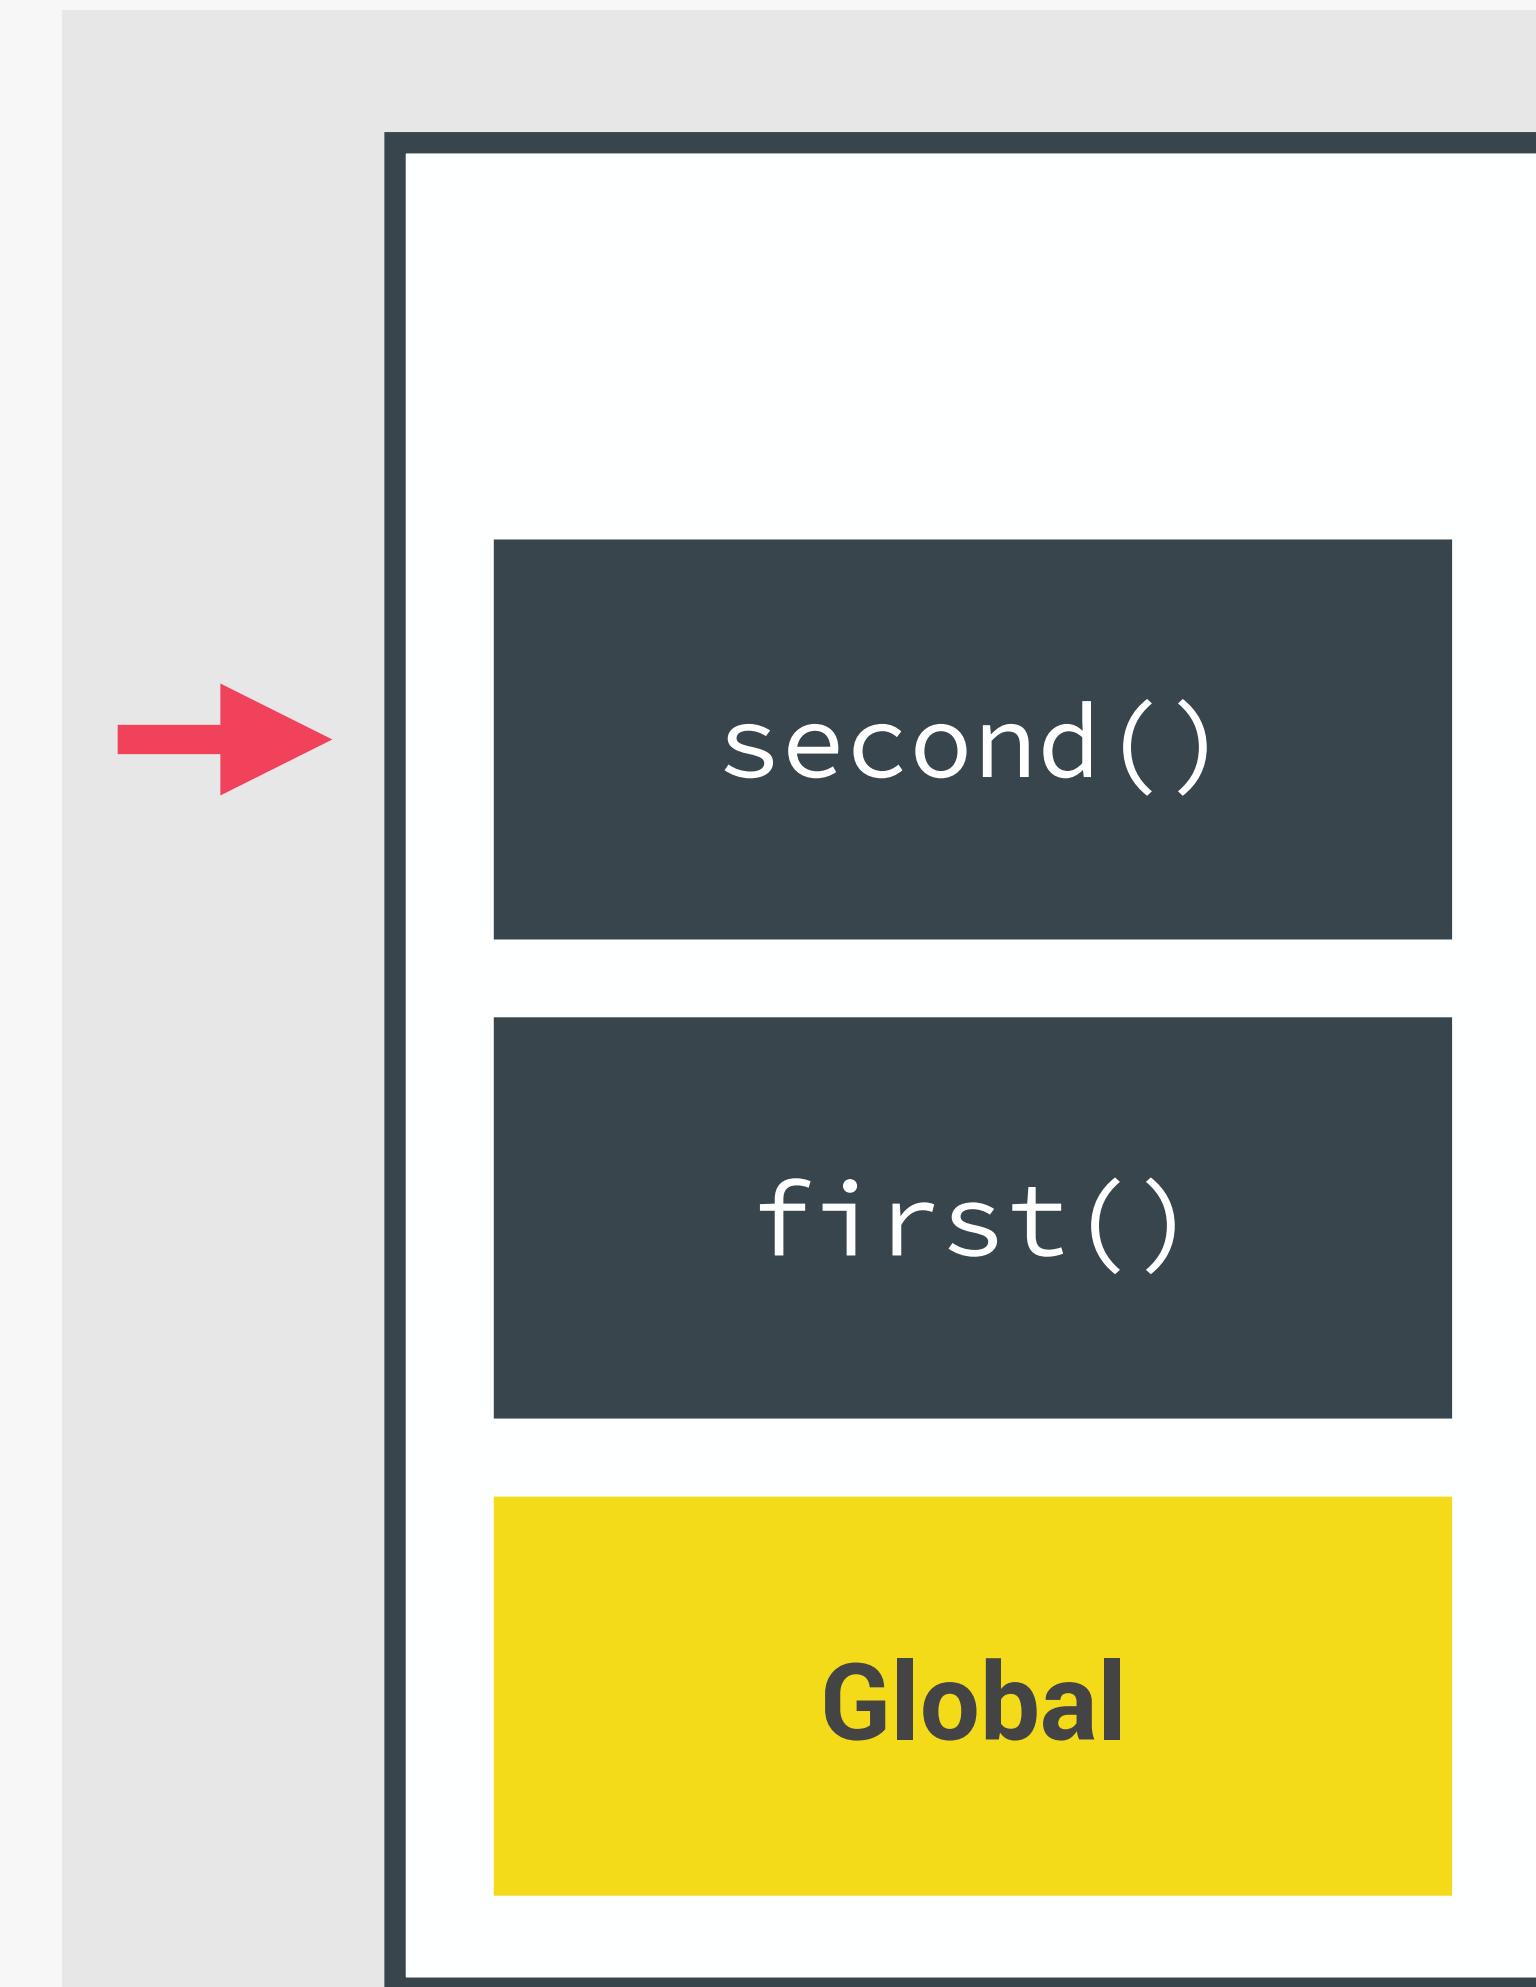

JS
ENGINE

"Place" where execution contexts get stacked on top of each other, to keep track of where we are in the execution

CALL STACK





JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

SCOPE AND THE SCOPE CHAIN

JS

SCOPING AND SCOPE IN JAVASCRIPT: CONCEPTS

SCOPE CONCEPTS

EXECUTION CONTEXT

- 👉 Variable environment
- 👉 Scope chain
- 👉 this keyword

- 👉 **Scoping:** How our program's variables are **organized** and **accessed**. “*Where do variables live?*” or “*Where can we access a certain variable, and where not?*”;
- 👉 **Lexical scoping:** Scoping is controlled by **placement** of functions and blocks in the code;
- 👉 **Scope:** Space or environment in which a certain variable is **declared** (*variable environment in case of functions*). There is **global** scope, **function** scope, and **block** scope;
- 👉 **Scope of a variable:** Region of our code where a certain variable can be **accessed**.

THE 3 TYPES OF SCOPE

GLOBAL SCOPE

```
const me = 'Jonas';
const job = 'teacher';
const year = 1989;
```

FUNCTION SCOPE

```
function calcAge(birthYear) {
  const now = 2037;
  const age = now - birthYear;
  return age;
}

console.log(now); // ReferenceError
```

BLOCK SCOPE (ES6)

```
if (year >= 1981 && year <= 1996) {
  const millennial = true;
  const food = 'Avocado toast';
} ← Example: if block, for loop block, etc.

console.log(millennial); // ReferenceError
```

- 👉 Outside of **any** function or block
- 👉 Variables declared in global scope are accessible **everywhere**

- 👉 Variables are accessible only **inside function**, NOT outside
- 👉 Also called local scope

- 👉 Variables are accessible only **inside block** (block scoped)
 - ⚠ **HOWEVER**, this only applies to **let** and **const** variables!
- 👉 Functions are **also block scoped** (only in strict mode)

THE SCOPE CHAIN

```
const myName = 'Jonas';


function first() {
    const age = 30;
    let and const are block-scoped
    if (age >= 30) { // true
        const decade = 3;
        var millennial = true;
    }
    var is function-scoped
    function second() {
        const job = 'teacher';
        console.log(`[myName] is a ${age}-old ${job}`);
        // Jonas is a 30-old teacher
    }
    second();
}
first();
```

Variables not in current scope

Global variable

SCOPE CHAIN

Scope has access to variables from all outer scopes

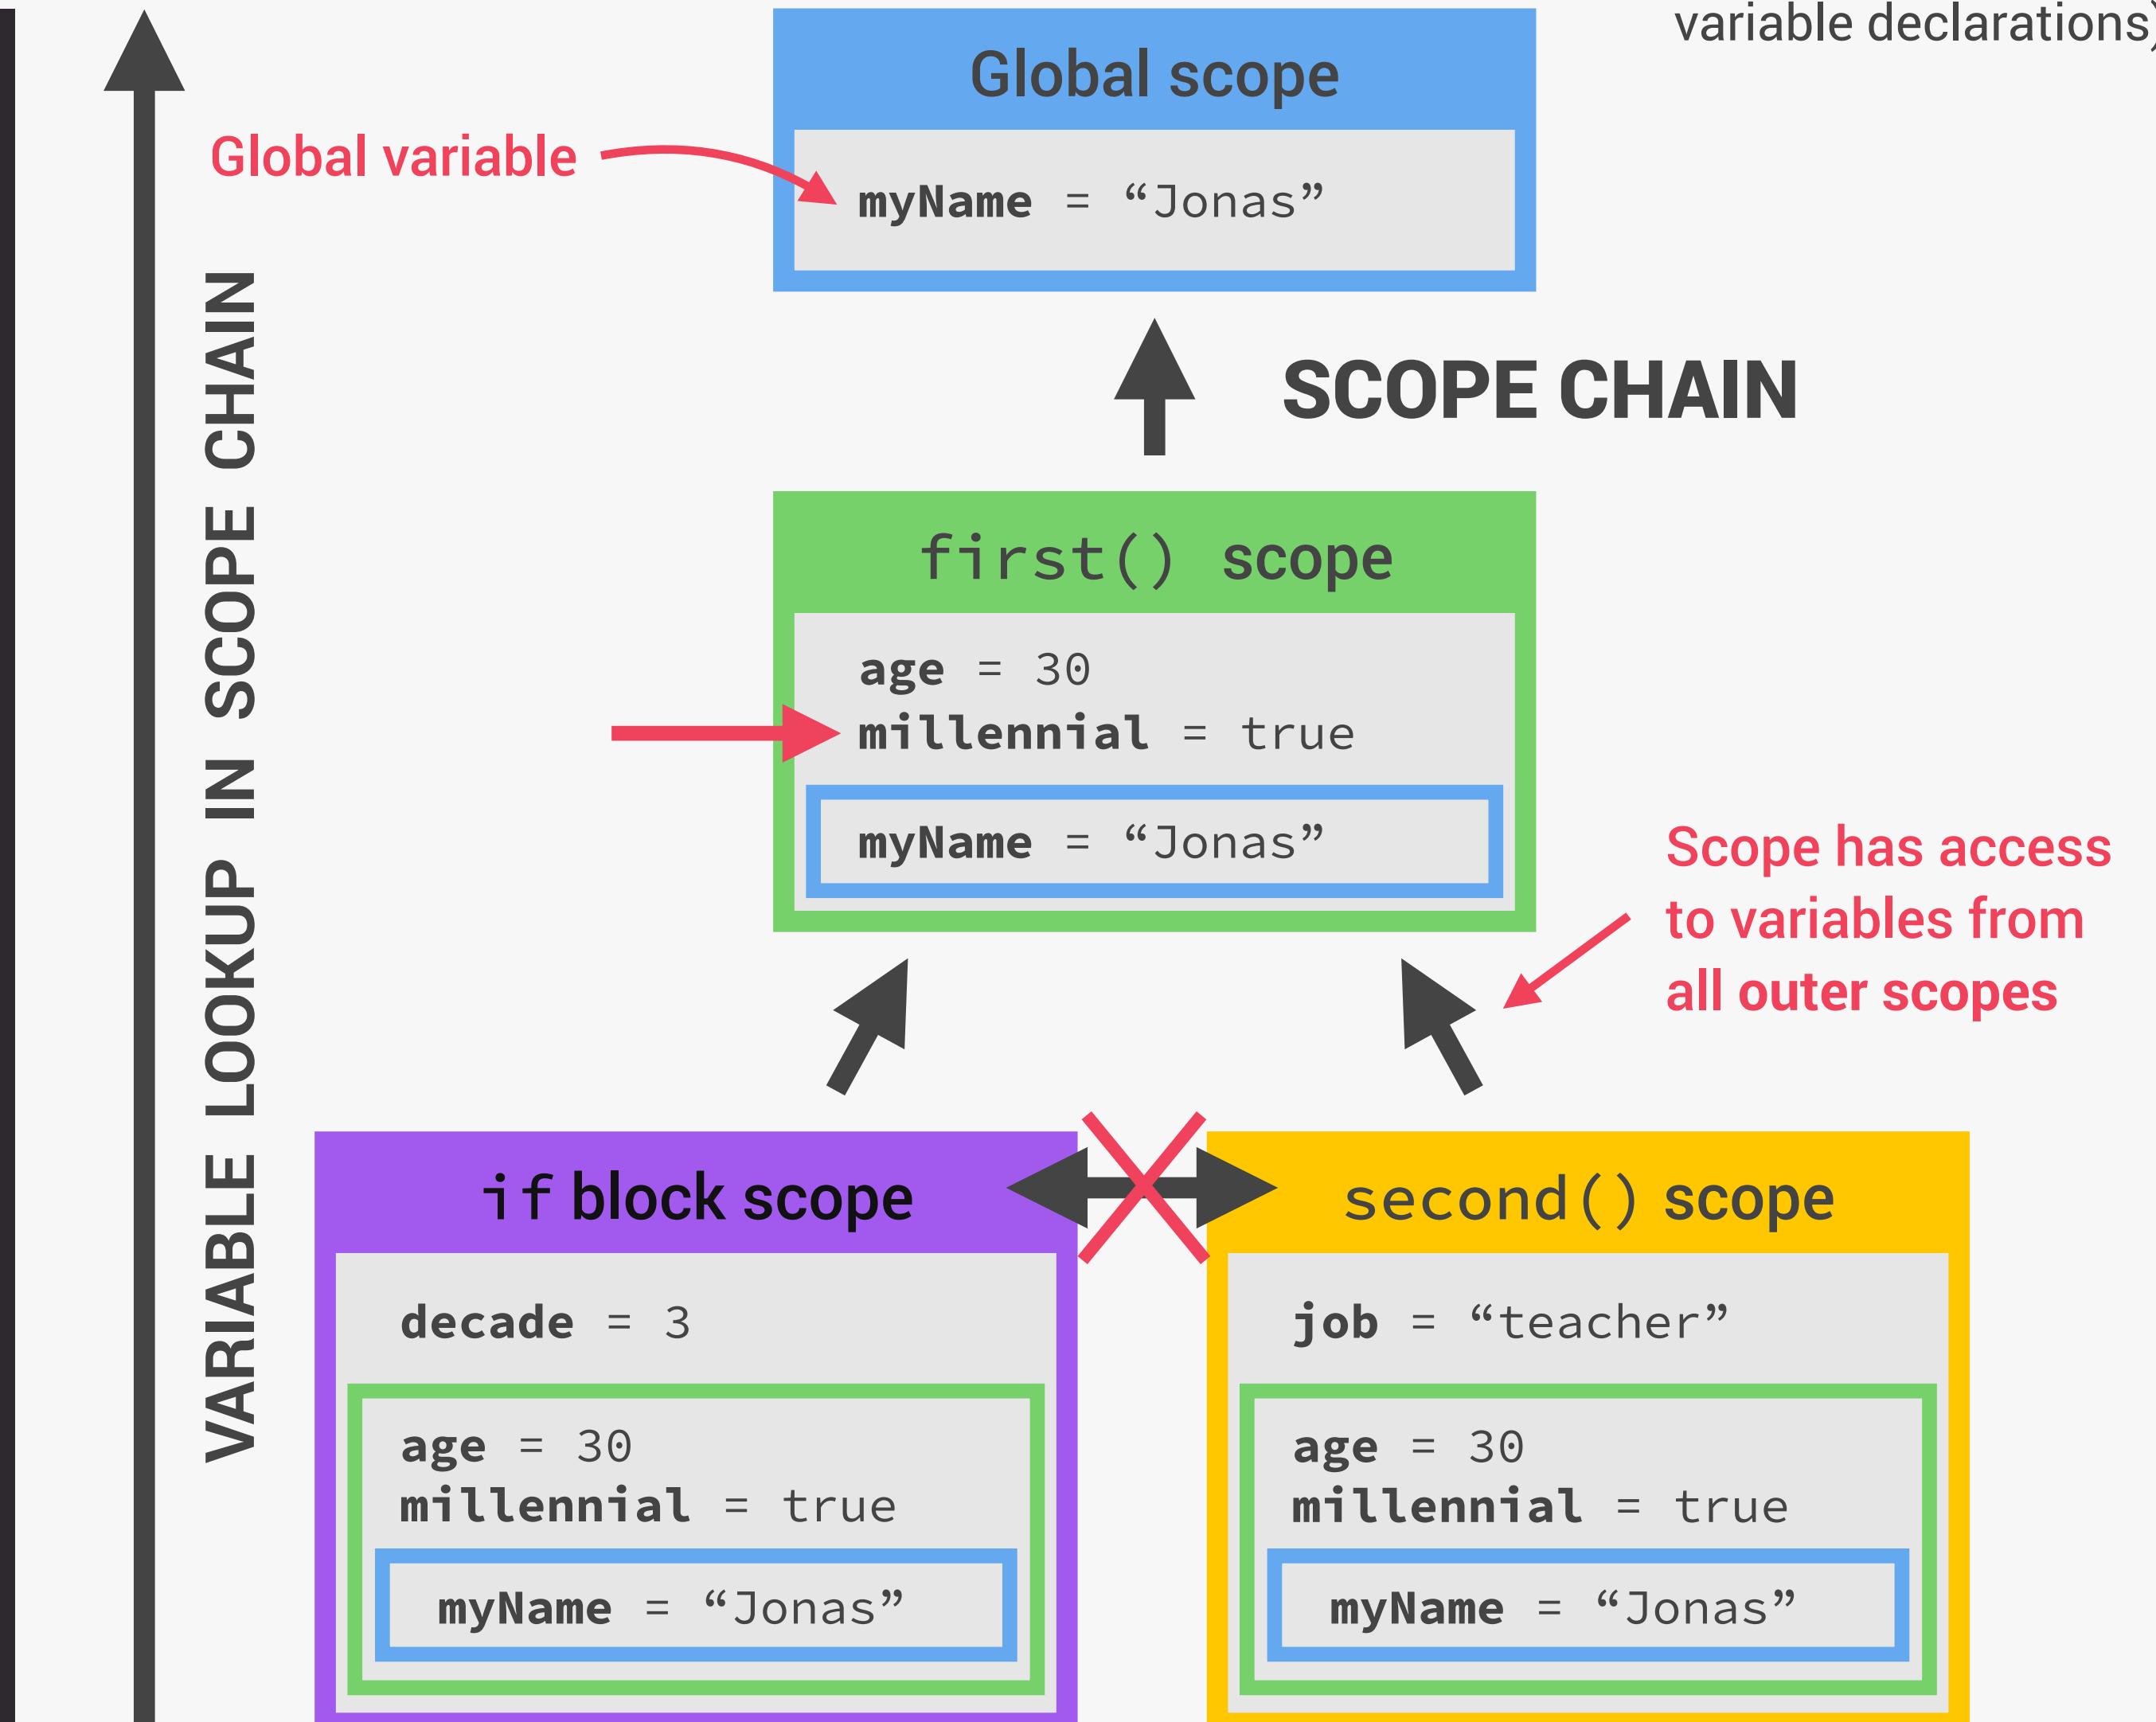

SCOPE CHAIN VS. CALL STACK

```
const a = 'Jonas';
first();


function first() {
  const b = 'Hello!';
  second();

  function second() {
    const c = 'Hi!';
    third();
  }
}


function third() {
  const d = 'Hey!';
  console.log(d + c + b + a);
  // ReferenceError
}
```

c and b can NOT be found in third() scope!

Variable environment (VE)

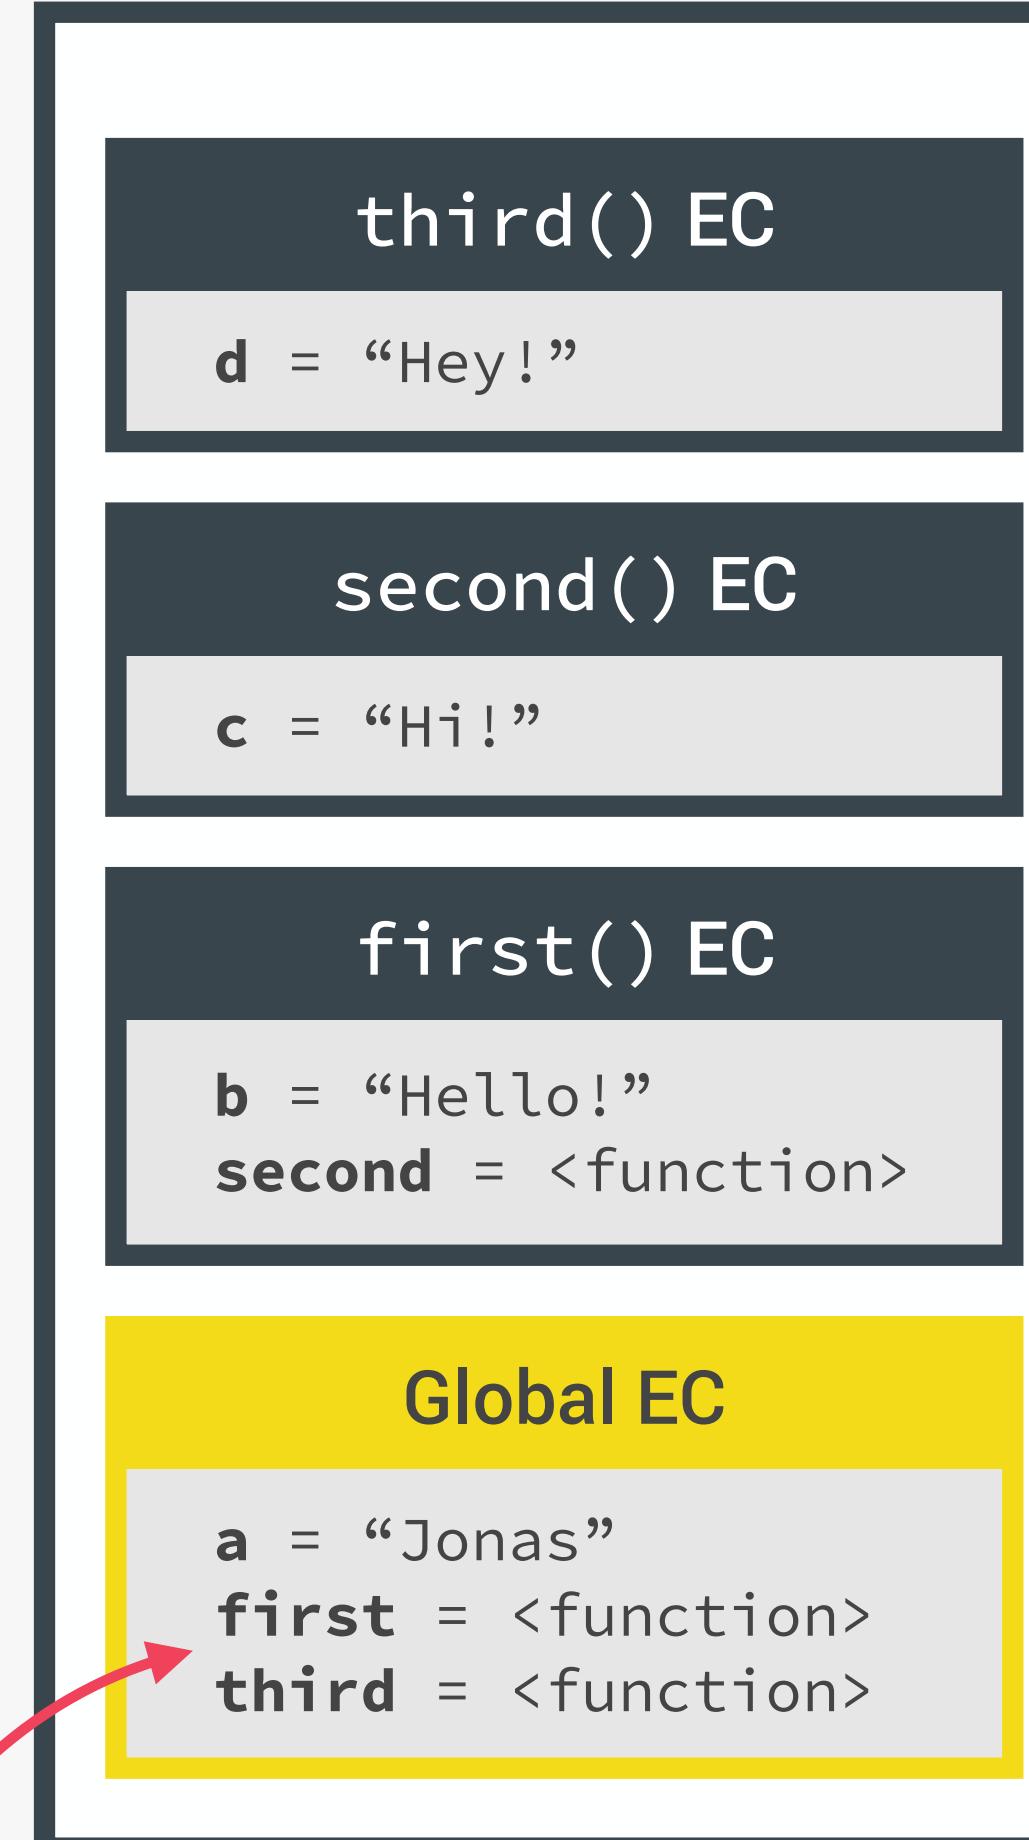

CALL STACK
Order in which functions were called

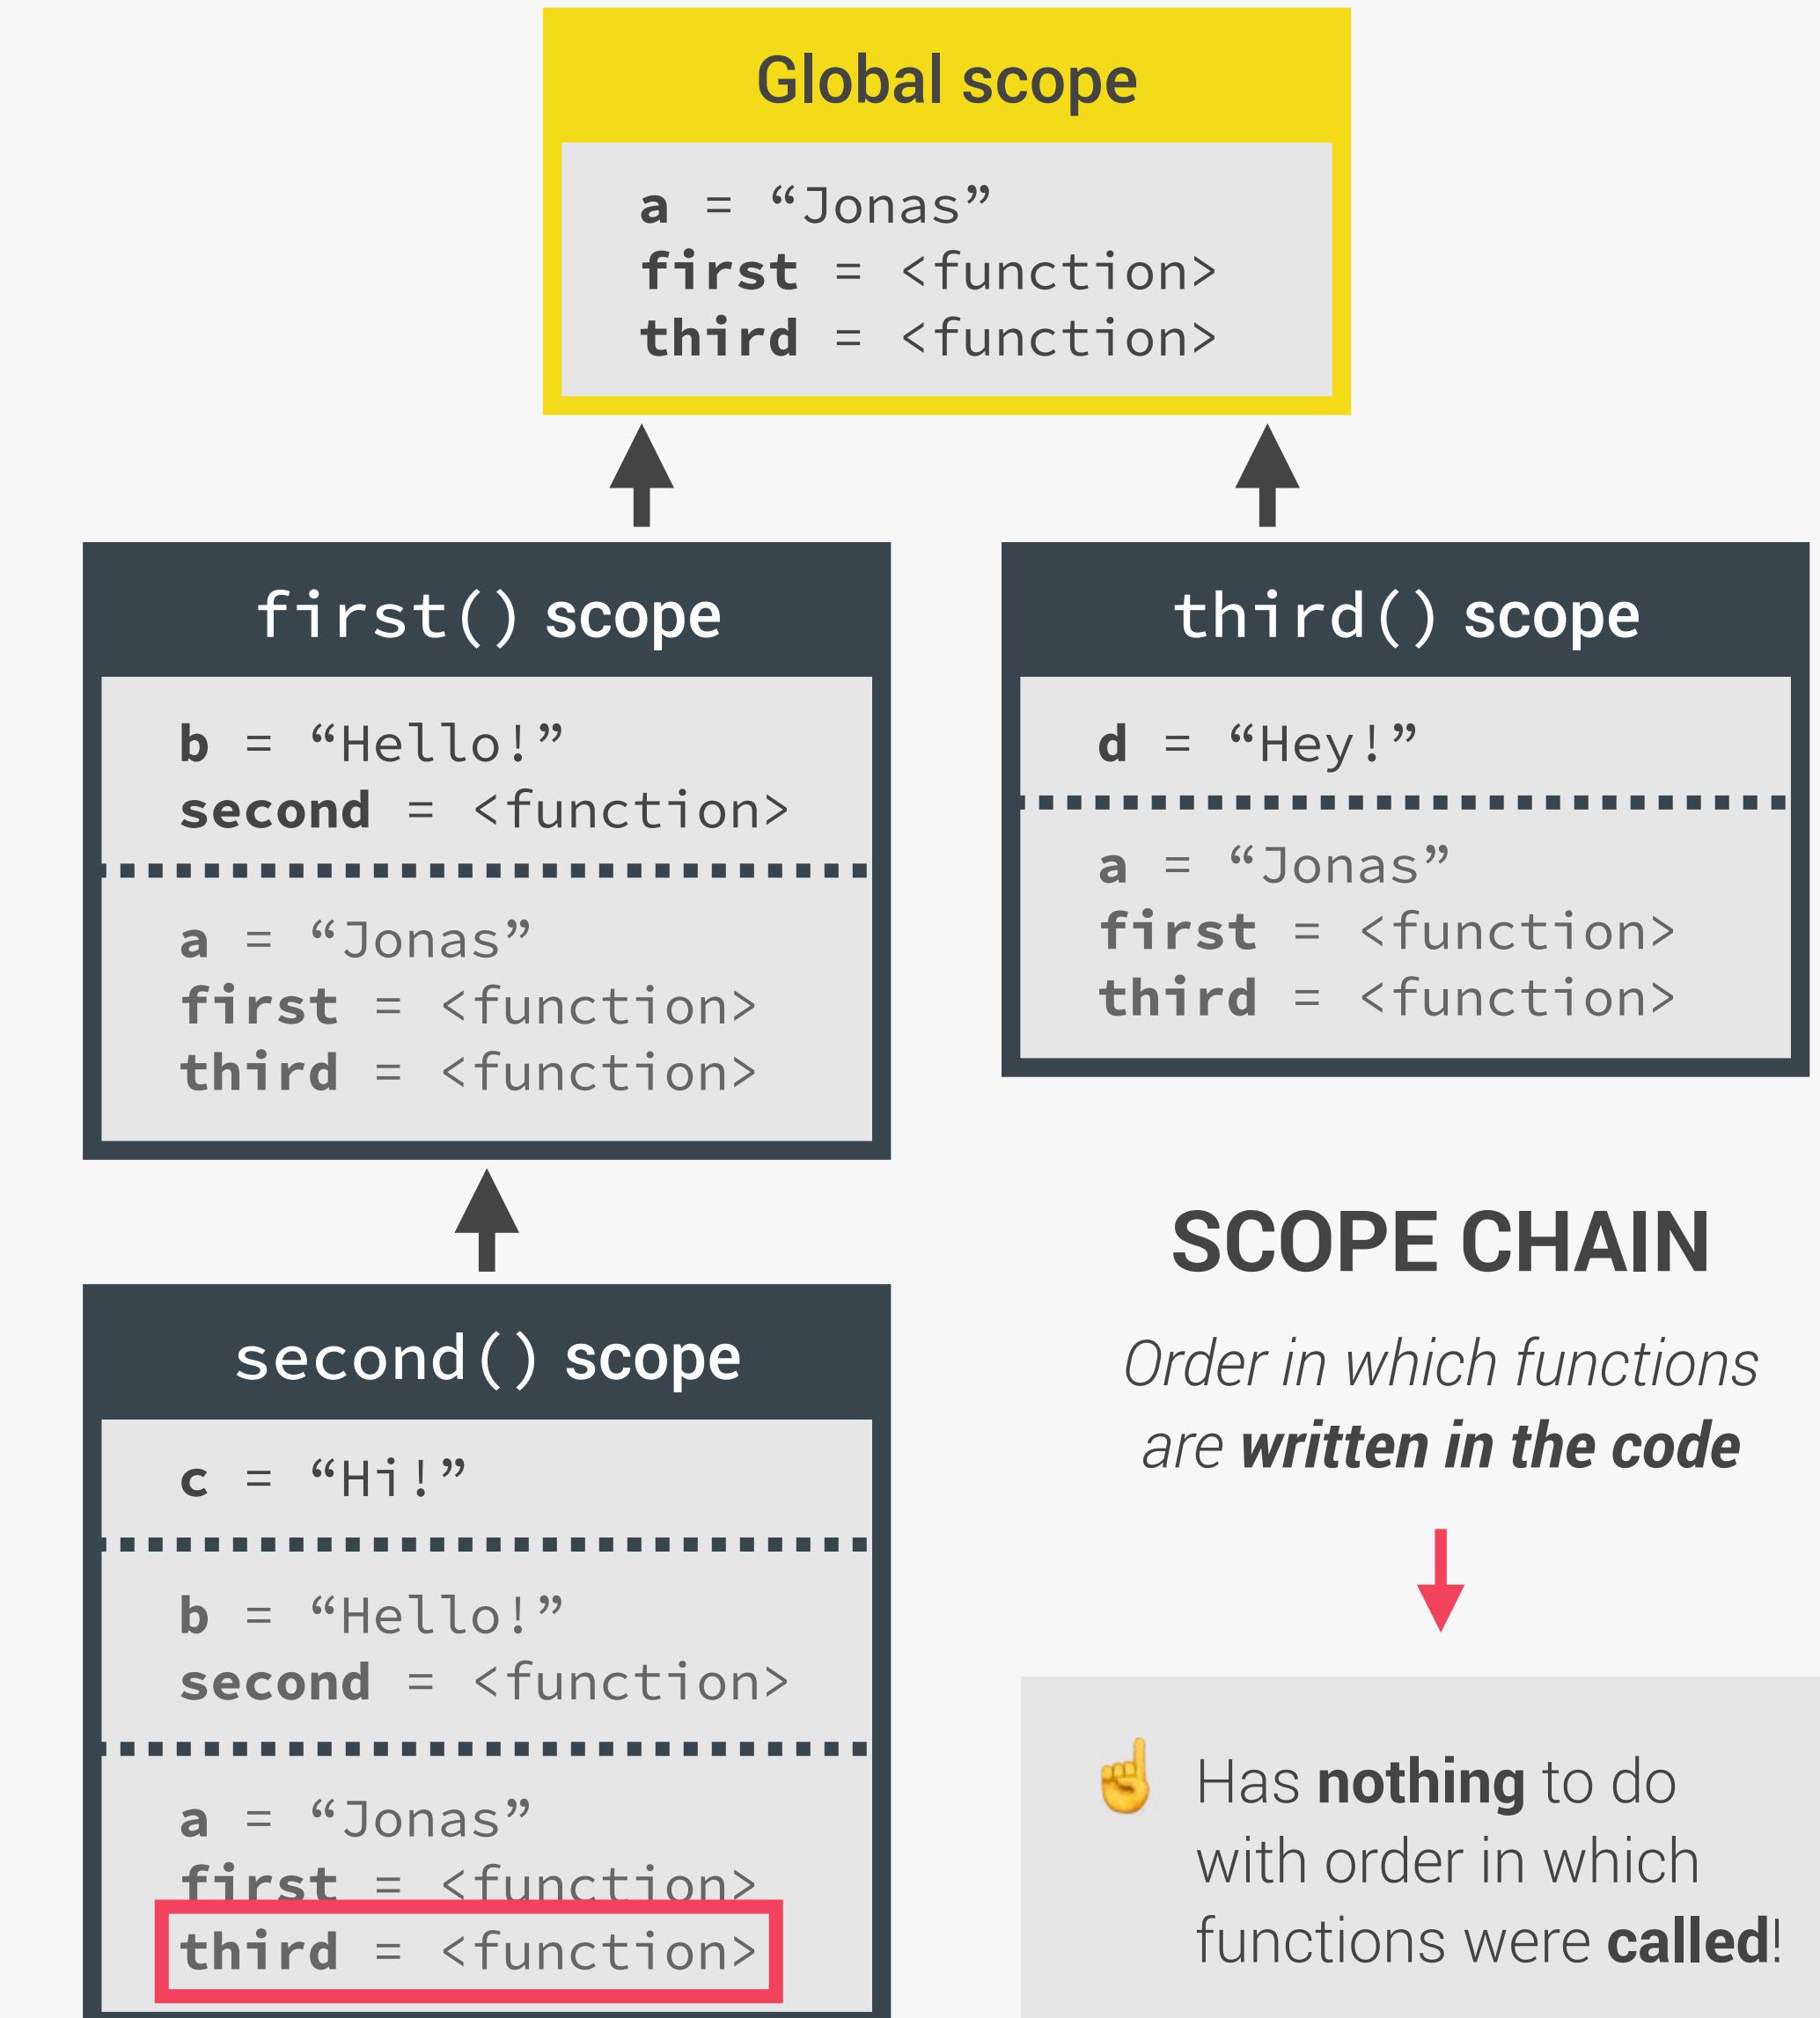

SUMMARY



- 👉 Scoping asks the question “*Where do variables live?*” or “*Where can we access a certain variable, and where not?*”;
- 👉 There are 3 types of scope in JavaScript: the global scope, scopes defined by functions, and scopes defined by blocks;
- 👉 Only `let` and `const` variables are block-scoped. Variables declared with `var` end up in the closest function scope;
- 👉 In JavaScript, we have lexical scoping, so the rules of where we can access variables are based on exactly where in the code functions and blocks are written;
- 👉 Every scope always has access to all the variables from all its outer scopes. This is the scope chain!
- 👉 When a variable is not in the current scope, the engine looks up in the scope chain until it finds the variable it's looking for. This is called variable lookup;
- 👉 The scope chain is a one-way street: a scope will never, ever have access to the variables of an inner scope;
- 👉 The scope chain in a certain scope is equal to adding together all the variable environments of the all parent scopes;
- 👉 The scope chain has nothing to do with the order in which functions were called. It does not affect the scope chain at all!



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

VARIABLE ENVIRONMENT: HOISTING
AND THE TDZ

JS

HOISTING IN JAVASCRIPT

👉 **Hoisting:** Makes some types of variables accessible/usable in the code before they are actually declared. “Variables lifted to the top of their scope”.

↓ **BEHIND THE SCENES**

Before execution, code is scanned for variable declarations, and for each variable, a new property is created in the **variable environment object**.

EXECUTION CONTEXT

- 👉 Variable environment
- ✓ Scope chain
- 👉 this keyword

	HOISTED?	INITIAL VALUE	SCOPE
function declarations	✓ YES	Actual function	Block
var variables	✓ YES	undefined	Function
let and const variables	✗ NO Technically, yes. But not in practice	<uninitialized>, TDZ	Block
function expressions and arrows		Depends if using var or let/const	Temporal Dead Zone

TEMPORAL DEAD ZONE, LET AND CONST

```
const myName = 'Jonas';

if (myName === 'Jonas') {
    console.log(`Jonas is a ${job}`);
    const age = 2037 - 1989;
    console.log(age);
    const job = 'teacher';
    console.log(x);
}
```

TEMPORAL DEAD ZONE FOR **job** VARIABLE

- 👉 Different kinds of error messages:

ReferenceError: Cannot access 'job' before initialization

ReferenceError: x is not defined

WHY HOISTING?

- 👉 Using functions before actual declaration;
- 👉 var hoisting is just a byproduct.

WHY TDZ?

- 👉 Makes it easier to avoid and catch errors: accessing variables before declaration is bad practice and should be avoided;
- 👉 Makes const variables actually work



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

THE THIS KEYWORD

JS

HOW THE THIS KEYWORD WORKS

👉 **this keyword/variable:** Special variable that is created for every execution context (every function).
Takes the value of (points to) the “owner” of the function in which the **this** keyword is used.

👉 **this** is **NOT** static. It depends on **how** the function is called, and its value is only assigned when the function **is actually called**.

EXECUTION CONTEXT

✓ Variable environment

✓ Scope chain

👉 **this keyword**

Method 👉 **this** = <Object that is calling the method>

Simple function call 👉 **this** = **undefined**

Arrow functions 👉 **this** = <**this** of surrounding function (lexical **this**)>

Event listener 👉 **this** = <DOM element that the handler is attached to>

new, call, apply, bind 👉 <Later in the course... ⏲>

Don't get own **this**

In strict mode! Otherwise:
window (in the browser)

👉 Method example:

```
const jonas = {  
  name: 'Jonas',  
  year: 1989,  
  calcAge: function() {  
    return 2037 - this.year  
  }  
};  
jonas.calcAge(); // 48
```

calcAge is method jonas 1989

👉 **this** does **NOT** point to the function itself, and also **NOT** the its variable environment!

Way better than using
jonas.year!



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

GOT QUESTIONS? FEEDBACK?
JUST POST IT IN THE Q&A OF THIS
VIDEO. AND YOU WILL GET HELP
THERE!

JS



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE


MEMORY MANAGEMENT: PRIMITIVES
VS. OBJECTS

JS

THE MEMORY LIFECYCLE IN JAVASCRIPT

🤔 “How and where are variables created in JavaScript?”

- 👉 Unlike other languages, **memory is automatically managed** by JavaScript behind the scenes
- 👉 Every value we create in JavaScript goes through a **memory lifecycle**

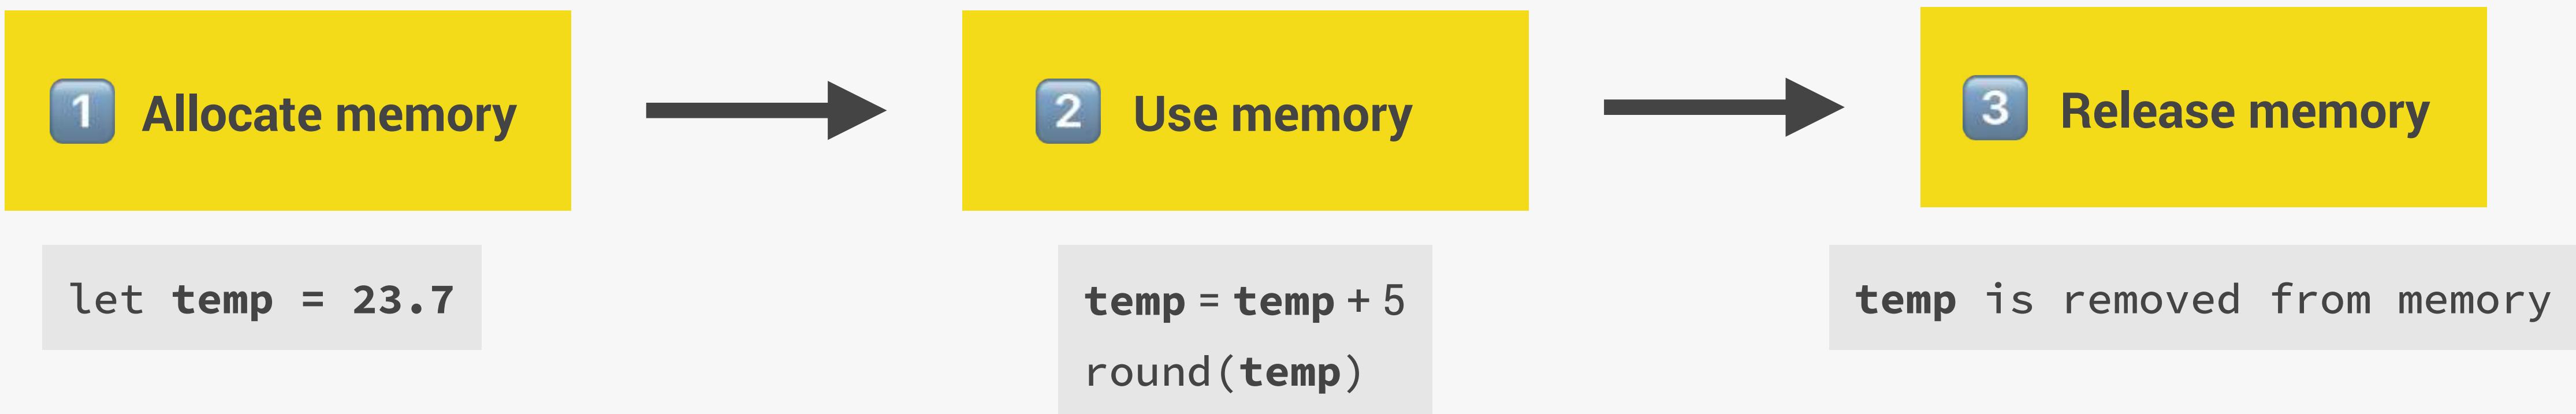


👉 Whenever we assign a value to a new variable, the engine automatically allocates (*reserves*) a piece of memory to store the value

👉 While code is running, the value is written, read, and updated in the allocated piece of memory

👉 When no longer needed, the value is deleted from memory to free up resources. The released memory is used for new values

WHERE IS MEMORY ALLOCATED?

1 Allocate memory

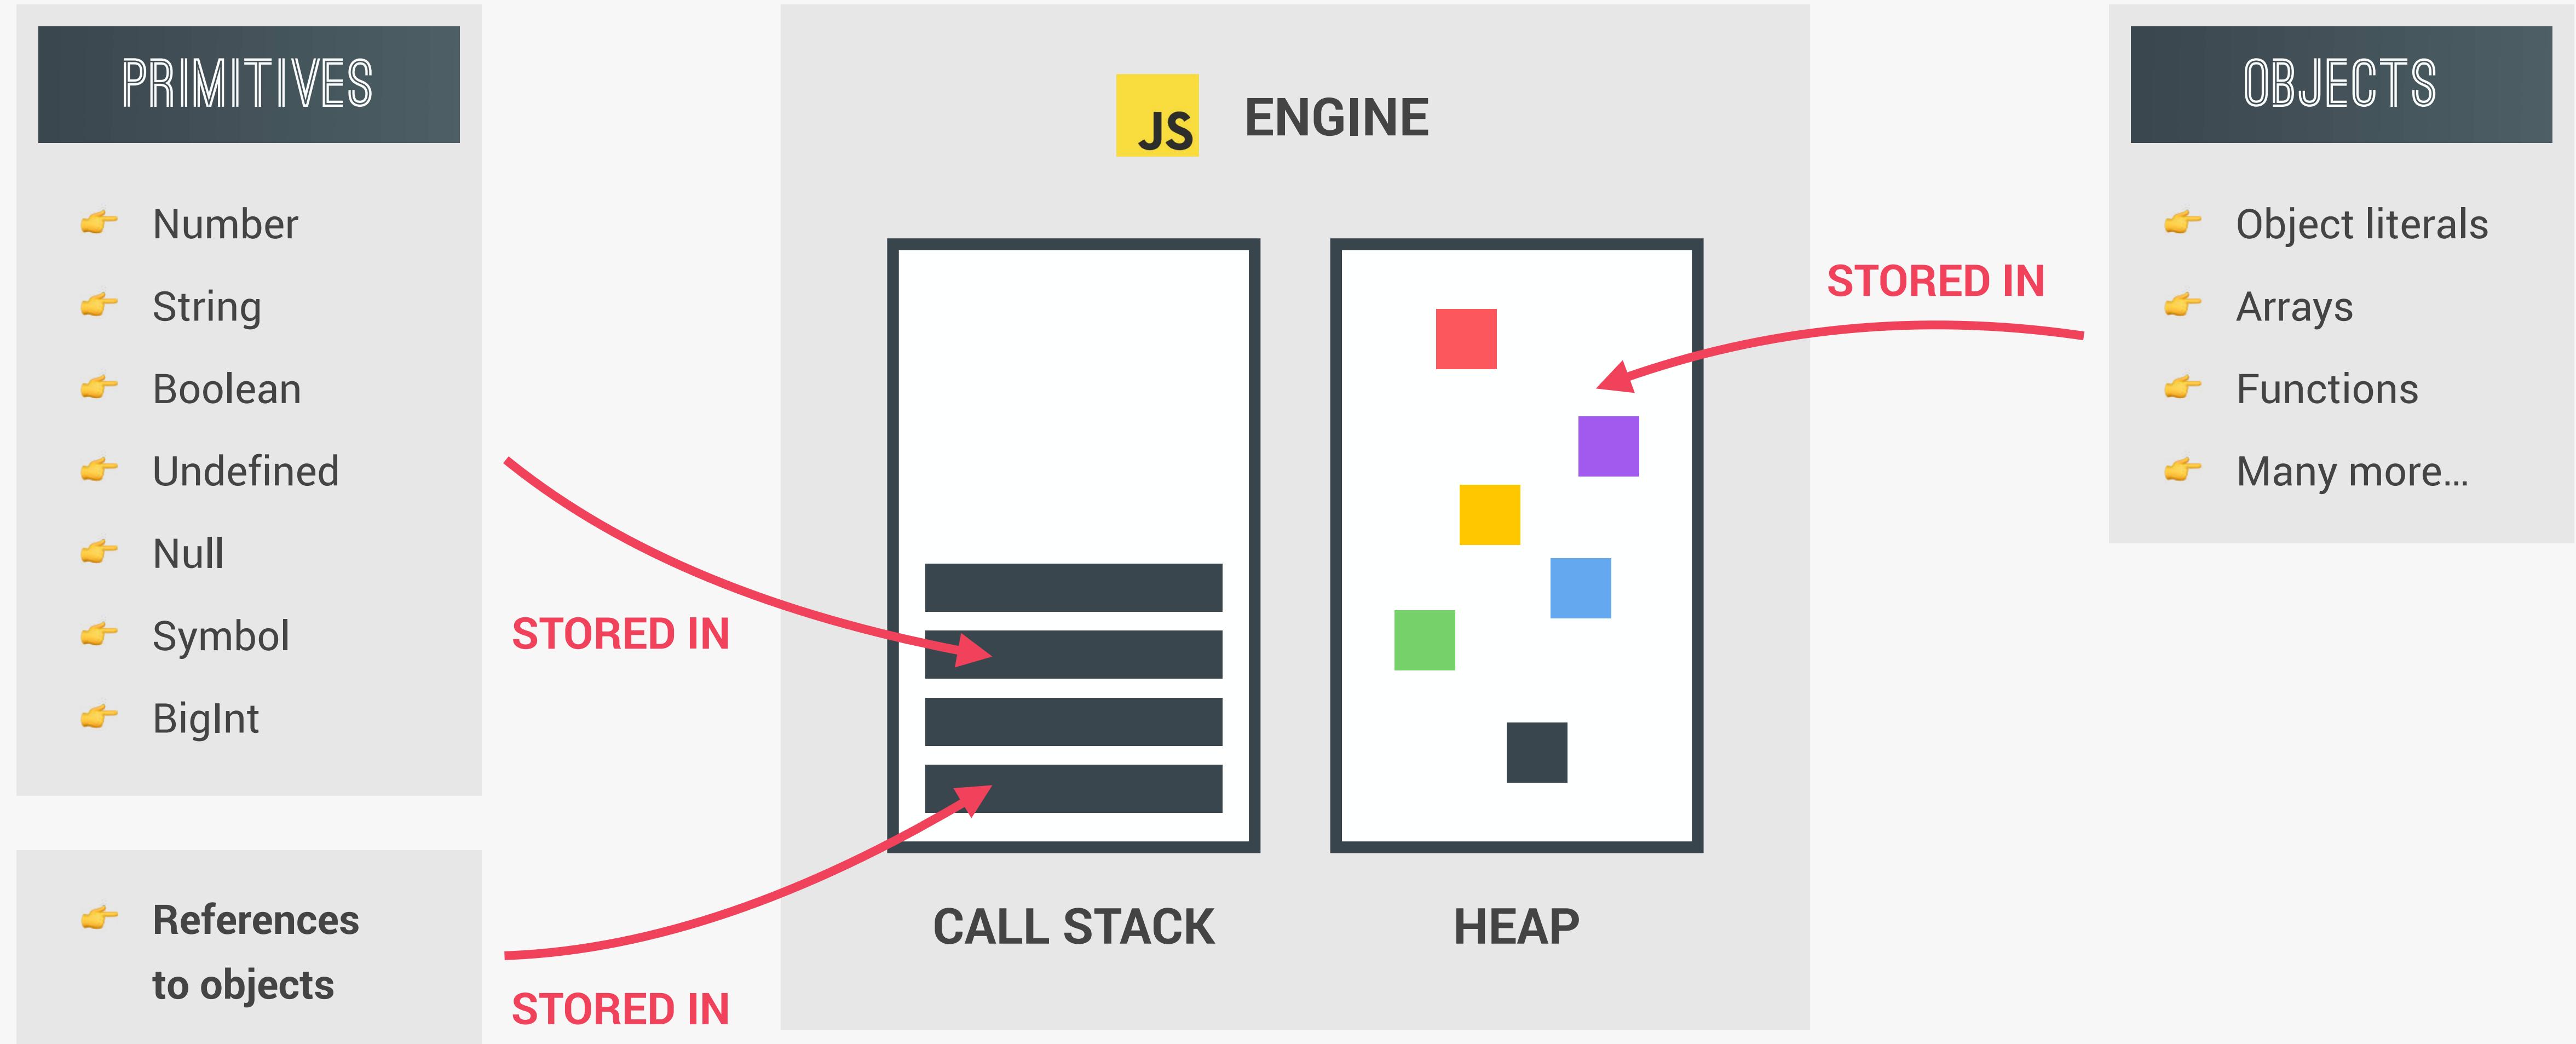

UNDERSTANDING OBJECT REFERENCES

1 Allocate memory


```
const name = 'Jonas';
const age = calcAge(1991);
let newAge = age;
newAge++;

const location = {
  city: 'Faro',
  country: 'Portugal',
};

const newLocation = location;
newLocation.city = 'Lisbon';

console.log(location);
// {city: 'Lisbon', country: 'Portugal'}

function calcAge(birthYear) {
  const now = 2037;
  const x = now - birthYear;
  return x;
}
```

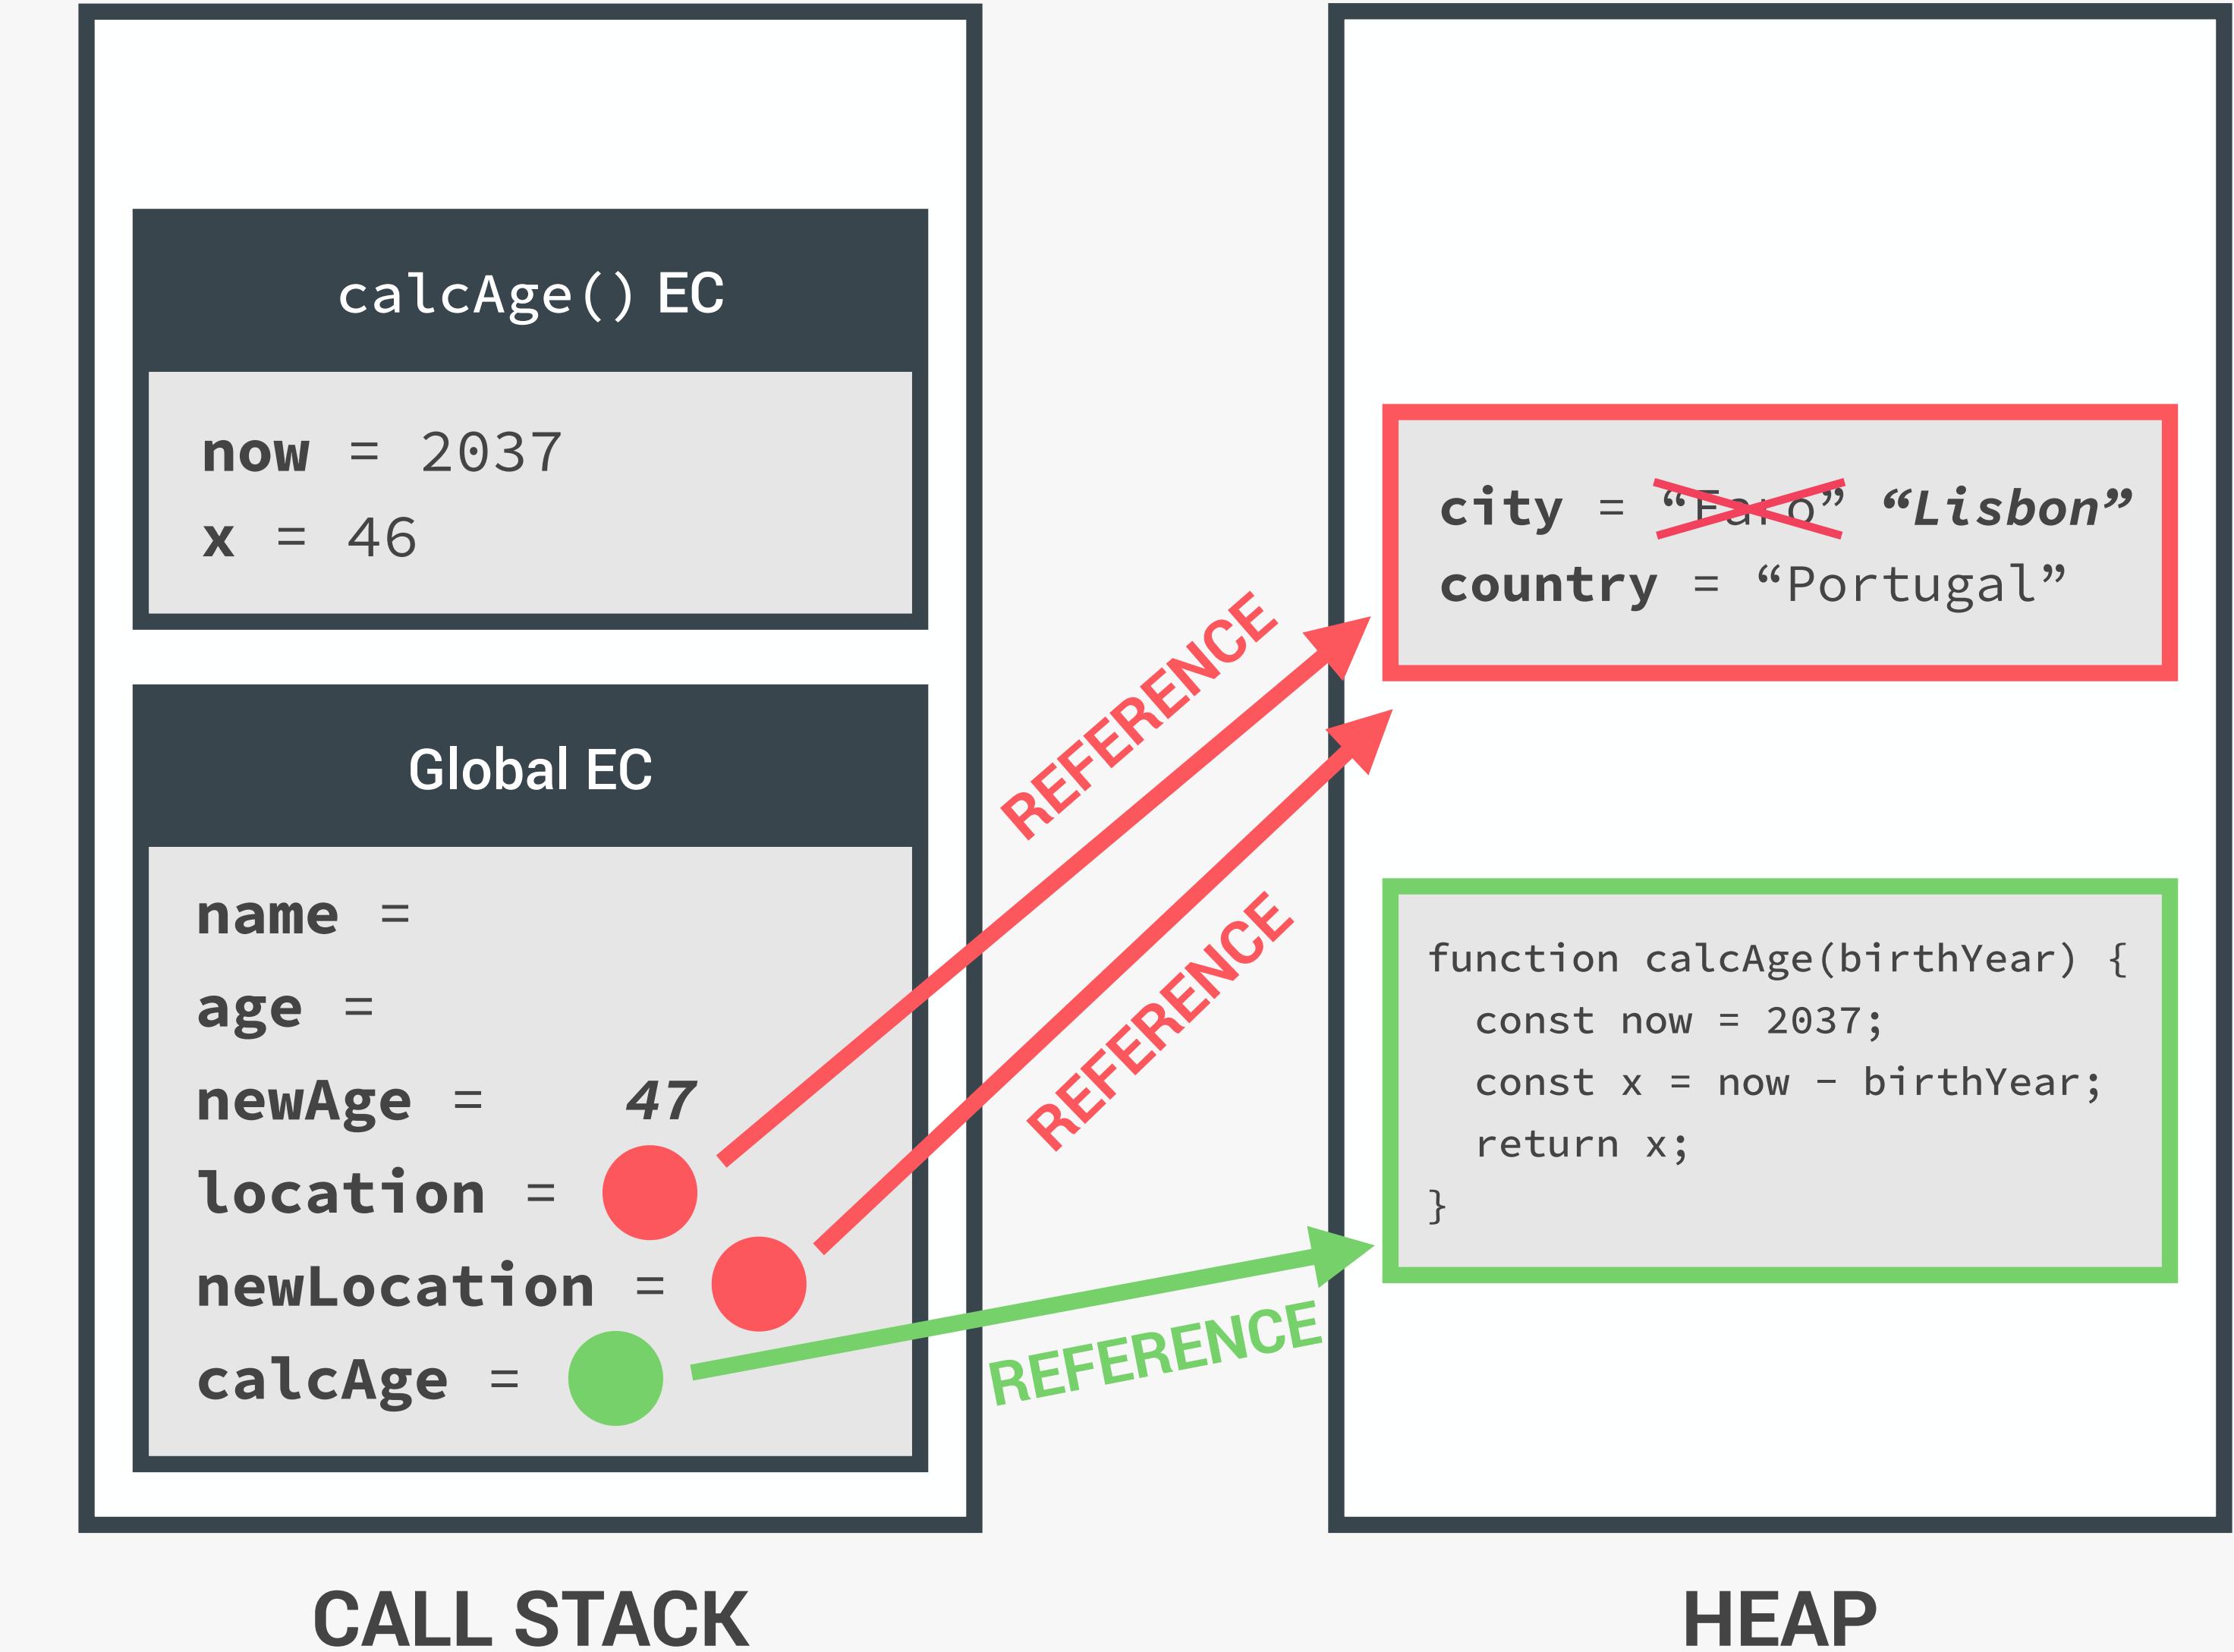



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


HOW JAVASCRIPT WORKS BEHIND THE
SCENES

LECTURE

MEMORY MANAGEMENT: GARBAGE
COLLECTION

JS

REVIEW: THE MEMORY LIFECYCLE

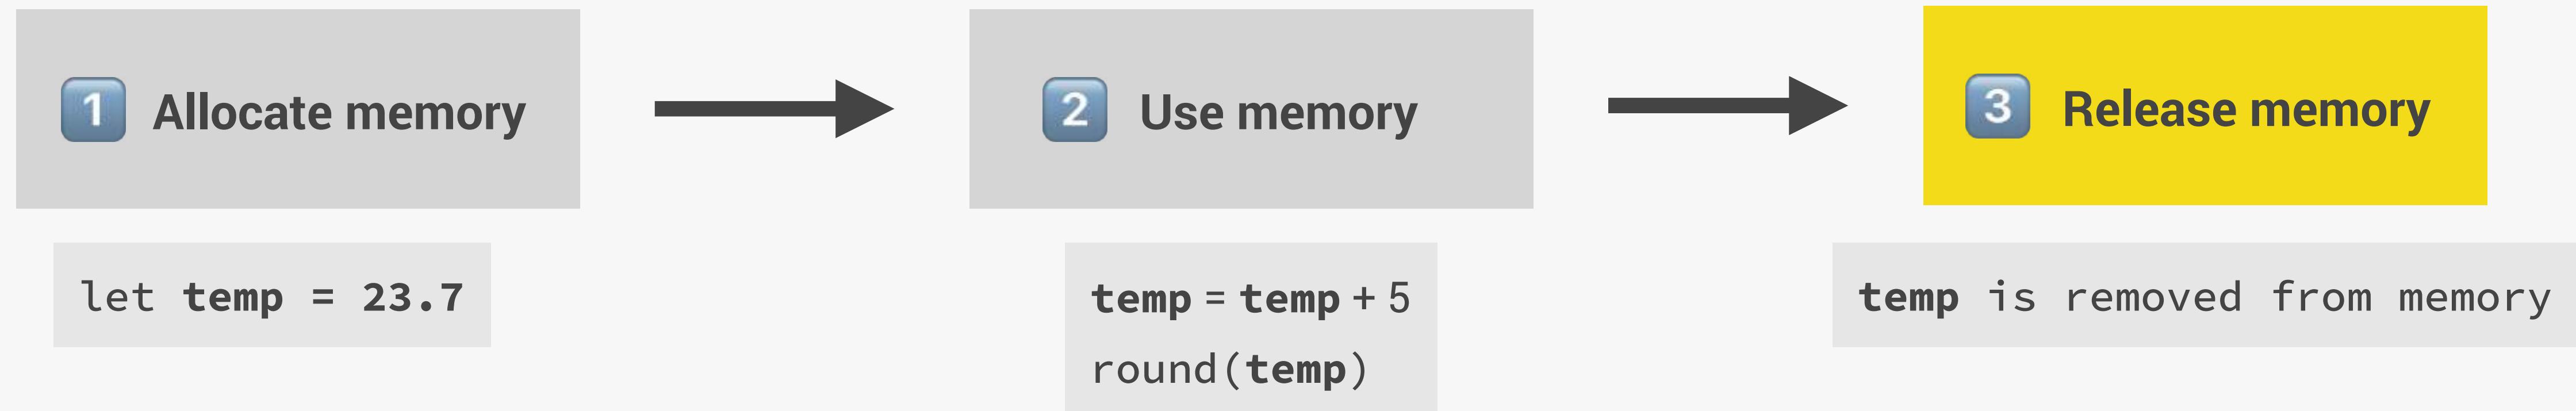

GARBAGE COLLECTION

3 Release memory



How is memory freed up after we no longer need a value?

CALL STACK



Variable environment is **simply deleted** when EC pops off stack

HEAP




Garbage collection (central memory management tool)

MARK-AND-SWEEP ALGORITHM:

- # 1 Mark: Mark all objects that are *reachable* from a root as “alive”

- 2 **Sweep:** Delete un-marked (*unreachable*) objects and reclaim memory for future allocations

👉 **Memory leak:** When objects that are no longer needed are **incorrectly still reachable**, and therefore **not being garbage collected**

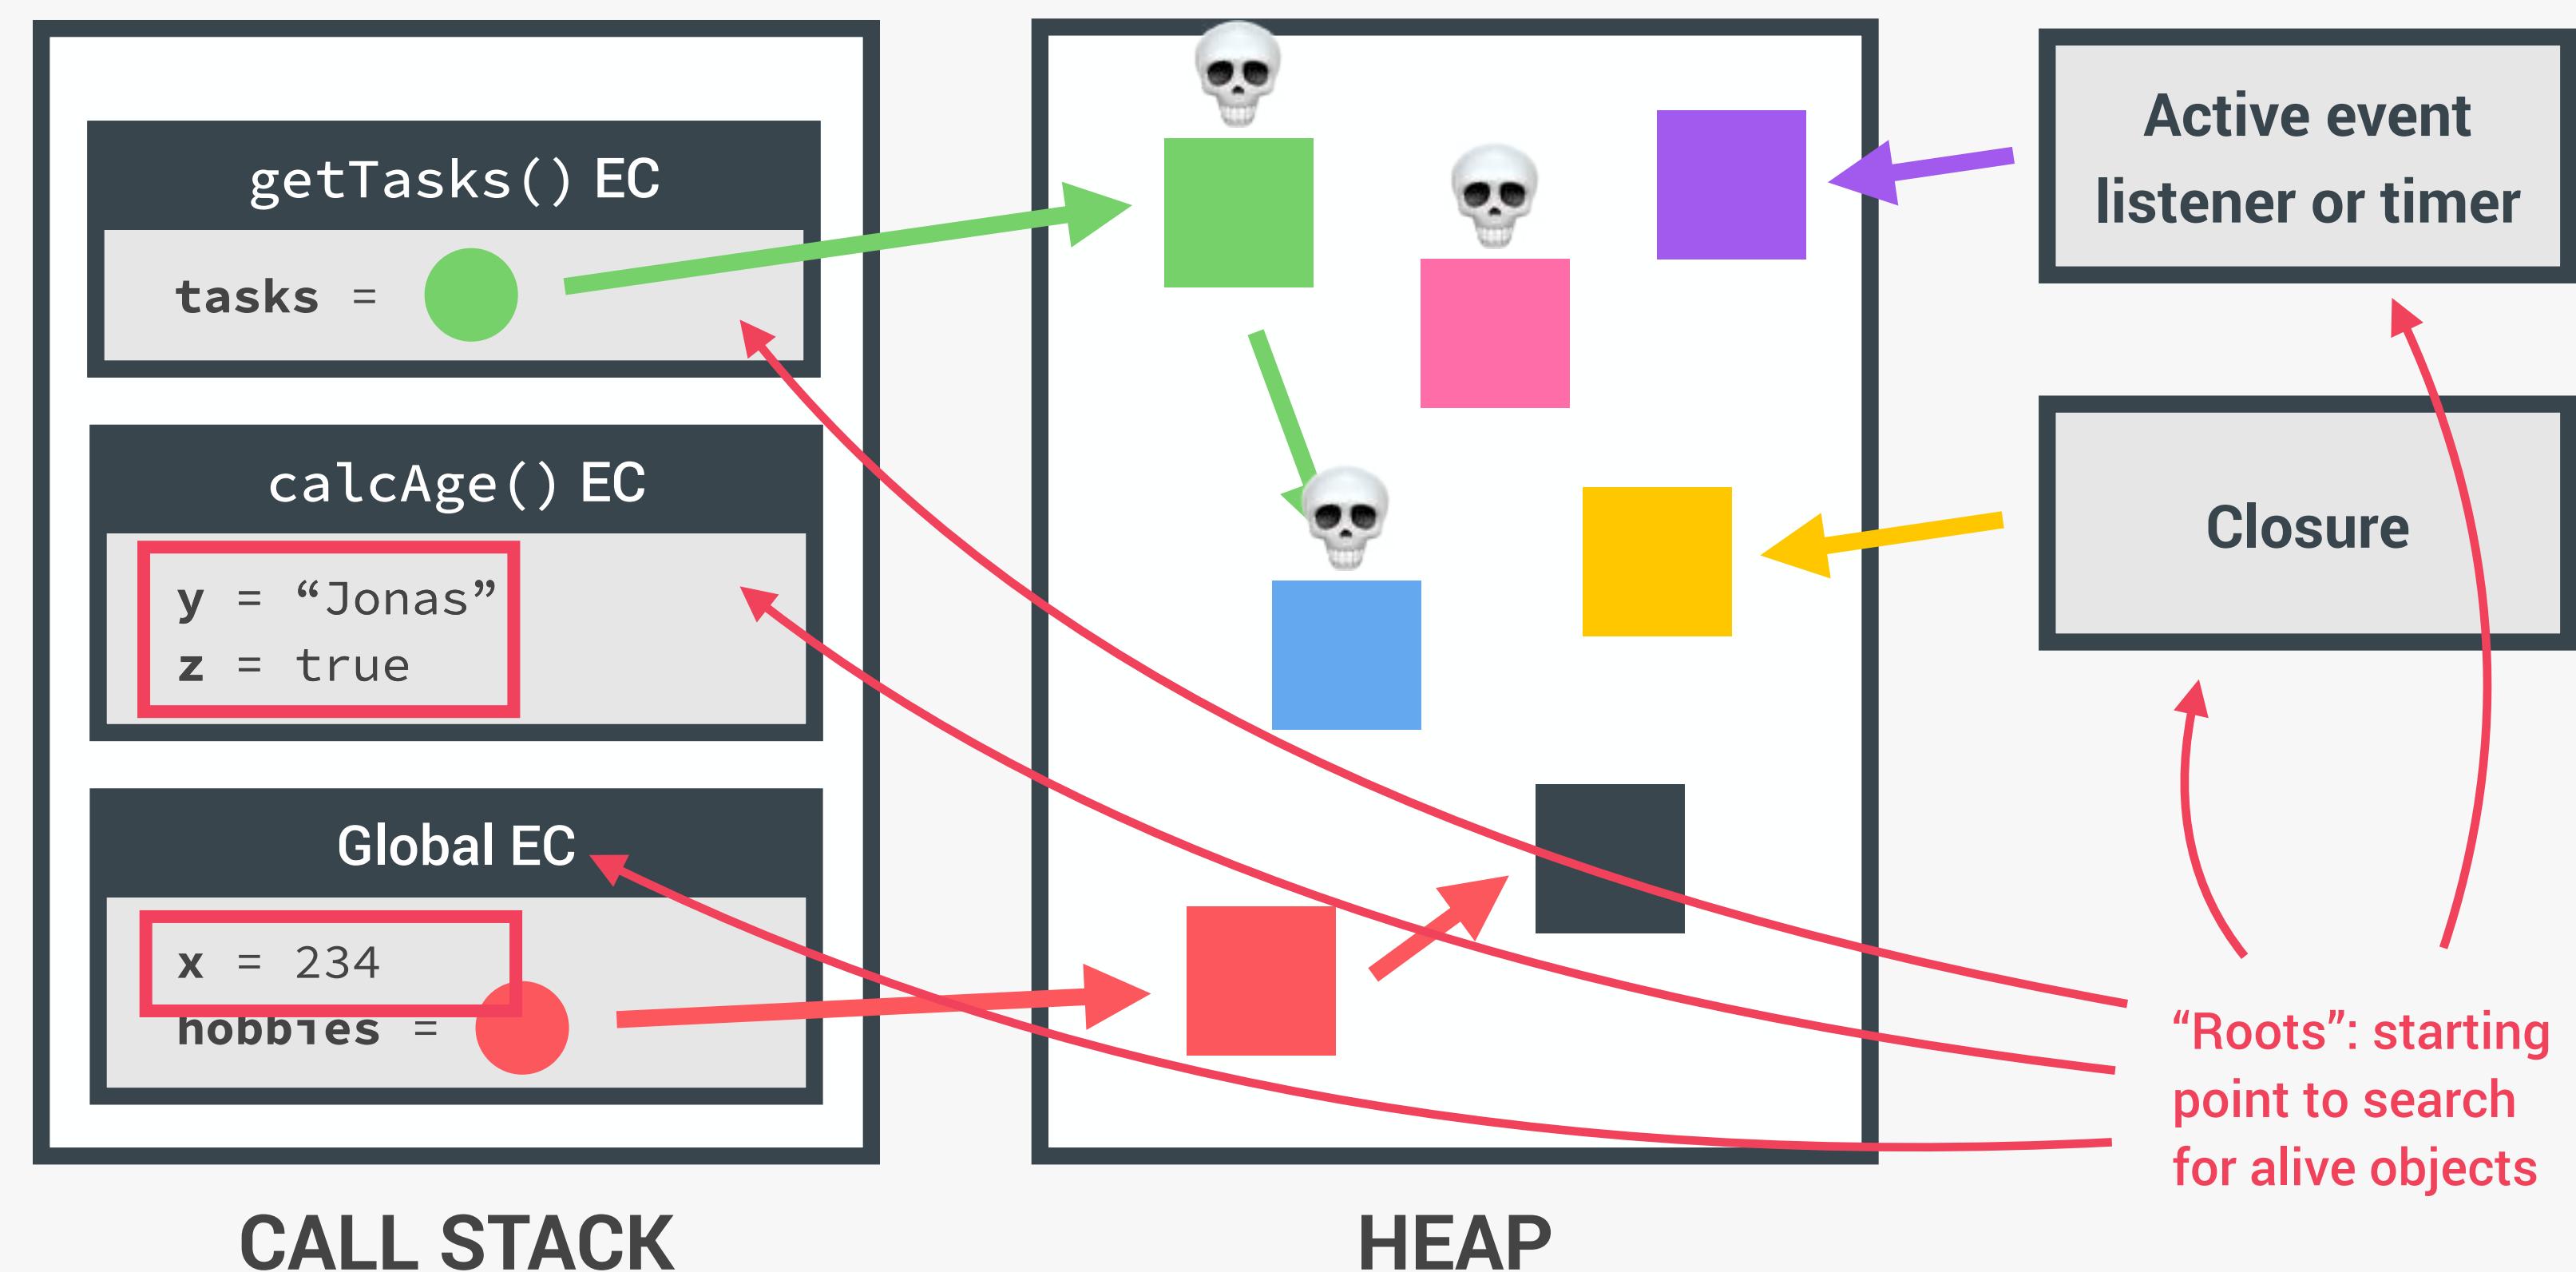

"HOW JAVASCRIPT WORKS BEHIND THE SCENES" TOPICS FOR LATER...



1

Closures ➡ A Closer Look at Functions

2

Prototypal Inheritance ➡ Object Oriented Programming (OOP) With JavaScript

3

Event Loop ➡ Asynchronous JavaScript: Promises, Async/Await and AJAX

4

How the DOM Really Works ➡ Advanced DOM and Events

DATA STRUCTURES,
MODERN OPERATORS
AND STRINGS



THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

DATA STRUCTURES, MODERN
OPERATORS AND STRINGS

LECTURE

SUMMARY: WHICH DATA STRUCTURE
TO USE?

JS

DATA STRUCTURES OVERVIEW

SOURCES OF DATA

- 1 **From the program itself:** Data written directly in source code (e.g. status messages)
- 2 **From the UI:** Data input from the user or data written in DOM (e.g tasks in todo app)
- 3 **From external sources:** Data fetched for example from web API (e.g. recipe objects)



Collection of data



Data structure

SIMPLE LIST?

Arrays or Sets

KEY/VALUE PAIRS?

Objects or Maps

OTHER BUILT-IN:

- 👉 WeakMap
- 👉 WeakSet

NON-BUILT IN:

- 👉 Stacks
- 👉 Queues
- 👉 Linked lists
- 👉 Trees
- 👉 Hash tables

Application
Programming
Interface

Keys allow us to
describe values

The diagram shows a JSON object structure with three levels of nesting. At the top level, there is an object with keys "count" and "recipes". The "count" key has a value of 3. The "recipes" key has a value that is an array containing three objects. Each object represents a recipe with fields: publisher, title, source_url, recipe_id, image_url, social_rank, and publisher_url. Red arrows point to the first object in the array, highlighting the term "Object". Another red arrow points to the "recipes" array, also highlighting the term "Object". A third red arrow points to the entire JSON structure, highlighting the term "Array".

```
{  
  "count": 3,  
  "recipes": [  
    {  
      "publisher": "101 Cookbooks",  
      "title": "Best Pizza Dough Ever",  
      "source_url": "http://www.101cookbooks.com/archiv  
      "recipe_id": "47746",  
      "image_url": "http://forkify-api.herokuapp.com/im  
      "social_rank": 100,  
      "publisher_url": "http://www.101cookbooks.com"  
    },  
    {  
      "publisher": "The Pioneer Woman",  
      "title": "Deep Dish Fruit Pizza",  
      "source_url": "http://thepioneerwoman.com/cooking  
      "recipe_id": "46956",  
      "image_url": "http://forkify-api.herokuapp.com/im  
      "social_rank": 100,  
      "publisher_url": "http://thepioneerwoman.com"  
    },  
    {  
      "publisher": "Closet Cooking",  
      "title": "Pizza Dip",  
      "source_url": "http://www.closetcooking.com/2011/  
      "recipe_id": "35477",  
      "image_url": "http://forkify-api.herokuapp.com/im  
      "social_rank": 99.99999999999994,  
      "publisher_url": "http://closetcooking.com"  
    }  
  ]  
}
```

👉 JSON data format example

ARRAYS VS. SETS AND OBJECTS VS. MAPS

ARRAYS

VS.

SETS

```
tasks = ['Code', 'Eat', 'Code'];
// ["Code", "Eat", "Code"]
```

- 👉 Use when you need **ordered** list of values (might contain duplicates)
- 👉 Use when you need to **manipulate** data

```
tasks = new Set(['Code', 'Eat', 'Code']);
// {"Code", "Eat"}
```

- 👉 Use when you need to work with **unique** values
- 👉 Use when **high-performance** is *really* important
- 👉 Use to **remove duplicates** from arrays

OBJECTS

VS.

MAPS

```
task = {
  task: 'Code',
  date: 'today',
  repeat: true
};
```

- 👉 More “traditional” key/value store (“abused” objects)
- 👉 Easier to write and access values with . and []

- 👉 Use when you need to include **functions** (methods)
- 👉 Use when working with JSON (can convert to map)

```
task = new Map([
  ['task', 'Code'],
  ['date', 'today'],
  [false, 'Start coding!']
]);
```

- 👉 Better performance
- 👉 Keys can have **any** data type
- 👉 Easy to iterate
- 👉 Easy to compute size

- 👉 Use when you simply need to map key to values
- 👉 Use when you need keys that are **not** strings

A CLOSER LOOK AT FUNCTIONS



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

A CLOSER LOOK AT FUNCTIONS

LECTURE

FIRST-CLASS AND HIGHER-ORDER
FUNCTIONS

JS

FIRST-CLASS VS. HIGHER-ORDER FUNCTIONS

FIRST-CLASS FUNCTIONS

- 👉 JavaScript treats functions as **first-class citizens**
- 👉 This means that functions are **simply values**
- 👉 Functions are just another "**type**" of object

- 👉 Store functions in variables or properties:

```
const add = (a, b) => a + b;  
  
const counter = {  
  value: 23,  
  inc: function() { this.value++; }  
}
```

- 👉 Pass functions as arguments to OTHER functions:

```
const greet = () => console.log('Hey Jonas');  
btnClose.addEventListener('click', greet)
```

- 👉 Return functions FROM functions

- 👉 Call methods on functions:

```
counter.inc.bind(someOtherObject);
```

HIGHER-ORDER FUNCTIONS

- 👉 A function that **receives** another function as an argument, that **returns** a new function, or **both**
- 👉 This is only possible because of first-class functions

- 1 Function that receives another function

```
const greet = () => console.log('Hey Jonas');  
btnClose.addEventListener('click', greet)
```

Higher-order
function

Callback
function



- 2 Function that returns new function

```
function count() {  
  let counter = 0;  
  return function() {  
    counter++;  
  };  
}
```

Higher-order
function

Returned
function



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN


SECTION

A CLOSER LOOK AT FUNCTIONS

LECTURE
CLOSURES

JS

"CREATING" A CLOSURE

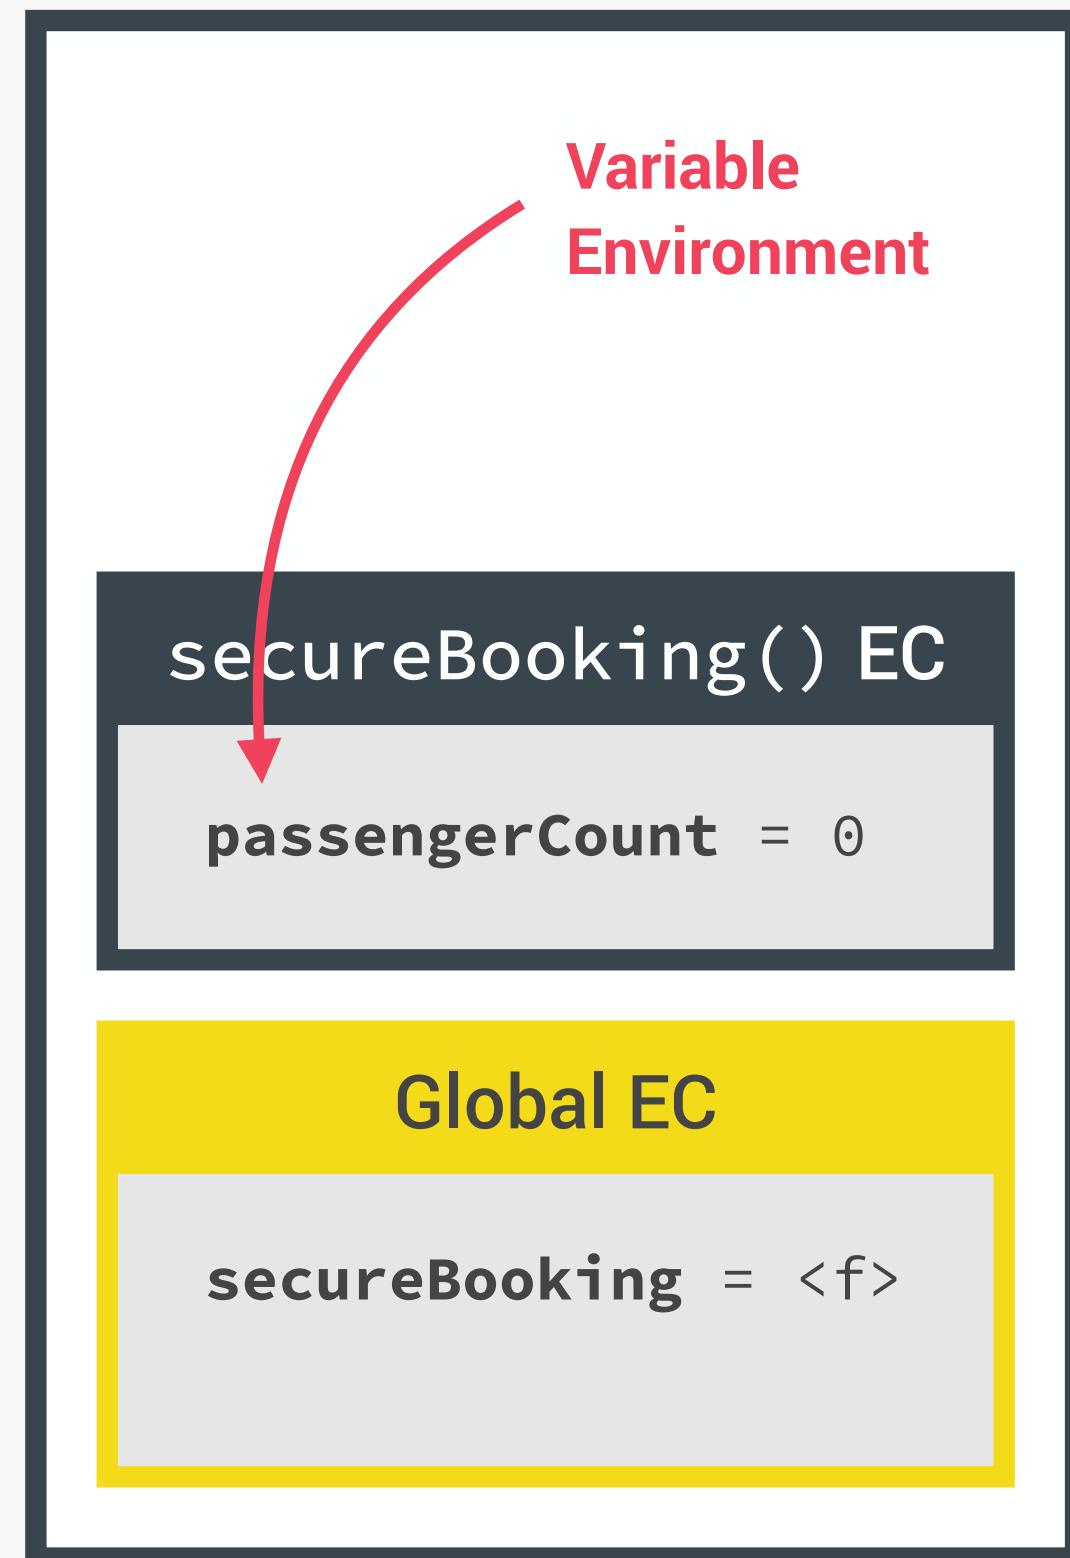


Order in which functions were *called*

```
const secureBooking = function () {
  let passengerCount = 0;

  return function () {
    passengerCount++;
    console.log(`#${passengerCount} passengers`);
  };
};


const booker = secureBooking();
```

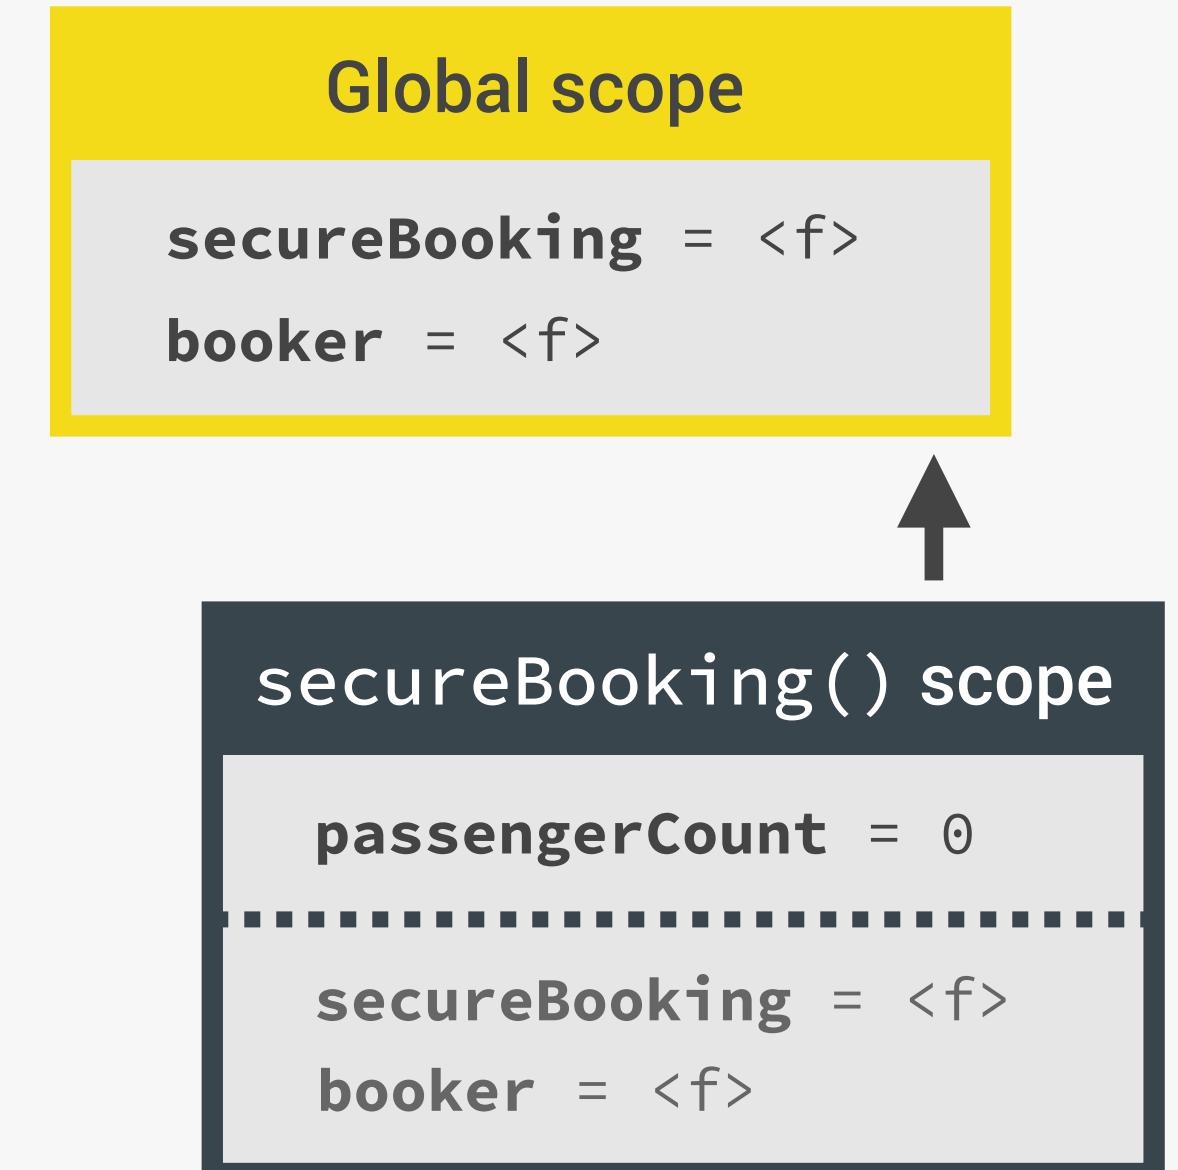

UNDERSTANDING CLOSURES

secureBooking() EC
passengerCount = 0


- 👉 Variable environment (VE) that popped off stack after secureBooking
- 👉 Because of the closure, VE was **moved to heap** and NOT garbage collected
- 👉 This execution context is where booker function was created!

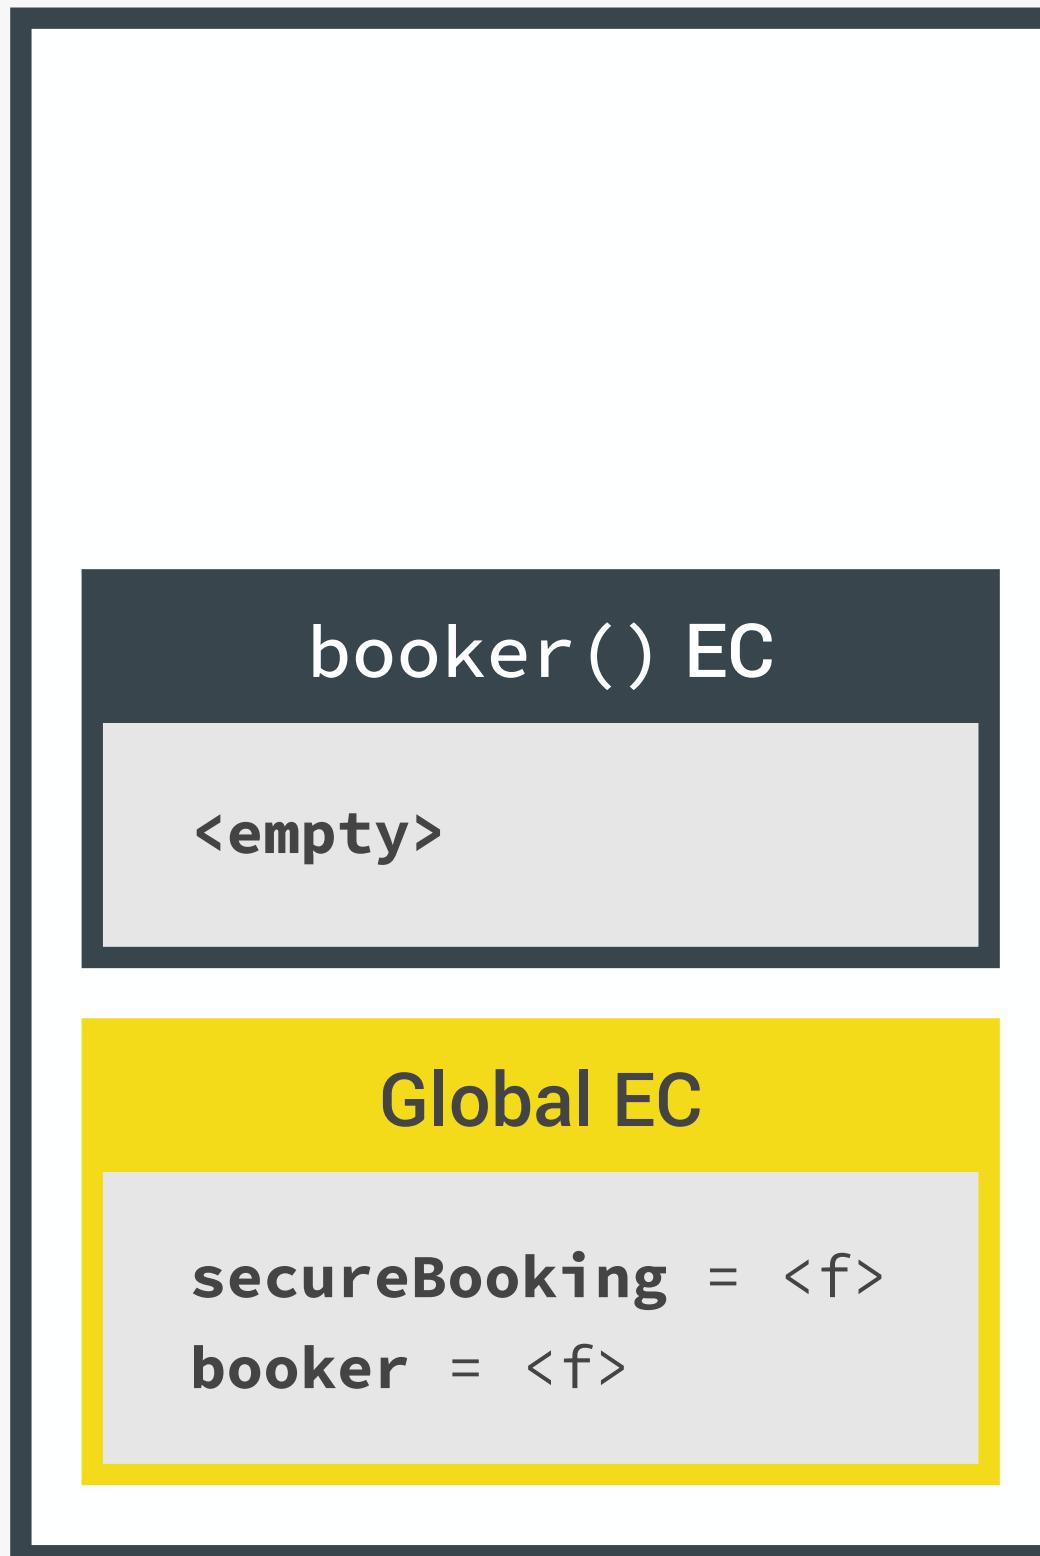

```
const secureBooking = function () {  
  let passengerCount = 0;  
  
  return function () {  
    passengerCount++;  
    console.log(`$ {passengerCount} passengers`);  
  };  
};  
  
const booker = secureBooking();  
booker(); // 1 passengers  
booker(); // 2 passengers
```

This is the function

How to access
passengerCount?

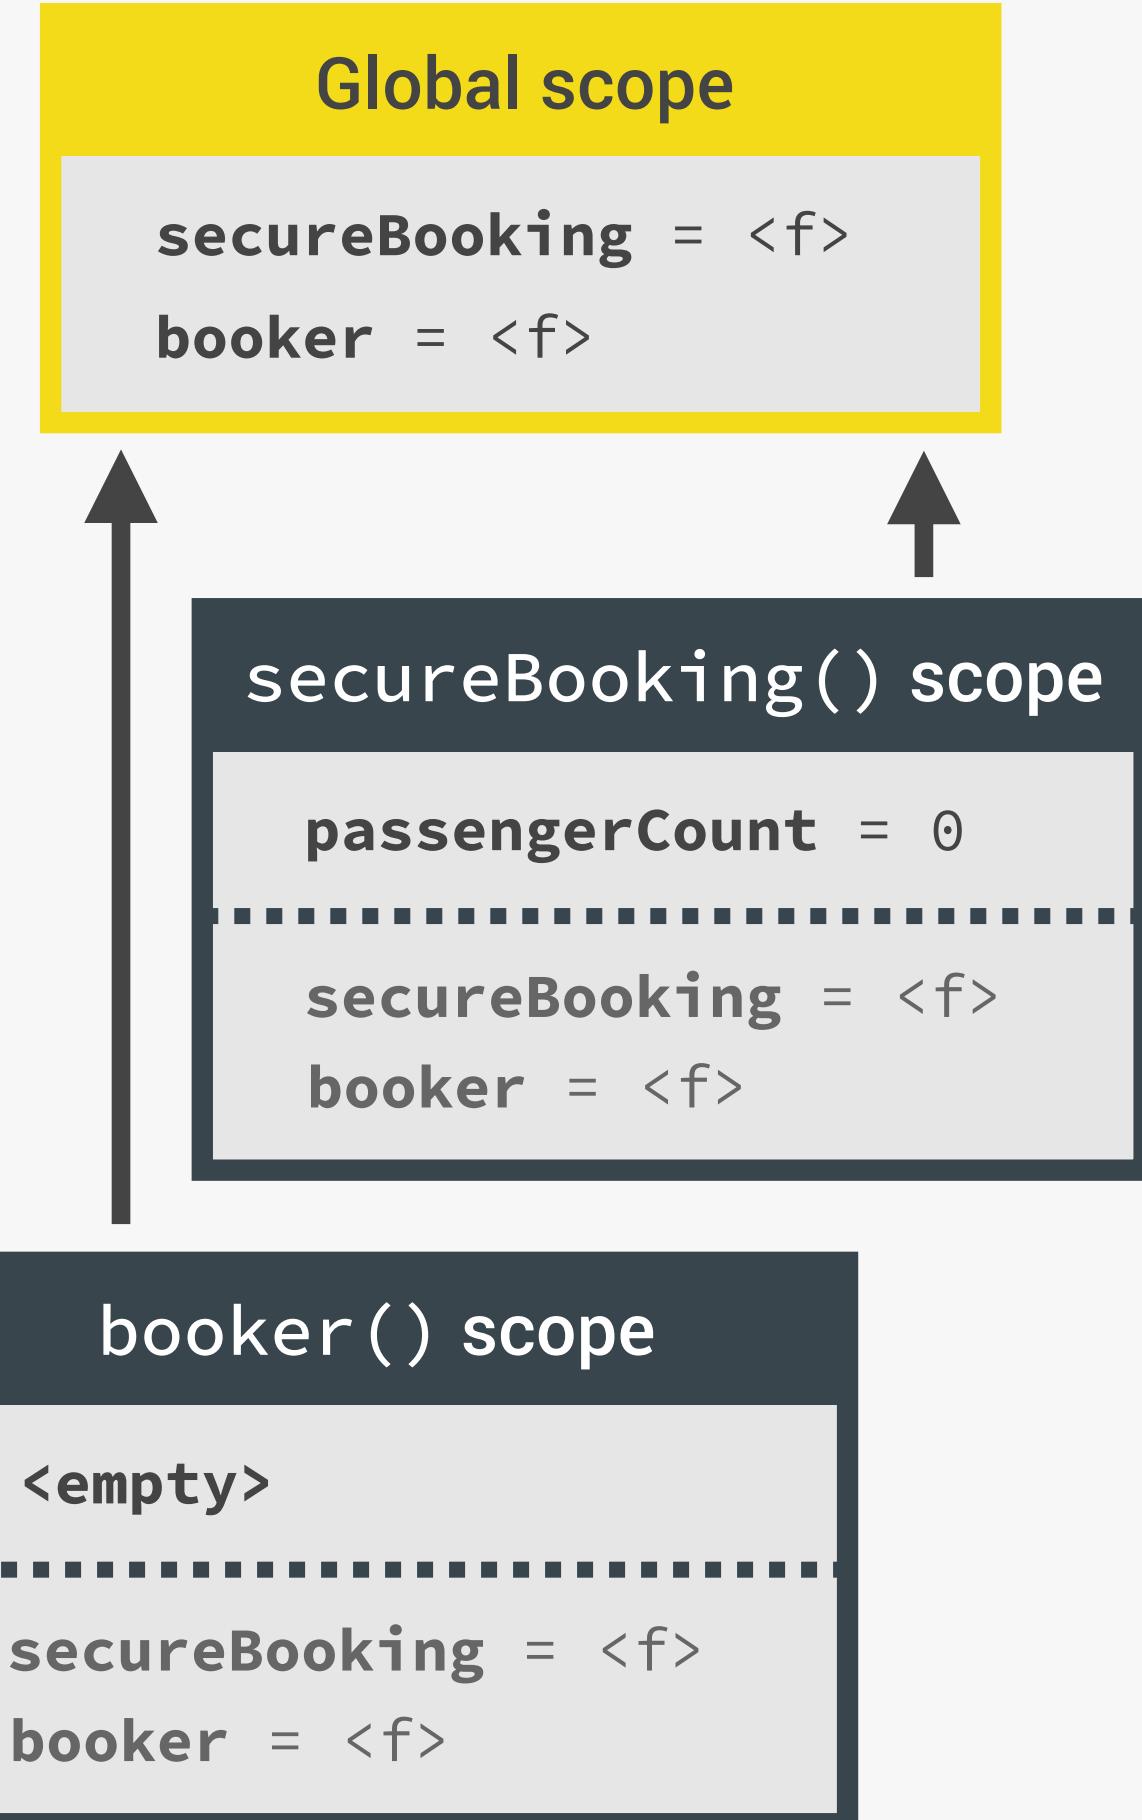


CALL STACK

SCOPE CHAIN

UNDERSTANDING CLOSURES

- 👉 A function has access to the variable environment (VE) of the execution context in which it was created
- 👉 **Closure:** VE attached to the function, exactly as it was at the time and place the function was created

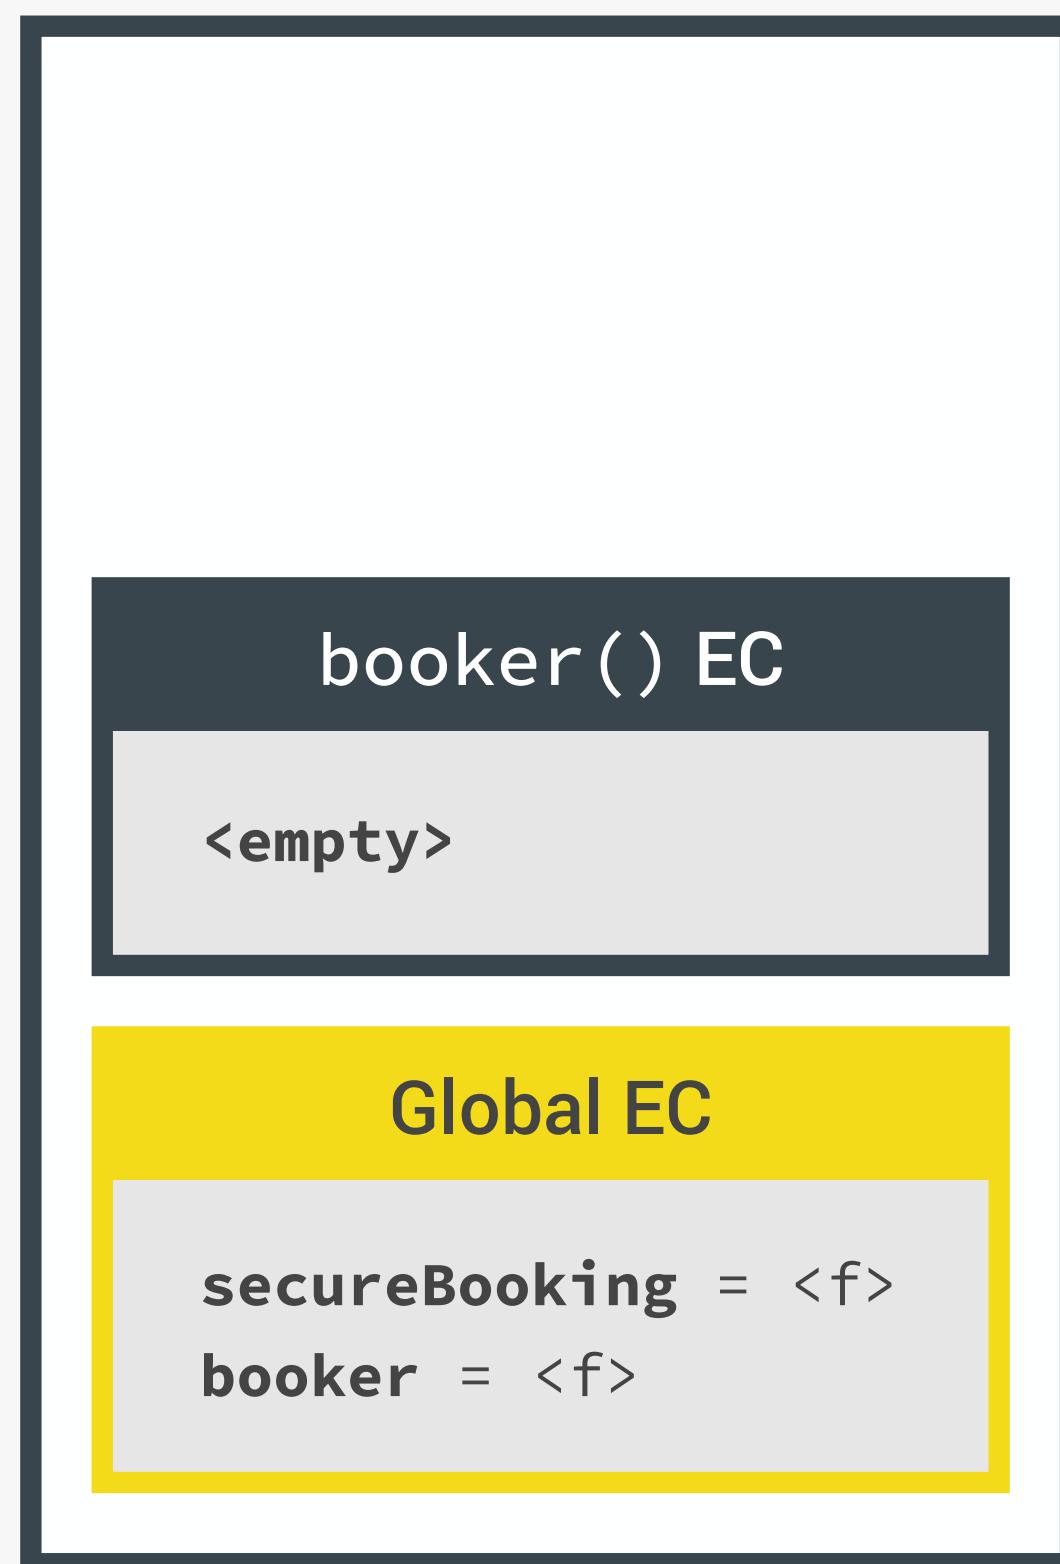


```
const secureBooking = function () {
  let passengerCount = 0;

  return function () {
    passengerCount++;
    console.log(`${
      passengerCount
      passengers
    }`);
  };
};

const booker = booker();
booker(); // 1 passengers
booker(); // 2 passengers
```

This is the function

The code defines a closure where the inner function `booker()` has access to the `passengerCount` variable from its parent scope. The `passengerCount` value is highlighted in red and shown as `2` in the code.

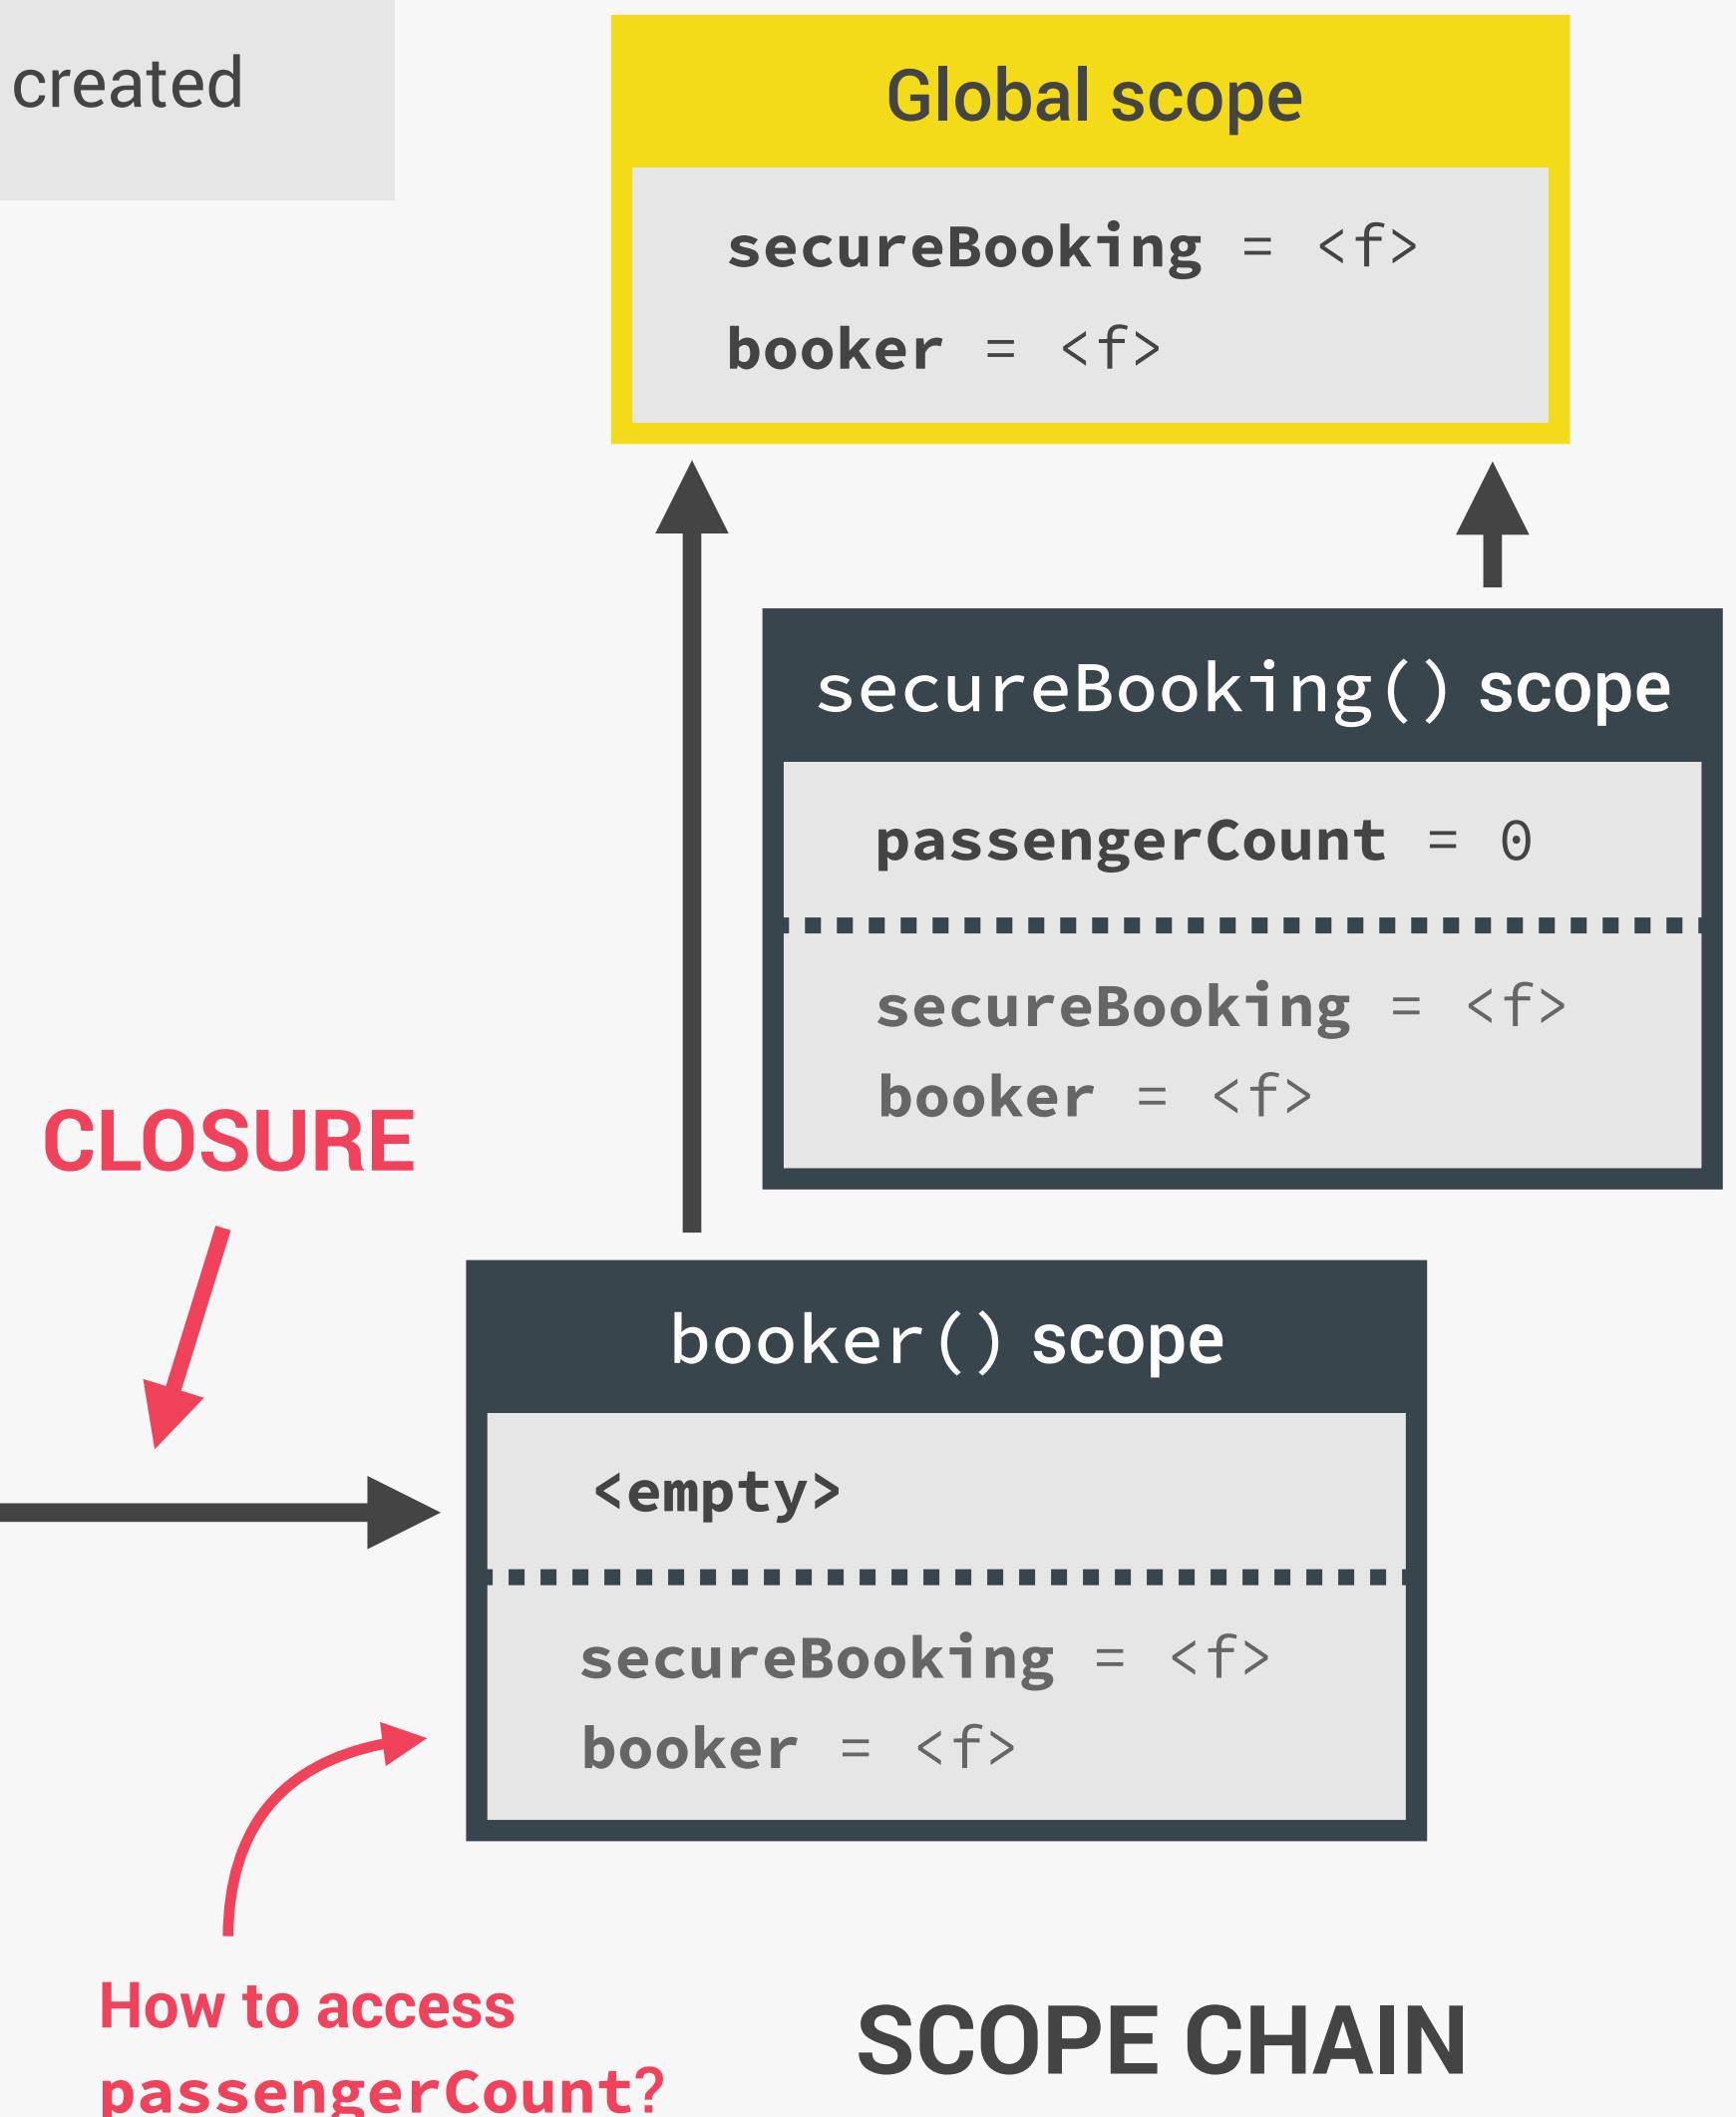

CALL STACK

SCOPE CHAIN


CLOSURES SUMMARY



- 👉 A closure is the closed-over **variable environment** of the execution context **in which a function was created**, even *after* that execution context is gone;
 - ↓ **Less formal**
- 👉 A closure gives a function access to all the variables **of its parent function**, even *after* that parent function has returned. The function keeps a **reference** to its outer scope, which *preserves* the scope chain throughout time.
 - ↓ **Less formal**

- 👉 A closure makes sure that a function doesn't loose connection to **variables that existed at the function's birth place**;

↓
Less formal

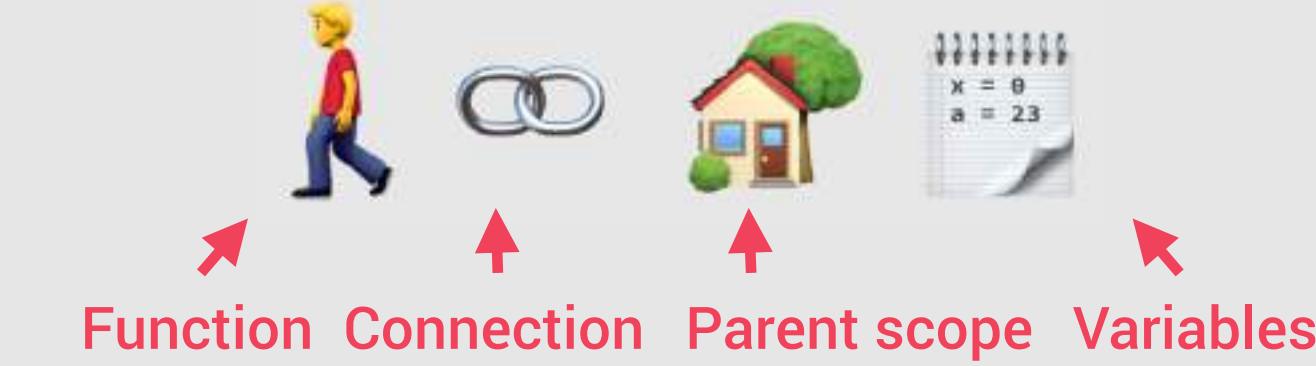

- 👉 A closure is like a **backpack** that a function carries around wherever it goes. This backpack has all the **variables that were present in the environment where the function was created**.



- 👉 We do **NOT** have to manually create closures, this is a JavaScript feature that happens automatically. We can't even access closed-over variables explicitly. A closure is **NOT** a tangible JavaScript object.

WORKING WITH ARRAYS



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!






@JONASSCHMEDTMAN

SECTION
WORKING WITH ARRAYS

LECTURE
DATA TRANSFORMATIONS: MAP, FILTER,
REDUCE

JS

DATA TRANSFORMATIONS WITH MAP, FILTER AND REDUCE

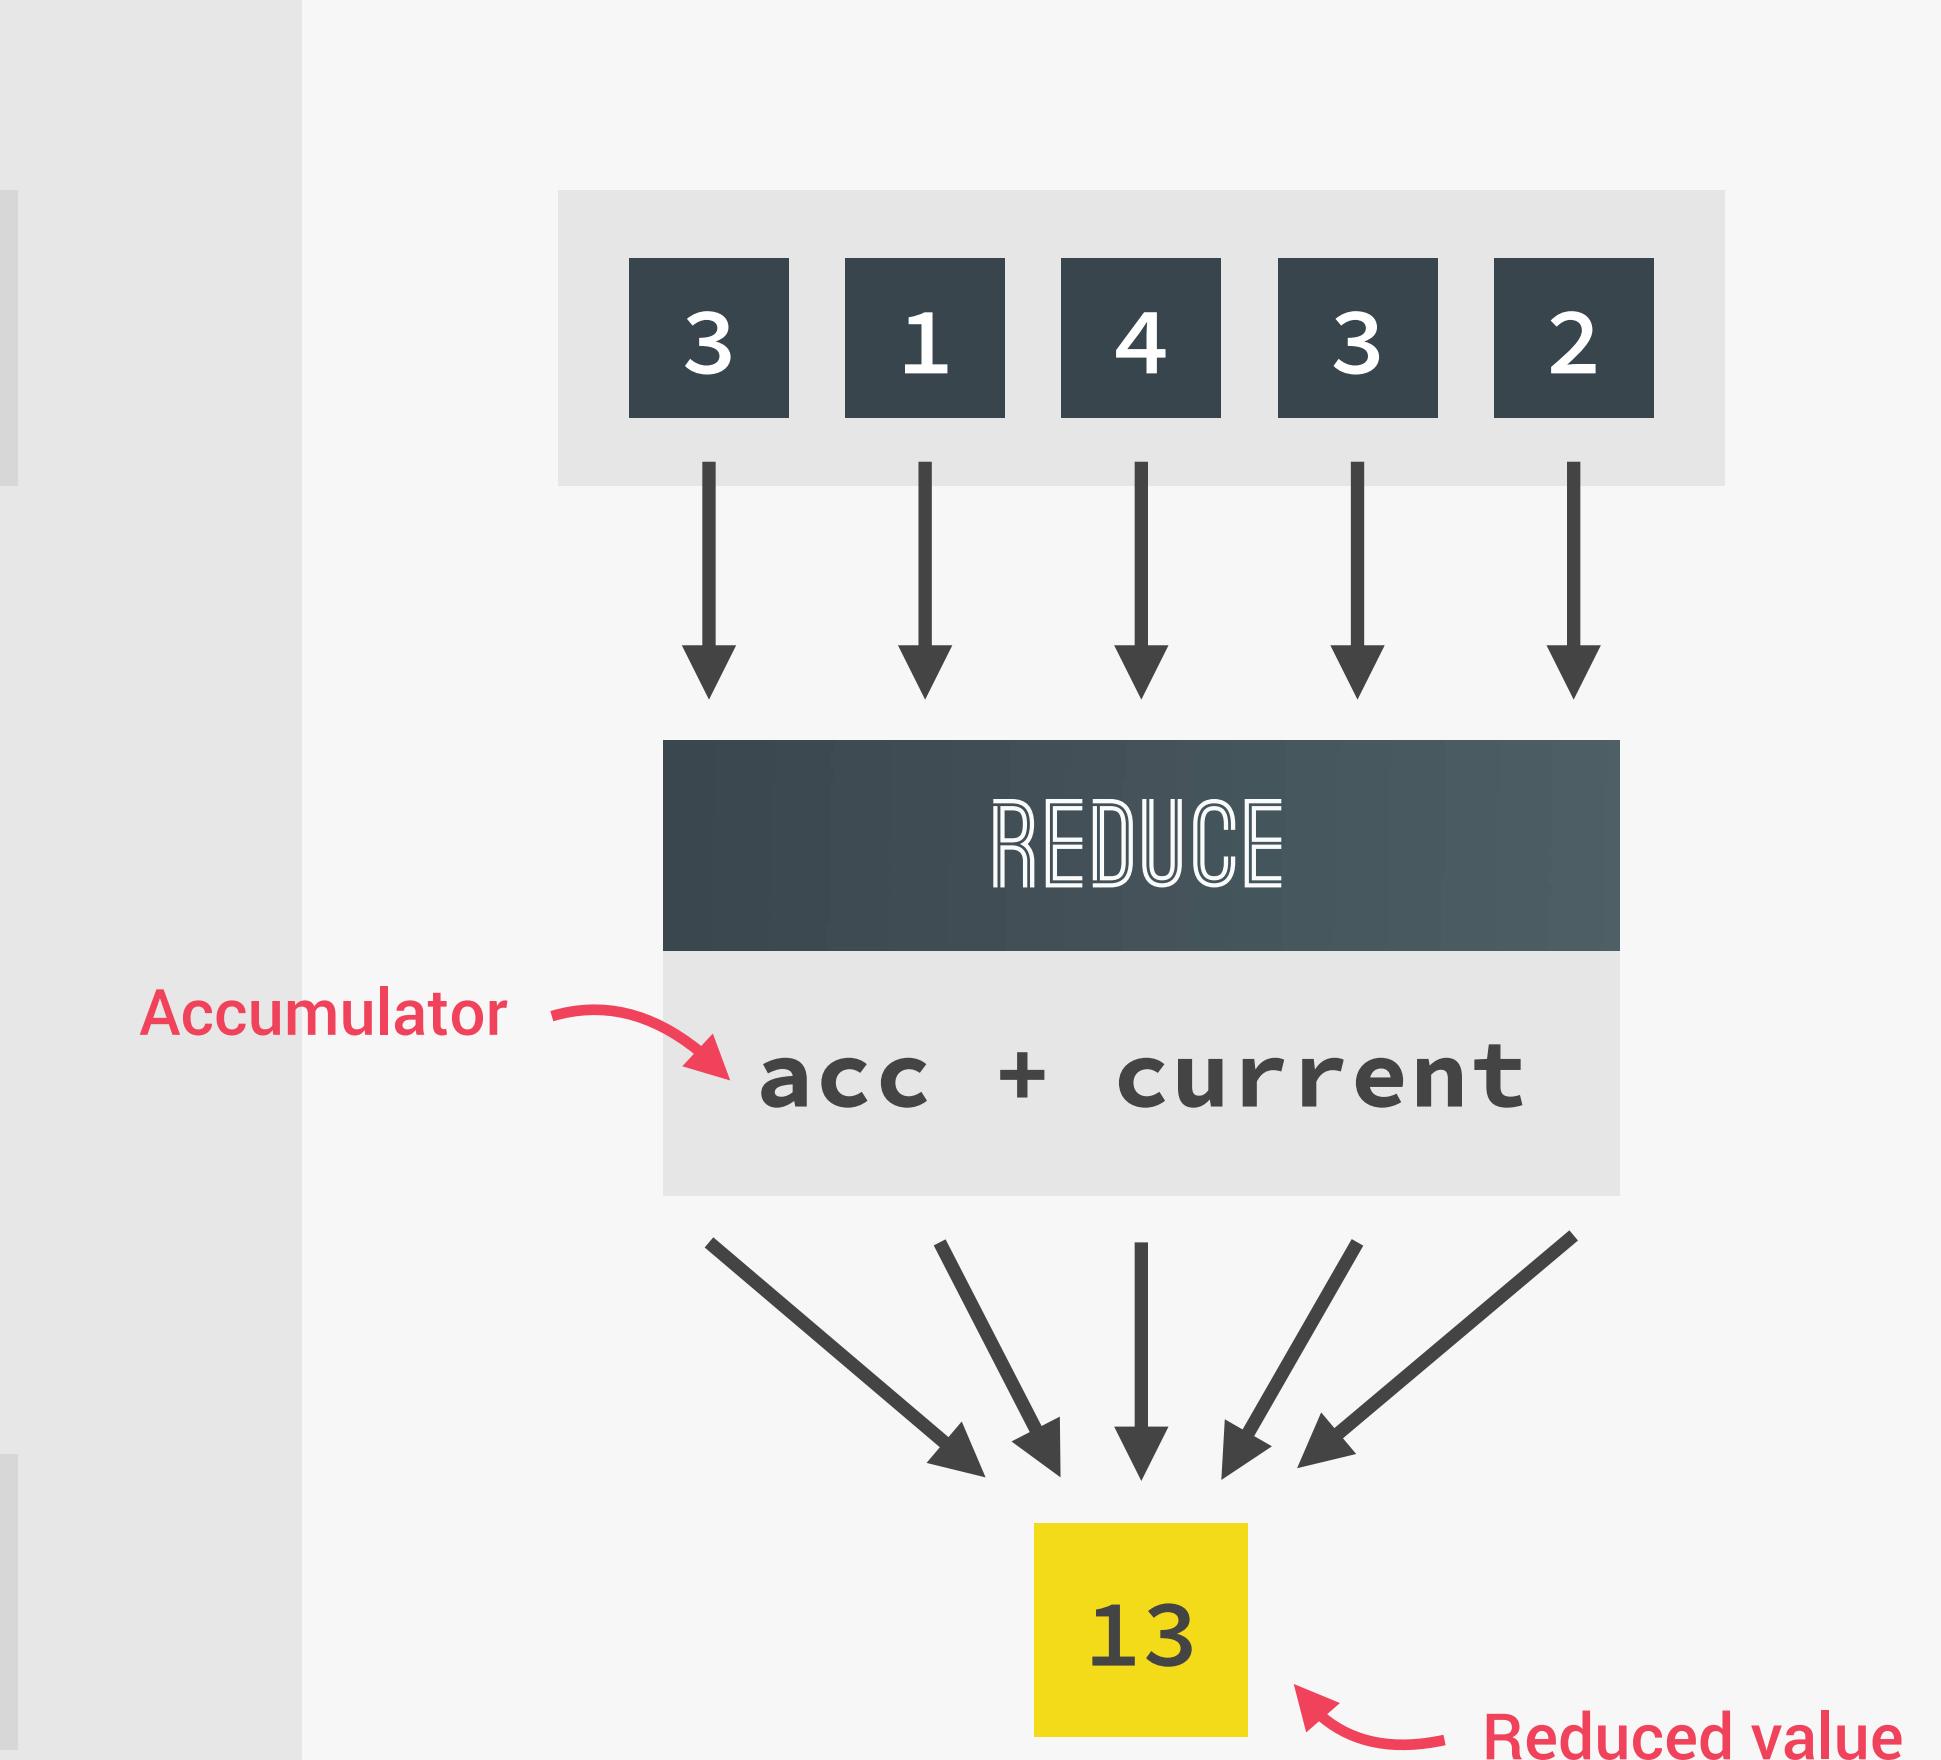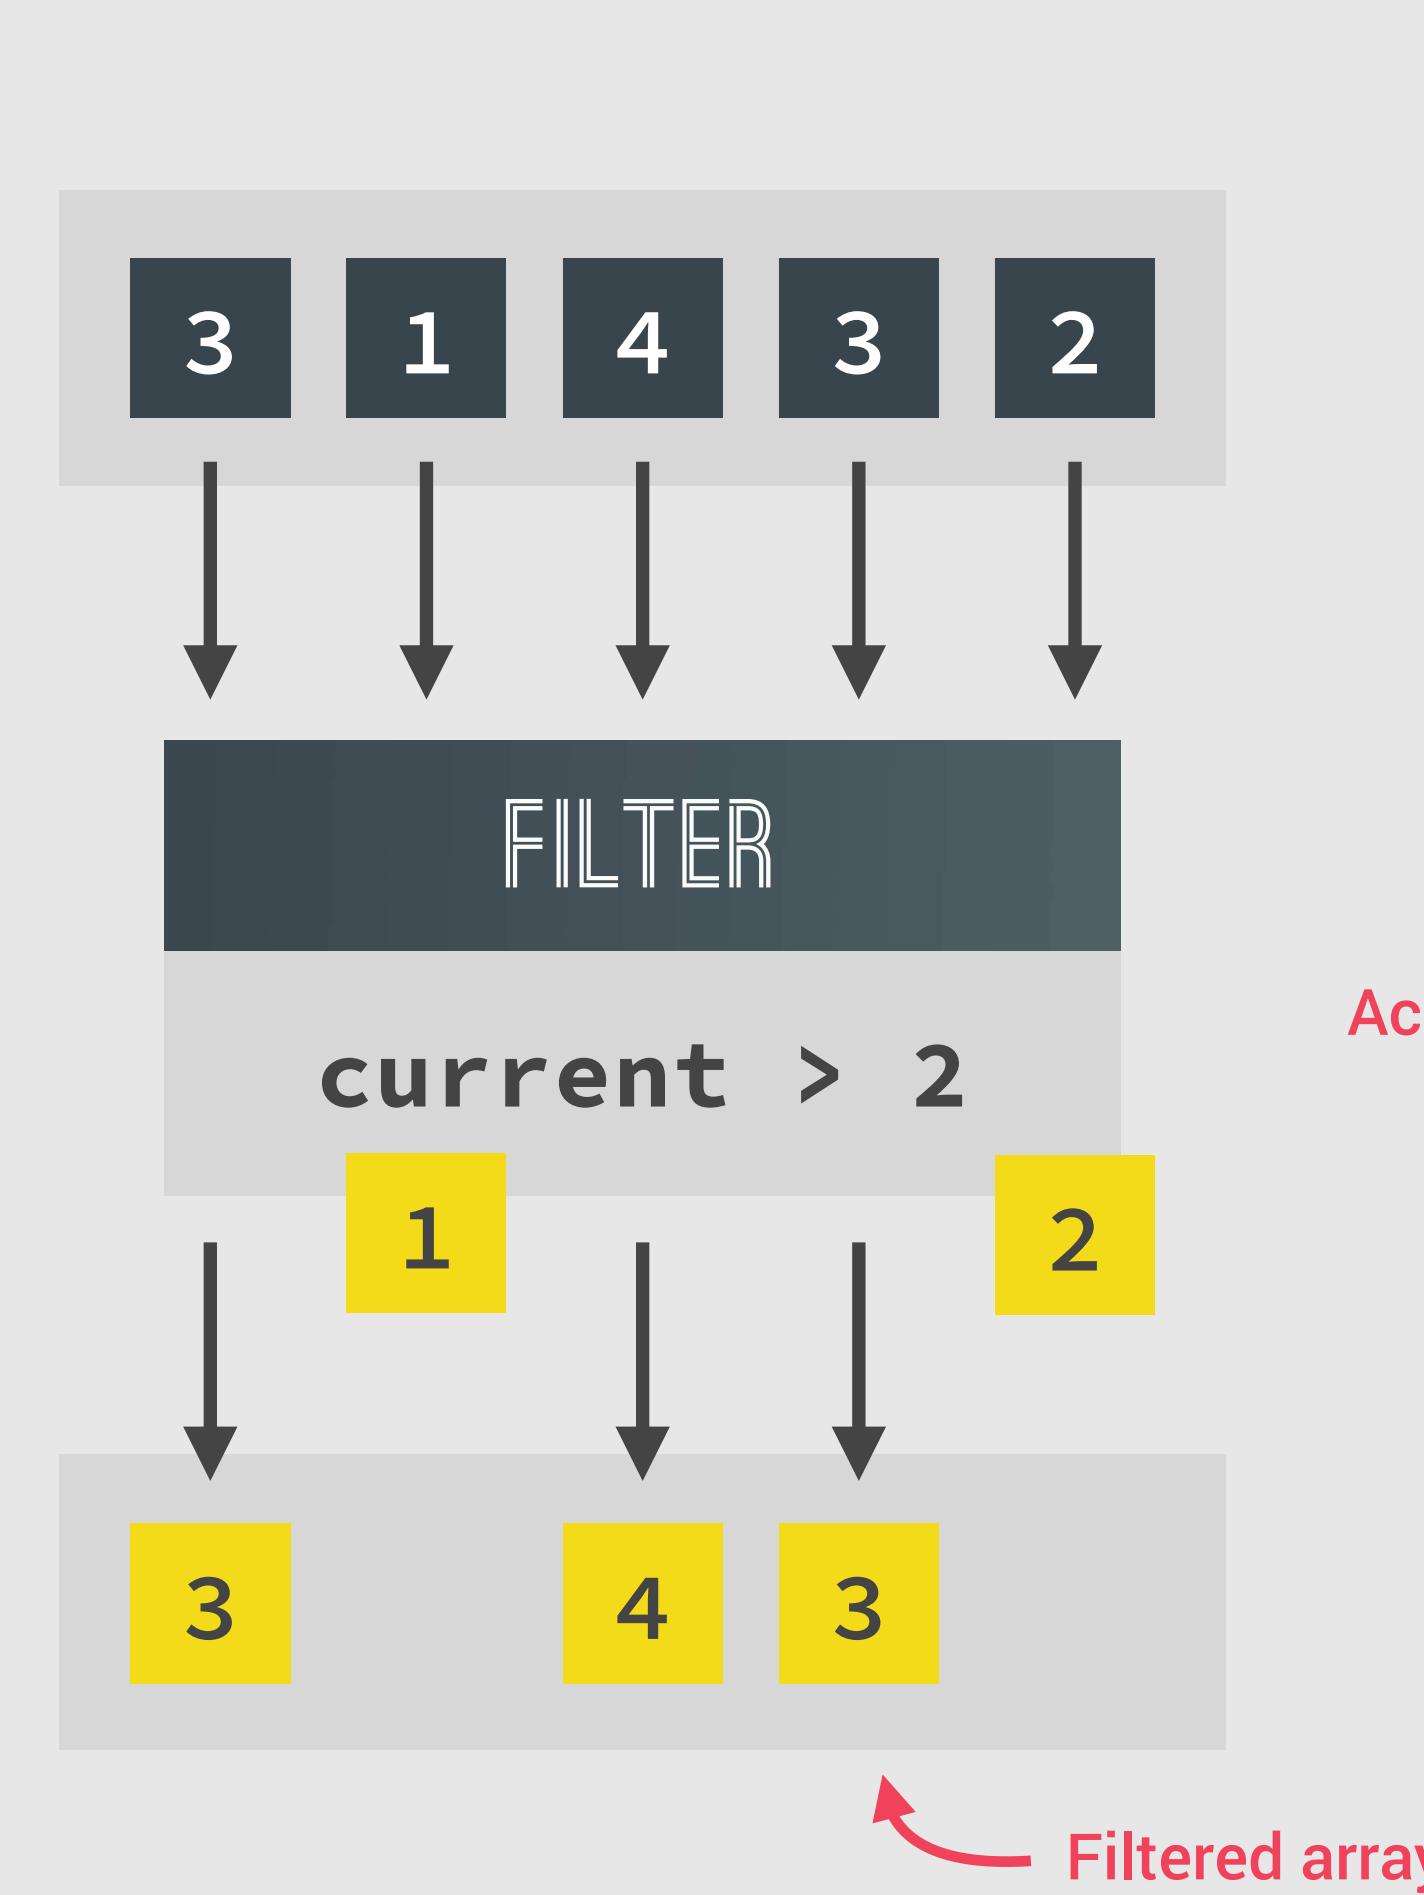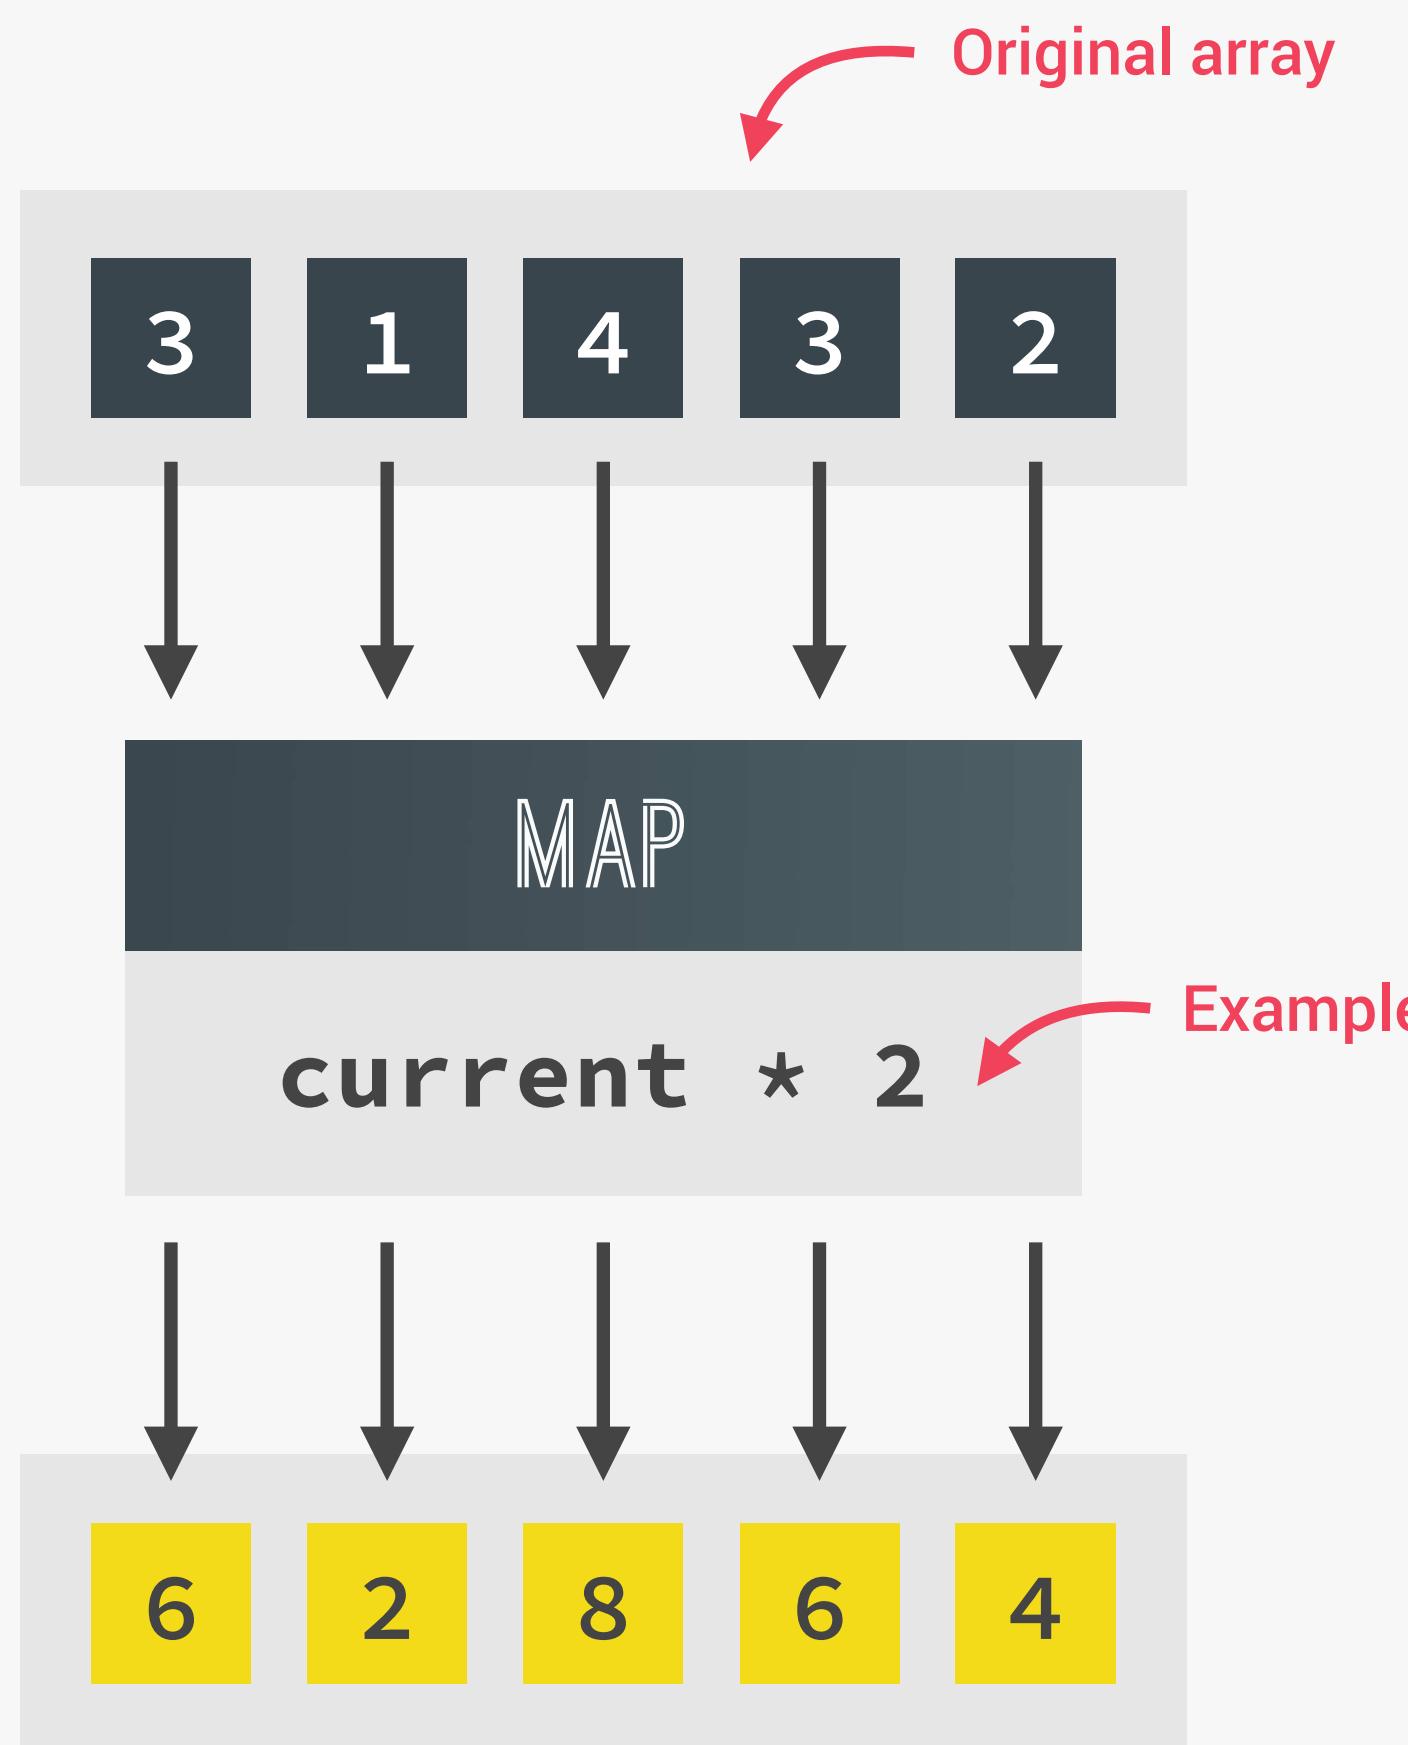

👉 map returns a **new array** containing the results of applying an operation on all original array elements

👉 filter returns a **new array** containing the array elements that passed a specified **test condition**

👉 reduce boils ("reduces") all array elements down to one single value (e.g. adding all elements together)



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION
WORKING WITH ARRAYS

LECTURE
SUMMARY: WHICH ARRAY METHOD TO
USE?

JS

WHICH ARRAY METHOD TO USE?



"I WANT..."

To mutate original

👉 Add to original:

`.push` (end)

`.unshift` (start)

👉 Remove from original:

`.pop` (end)

`.shift` (start)

`.splice` (any)

👉 Others:

`.reverse`

`.sort`

`.fill`

👉 These should
usually be avoided!

A new array based on original

👉 Same length as original:

`.map` (loop)

👉 Filtered using condition:

`.filter`

👉 Taking portion of original:

`.slice`

👉 With one item replaced:

`.with`

👉 Flattened:

`.flat`

`.flatMap`

👉 Reversed:

`.toReversed`

👉 Sorted:

`.toSorted`

👉 With deleted items:

`.toSpliced`

👉 Joining two arrays:

`.concat`

An array index

👉 Based on value:

`.indexOf`

👉 Based on test condition:

`.findIndex`

`.findLastIndex`

An array element

👉 Based on test condition:

`.find`

`.findLast`

👉 Based on position:

`.at`

Know if array includes

👉 Based on value:

`.includes`

👉 Based on test condition:

`.some`

`.every`

A new string

👉 Based on separator:

`.join`

To transform to value

👉 Based on accumulator:

`.reduce`

(Boil down array to single value of any type: number, string, boolean, or even new array or object)

To just loop array

👉 Based on callback:

`.forEach`

(Does not create a new array, just loops over it)

MORE ARRAY TOOLS AND TECHNIQUES

👉 Grouping an array by categories:

```
Object.groupBy
```

👉 Creating a new array **from scratch**:

```
Array.from
```

👉 Creating a new array **from scratch** with n empty positions (use together with `.fill` method):

```
new Array(n)
```

👉 Joining 2 or more arrays:

```
[...arr1, ...arr2]
```

👉 Creating a new array containing **unique** values from arr

```
[...new Set(arr)]
```

👉 Creating a new array containing unique elements that are present **in both** arr1 and arr2

```
[...new Set(arr1).intersection(new Set(arr2))]
```


ADVANCED DOM AND EVENTS



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


ADVANCED DOM AND EVENTS

LECTURE

HOW THE DOM REALLY WORKS


JS

REVIEW: WHAT IS THE DOM?

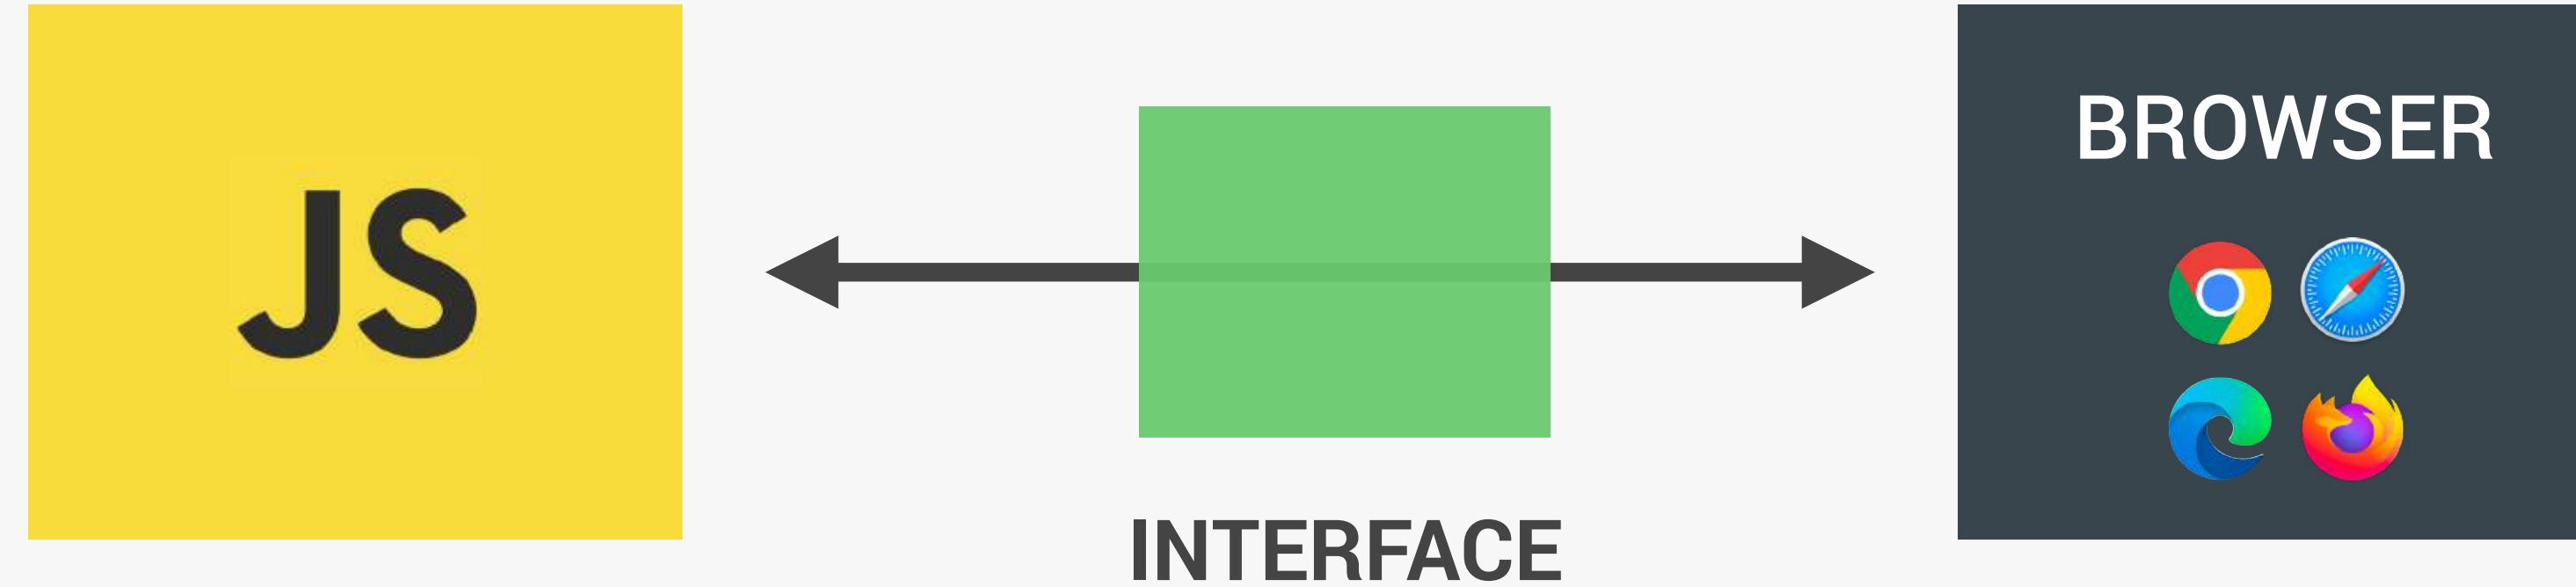

- 👉 Allows us to make JavaScript interact with the browser;
- 👉 We can write JavaScript to create, modify and delete HTML elements; set styles, classes and attributes; and listen and respond to events;
- 👉 DOM tree is generated from an HTML document, which we can then interact with;
- 👉 DOM is a very complex API that contains lots of methods and properties to interact with the DOM tree

Application Programming Interface

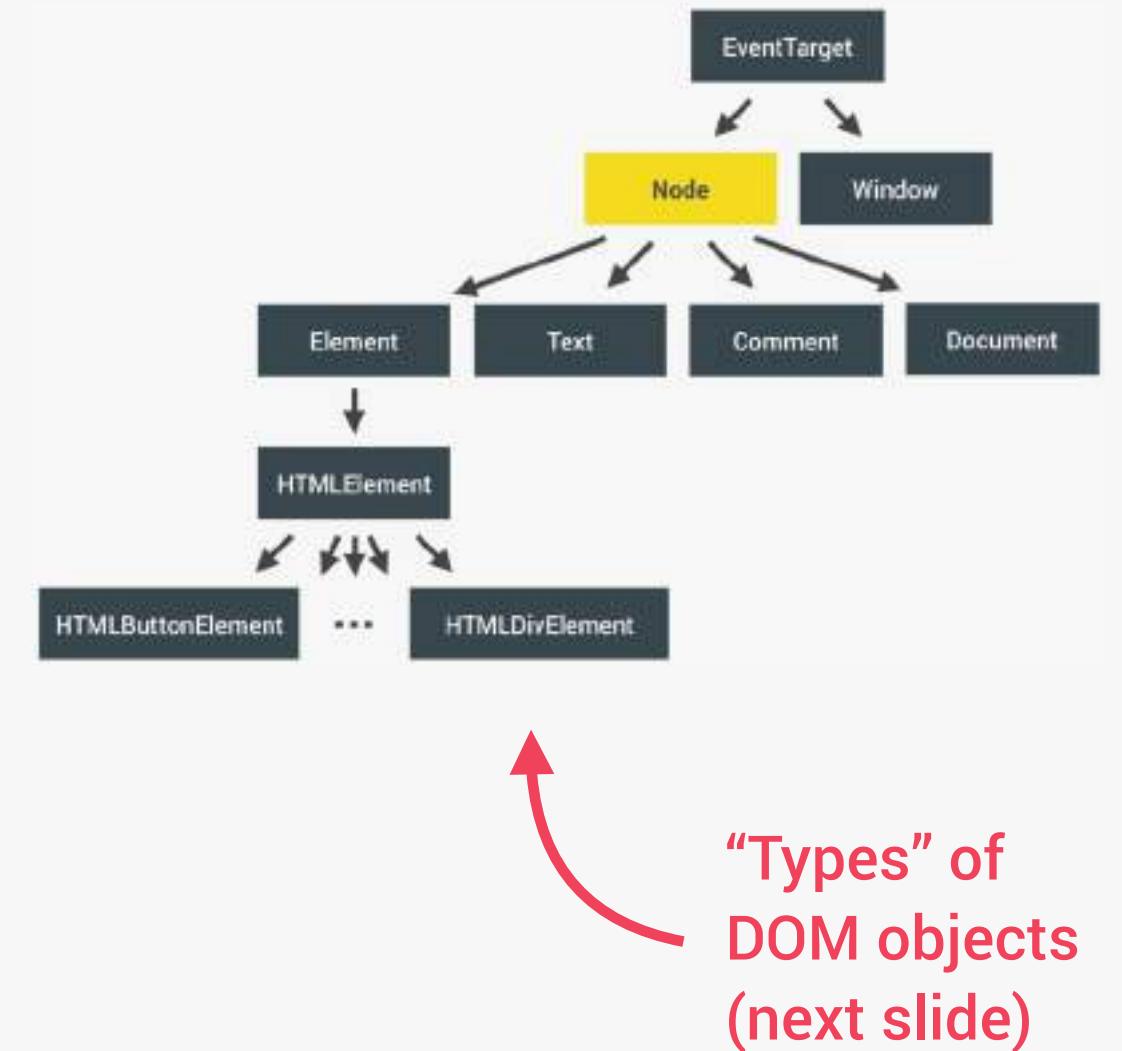


```
.querySelector() / .addEventListener() / .createElement() /  
.innerHTML / .textContent / .children / etc ...
```

HOW THE DOM API IS ORGANIZED BEHIND THE SCENES



.innerHTML
.classList
.children
.parentElement
.append()
.remove()
.insertAdjacentHTML()
.querySelector()
.closest()
.matches()
.scrollIntoView()
.setAttribute()

A red arrow points from the ".querySelector()" line to the "Element" node in the diagram.

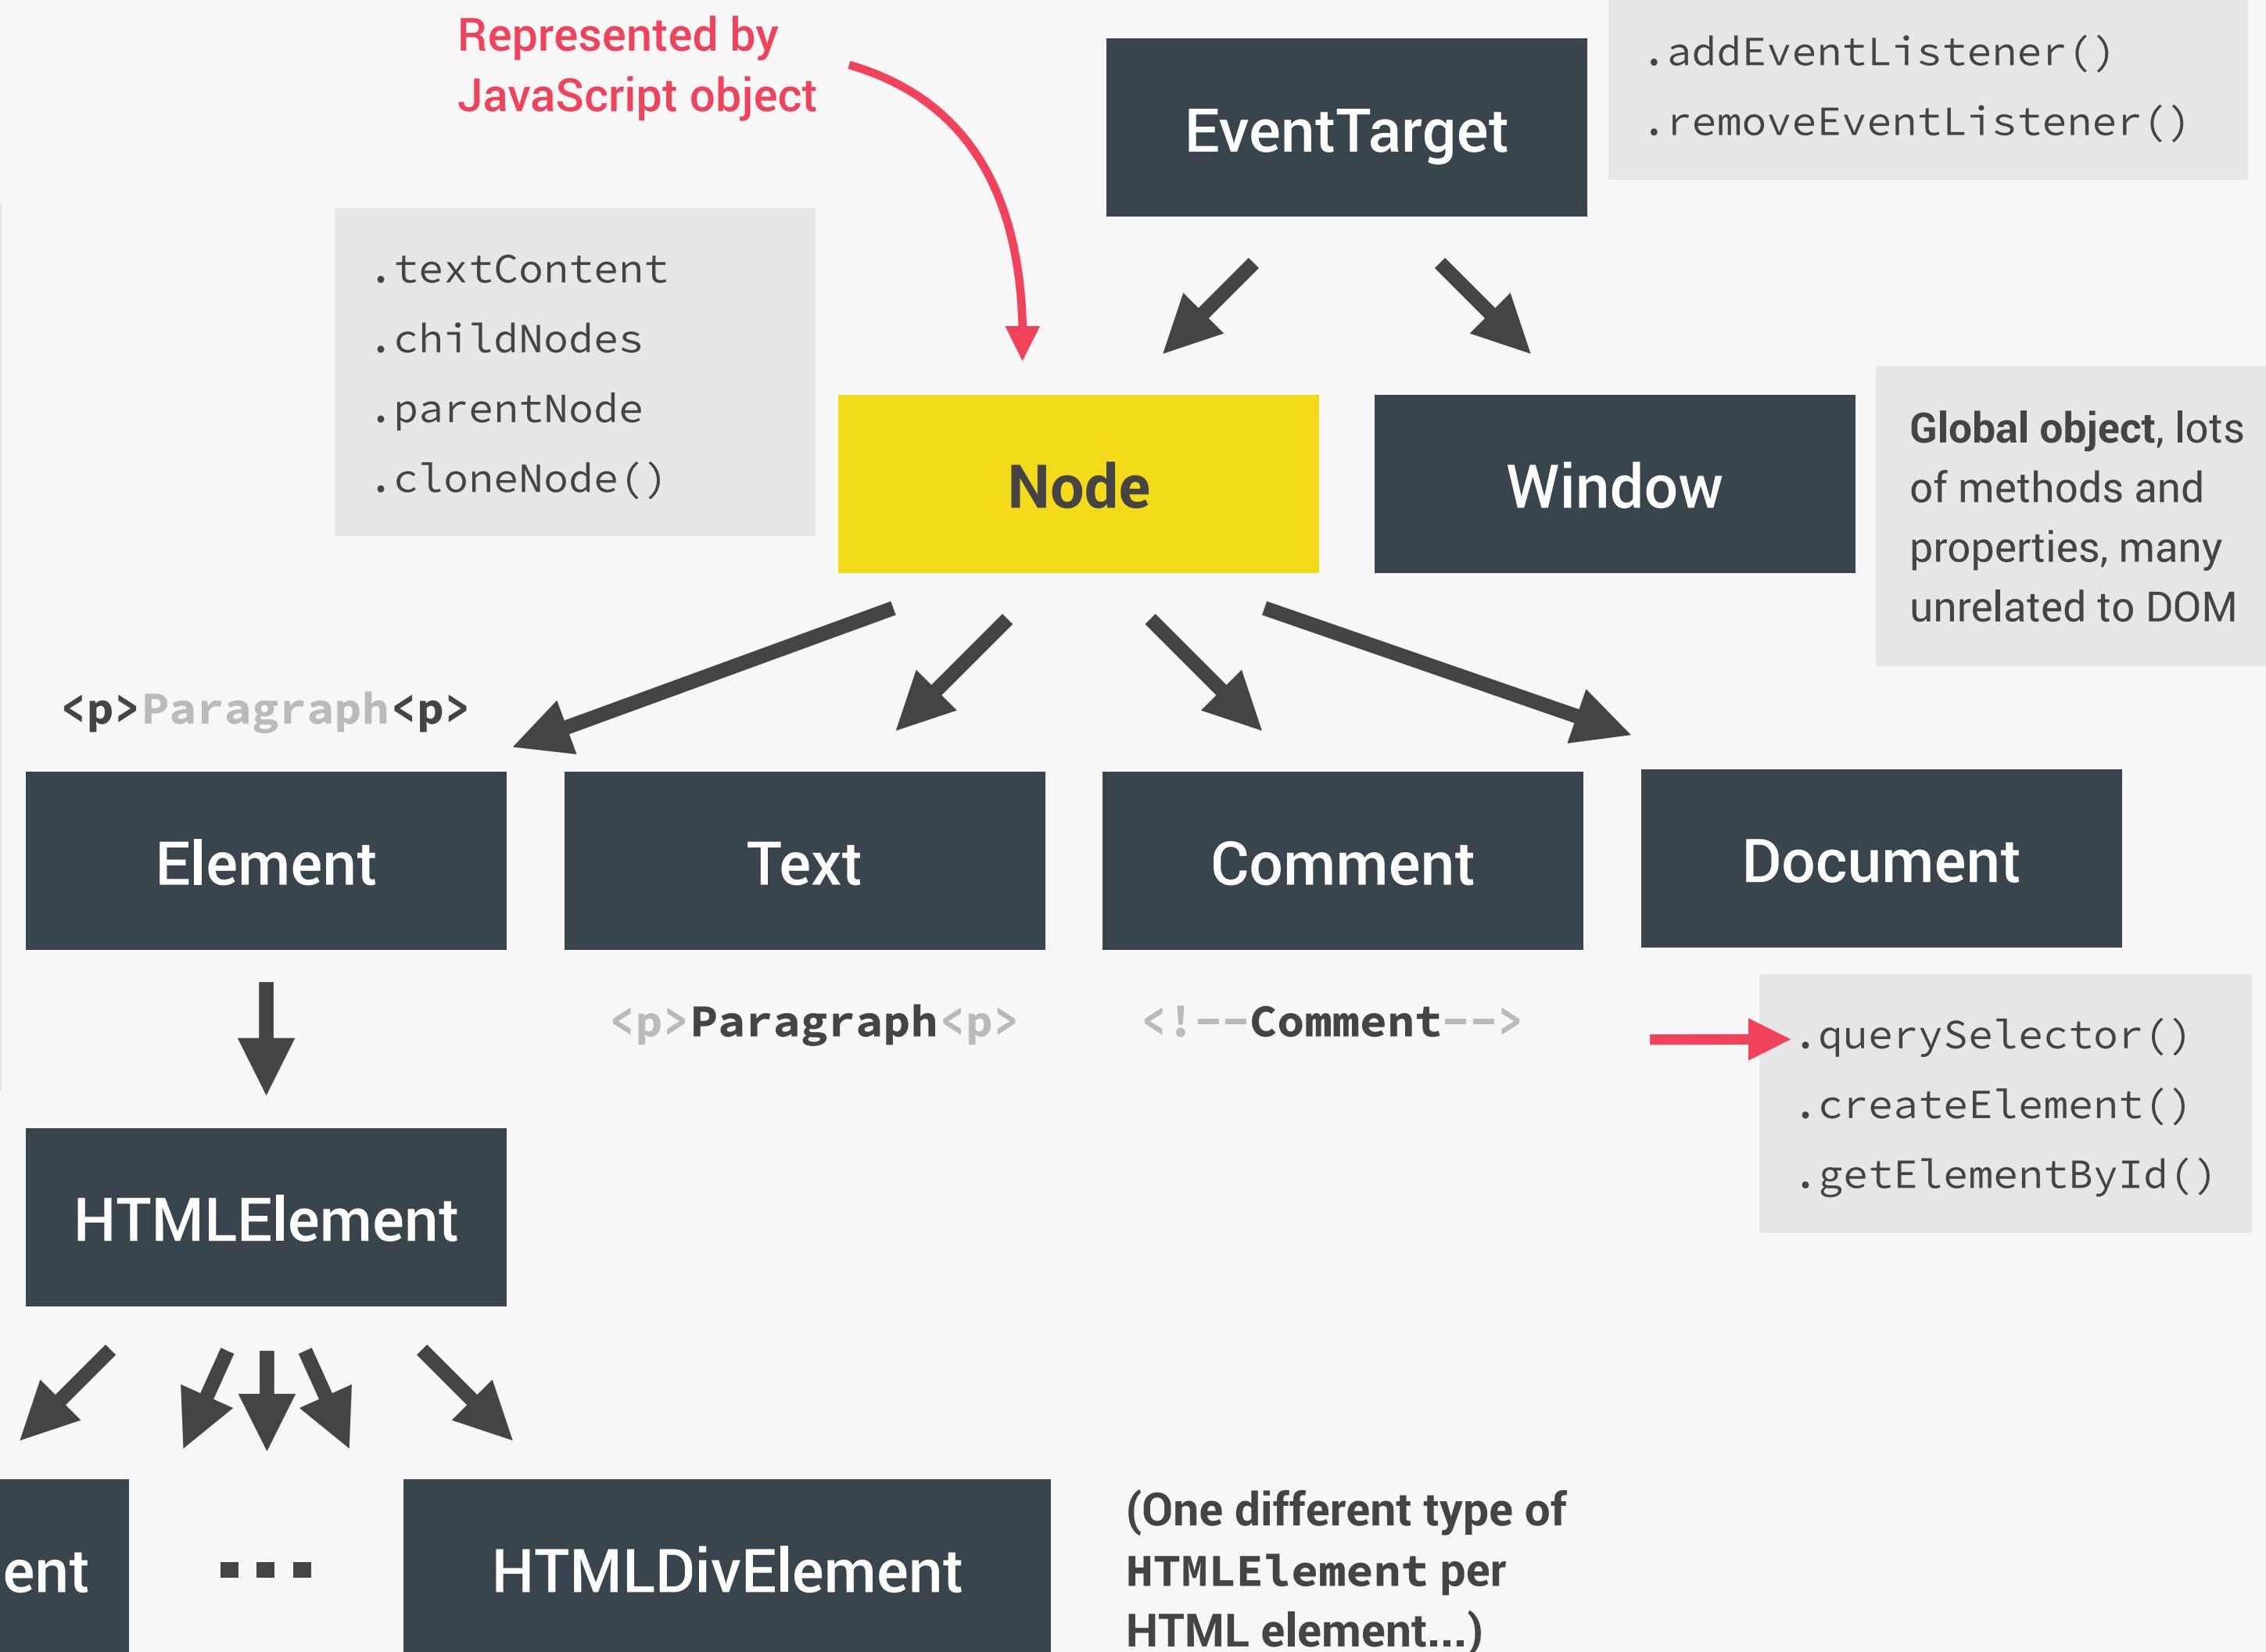

INHERITANCE OF METHODS AND PROPERTIES

Example:

Any HTMLElement will have access to .addEventListener(), .cloneNode(), or .closest() methods.

(THIS IS NOT A DOM TREE)



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

ADVANCED DOM AND EVENTS

LECTURE

EVENT PROPAGATION: BUBBLING AND
CAPTURING

JS

BUBBLING AND CAPTURING

```
<html>
  <head>
    <title>A Simple Page</title>
  </head>
  <body>
    <section>
      <p>A paragraph with a <a>link</a></p>
      <p>A second paragraph</p>
    </section>
    <section>
      
    </section>
  </body>
</html>
```


1 CAPTURING PHASE

Click event

1

2 TARGET PHASE

2

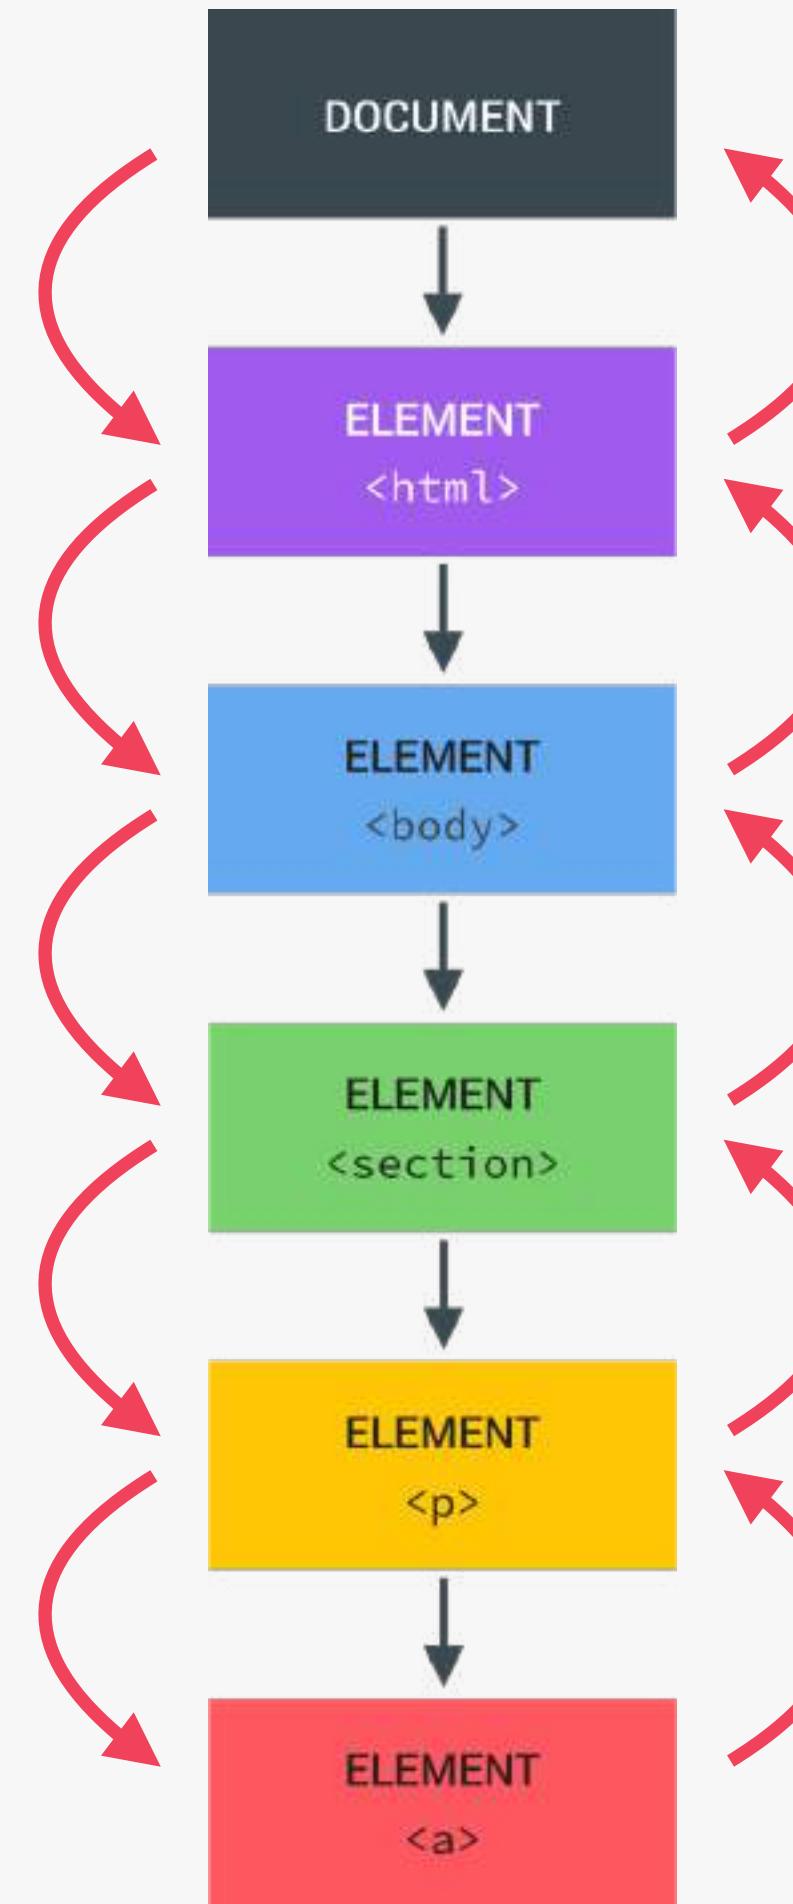

3 BUBBLING PHASE

```
document
  .querySelector('section')
  .addEventListener('click', () => {
    alert('You clicked me 😊');
 });
```

127.0.0.1:8080 says
You clicked me 😊

```
document
  .querySelector('a')
  .addEventListener('click', () => {
    alert('You clicked me 😊');
});
```

127.0.0.1:8080 says
You clicked me 😊

(THIS DOES NOT HAPPEN
ON ALL EVENTS)



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


ADVANCED DOM AND EVENTS

LECTURE

EFFICIENT SCRIPT LOADING: DEFER
AND ASYNC


JS

DEFER AND ASYNC SCRIPT LOADING

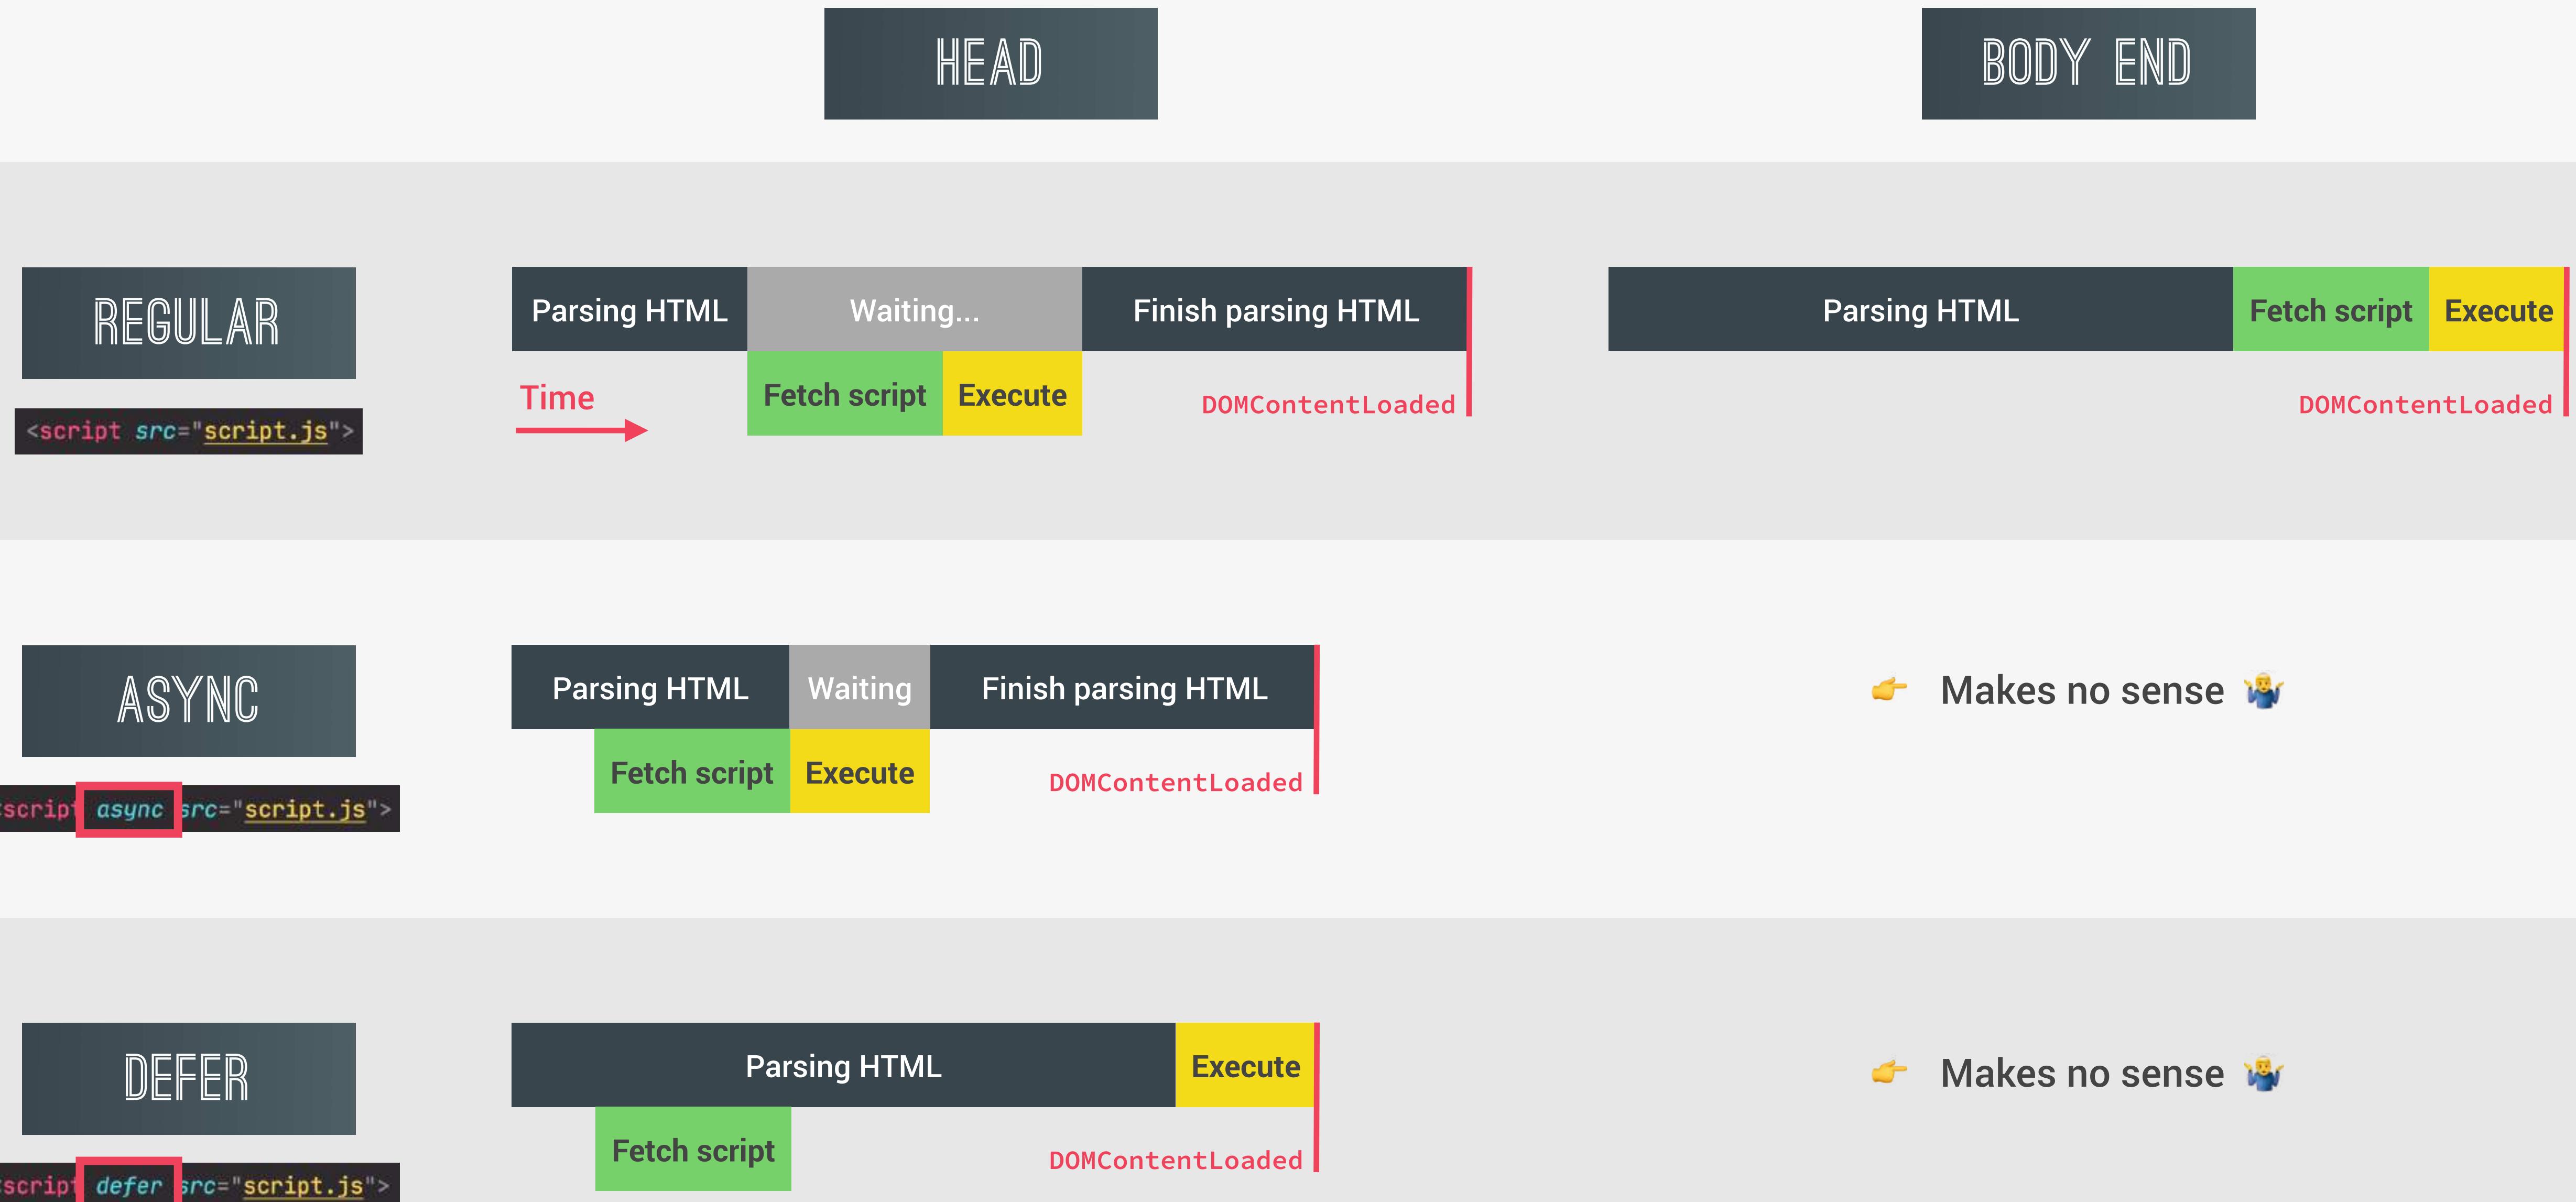

REGULAR VS. ASYNC VS. DEFER

END OF BODY

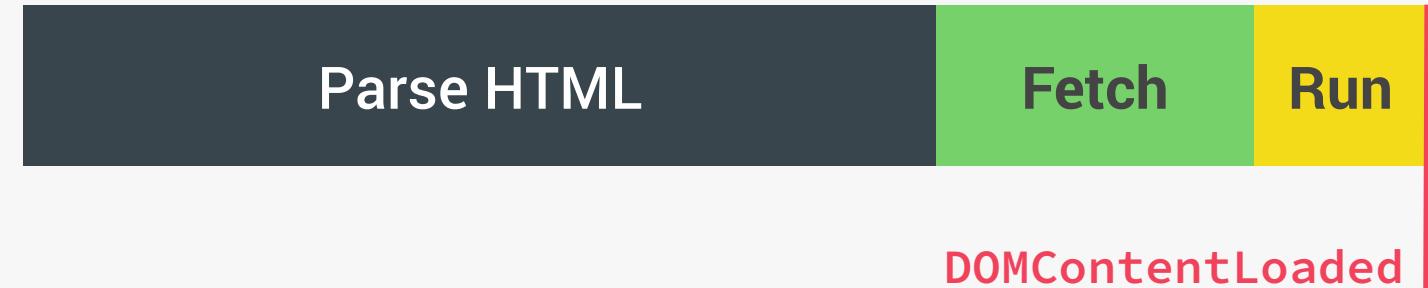


- 👉 Scripts are fetched and executed **after the HTML is completely parsed**
- 👉 **Use if you need to support old browsers**

You can, of course, use **different strategies for different scripts**. Usually a complete web application includes more than just one script


ASYNC IN HEAD




- 👉 Scripts are fetched **asynchronously** and executed **immediately**
- 👉 Usually the DOMContentLoaded event waits for **all** scripts to execute, except for async scripts. So, DOMContentLoaded does **not** wait for an async script
- 👉 Scripts **not** guaranteed to execute in order
- 👉 **Use for 3rd-party scripts where order doesn't matter (e.g. Google Analytics)**

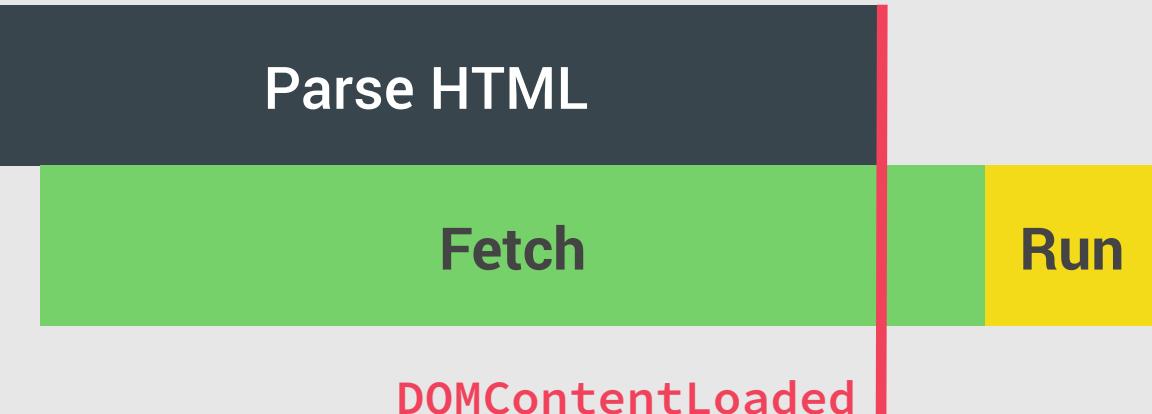

DEFER IN HEAD

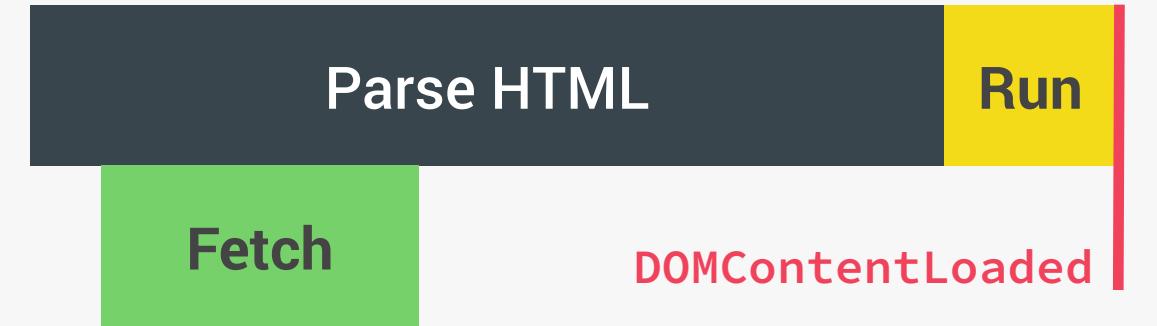

- 👉 Scripts are fetched **asynchronously** and executed **after the HTML is completely parsed**
- 👉 DOMContentLoaded event fires **after** defer script is executed
- 👉 Scripts are executed **in order**
- 👉 **This is overall the best solution! Use for your own scripts, and when order matters (e.g. including a library)**

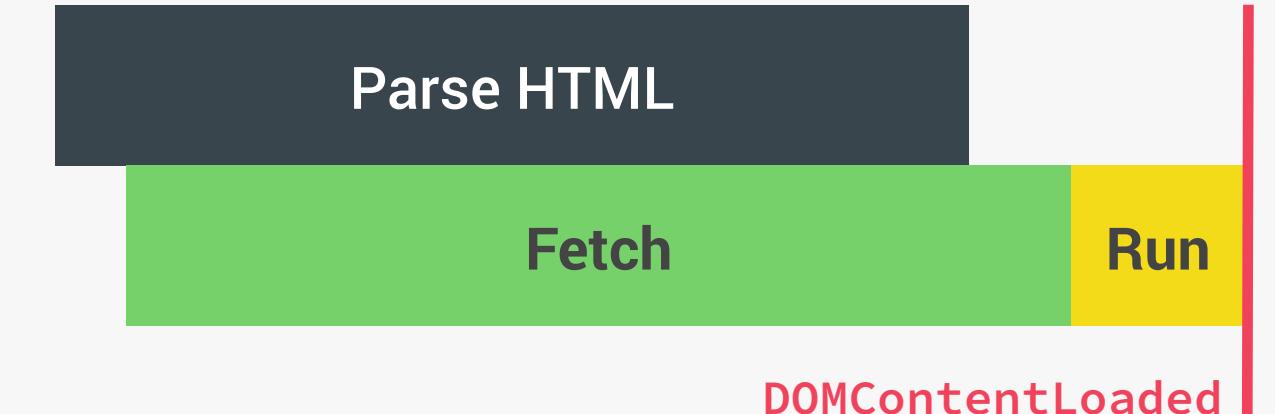

OBJECT ORIENTED
PROGRAMMING (OOP)
WITH JAVASCRIPT



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE

WHAT IS OBJECT-ORIENTED
PROGRAMMING?


JS

WHAT IS OBJECT-ORIENTED PROGRAMMING? (OOP)


OOP



Data

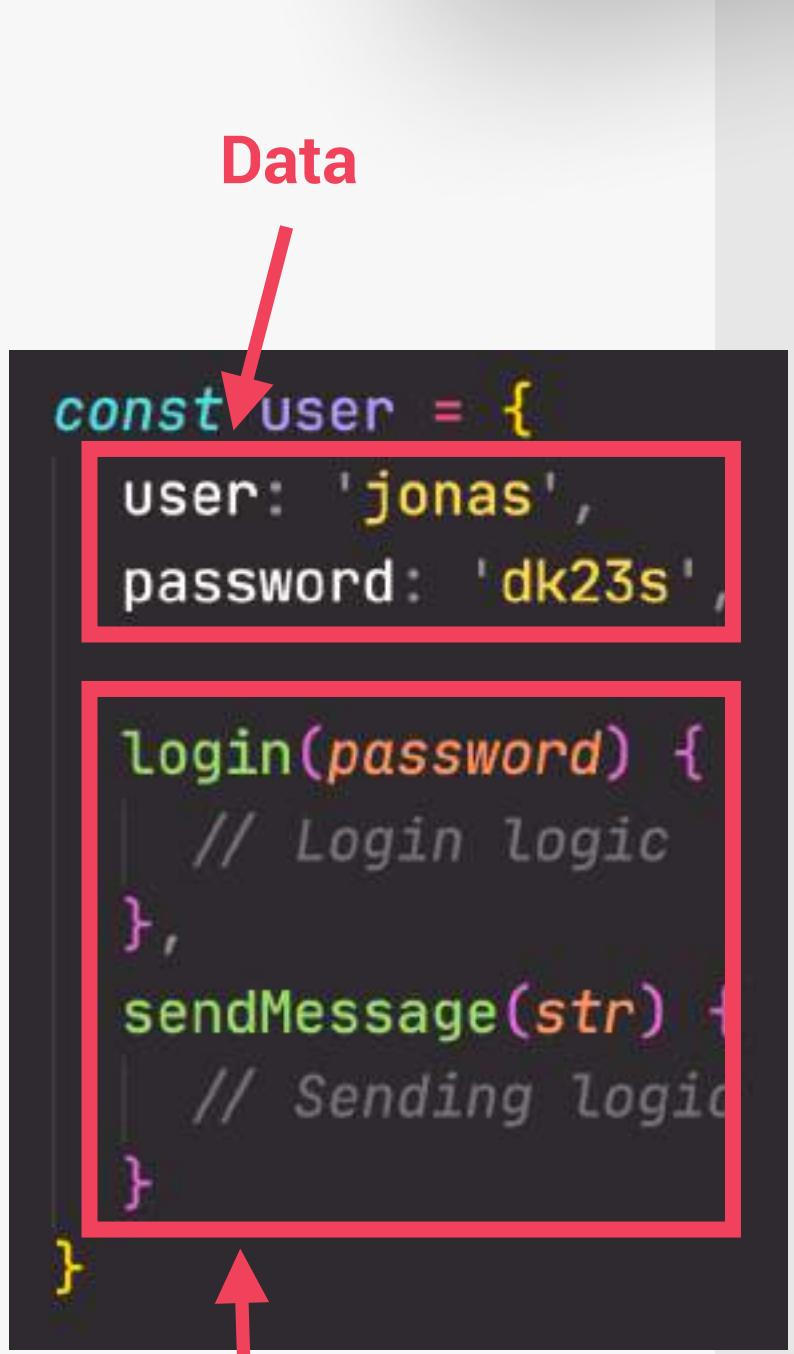


Behaviour

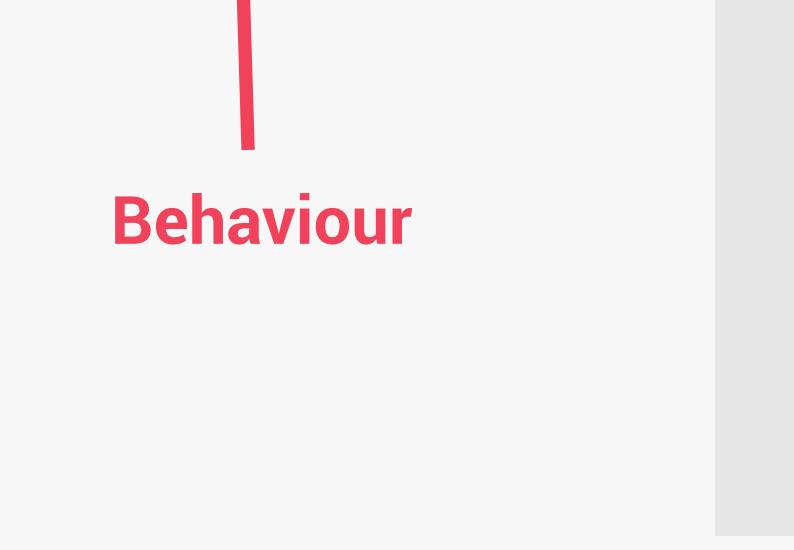

- 👉 Object-oriented programming (OOP) is a programming paradigm based on the concept of objects;
- 👉 We use objects to **model** (describe) real-world or abstract features;
E.g. user or todo list item
E.g. HTML component or data structure
- 👉 Objects may contain data (properties) and code (methods). By using objects, we pack **data and the corresponding behavior** into one block;
- 👉 In OOP, objects are **self-contained** pieces/blocks of code;
- 👉 Objects are **building blocks** of applications, and **interact** with one another;
- 👉 Interactions happen through a **public interface** (API): methods that the code **outside** of the object can access and use to communicate with the object;
- 👉 OOP was developed with the goal of **organizing** code, to make it **more flexible** and easier to maintain (avoid “spaghetti code”).

CLASSES AND INSTANCES (TRADITIONAL OOP)

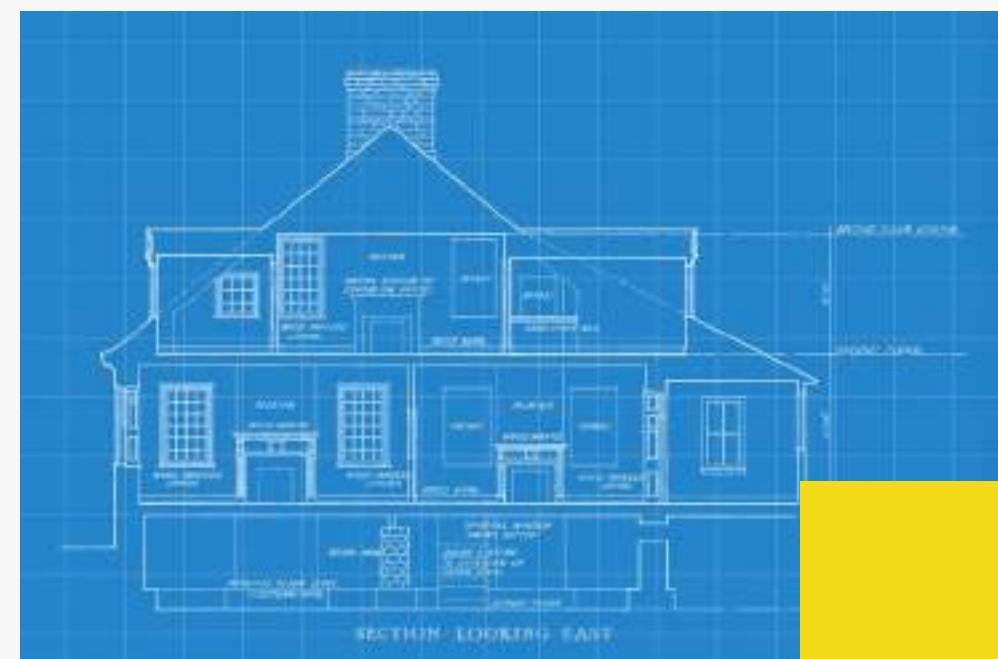

CLASS

```
User {  
  user  
  password  
  email  
  
  login(password) {  
    // Login logic  
  }  
  sendMessage(str) {  
    // Sending logic  
  }  
}
```

Just a representation,
NOT actual JavaScript
syntax!

JavaScript does NOT
support *real* classes
like represented here

Like a blueprint from
which we can create
new objects

Instance



```
{  
  user = 'jonas'  
  password = 'dk23s'  
  email = 'hello@jonas.io'  
  
  login(password) {  
    // Login logic  
  }  
  sendMessage(str) {  
    // Sending logic  
  }  
}
```

New object created from the class. Like a
real house created from an *abstract* blueprint

Instance



```
{  
  user = 'mary'  
  password = 'qwerty23'  
  email = 'mary@test.com'  
  
  login(password) {  
    // Login logic  
  }  
  sendMessage(str) {  
    // Sending logic  
  }  
}
```

Instance



```
{  
  user = 'steven'  
  password = '5p8dz32dd'  
  email = 'steven@tes.co'  
  
  login(password) {  
    // Login logic  
  }  
  sendMessage(str) {  
    // Sending logic  
  }  
}
```

👉 Conceptual overview: it works
a bit differently in JavaScript.
Still important to understand!

THE 4 FUNDAMENTAL OOP PRINCIPLES

Abstraction

Encapsulation


Inheritance

Polymorphism

The 4 fundamental
principles of Object-
Oriented Programming



🤔 “How do we actually design classes? How
do we model real-world data into classes?”

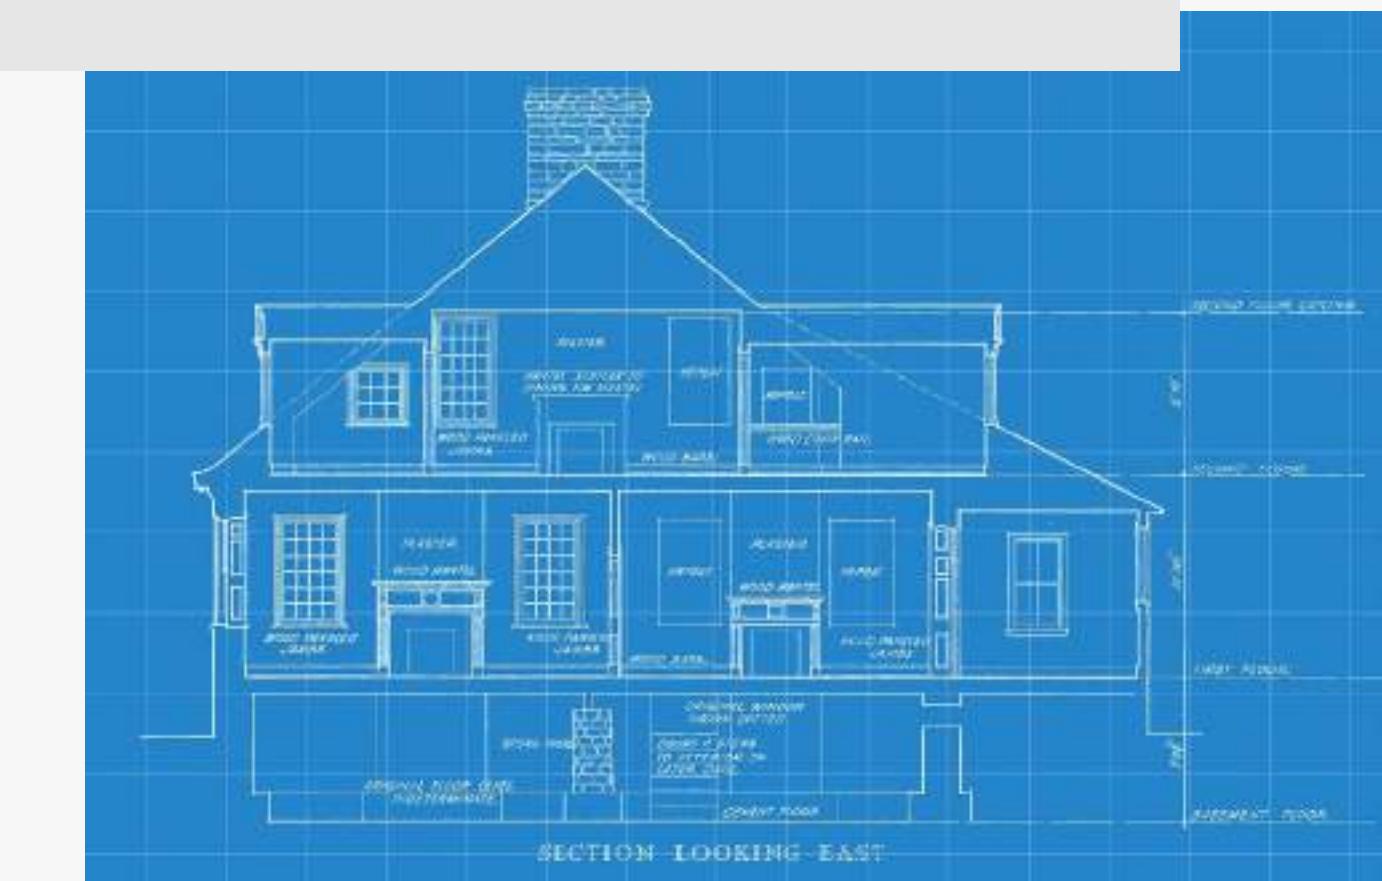

PRINCIPLE 1: ABSTRACTION

Abstraction

Encapsulation

Inheritance

Polymorphism

```
Phone {  
    charge  
    volume  
    voltage  
    temperature  
  
    homeBtn() {}  
    volumeBtn() {}  
    screen() {}  
    verifyVolt() {}  
    verifyTemp() {}  
    vibrate() {}  
    soundSpeaker() {}  
    soundEar() {}  
    frontCamOn() {}  
    frontCamOff() {}  
    rearCamOn() {}  
    rearCamOff() {}  
}
```

Real phone



Abstracted phone



```
Phone {  
    charge  
    volume  
  
    homeBtn() {}  
    volumeBtn() {}  
    screen() {}  
}
```

Details have been abstracted away

Do we *really* need all these low-level details?

👉 **Abstraction:** Ignoring or hiding details that **don't matter**, allowing us to get an **overview** perspective of the *thing* we're implementing, instead of messing with details that don't really matter to our implementation.

PRINCIPLE 2: ENCAPSULATION

Abstraction

Encapsulation

Inheritance

Polymorphism

NOT accessible from outside the class!

STILL accessible from within the class!

STILL accessible from within the class!

NOT accessible from outside the class!

```
User {  
    user  
    private password  
    private email  
  
    login(word) {  
        this.password === word  
    }  
    comment(text) {  
        this.checkSPAM(text)  
    }  
    private checkSPAM(text) {  
        // Verify logic  
    }  
}
```

Again, NOT actually JavaScript syntax (the **private** keyword doesn't exist)

WHY?

👉 Prevents external code from accidentally manipulating internal properties/state

👉 Allows to change internal implementation without the risk of breaking external code

👉 **Encapsulation:** Keeping properties and methods **private** inside the class, so they are **not accessible from outside the class**. Some methods can be **exposed** as a public interface (API).


PRINCIPLE 3: INHERITANCE

Abstraction

Encapsulation



Inheritance

Polymorphism

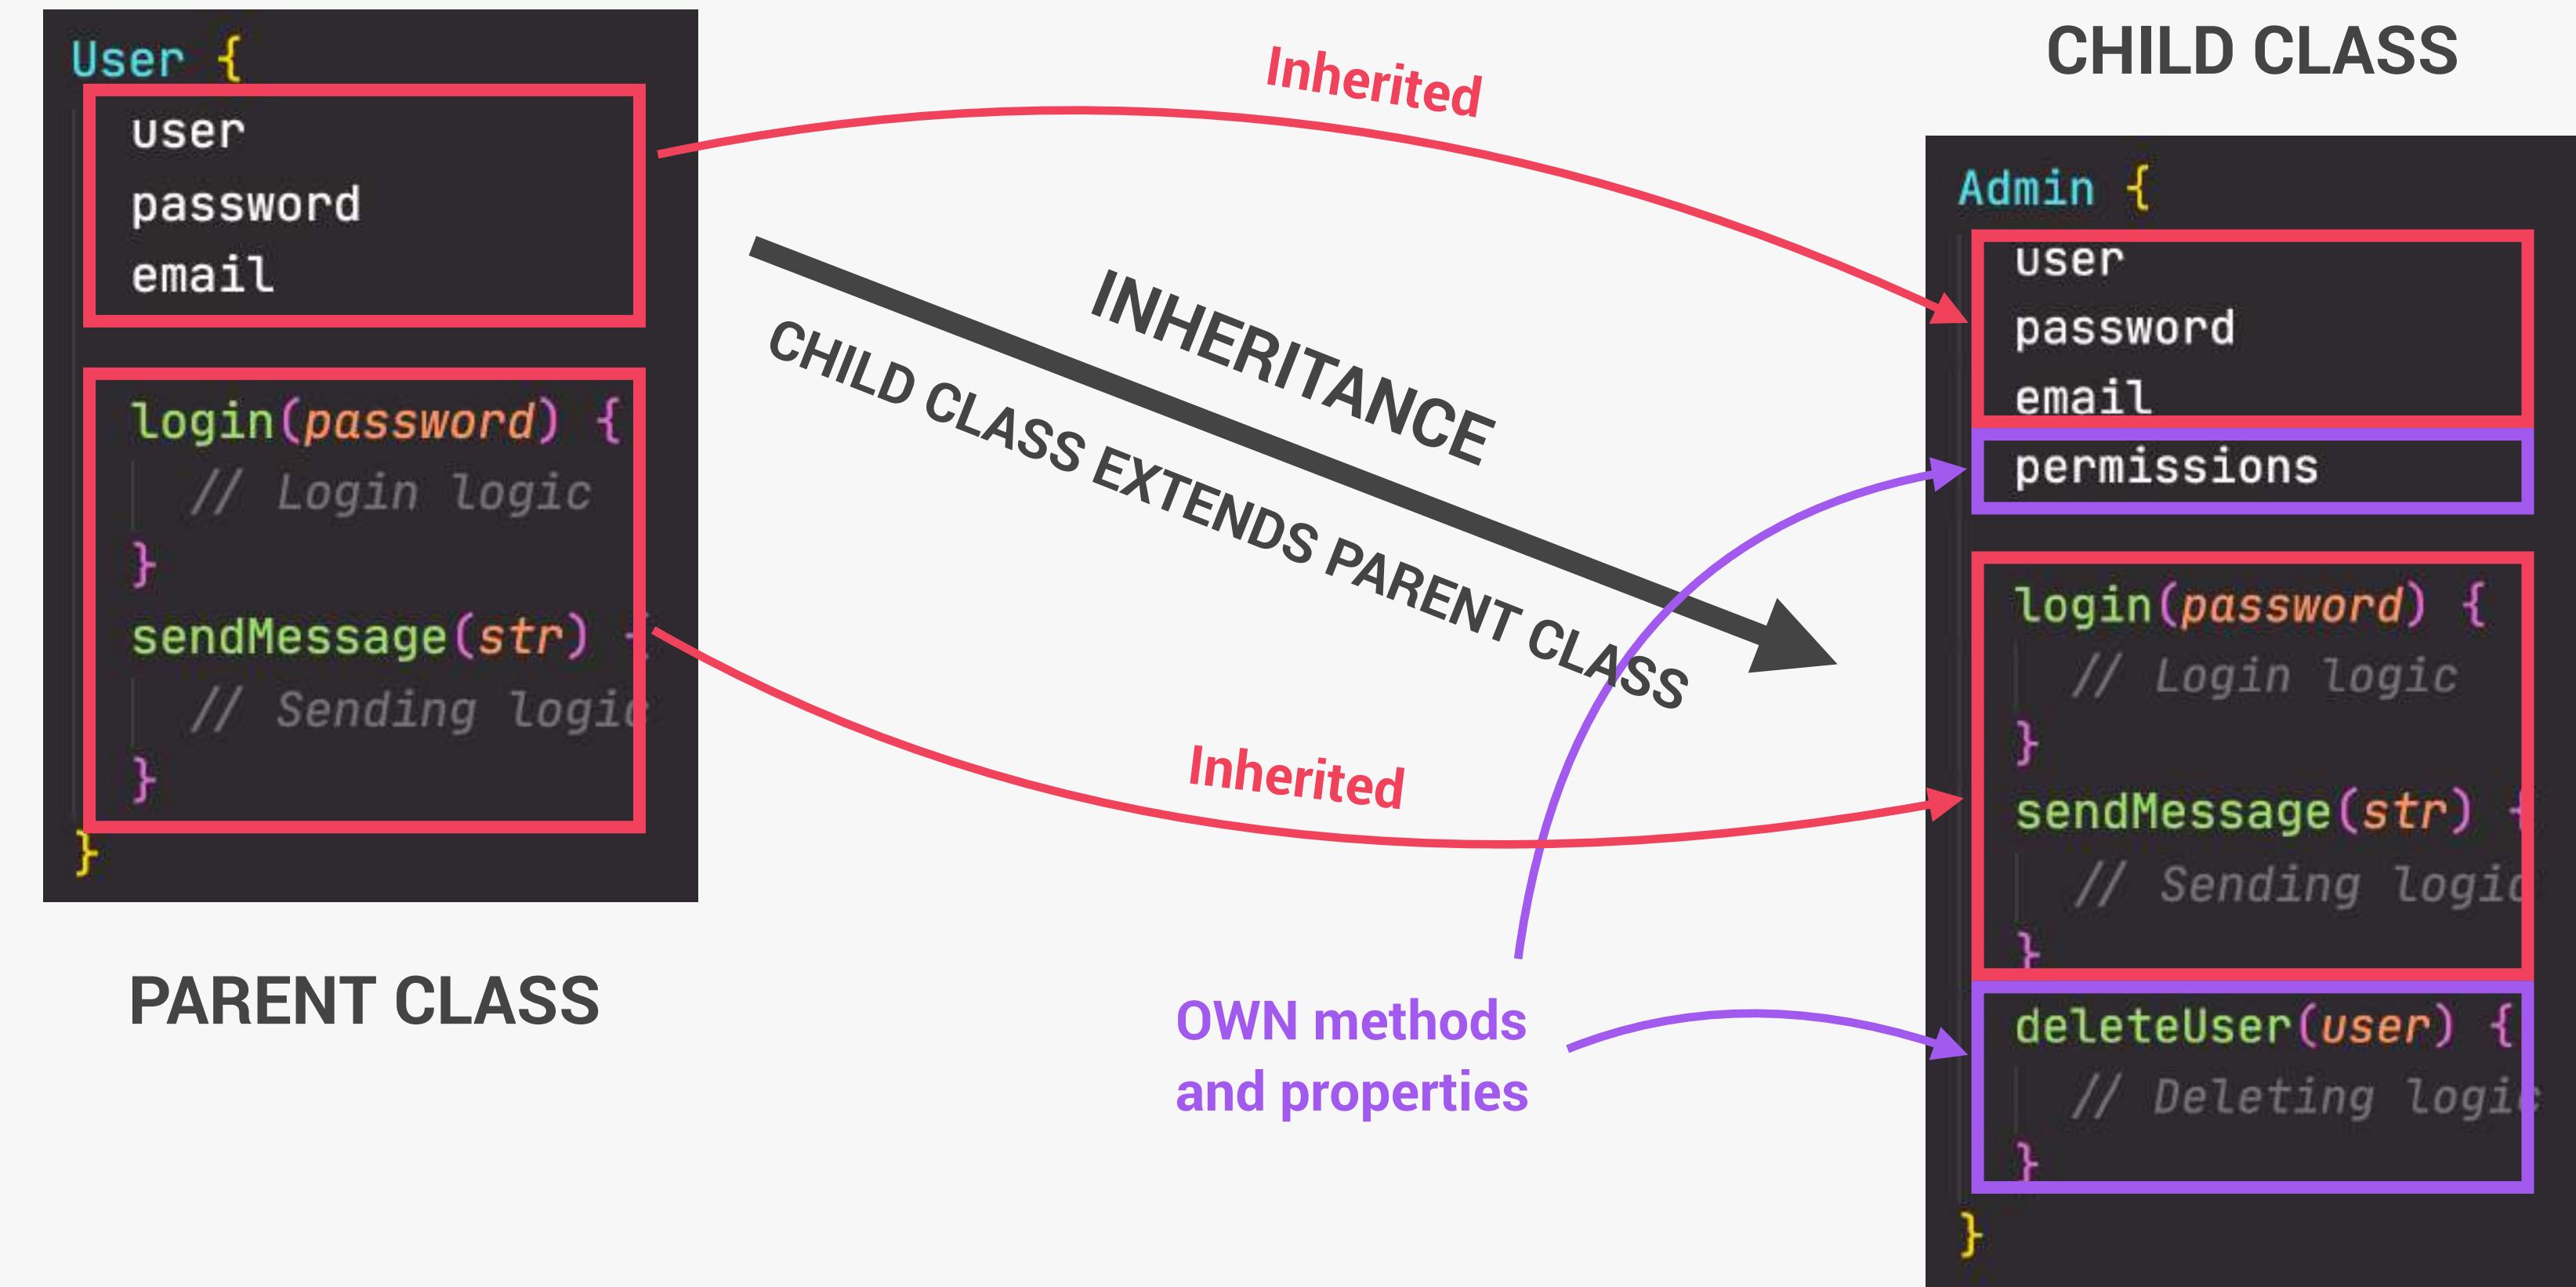

- 👉 **Inheritance:** Making all properties and methods of a certain class **available** to a **child class**, forming a hierarchical relationship between classes. This allows us to **reuse common logic** and to model real-world relationships.

PRINCIPLE 4: POLYMORPHISM

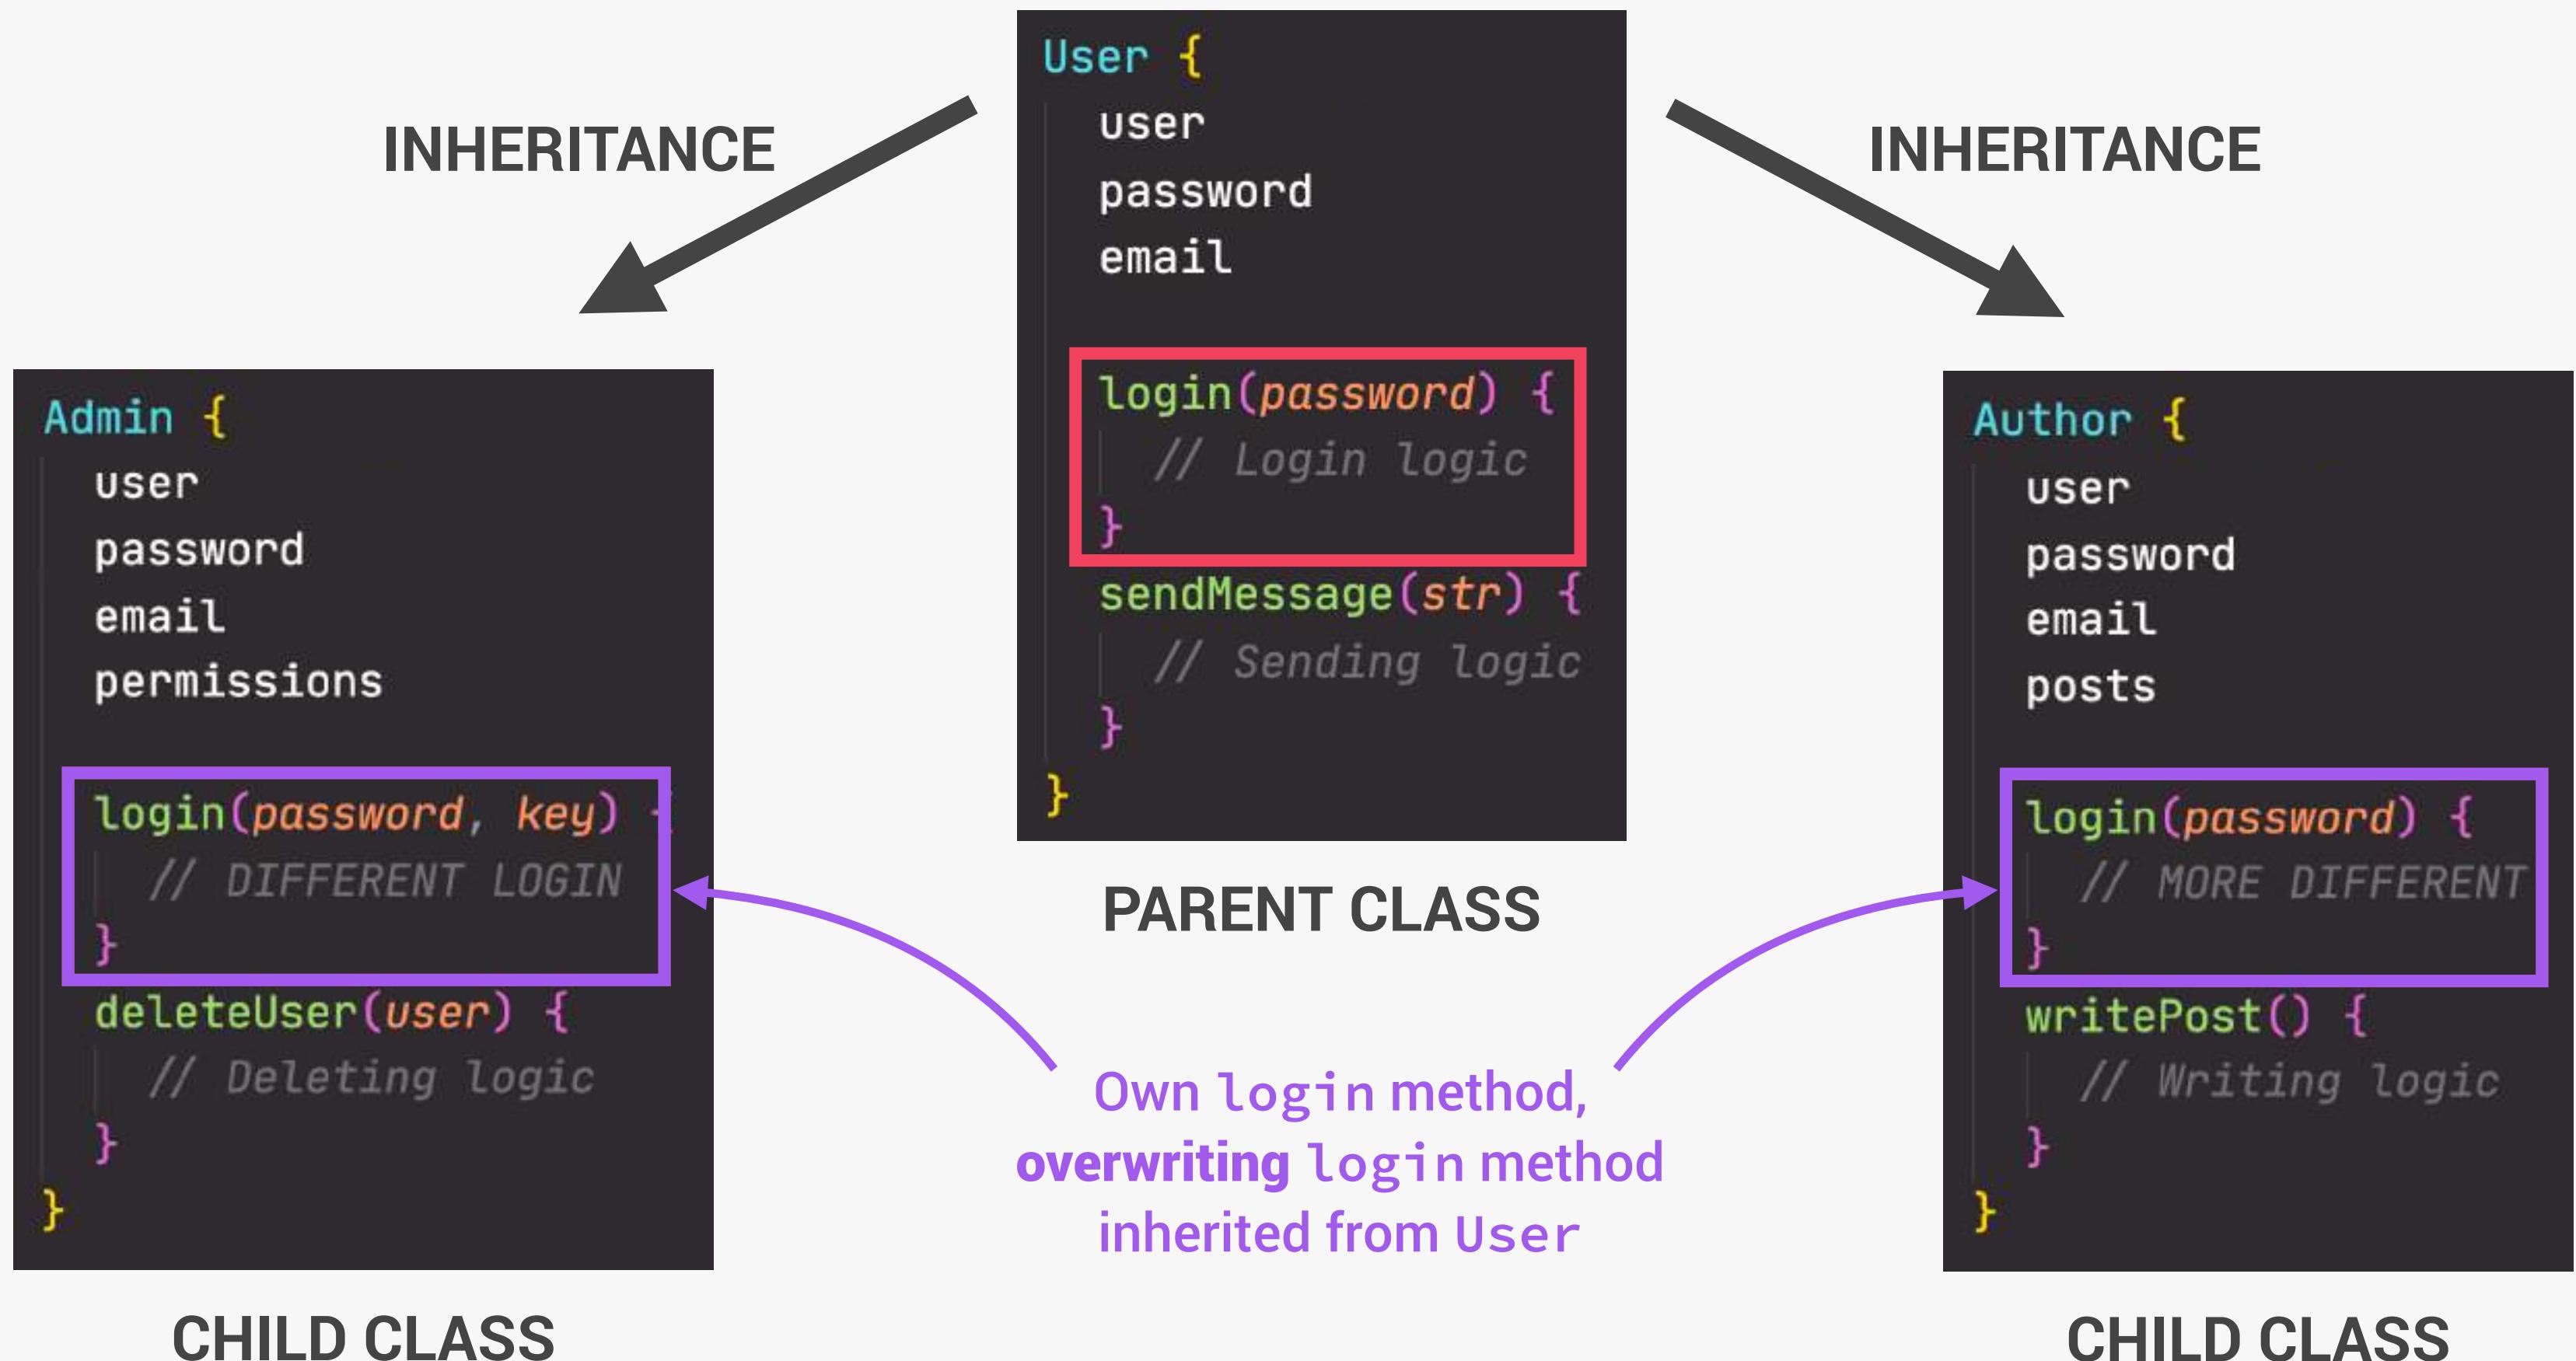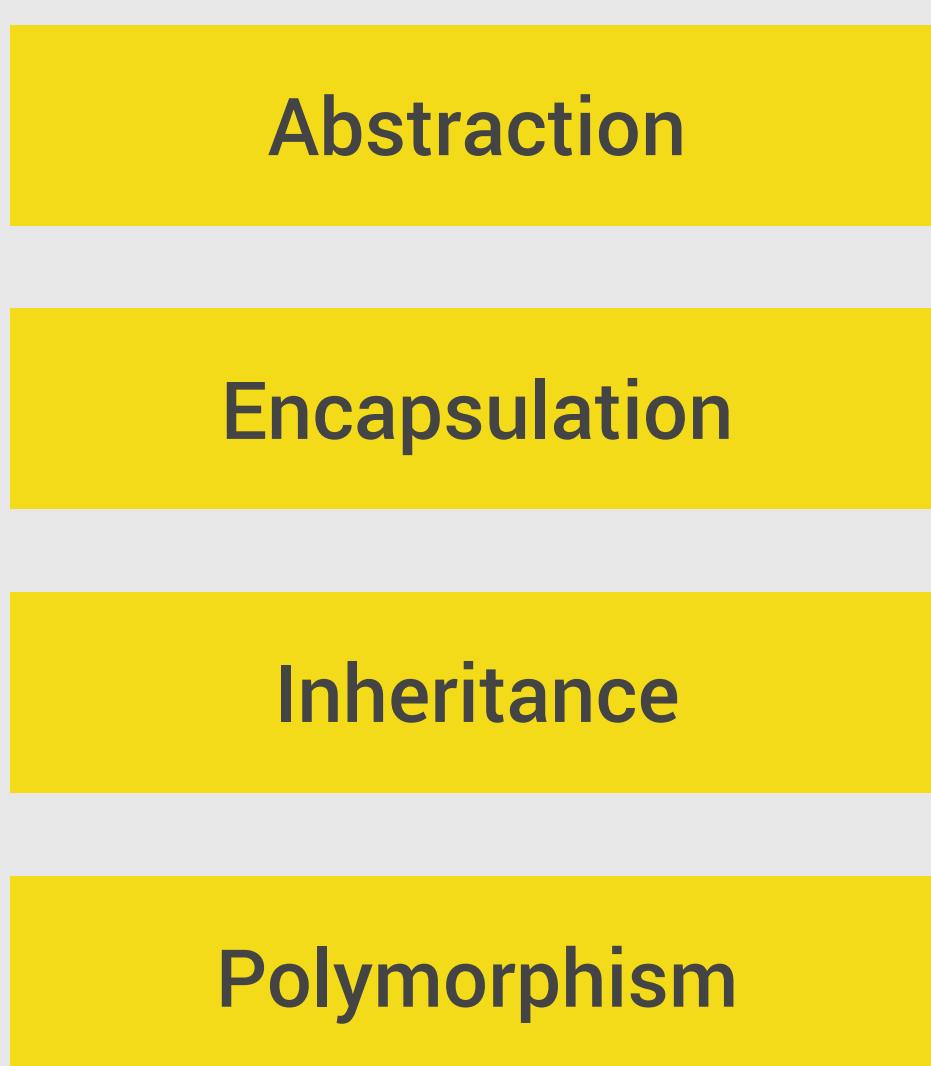

👉 **Polymorphism:** A child class can **overwrite** a method it inherited from a parent class [it's more complex than that, but enough for our purposes].



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT


LECTURE

OOP IN JAVASCRIPT

JS


OOP IN JAVASCRIPT: PROTOTYPES

"CLASSICAL OOP": CLASSES

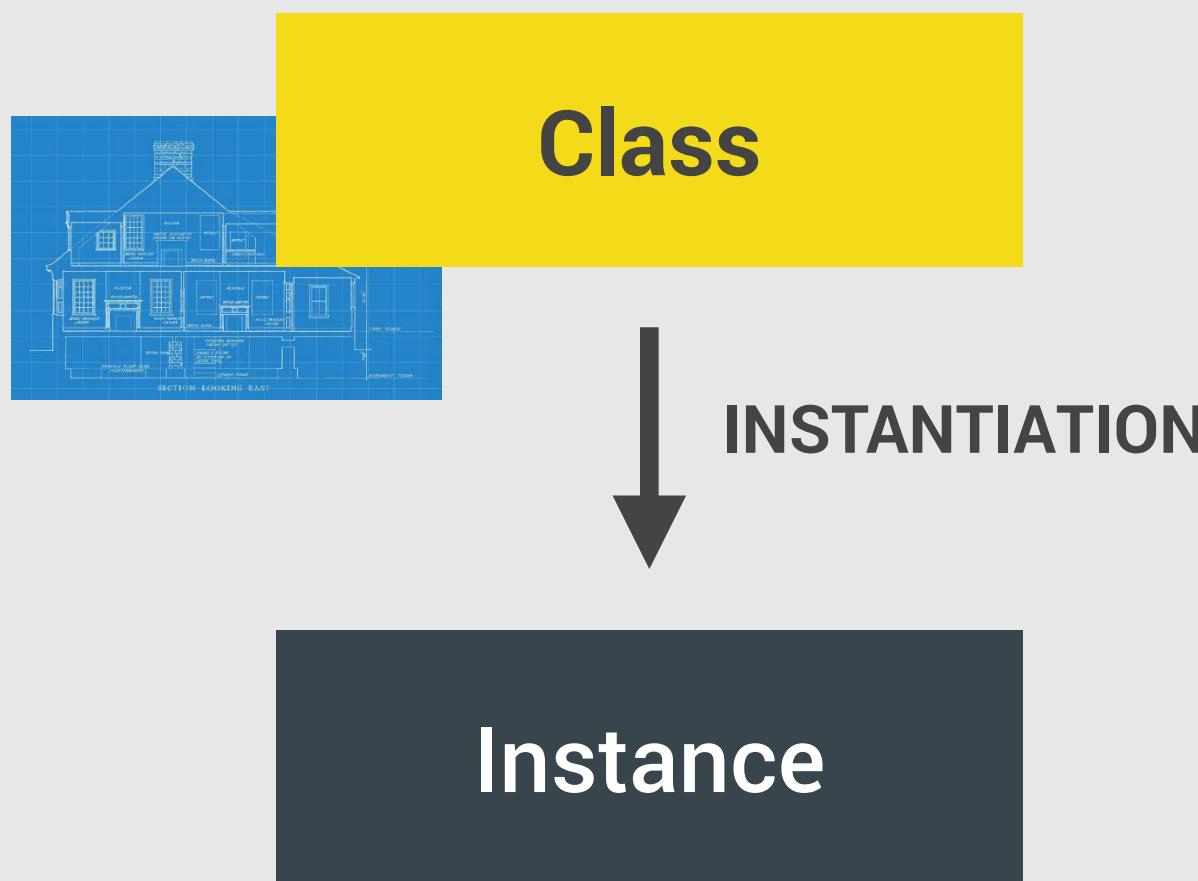

- 👉 Objects (instances) are **instantiated** from a class, which functions like a blueprint;
- 👉 Behavior (methods) is **copied** from class to all instances.

OOP IN JS: PROTOTYPES

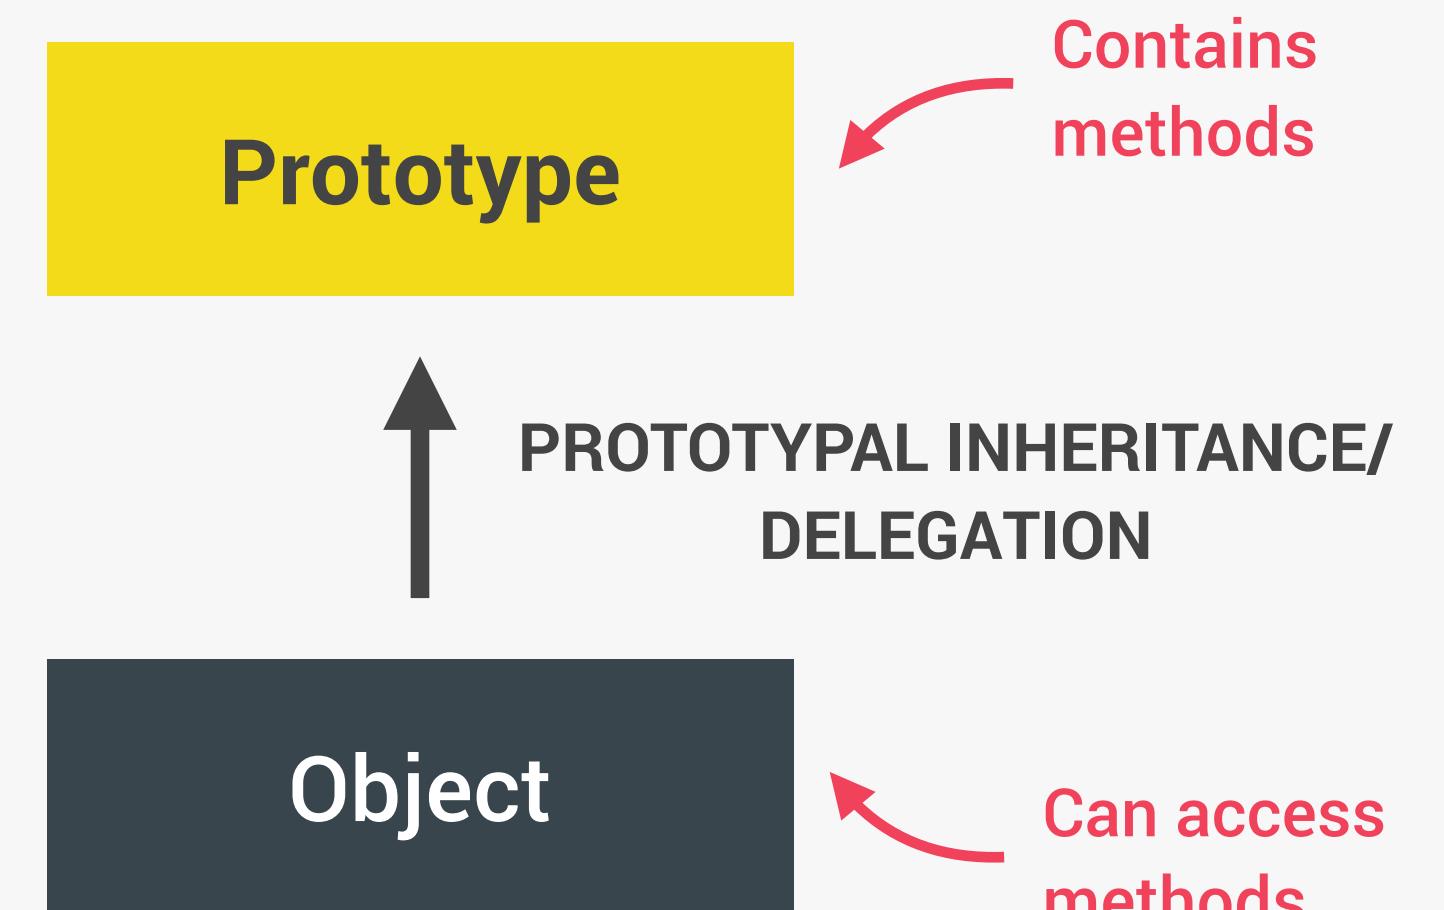

- 👉 Objects are **linked** to a prototype object;
- 👉 **Prototypal inheritance:** The prototype contains methods (behavior) that are **accessible** to all objects linked to that prototype;
- 👉 Behavior is **delegated** to the linked prototype object.

👉 Example: Array

```
const num = [1, 2, 3];
num.map(v => v * 2);
```

MDN web docs
moz://a

```
Array.prototype.keys()
Array.prototype.lastIndexOf()
Array.prototype.map()
```

👉 **Array.prototype** is the prototype of all array objects we create in JavaScript

Therefore, all arrays have access to the **map** method!

```
▼ f Array() i
  arguments: (...)

  caller: (...)

  length: 1

  name: "Array"

  prototype: Array(0)
    ► unique: f ()
    ► length: 0
    ► constructor: f Array()
    ► concat: f concat()

    map: f map()
```

3 WAYS OF IMPLEMENTING PROTOTYPAL INHERITANCE IN JAVASCRIPT



"How do we actually create prototypes? And how do we link objects to prototypes? How can we create new objects, without having classes?"

👉 The 4 pillars of OOP are still valid!

- 👉 Abstraction
- 👉 Encapsulation
- 👉 Inheritance
- 👉 Polymorphism

1

Constructor functions

- 👉 Technique to create objects from a function;
- 👉 This is how built-in objects like Arrays, Maps or Sets are actually implemented.

2

ES6 Classes

- 👉 Modern alternative to constructor function syntax;
- 👉 "Syntactic sugar": behind the scenes, ES6 classes work **exactly** like constructor functions;
- 👉 ES6 classes do **NOT** behave like classes in "classical OOP" (last lecture).

3

`Object.create()`

- 👉 The easiest and most straightforward way of linking an object to a prototype object.



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE


PROTOTYPAL INHERITANCE AND THE
PROTOTYPE CHAIN

JS

HOW PROTOTYPAL INHERITANCE / DELEGATION WORKS

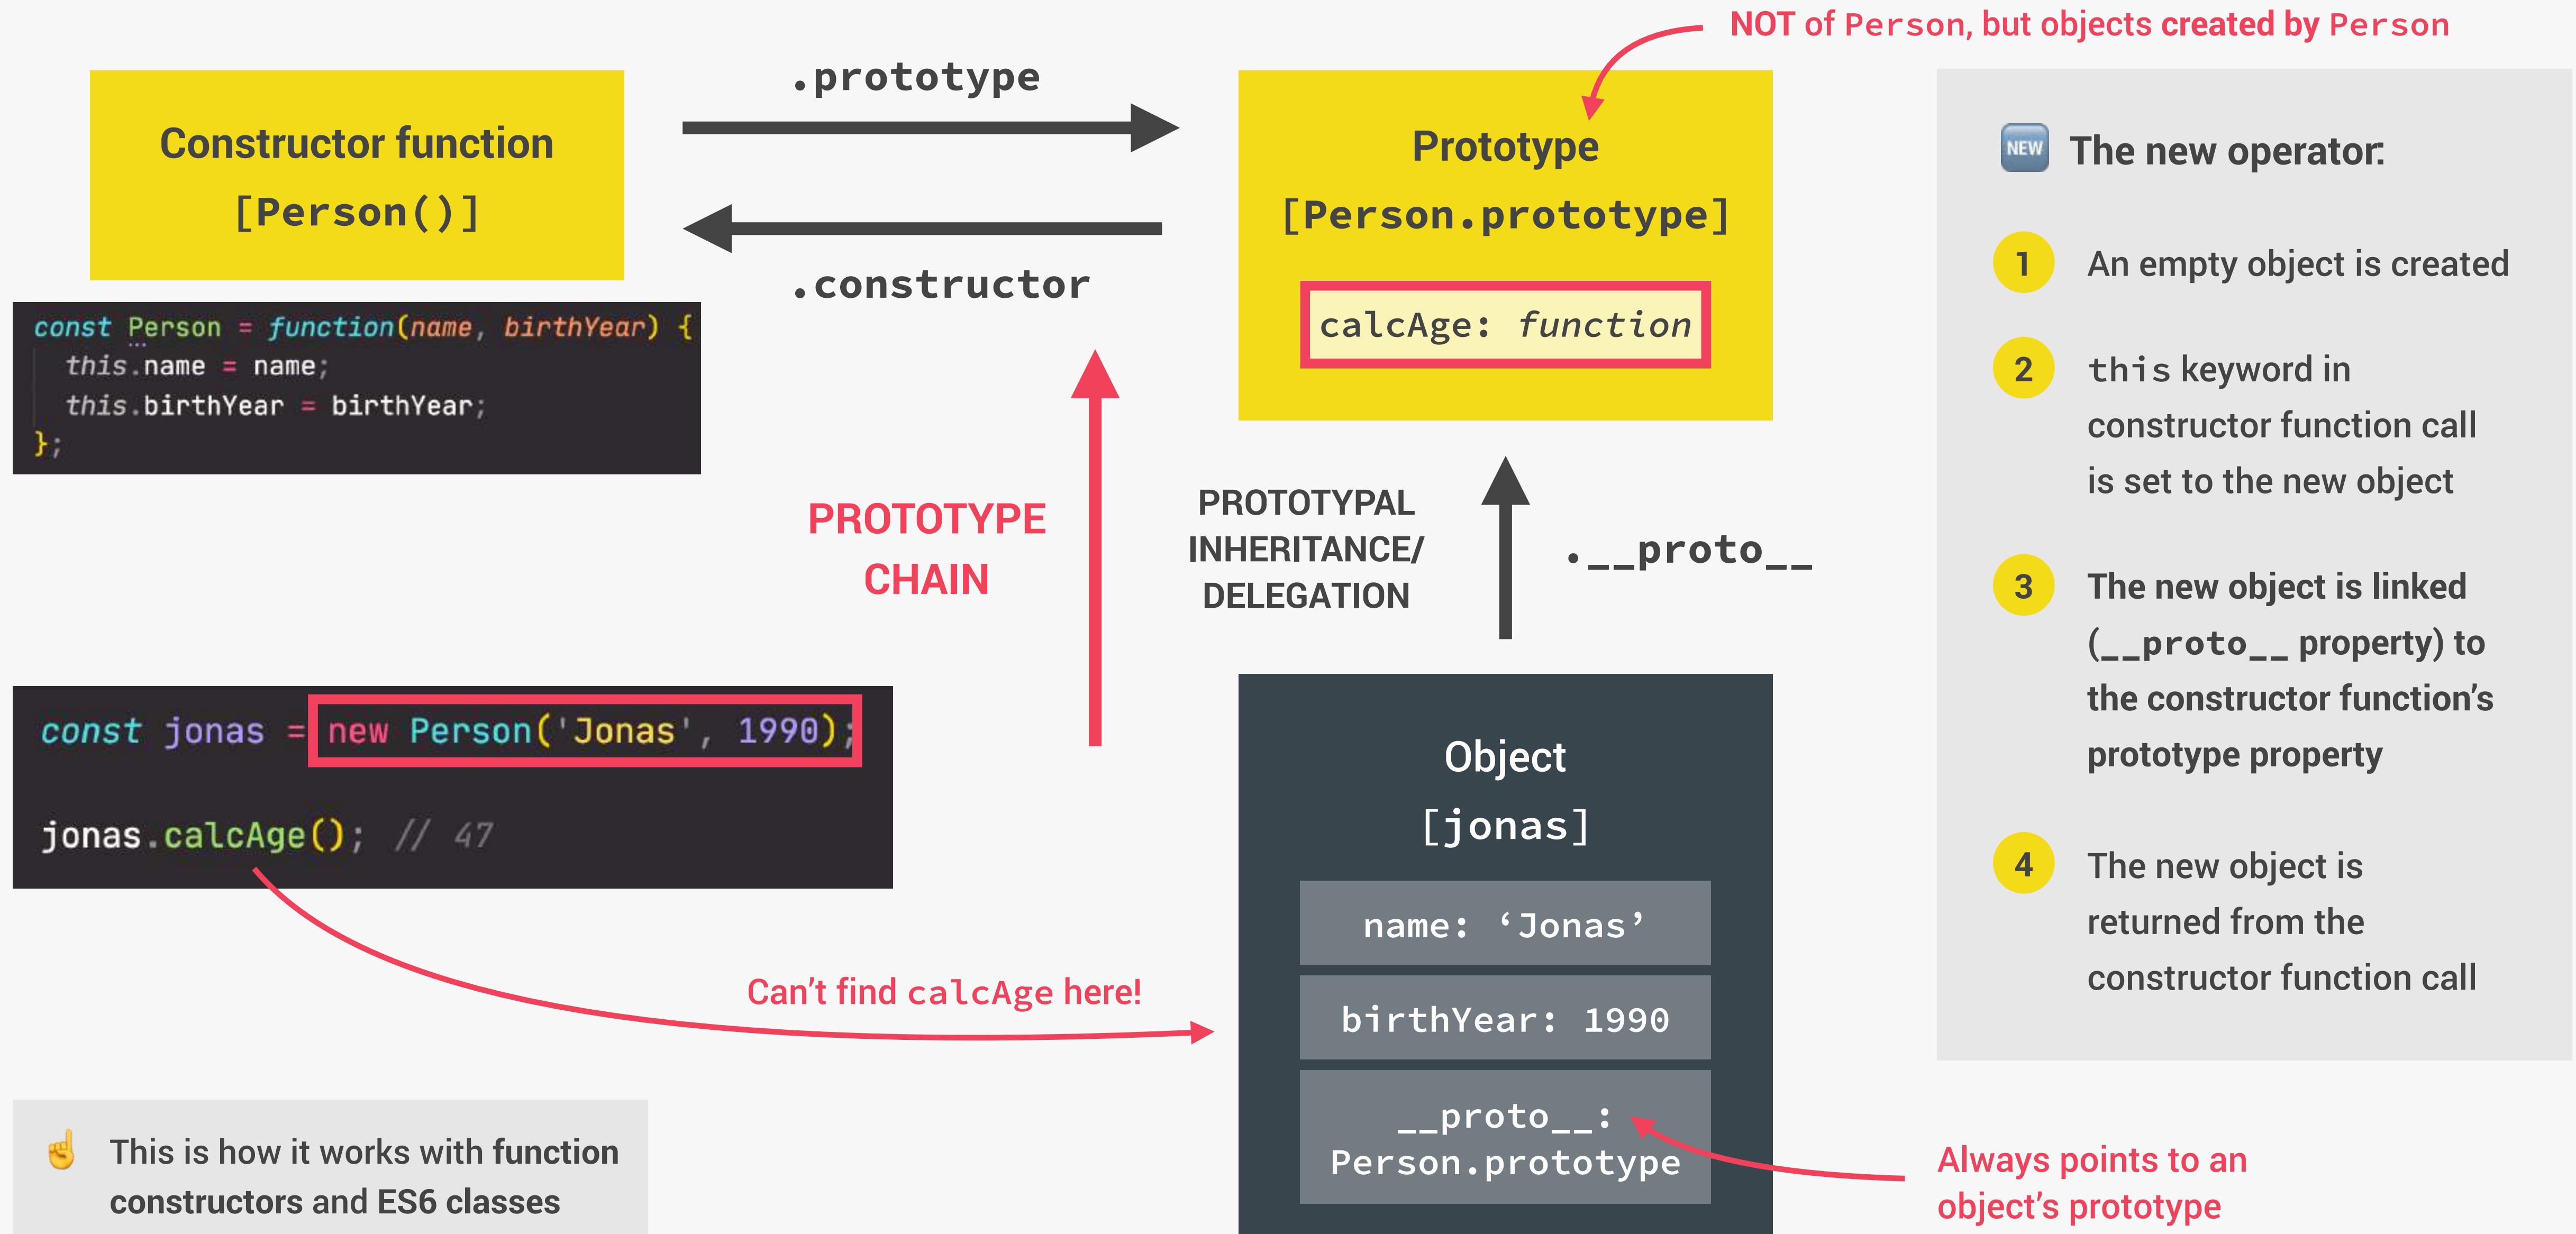

THE PROTOTYPE CHAIN

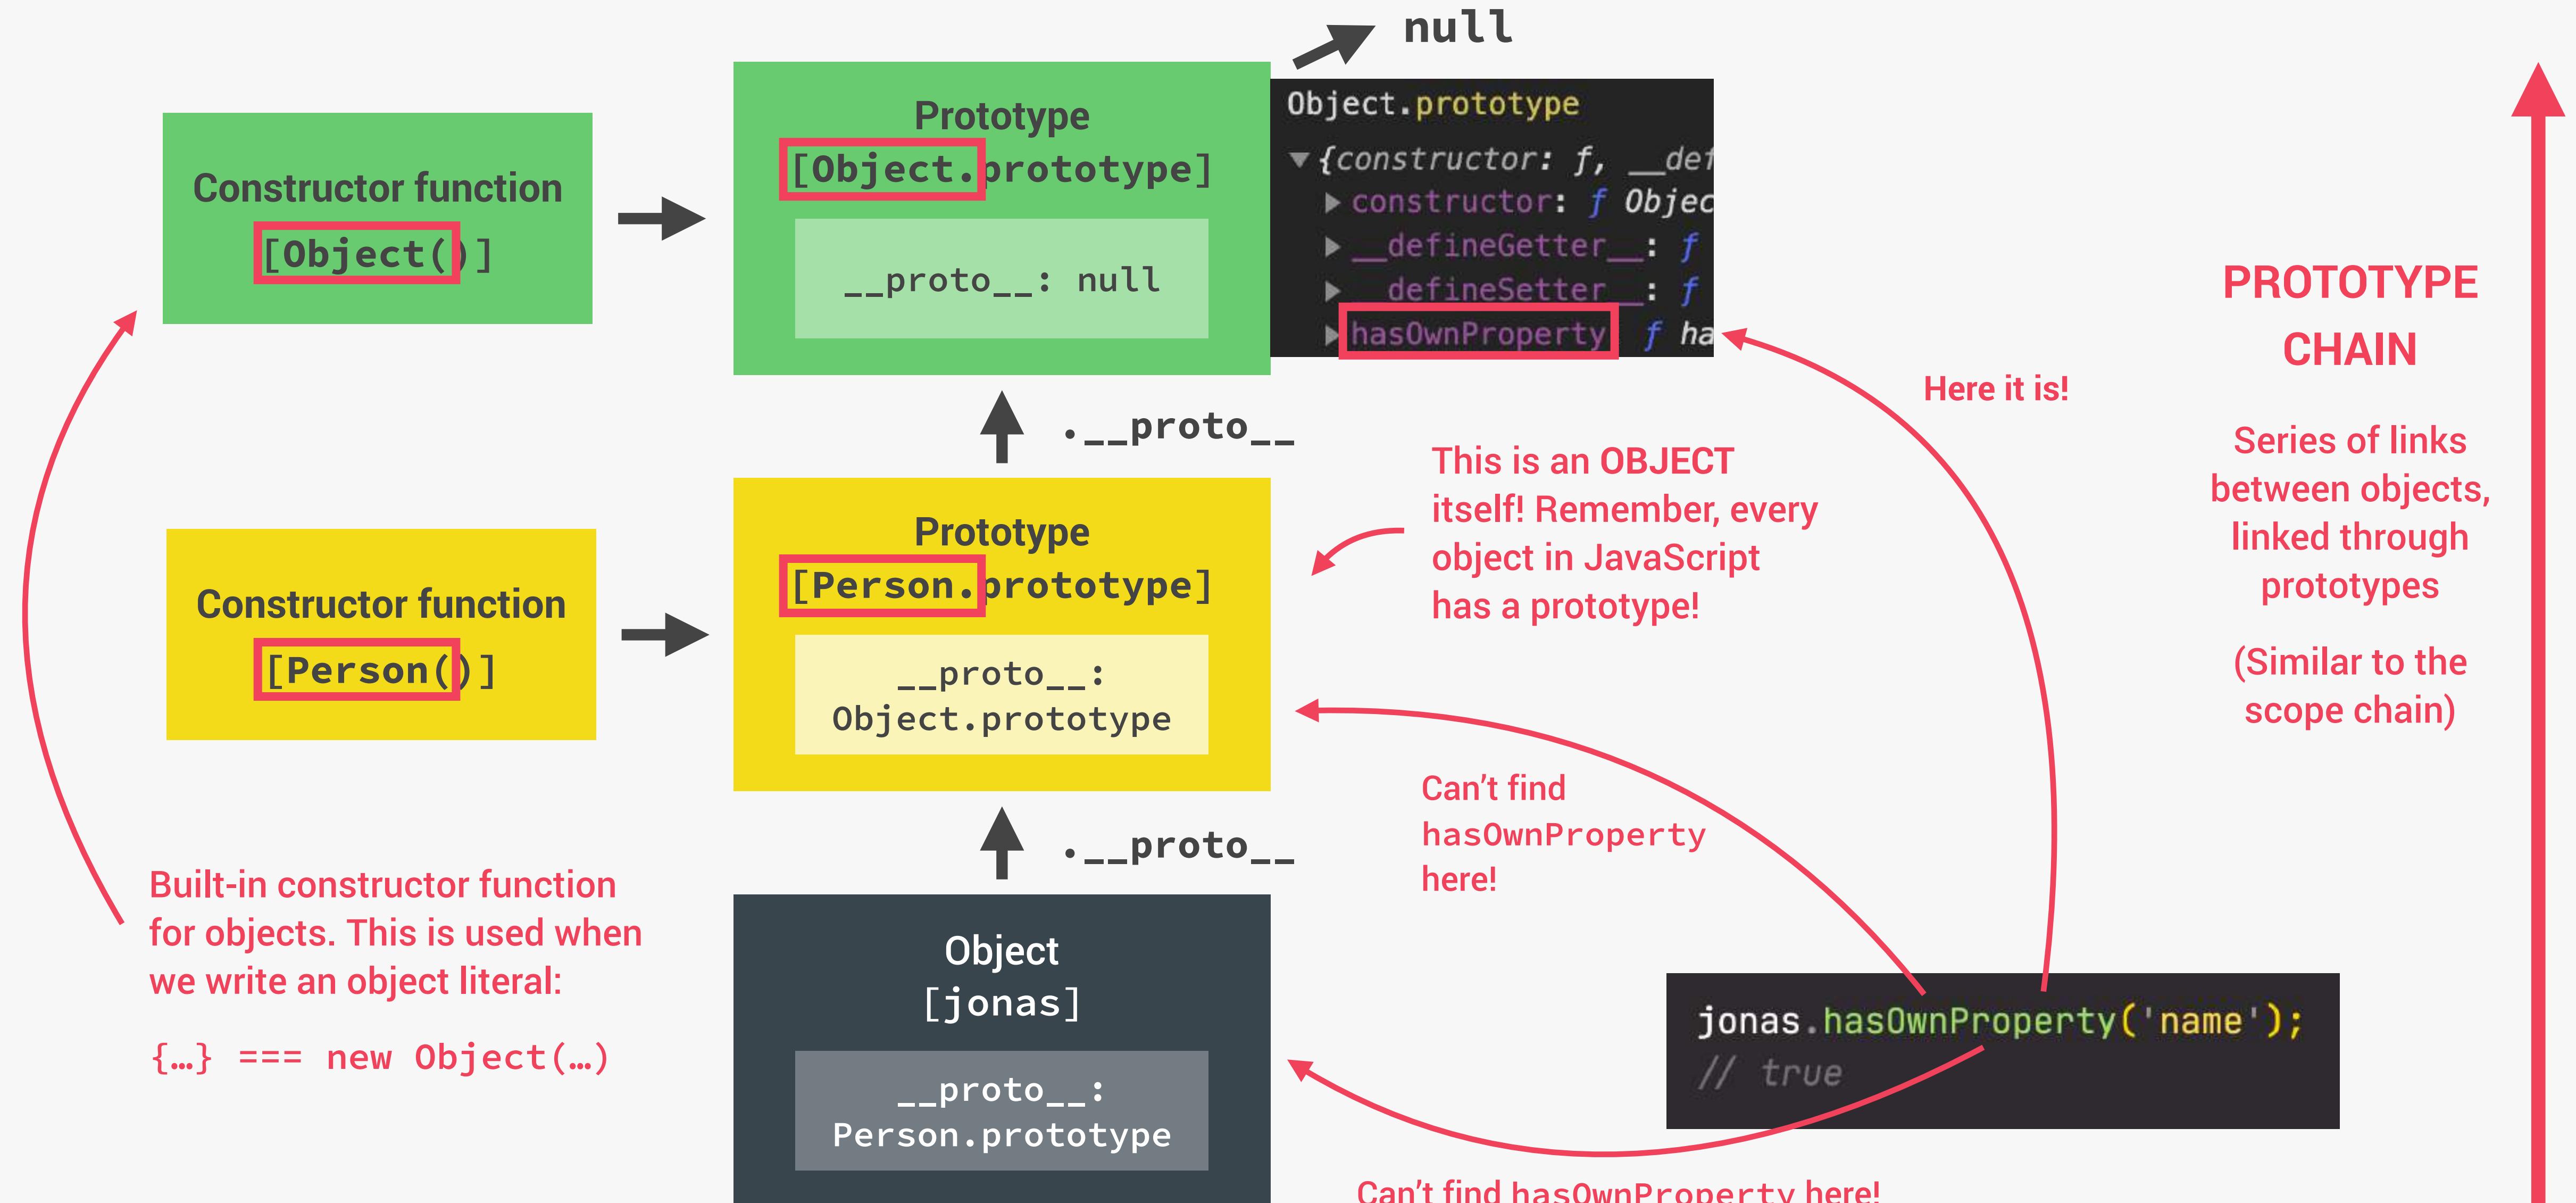



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE


OBJECT.CREATE

JS

HOW OBJECT.CREATE WORKS

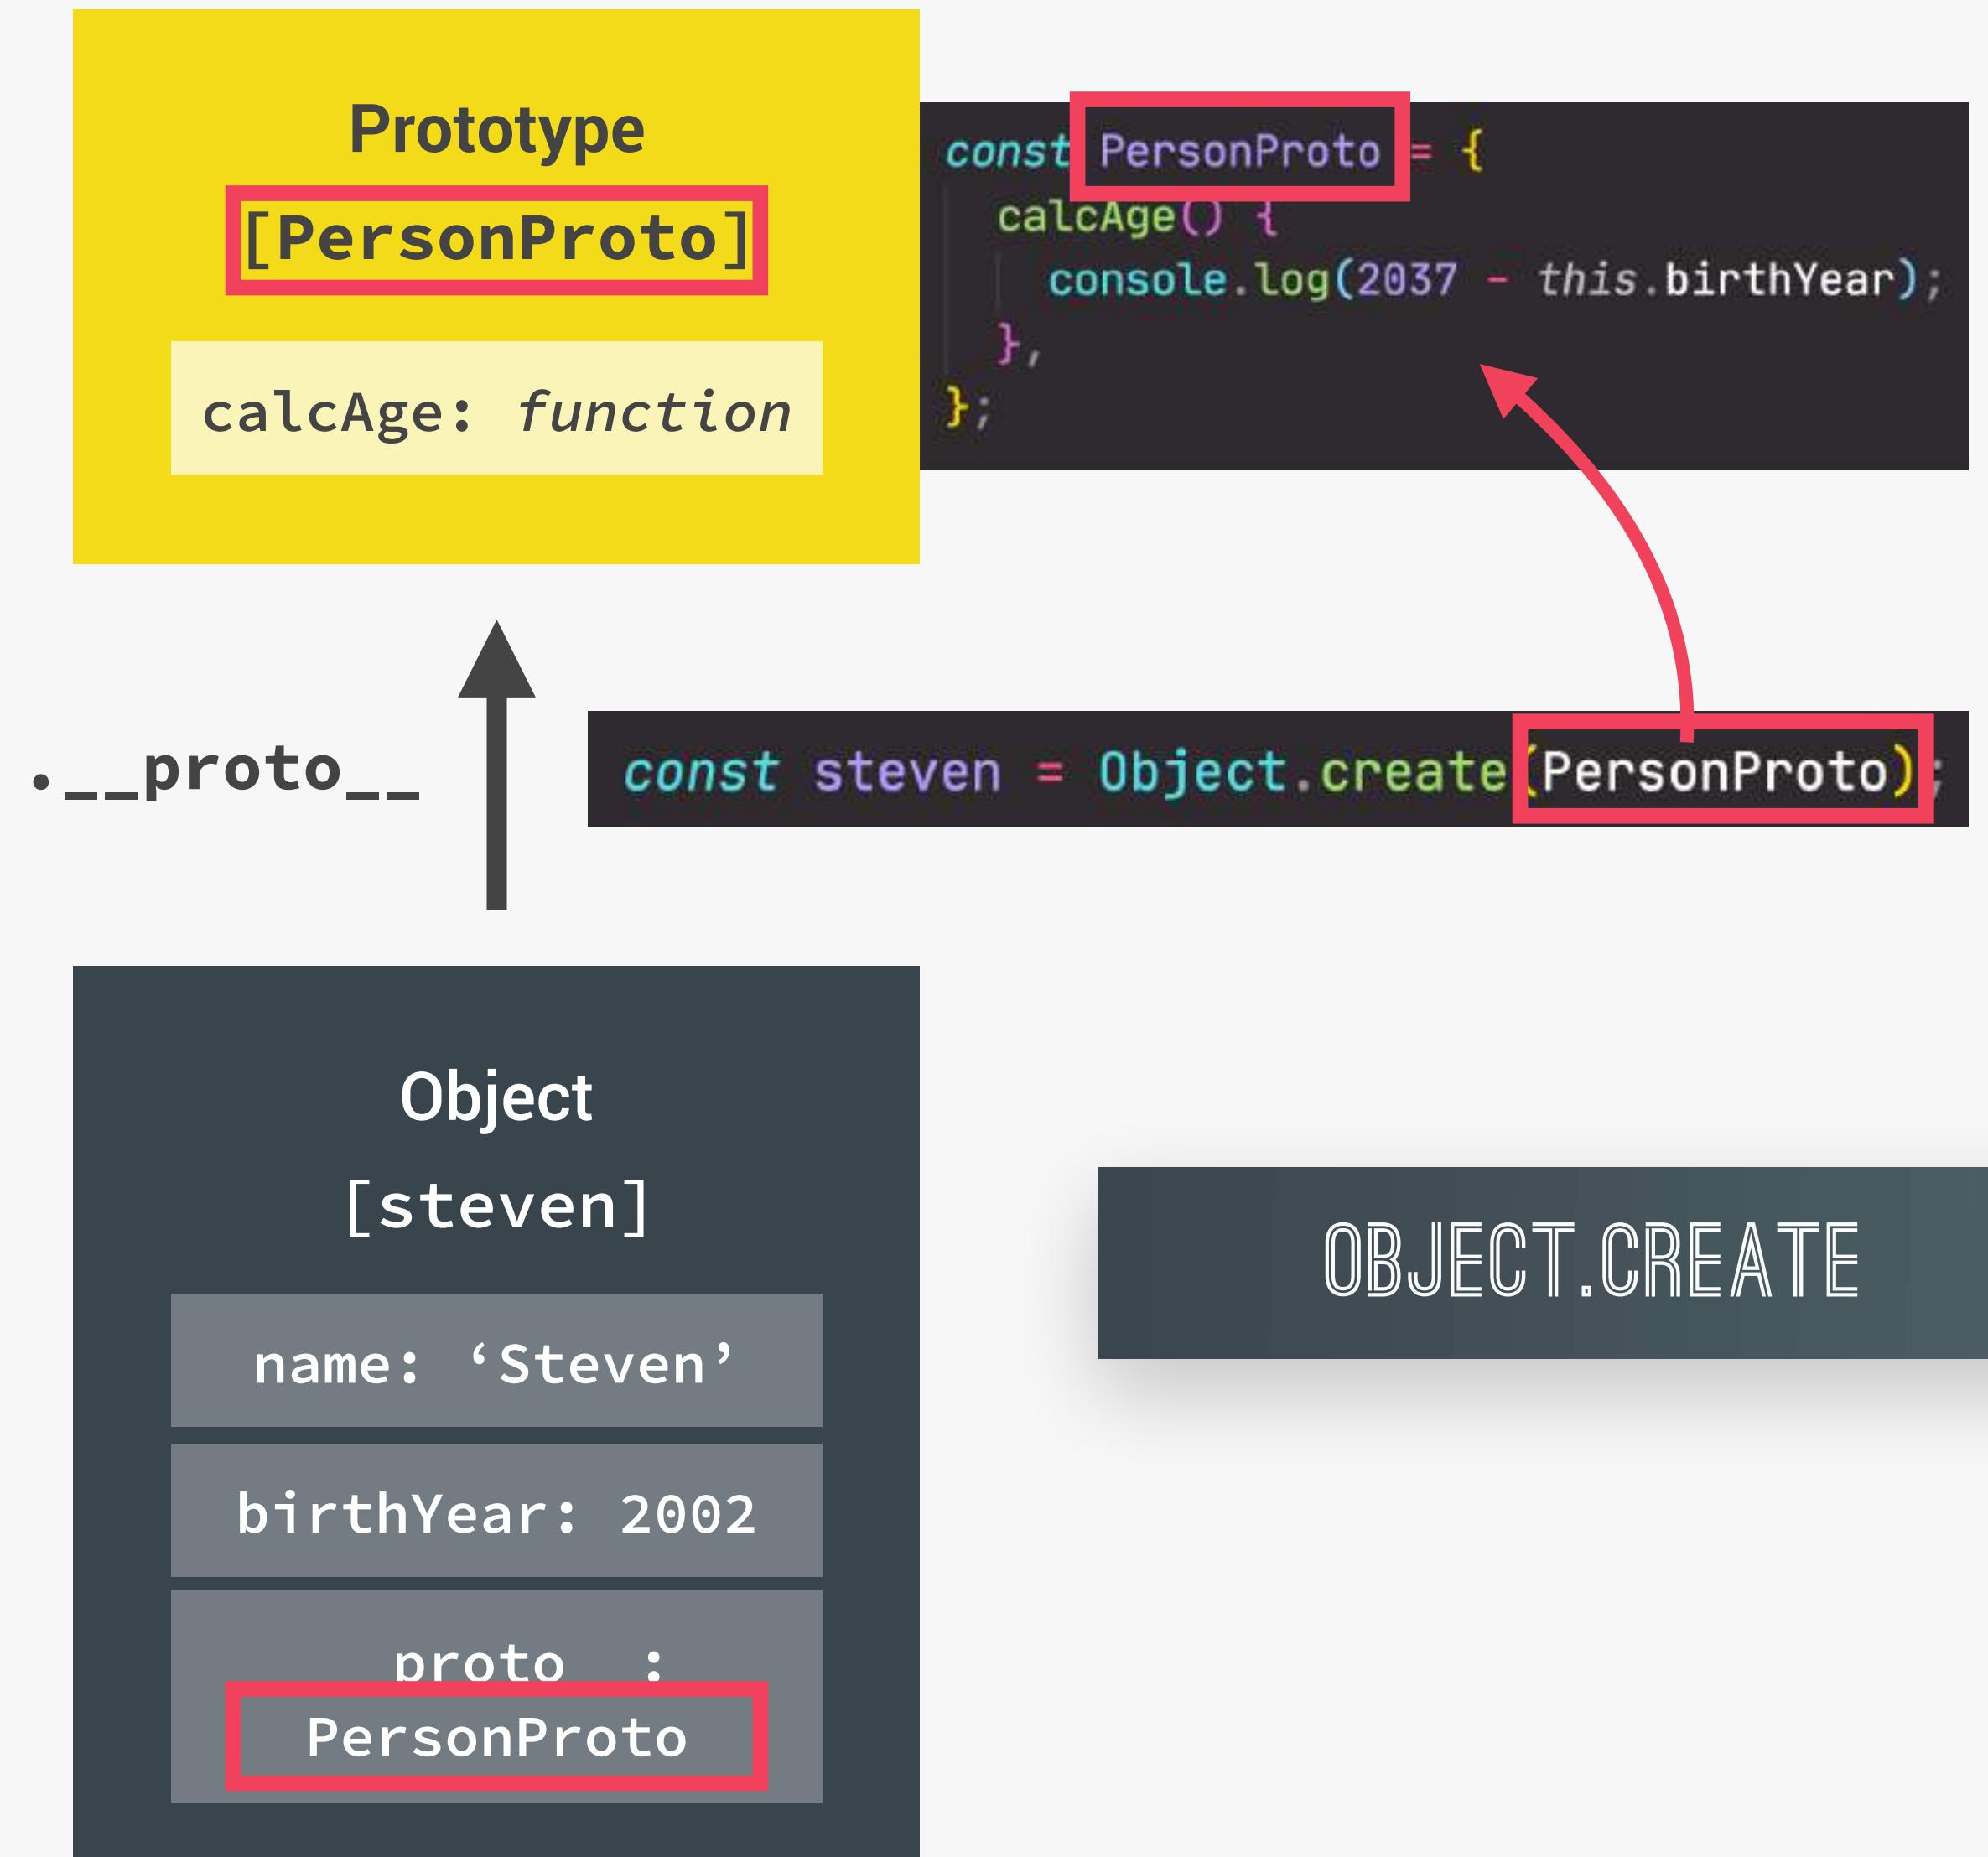

CONSTRUCTOR FUNCTIONS

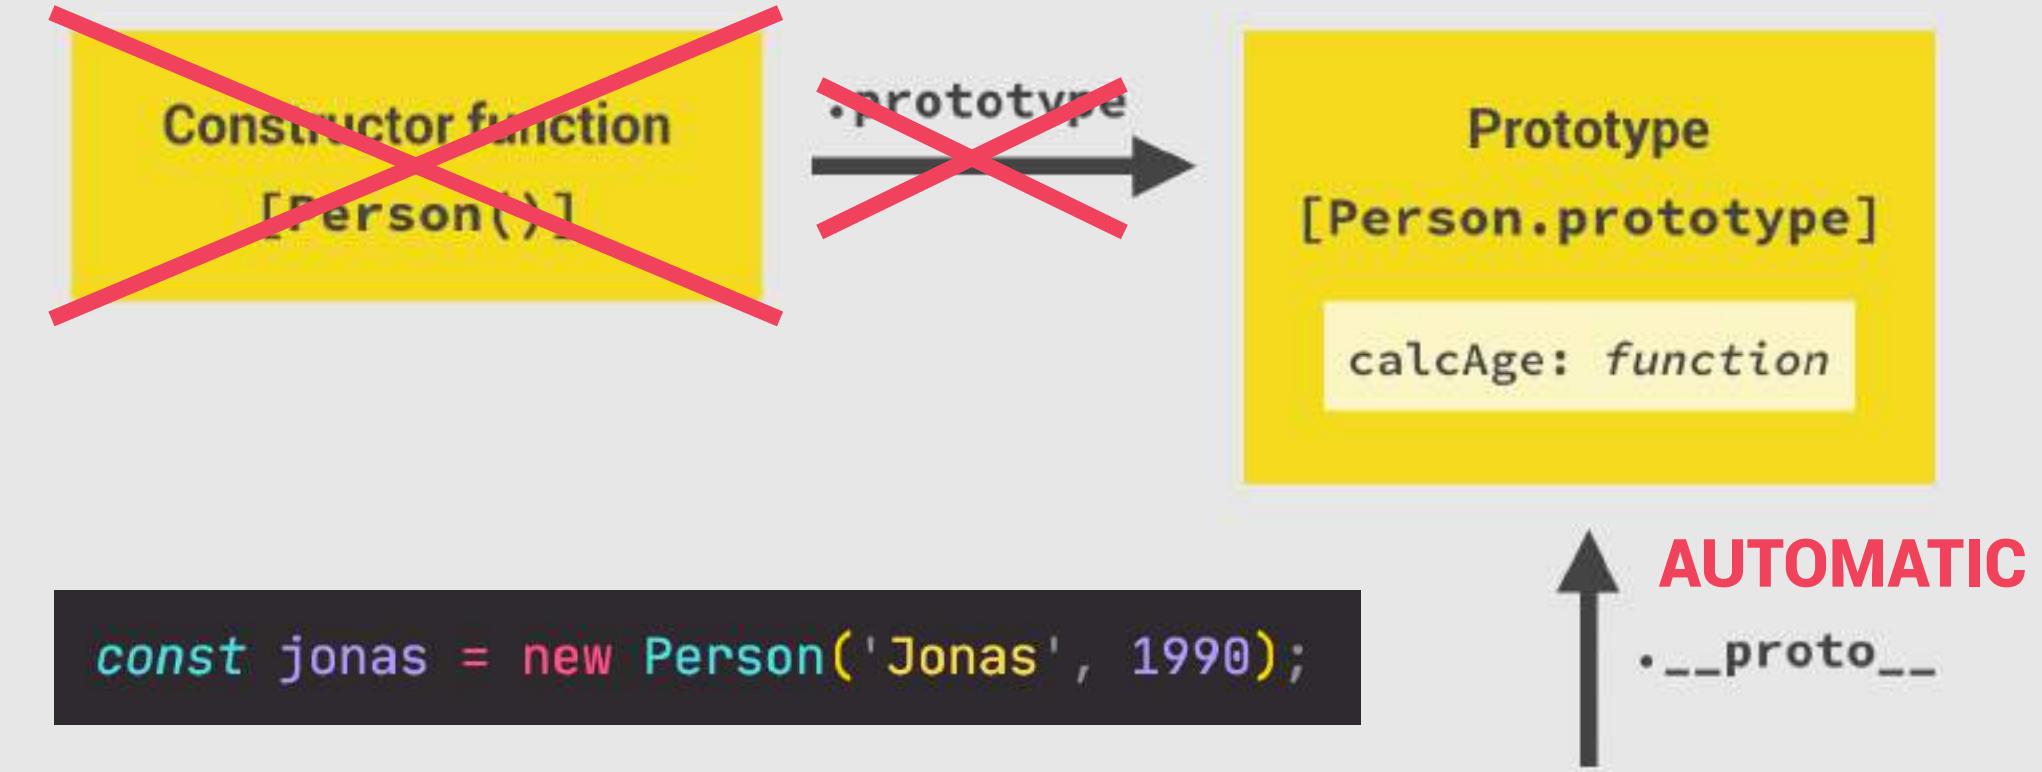



THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE

INHERITANCE BETWEEN "CLASSES":
CONSTRUCTOR FUNCTIONS

JS


INHERITANCE BETWEEN "CLASSES"

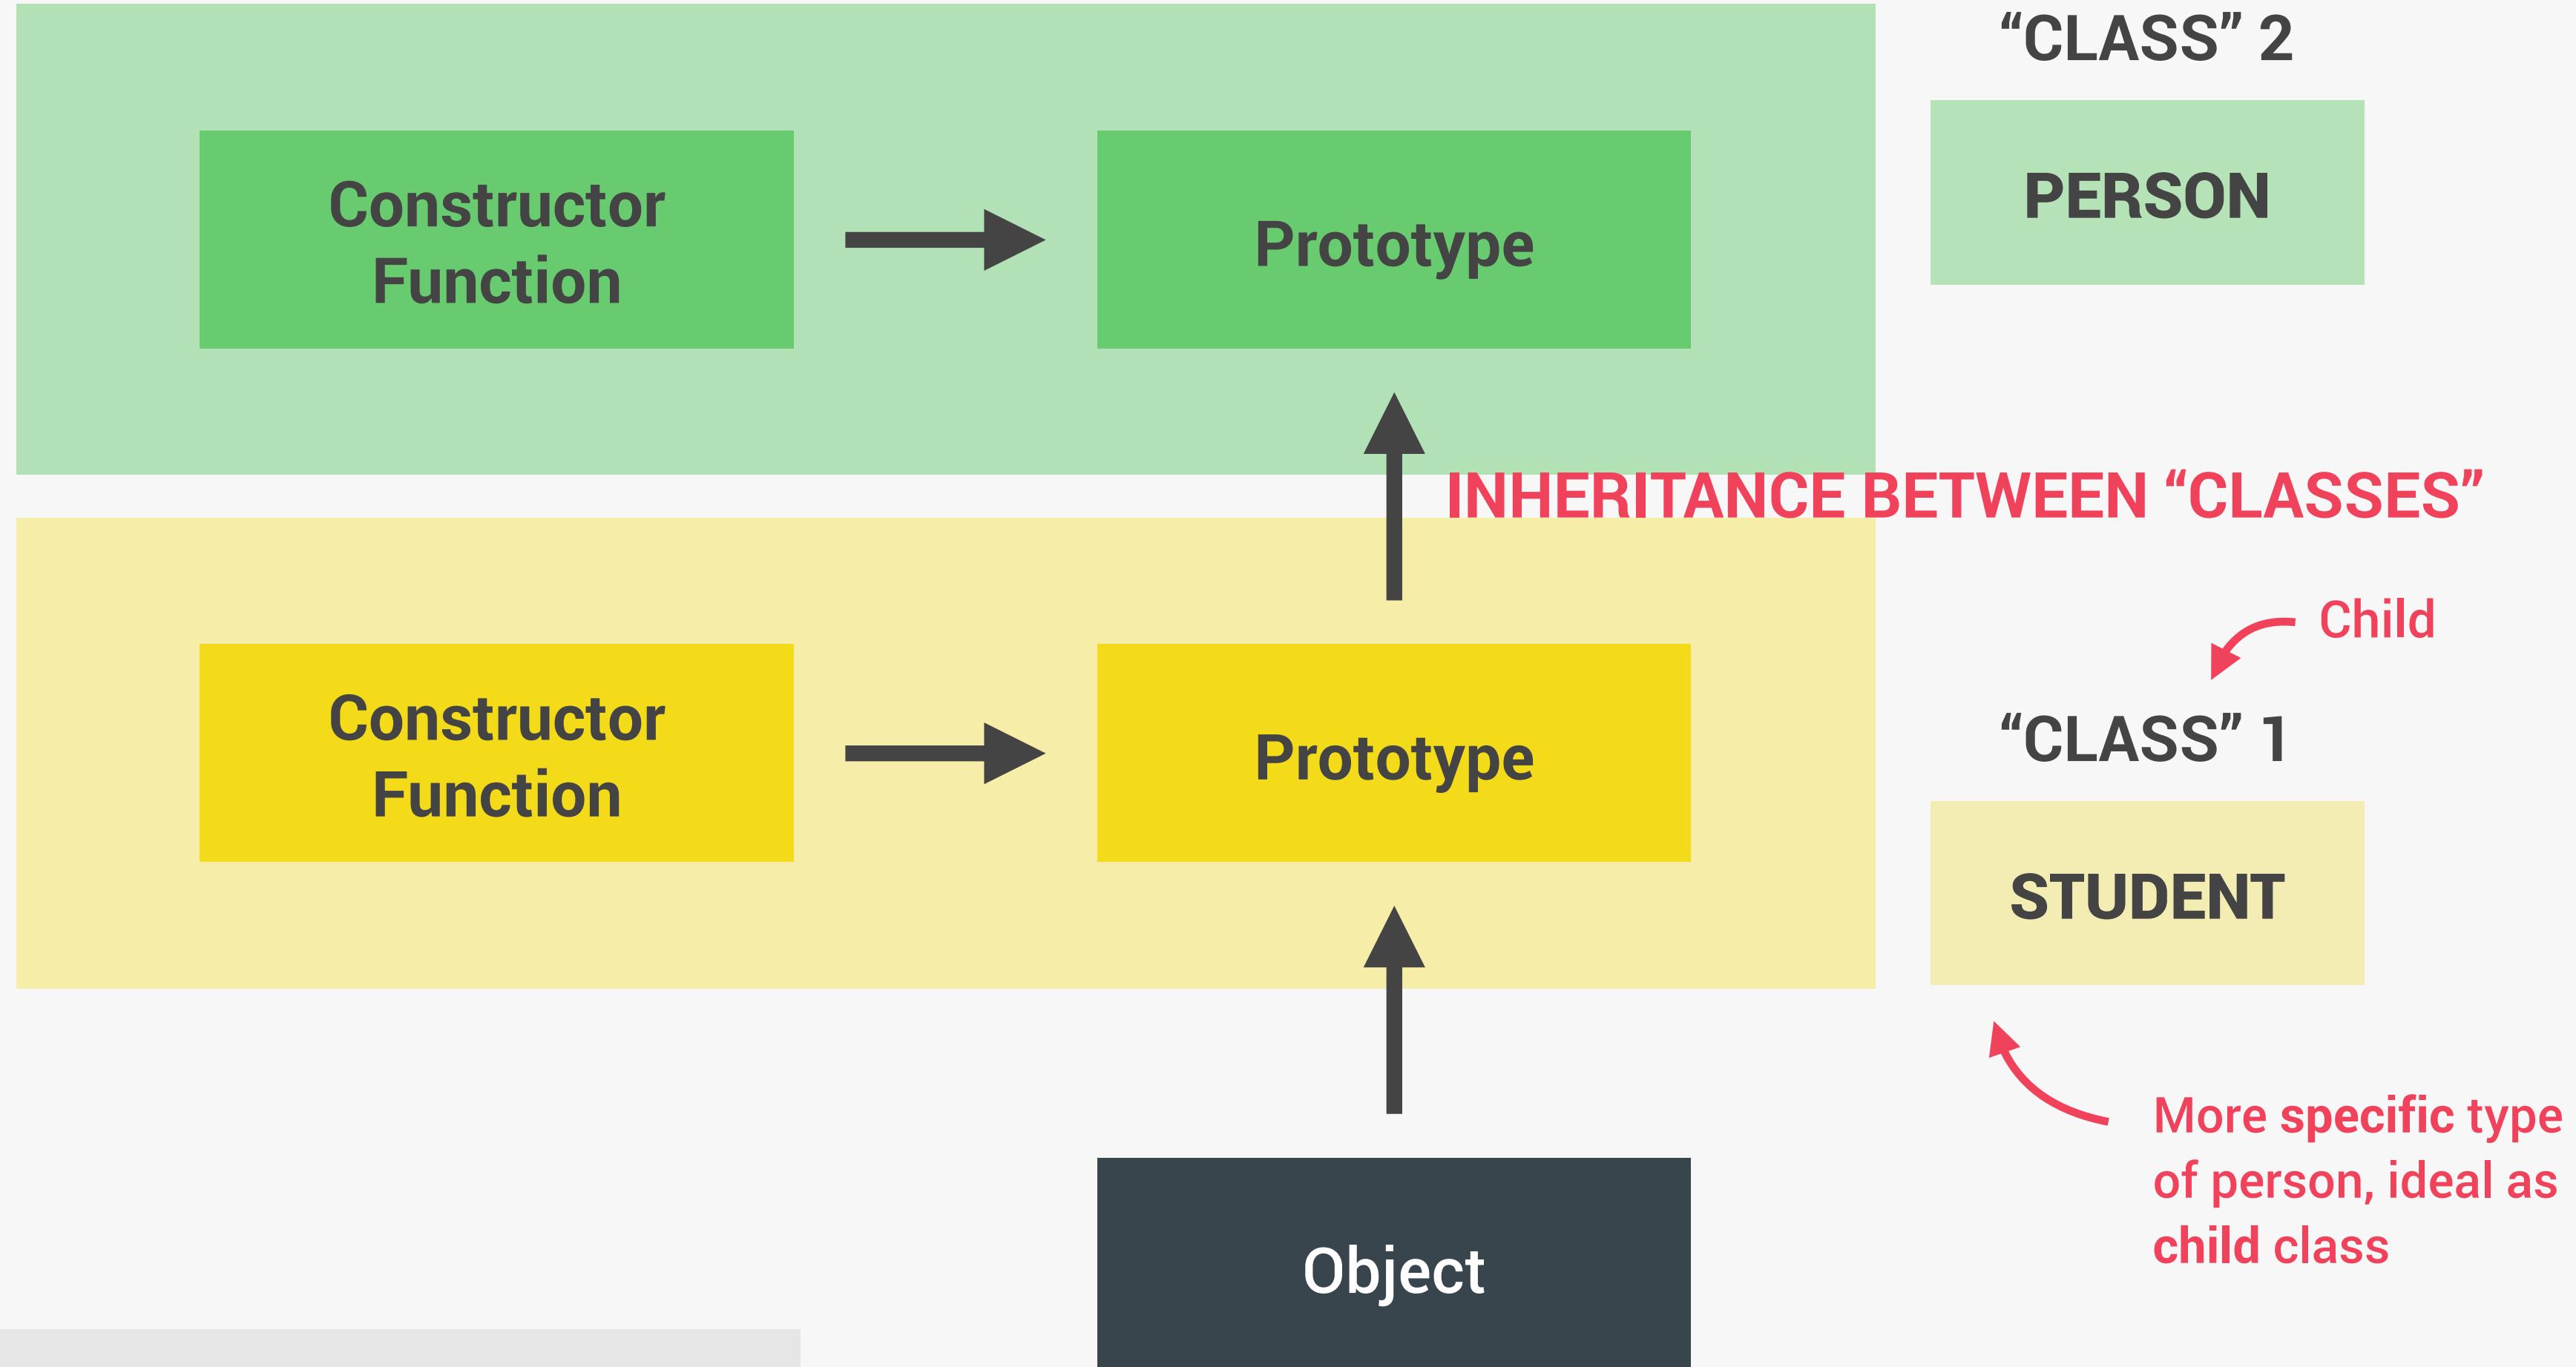

👉 Using class terminology here to make it easier to understand.


- 1 Constructor functions
- 2 ES6 Classes
- 3 `Object.create()`

INHERITANCE BETWEEN "CLASSES"

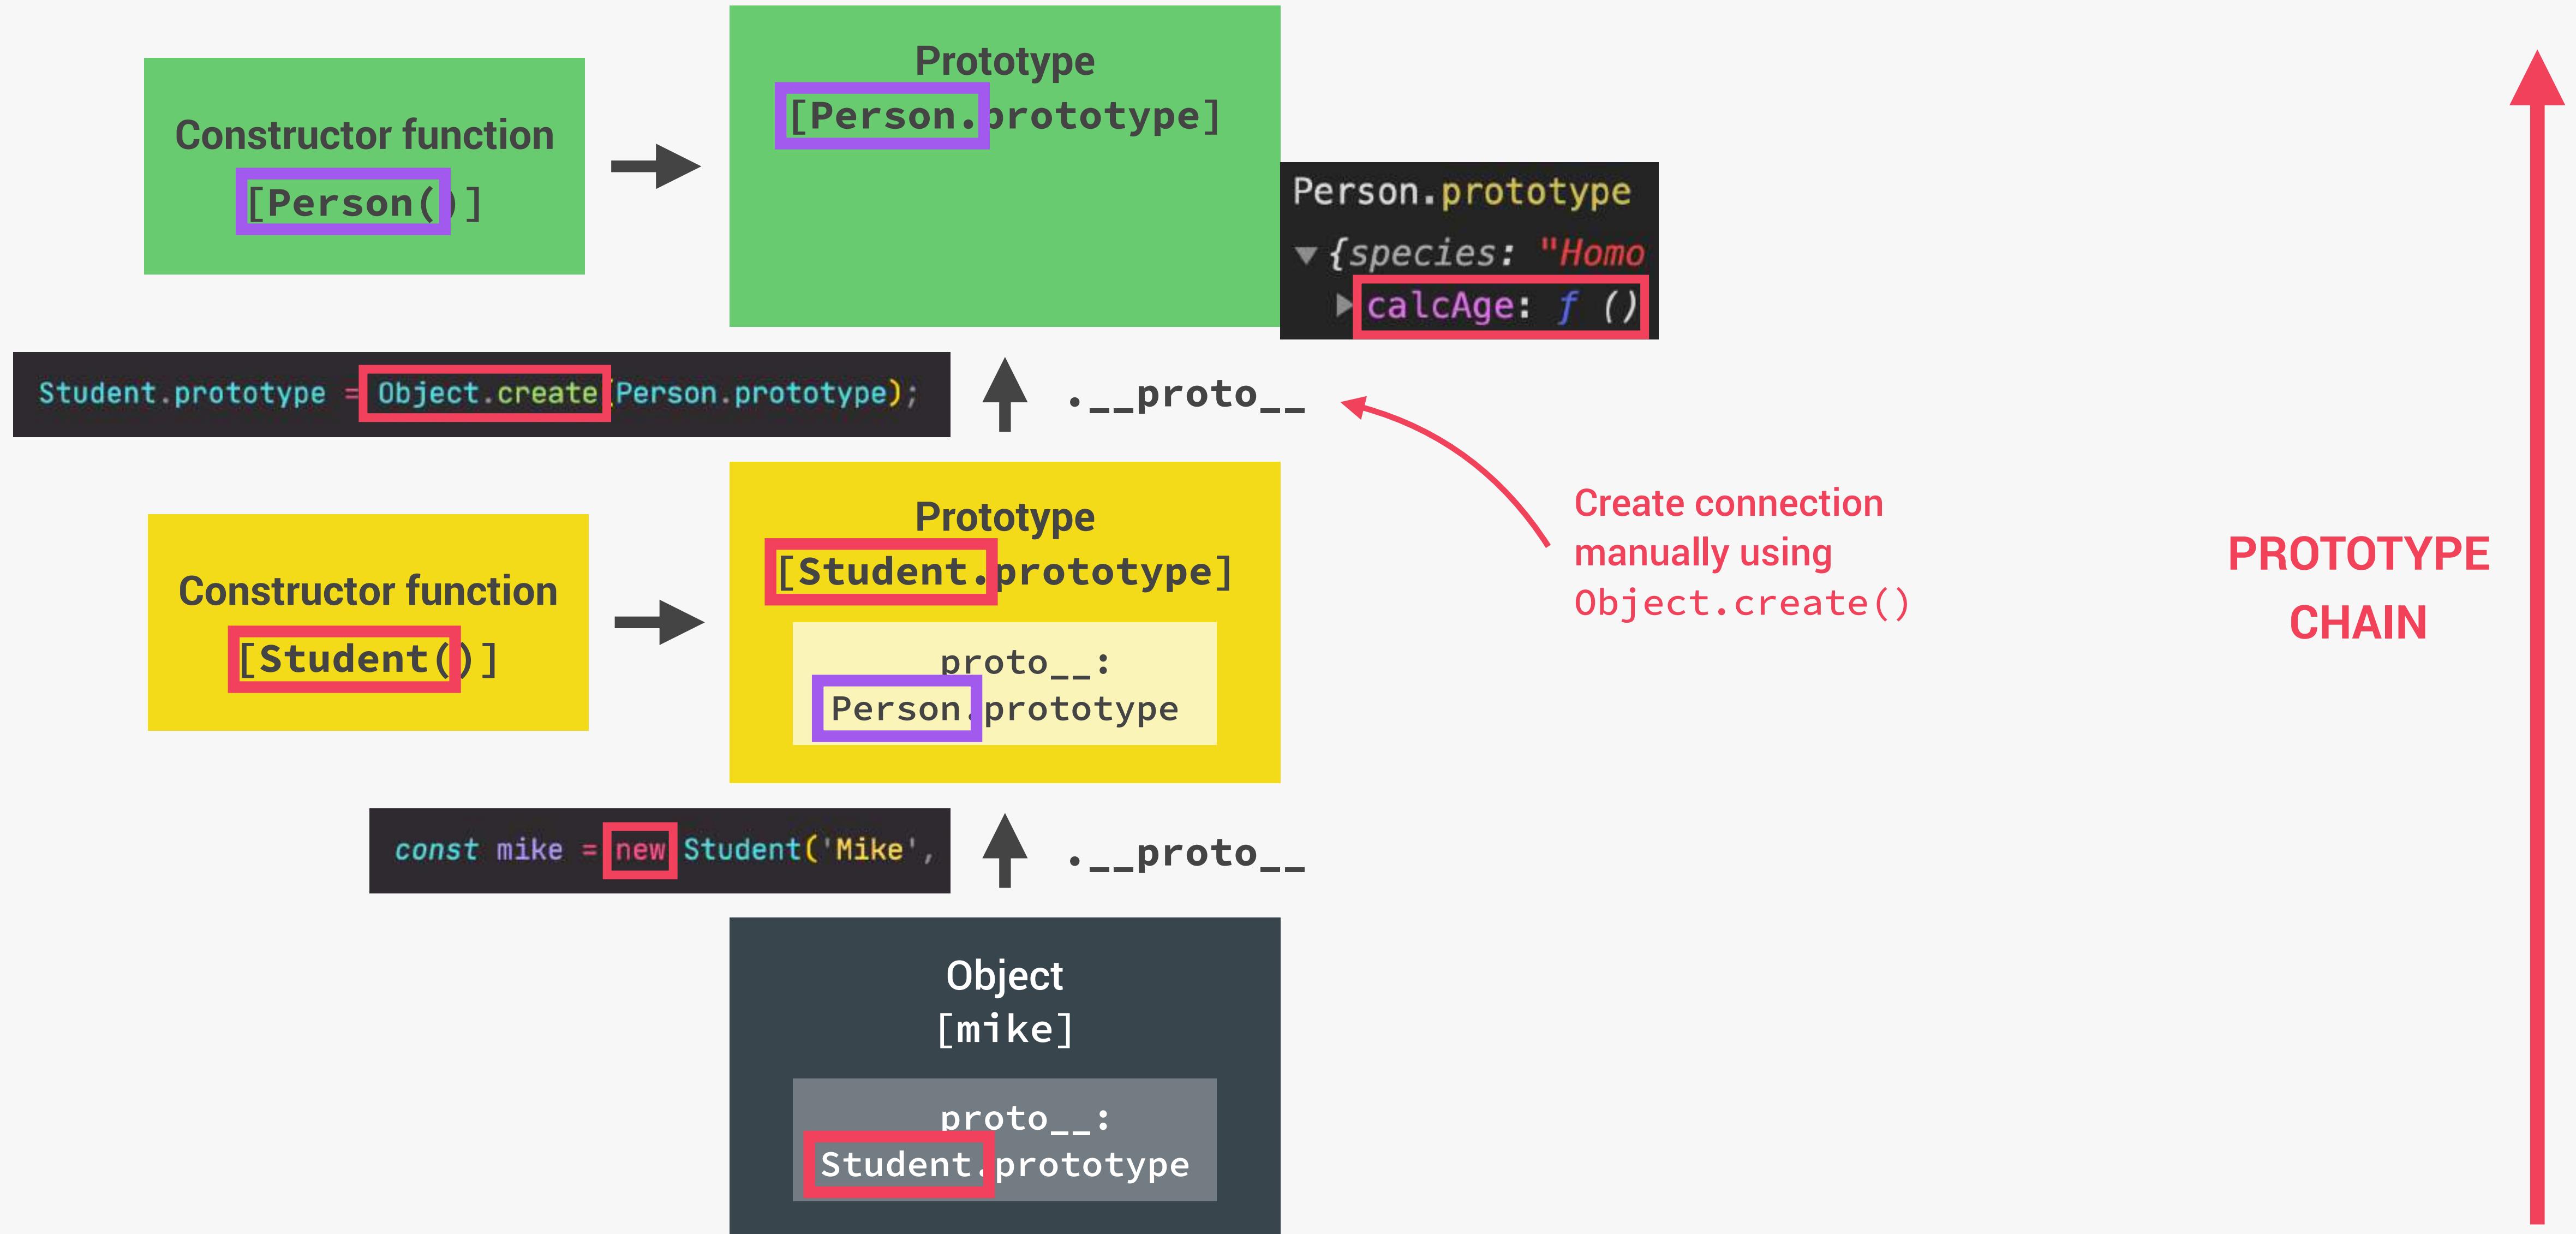

INHERITANCE BETWEEN "CLASSES"

```
Student.prototype = Object.create(Person.prototype);
```

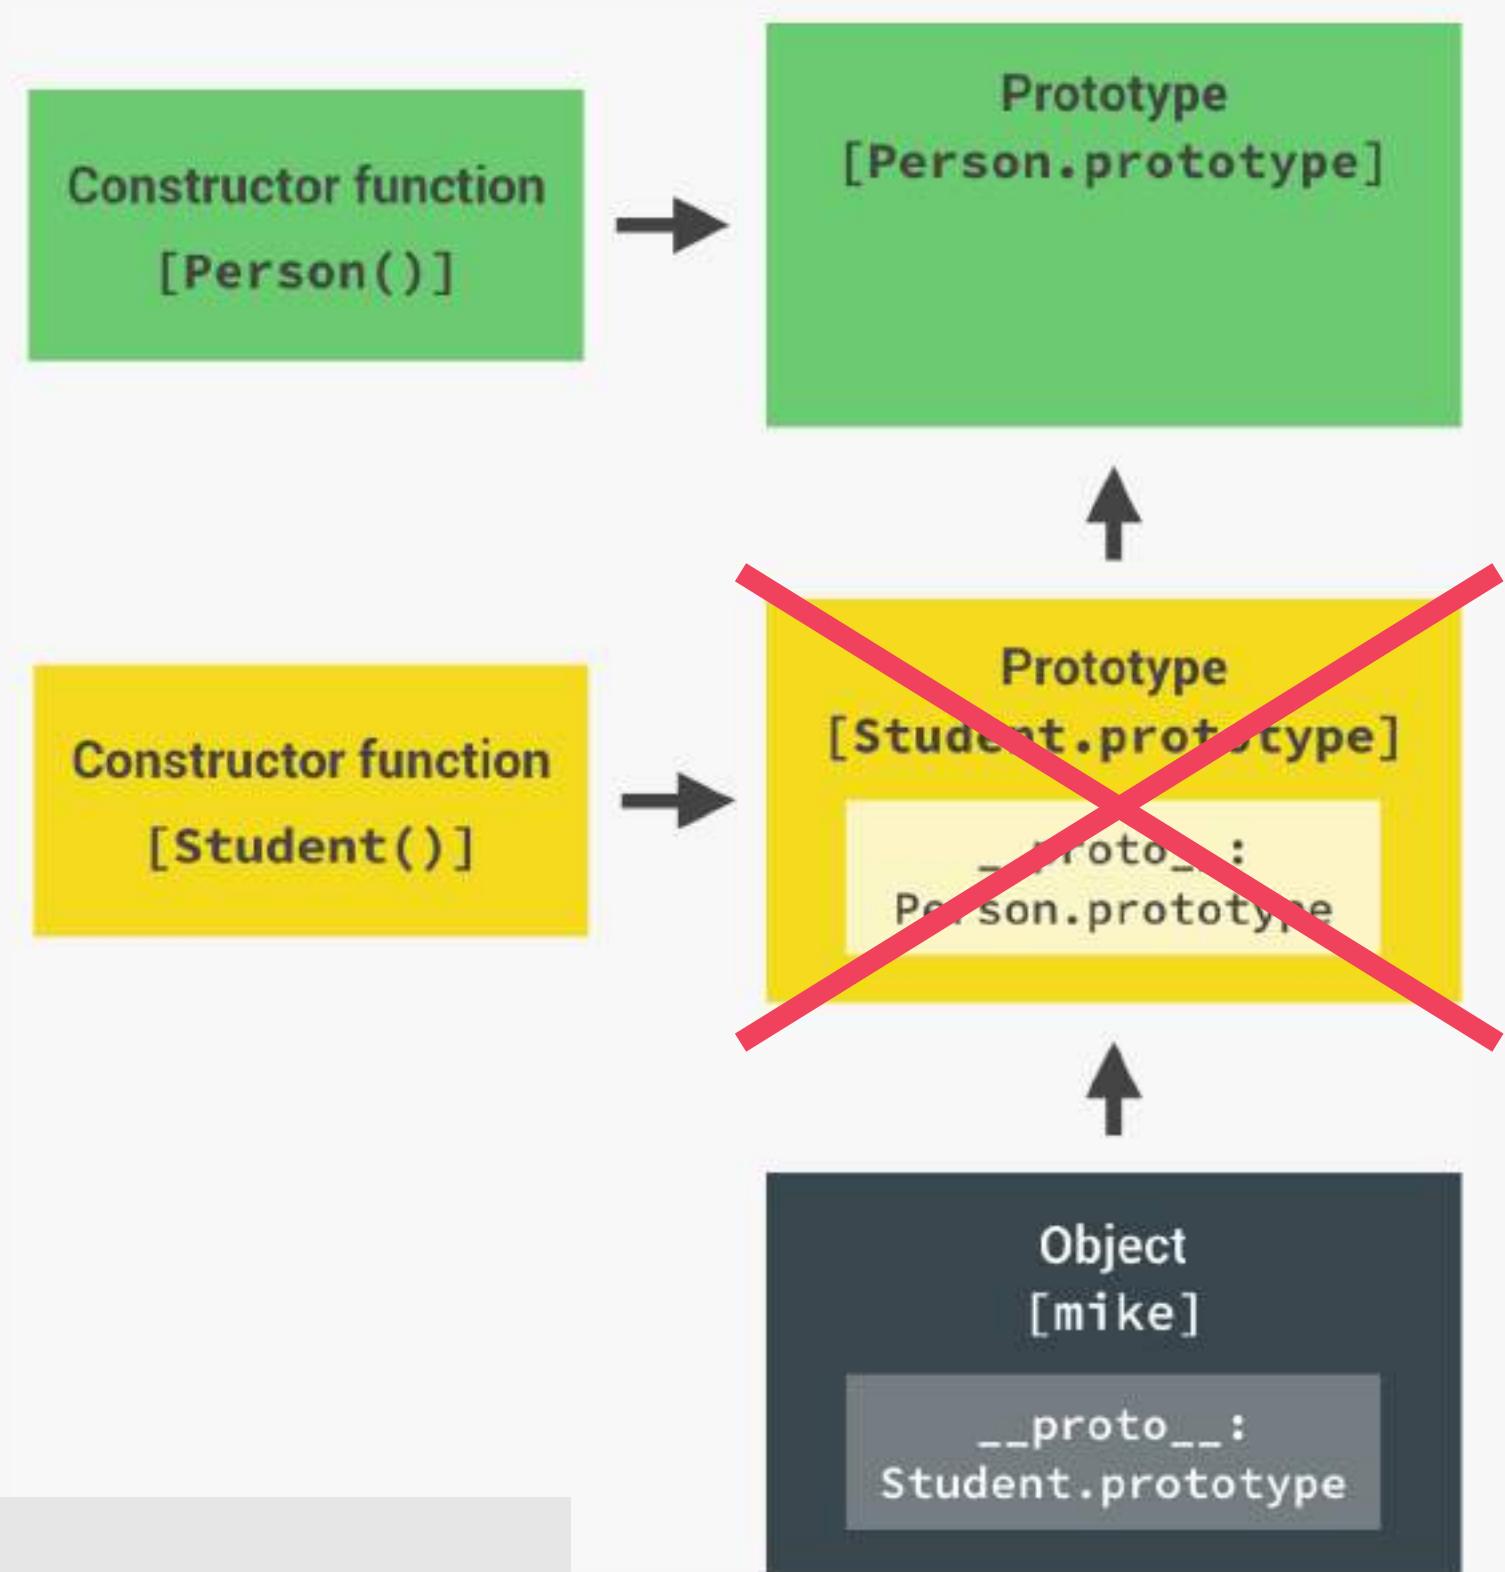


GOOD


```
Student.prototype = Person.prototype;
```



BAD

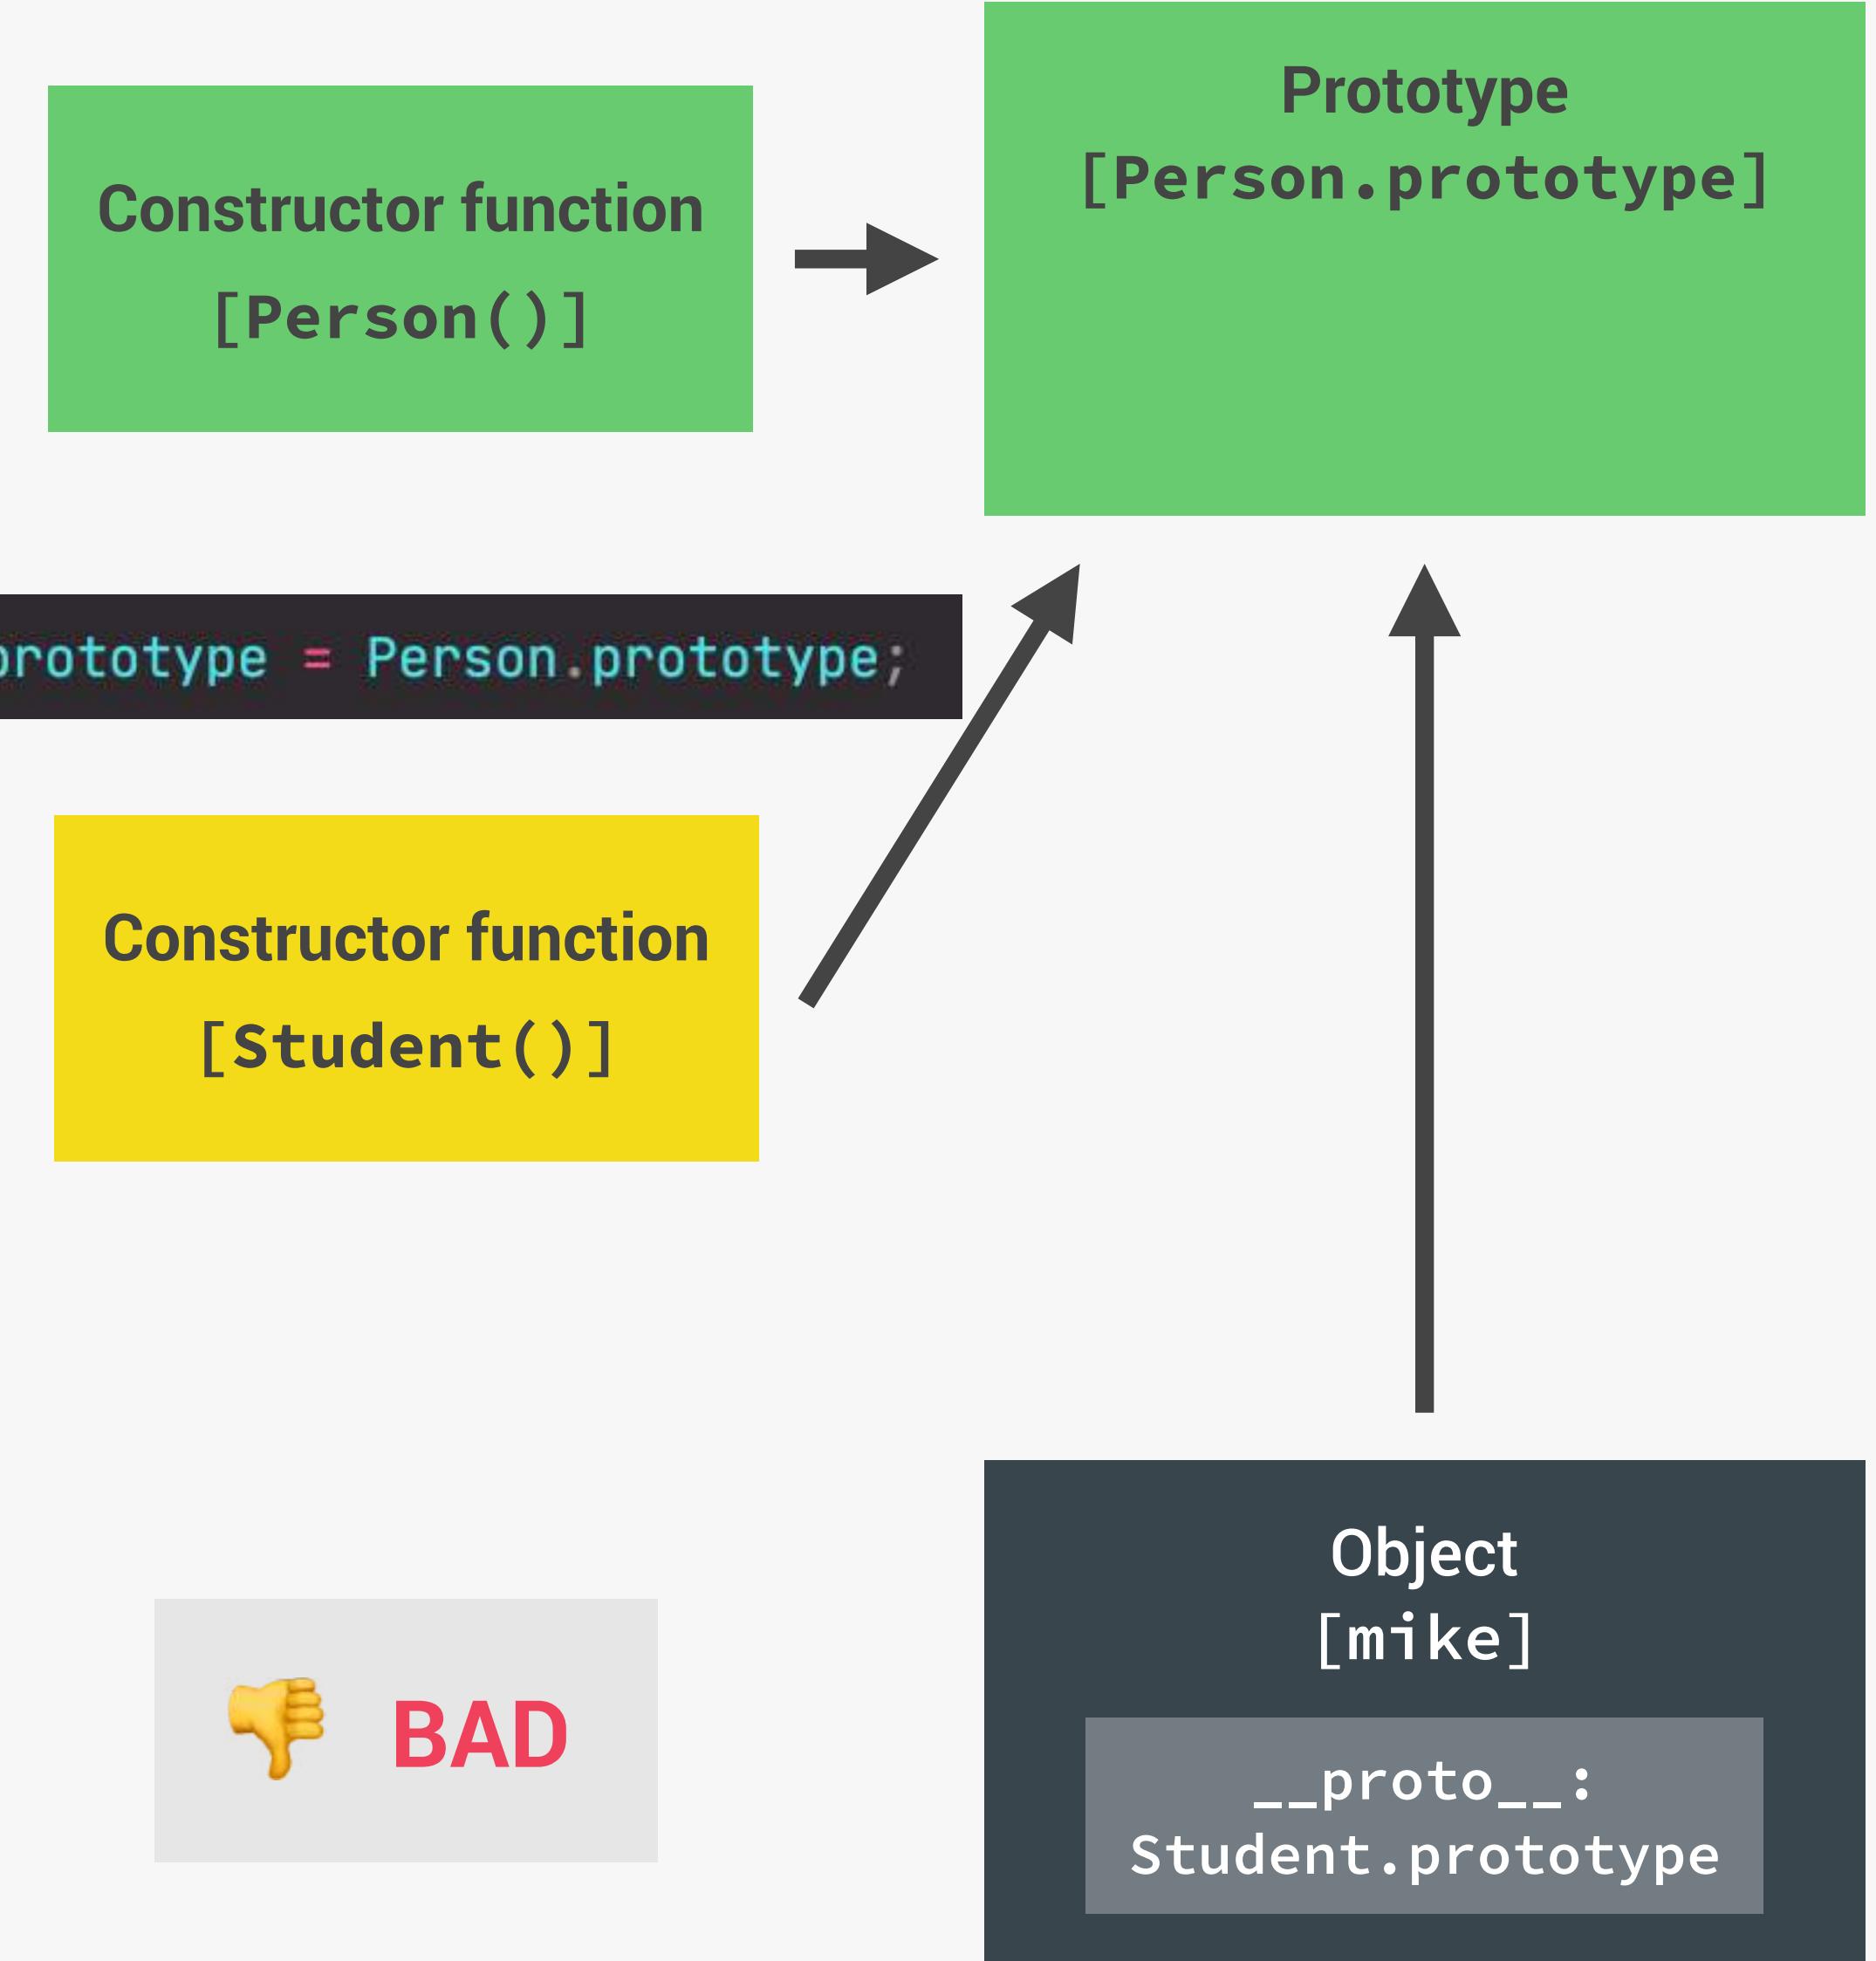

INHERITANCE BETWEEN "CLASSES"

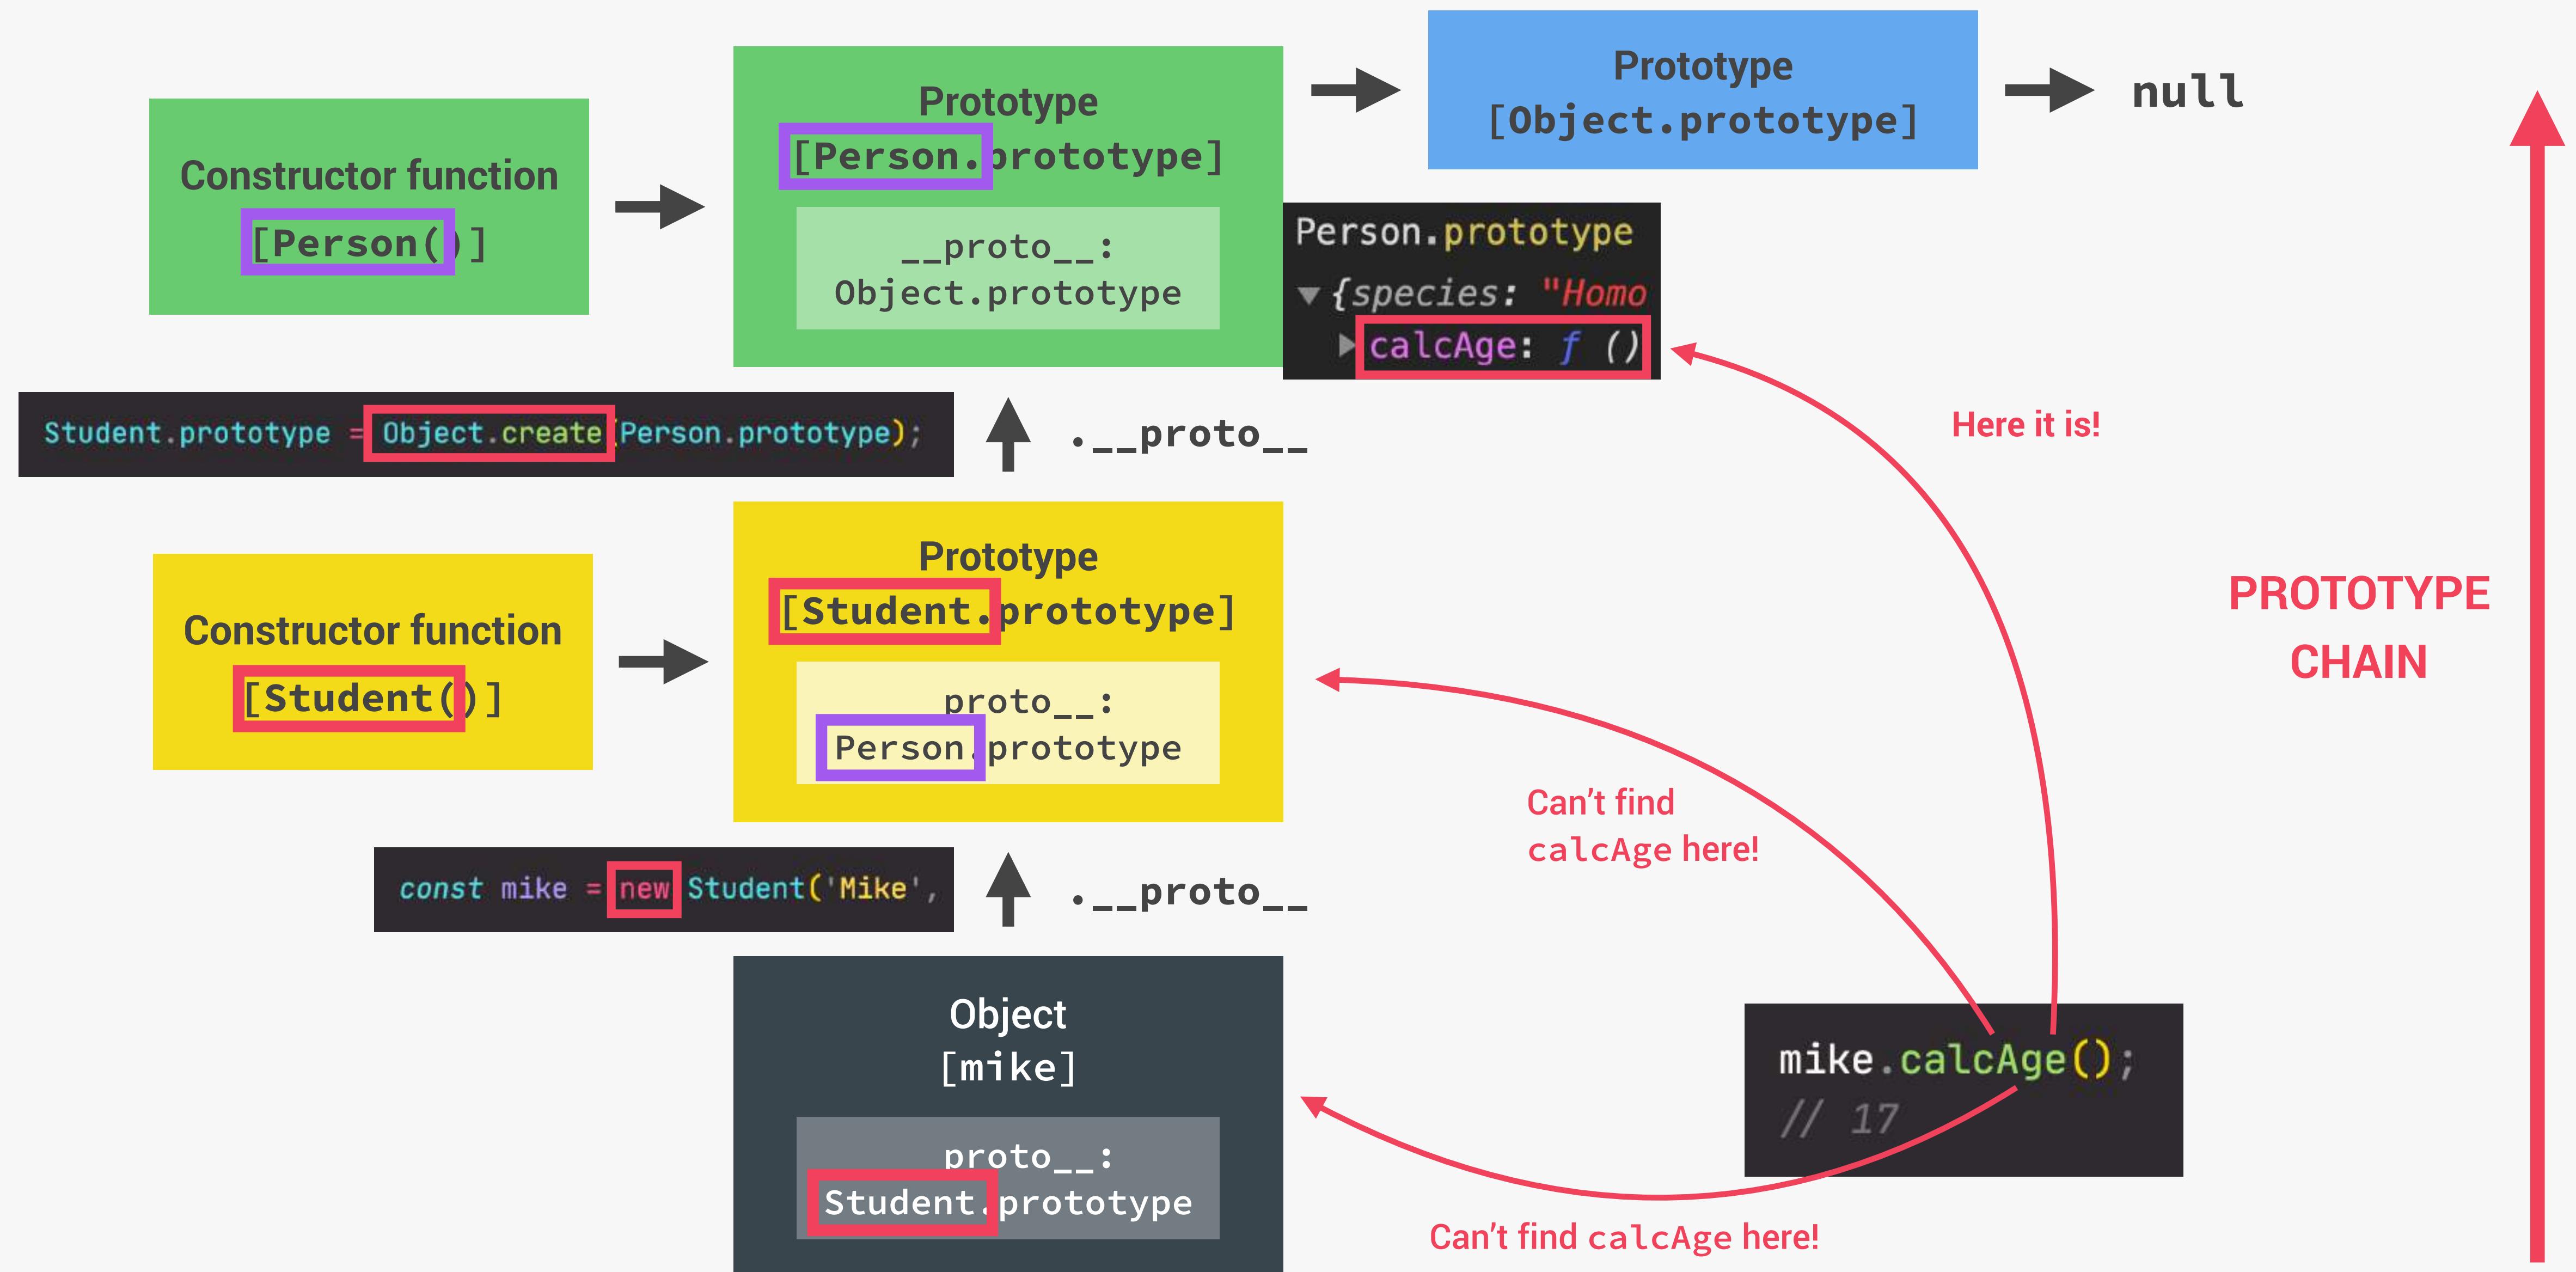



THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE

INHERITANCE BETWEEN "CLASSES":
OBJECT.CREATE

JS

INHERITANCE BETWEEN "CLASSES": OBJECT.CREATE

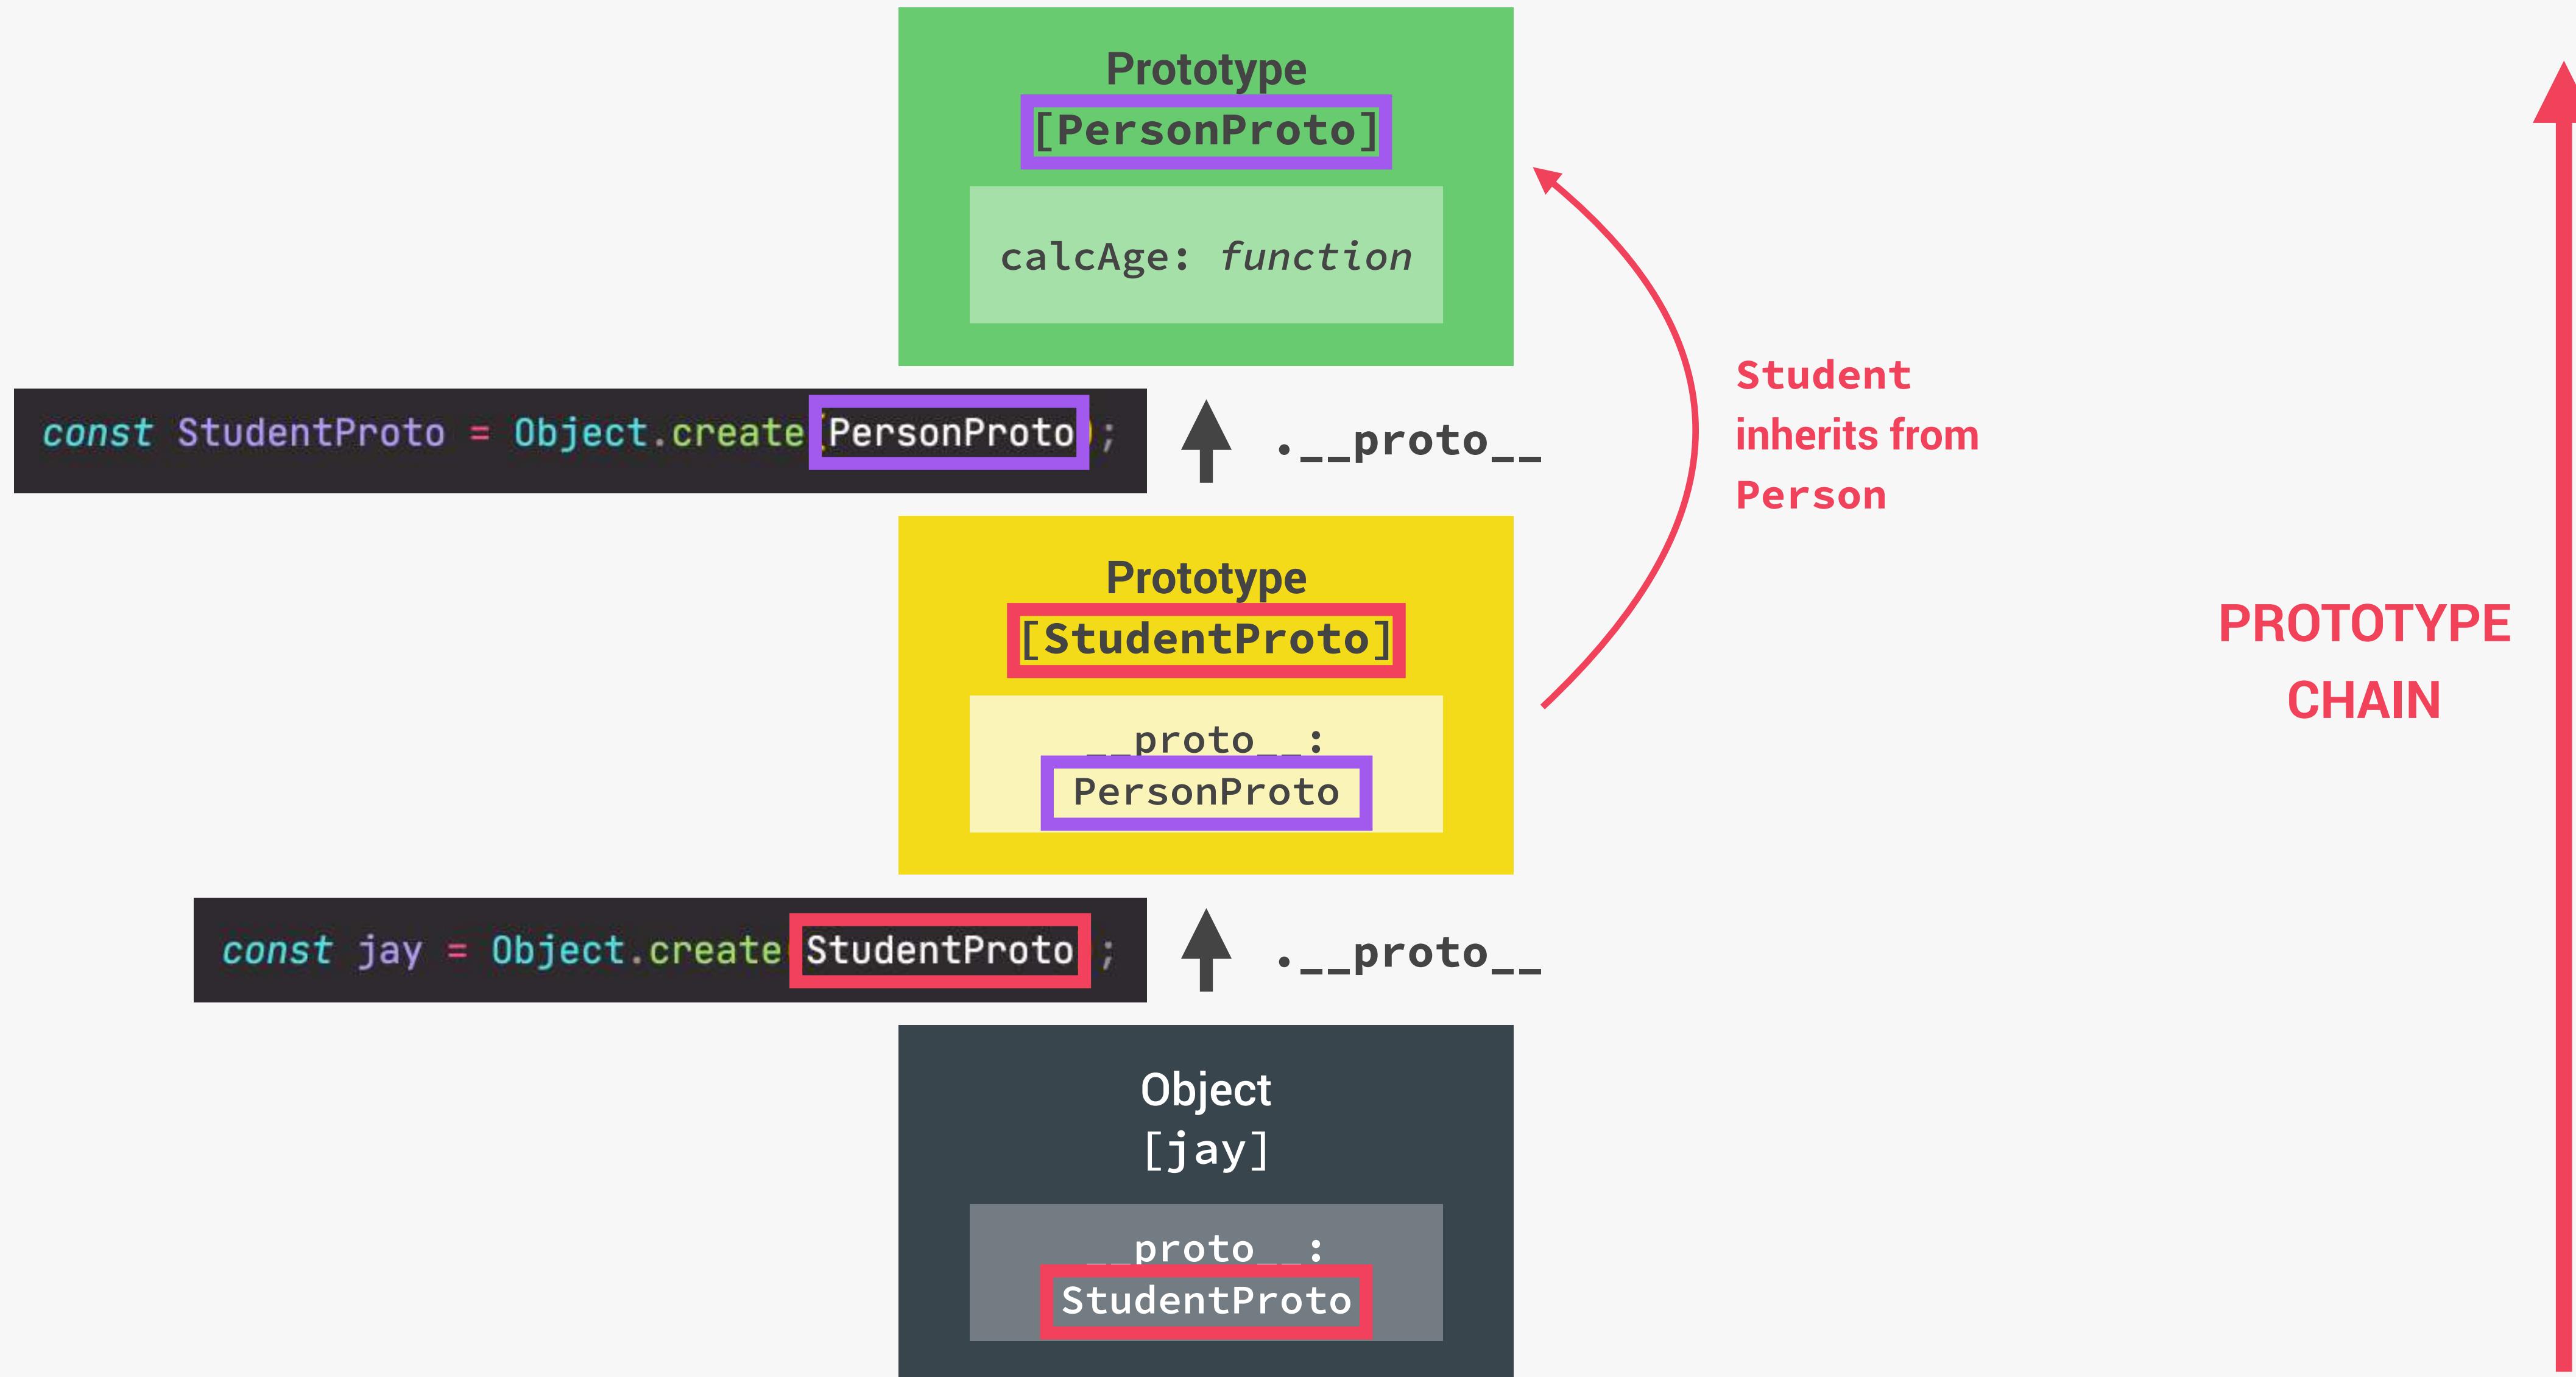



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

OBJECT ORIENTED PROGRAMMING
(OOP) WITH JAVASCRIPT

LECTURE

ES6 CLASSES SUMMARY

JS

Public field (similar to property, available on created object)

Private fields (not accessible outside of class)

Static public field (available only on class)

Call to parent (super) class (necessary with extend). Needs to happen before accessing this

Instance property (available on created object)

Redefining private field

Public method

Referencing private field and method

Private method (⚠ Might not yet work in your browser. "Fake" alternative: _ instead of #)

Getter method

Setter method (use _ to set property with same name as method, and also add getter)

Static method (available only on class. Can not access instance properties nor methods, only static ones)

Creating new object with new operator

```
class Student extends Person {  
    university = 'University of Lisbon';  
    #studyHours = 0;  
    #course;  
    static numSubjects = 10;  
  
    constructor(fullName, birthYear, startYear, course) {  
        super(fullName, birthYear);  
  
        this.startYear = startYear;  
        this.#course = course;  
    }  
  
    introduce() {  
        console.log(`I study ${this.#course} at ${this.university}`);  
    }  
  
    study(h) {  
        this.#makeCoffe();  
        this.#studyHours += h;  
    }  
  
    #makeCoffe() {  
        return 'Here is a coffe for you 😊';  
    }  
  
    get testScore() {  
        return this._testScore;  
    }  
  
    set testScore(score) {  
        this._testScore = score <= 20 ? score : 0;  
    }  
  
    static printCurriculum() {  
        console.log(`There are ${this.numSubjects} subjects`);  
    }  
}  
  
const student = new Student('Jonas', 2020, 2037, 'Medicine');
```

Parent class

Inheritance between classes, automatically sets prototype

Child class

Constructor method, called by new operator. Mandatory in regular class, might be omitted in a child class

👉 Classes are just "syntactic sugar" over constructor functions

👉 Classes are **not** hoisted

👉 Classes are **first-class** citizens

👉 Class body is always executed in **strict mode**

**MAPTY APP. OOP,
GEOLOCATION,
EXTERNAL LIBRARIES,
AND MORE!**



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


MAPTY APP: OOP, GEOLOCATION,
EXTERNAL LIBRARIES, AND MORE!

LECTURE

HOW TO PLAN A WEB PROJECT

JS

PROJECT PLANNING

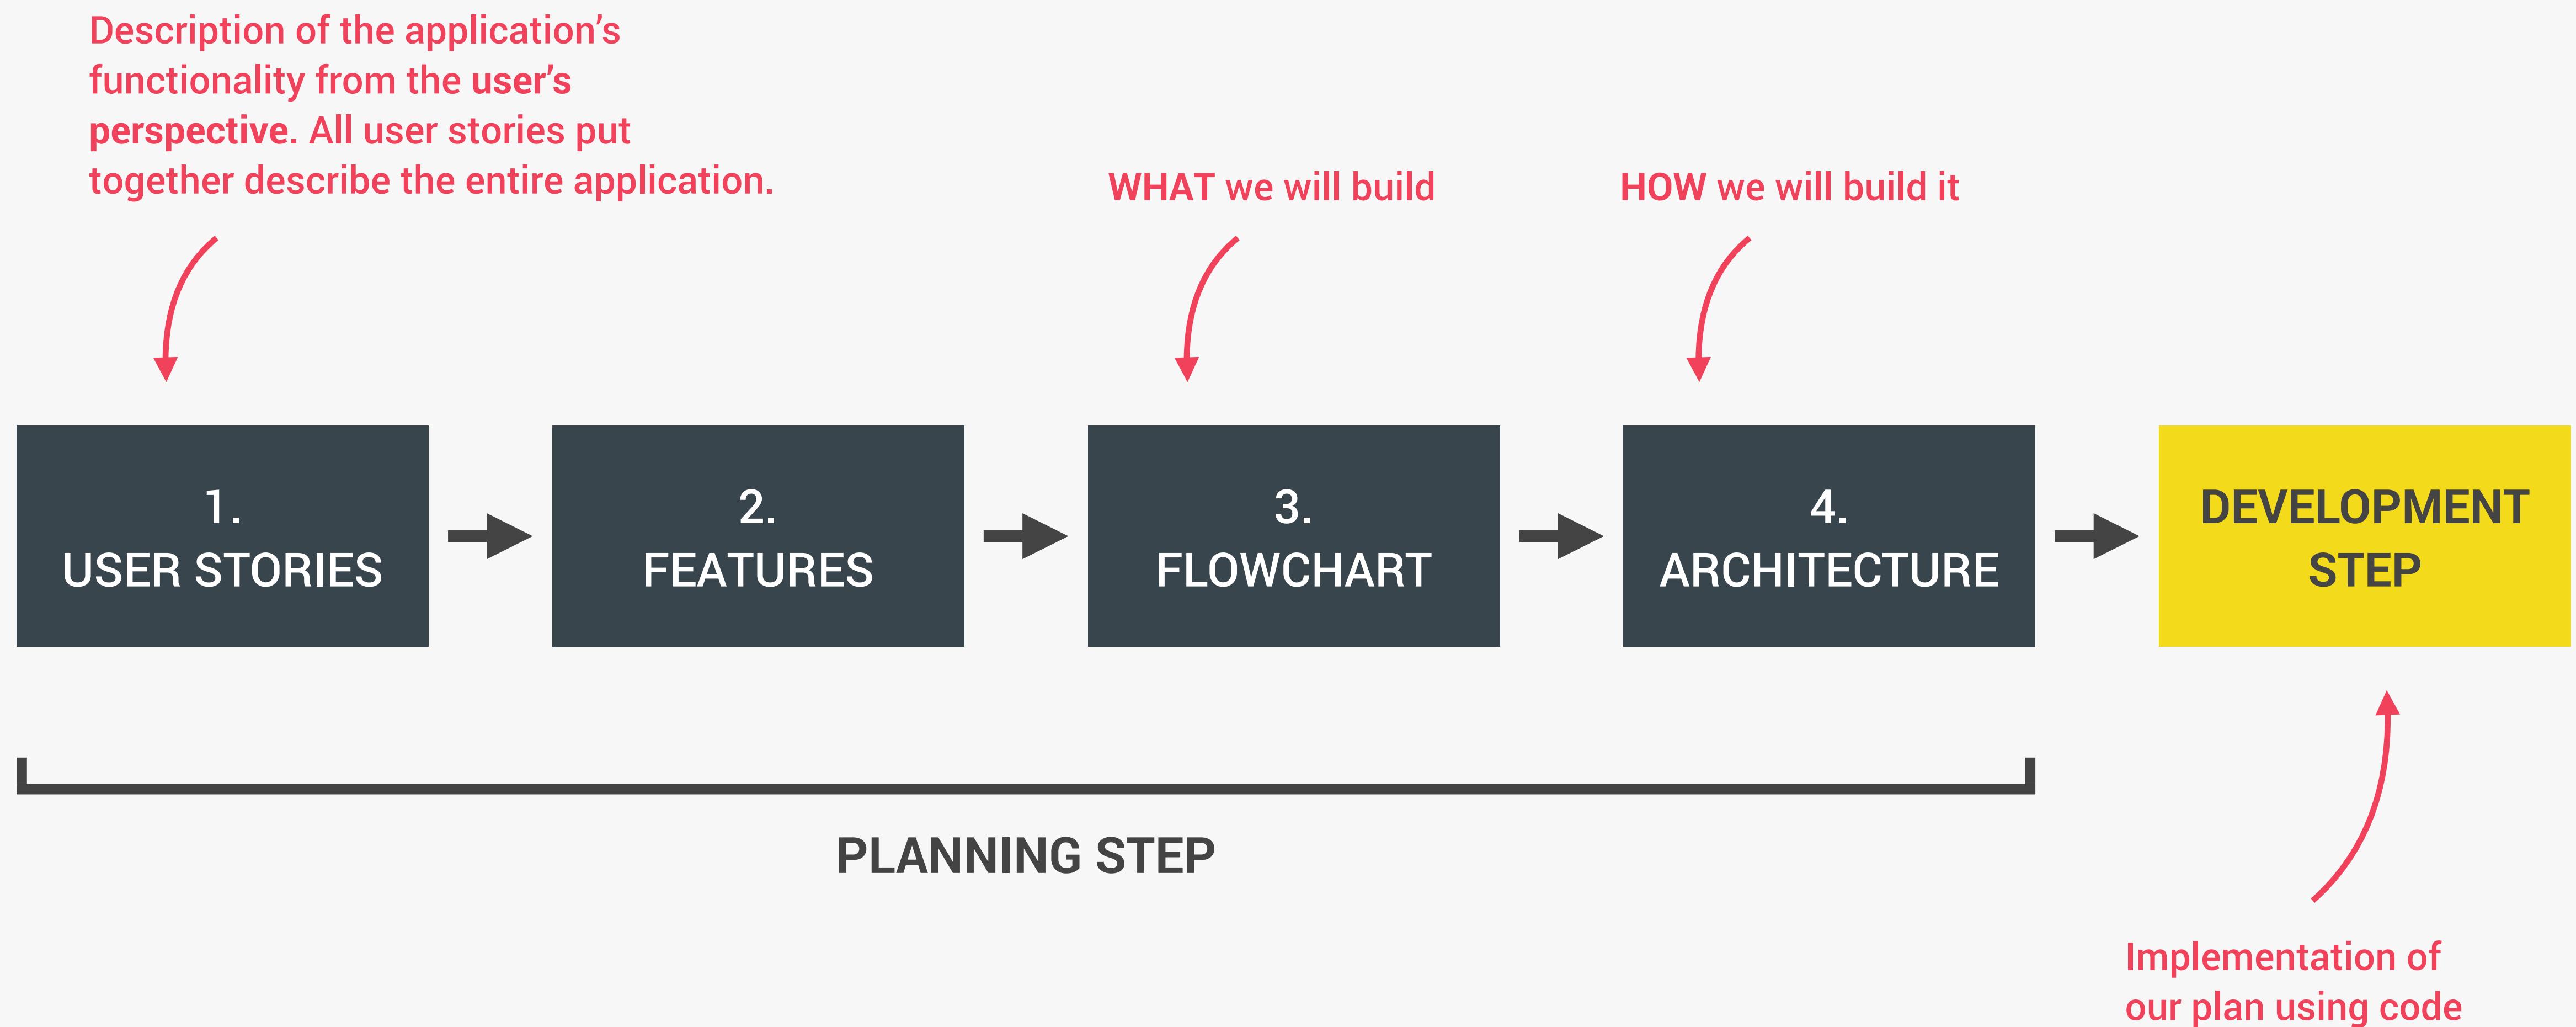

1. USER STORIES



👉 **User story:** Description of the application's functionality from the user's perspective.

👉 **Common format:** As a *[type of user]*, I want *[an action]* so that *[a benefit]*

Who?

What?

Why?

Example: user, admin, etc.

1 As a user, I want to log my running workouts with location, distance, time, pace and steps/minute, so I can keep a log of all my running

2 As a user, I want to log my cycling workouts with location, distance, time, speed and elevation gain, so I can keep a log of all my cycling

3 As a user, I want to see all my workouts at a glance, so I can easily track my progress over time


4 As a user, I want to also see my workouts on a map, so I can easily check where I work out the most

5 As a user, I want to see all my workouts when I leave the app and come back later, so that I can keep using there app over time

2. FEATURES



USER STORIES



FEATURES

- | | |
|---|--|
| 1 Log my running workouts with location, distance, time, pace and steps/minute | <ul style="list-style-type: none">👉 Map where user clicks to add new workout (best way to get location coordinates)👉 Geolocation to display map at current location (more user friendly)👉 Form to input distance, time, pace, steps/minute |
| 2 Log my cycling workouts with location, distance, time, speed and elevation gain | <ul style="list-style-type: none">👉 Form to input distance, time, speed, elevation gain |
| 3 See all my workouts at a glance | <ul style="list-style-type: none">👉 Display all workouts in a list |
| 4 See my workouts on a map | <ul style="list-style-type: none">👉 Display all workouts on the map |
| 5 See all my workouts when I leave the app and come back later | <ul style="list-style-type: none">👉 Store workout data in the browser using local storage API👉 On page load, read the saved data from local storage and display |


3. FLOWCHART



FEATURES

1. Geolocation to display map at current location
2. Map where user clicks to add new workout
3. Form to input distance, time, pace, steps/minute
4. Form to input distance, time, speed, elevation gain
5. Display workouts in a list
6. Display workouts on the map
7. Store workout data in the browser
8. On page load, read the saved data and display
9. Move map to workout location on click

Added later

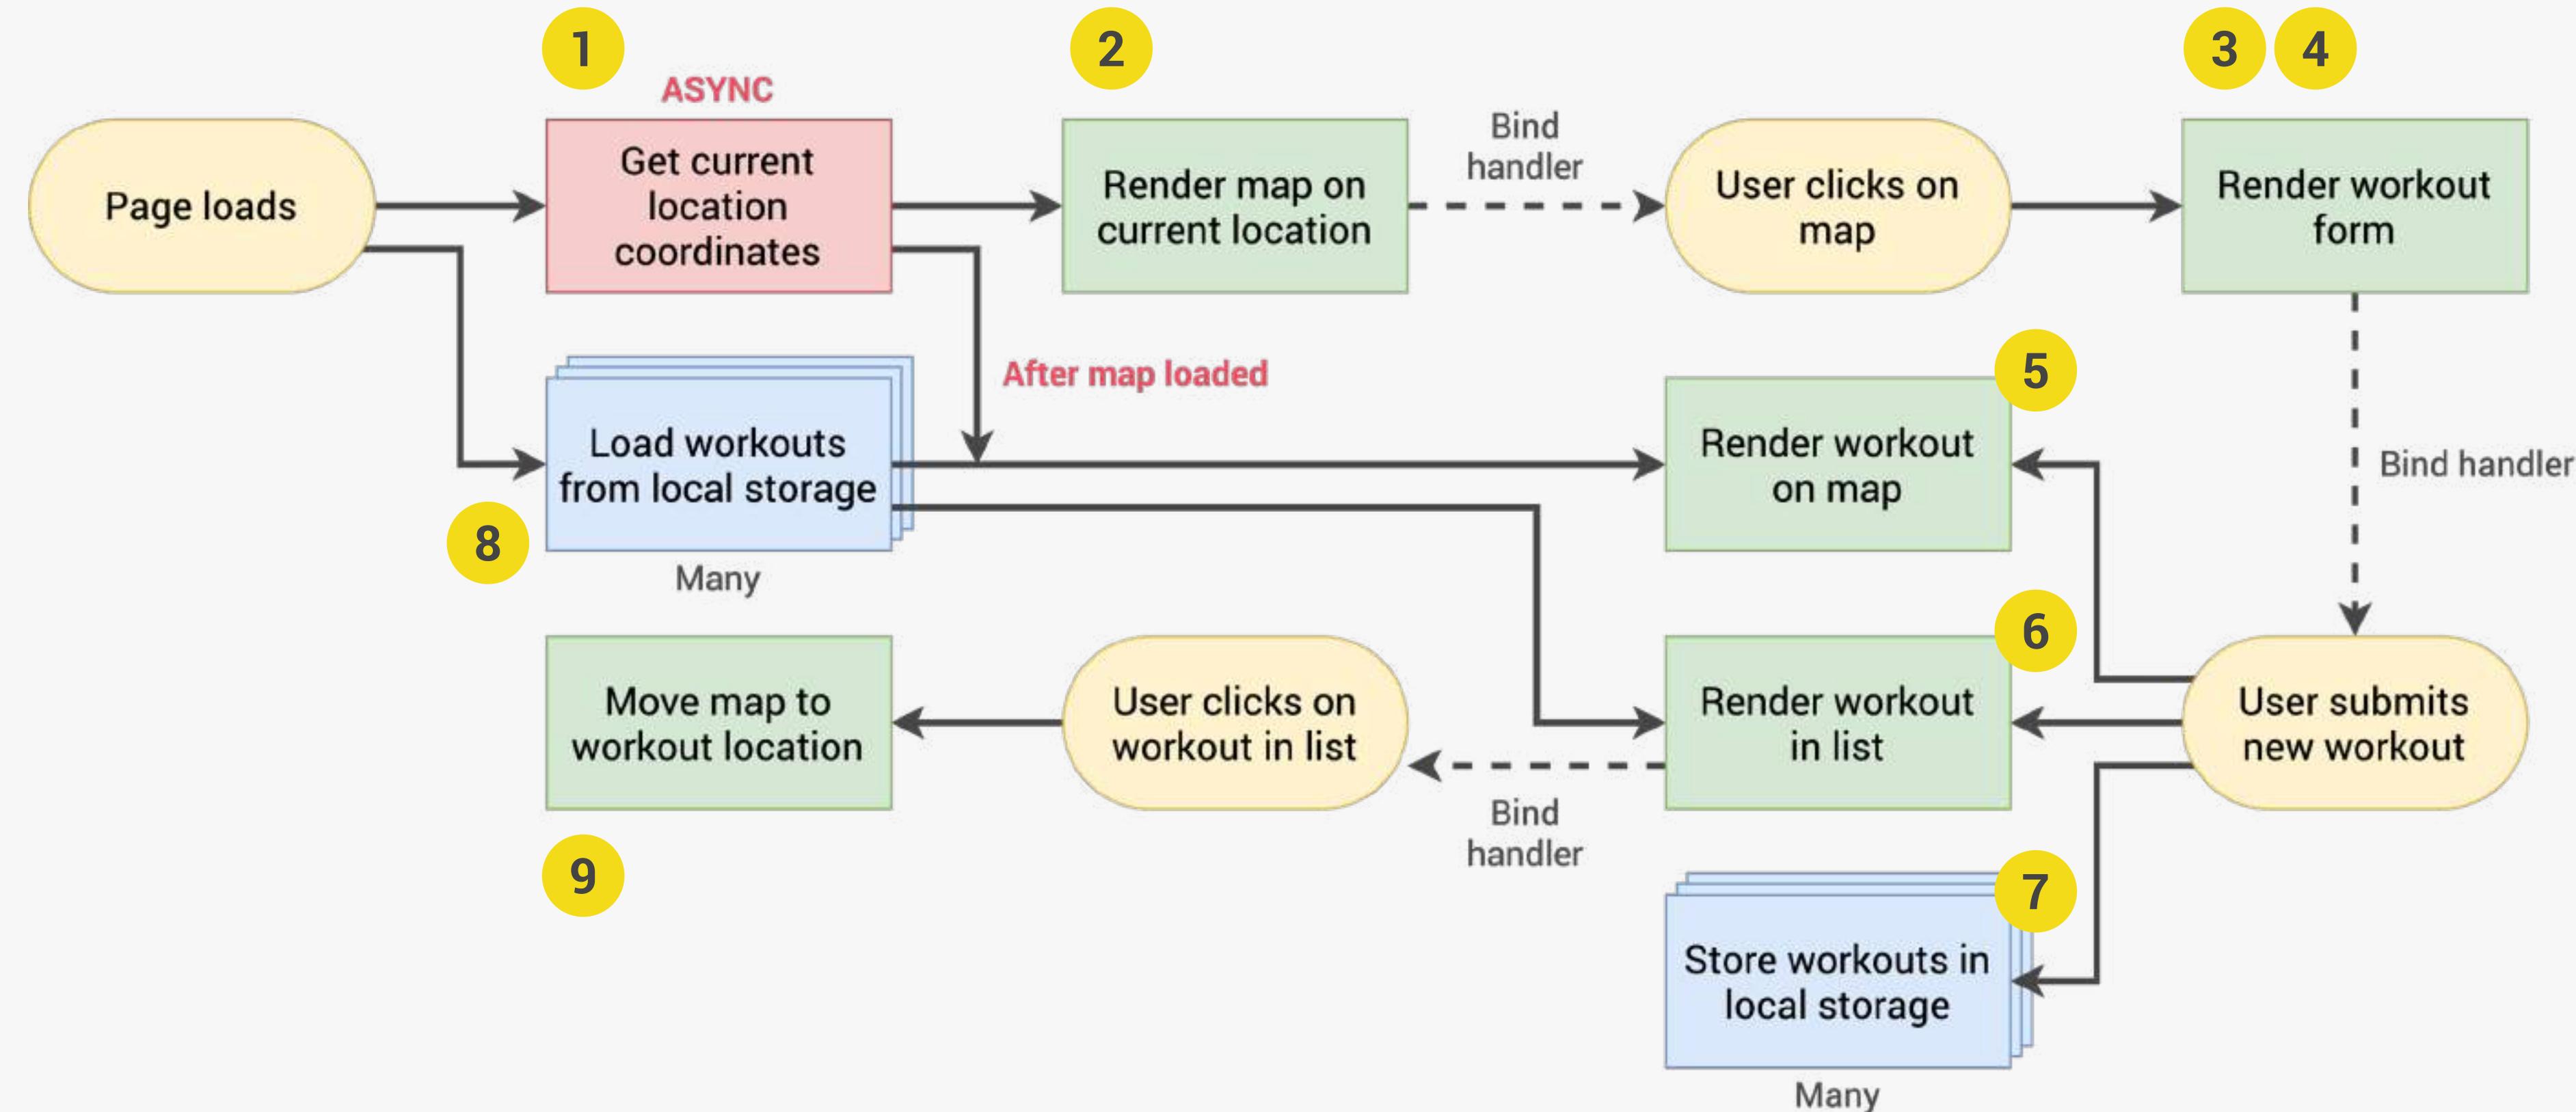

👉 In the real-world, you don't have to come with the final flowchart right in the planning phase. It's normal that it changes throughout implementation!

FOR NOW, LET'S JUST
START CODING 



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

MAPTY APP: OOP, GEOLOCATION,
EXTERNAL LIBRARIES, AND MORE!

LECTURE


FINAL CONSIDERATIONS

JS

10 ADDITIONAL FEATURE IDEAS: CHALLENGES



- 👉 Ability to **edit** a workout;
- 👉 Ability to **delete** a workout;
- 👉 Ability to **delete all** workouts;
- 👉 Ability to **sort** workouts by a certain field (e.g. distance);
- 👉 **Re-build** Running and Cycling objects coming from Local Storage;
- 👉 More realistic error and confirmation **messages**;
- 👉 Ability to position the map to **show all workouts** [very hard];
- 👉 Ability to **draw lines and shapes** instead of just points [very hard];
- 👉 **Geocode location** from coordinates (“Run in Faro, Portugal”) [only after asynchronous JavaScript section];
- 👉 **Display weather** data for workout time and place [only after asynchronous JavaScript section].

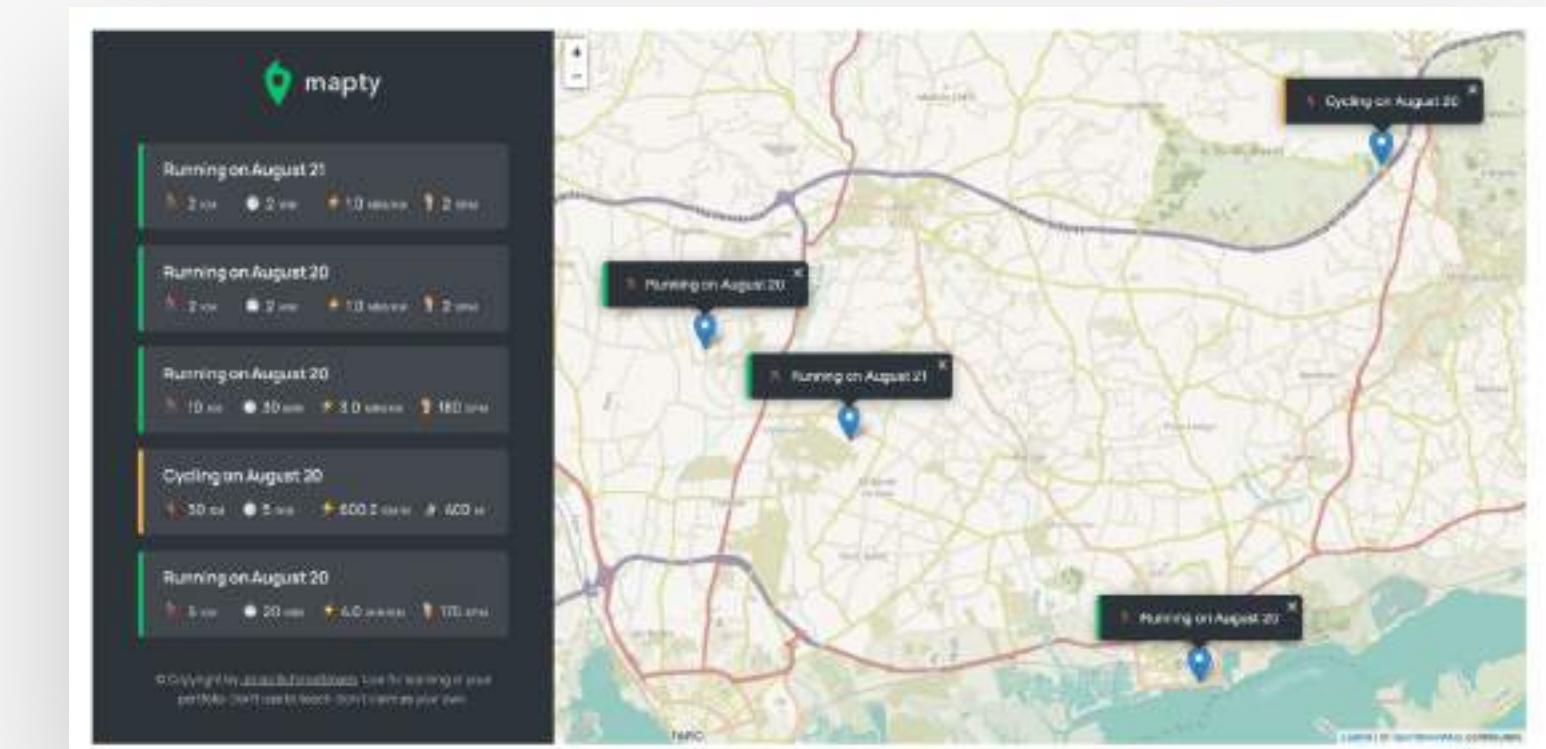

ASYNCHRONOUS JAVASCRIPT: PROMISES, ASYNC/ AWAIT AND AJAX



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

ASYNCHRONOUS JAVASCRIPT:
PROMISES, ASYNC/AWAIT AND AJAX

LECTURE

ASYNCHRONOUS JAVASCRIPT, AJAX
AND APIs

JS

SYNCHRONOUS CODE


BLOCKING

The screenshot shows a browser developer tools console with the following code:

```
const p = document.querySelector('.p');
p.textContent = 'My name is Jonas!';
alert('Text set!');
p.style.color = 'red';
```

Below the code, a message box is displayed with the text "127.0.0.1:8080 says" and "Text set!" followed by an "OK" button.

THREAD OF EXECUTION

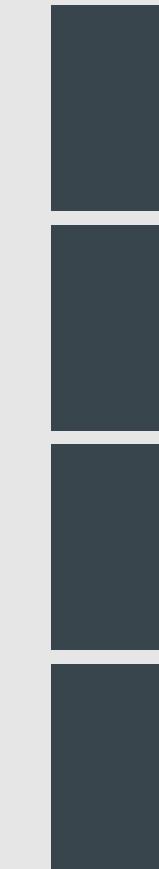

- 👉 Most code is **synchronous**;
- 👉 Synchronous code is **executed line by line**;
- 👉 Each line of code **waits** for previous line to finish;
- 👉 Long-running operations **block** code execution.

Part of execution context that actually executes the code in computer's CPU

SYNCHRONOUS

ASYNCHRONOUS CODE

CALLBACK WILL
RUN AFTER TIMER

Asynchronous

```
const p = document.querySelector('.p');
setTimeout(function () {
  p.textContent = 'My name is Jonas!';
}, 5000);
p.style.color = 'red';
```


👉 Example: Timer with callback

Callback does NOT automatically
make code asynchronous!

```
[1, 2, 3].map(v => v * 2);
```

Executed after
all other code

THREAD OF
EXECUTION

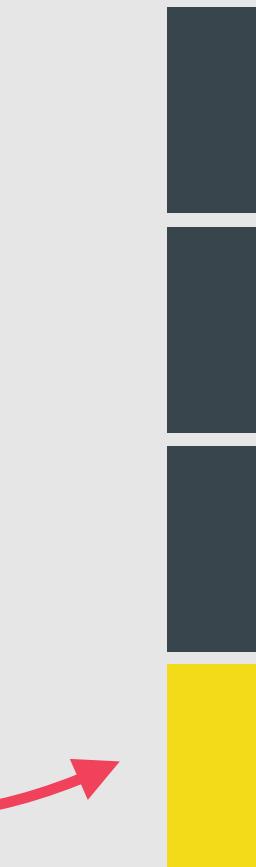

"BACKGROUND"

Timer
running



(More on this in the
lecture on Event Loop)

ASYNCHRONOUS

Coordinating behavior of a
program over a period of time

- 👉 Asynchronous code is executed **after a task that runs in the “background” finishes**;
- 👉 Asynchronous code is **non-blocking**;
- 👉 Execution doesn’t wait for an asynchronous task to finish its work;
- 👉 Callback functions alone do **NOT** make code asynchronous!

ASYNCHRONOUS CODE

CALLBACK WILL RUN
AFTER IMAGE LOADS

```
const img = document.querySelector('.dog');
img.src = 'dog.jpg';
img.addEventListener('load', function () {
  img.classList.add('fadeIn');
});
p.style.width = '300px';
```

Asynchronous

THREAD OF EXECUTION



"BACKGROUND"

Image loading



(More on this in the
lecture on Event Loop)

addEventListener does
NOT automatically make
code asynchronous!

👉 Asynchronous code is executed **after a task that runs in the “background” finishes**;

👉 Asynchronous code is **non-blocking**;

👉 Execution doesn't wait for an asynchronous task to finish its work;


👉 Callback functions alone do **NOT** make code asynchronous!

ASYNCHRONOUS
Coordinating behavior of a
program over a period of time


WHAT ARE AJAX CALLS?

AJAX

Asynchronous JavaScript And XML: Allows us to communicate with remote web servers in an **asynchronous way**. With AJAX calls, we can **request data from web servers dynamically**.

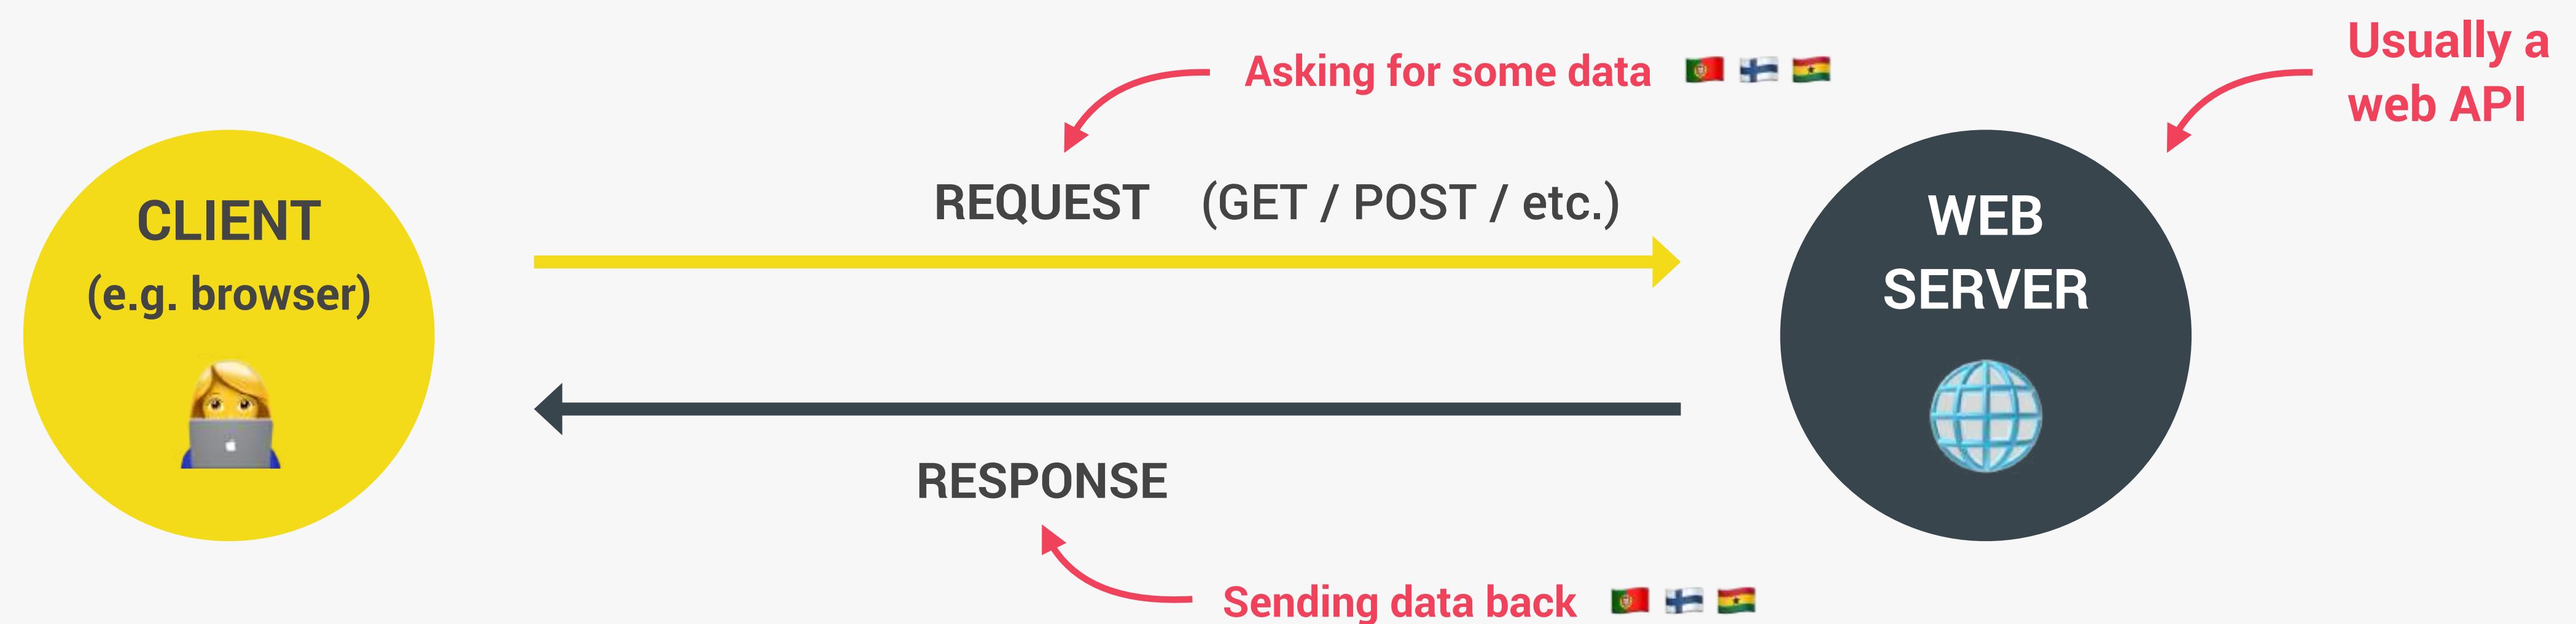

WHAT IS AN API?

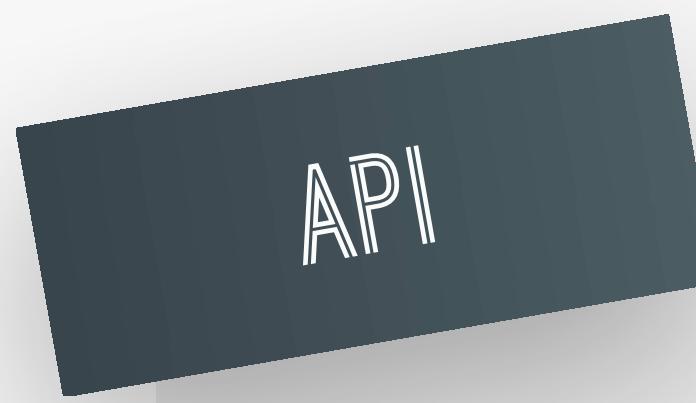

- 👉 Application Programming Interface: Piece of software that can be used by another piece of software, in order to allow **applications to talk to each other**;

- 👉 There are many types of APIs in web development:

DOM API

Geolocation API

Own Class API

“Online” API


Just “API”

- 👉 **“Online” API**: Application running on a server, that receives requests for data, and sends data back as response;

- 👉 We can build **our own** web APIs (requires back-end development, e.g. with node.js) or use **3rd-party** APIs.



XML
data
format

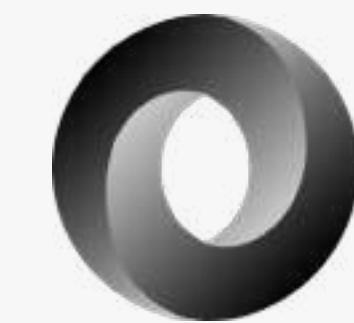

JSON data
format



Most popular
API data format

There is an API for
everything

- 👉 Weather data
- 👉 Data about countries
- 👉 Flights data
- 👉 Currency conversion data
- 👉 APIs for sending email or SMS
- 👉 Google Maps
- 👉 Millions of possibilities...





JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

ASYNCHRONOUS JAVASCRIPT:
PROMISES, ASYNC/AWAIT AND AJAX


LECTURE

HOW THE WEB WORKS: REQUESTS
AND RESPONSES


JS

WHAT HAPPENS WHEN WE ACCESS A WEB SERVER

👉 Request-response model or Client-server architecture

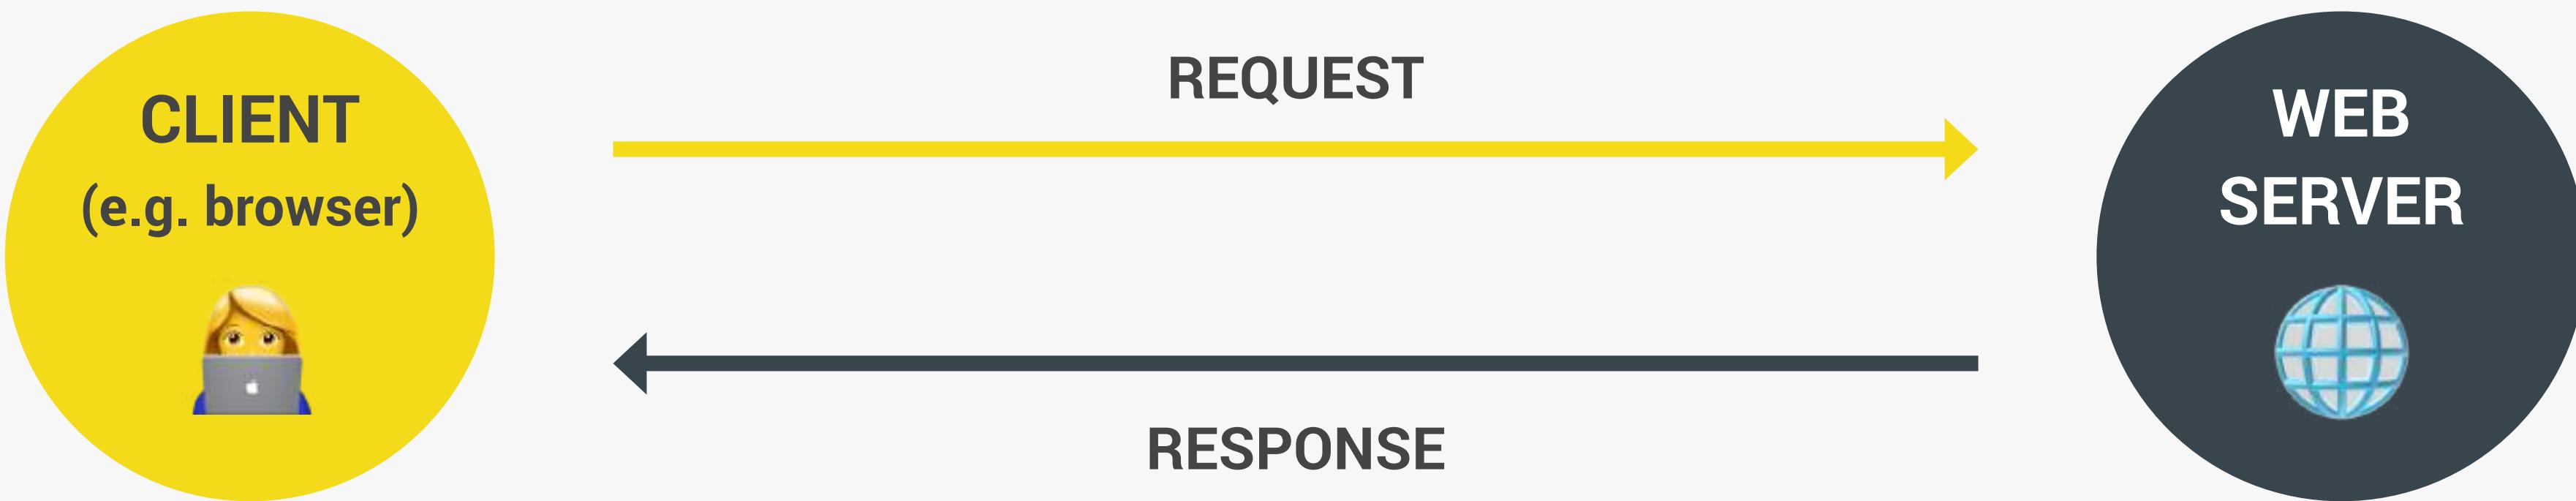

WHAT HAPPENS WHEN WE ACCESS A WEB SERVER

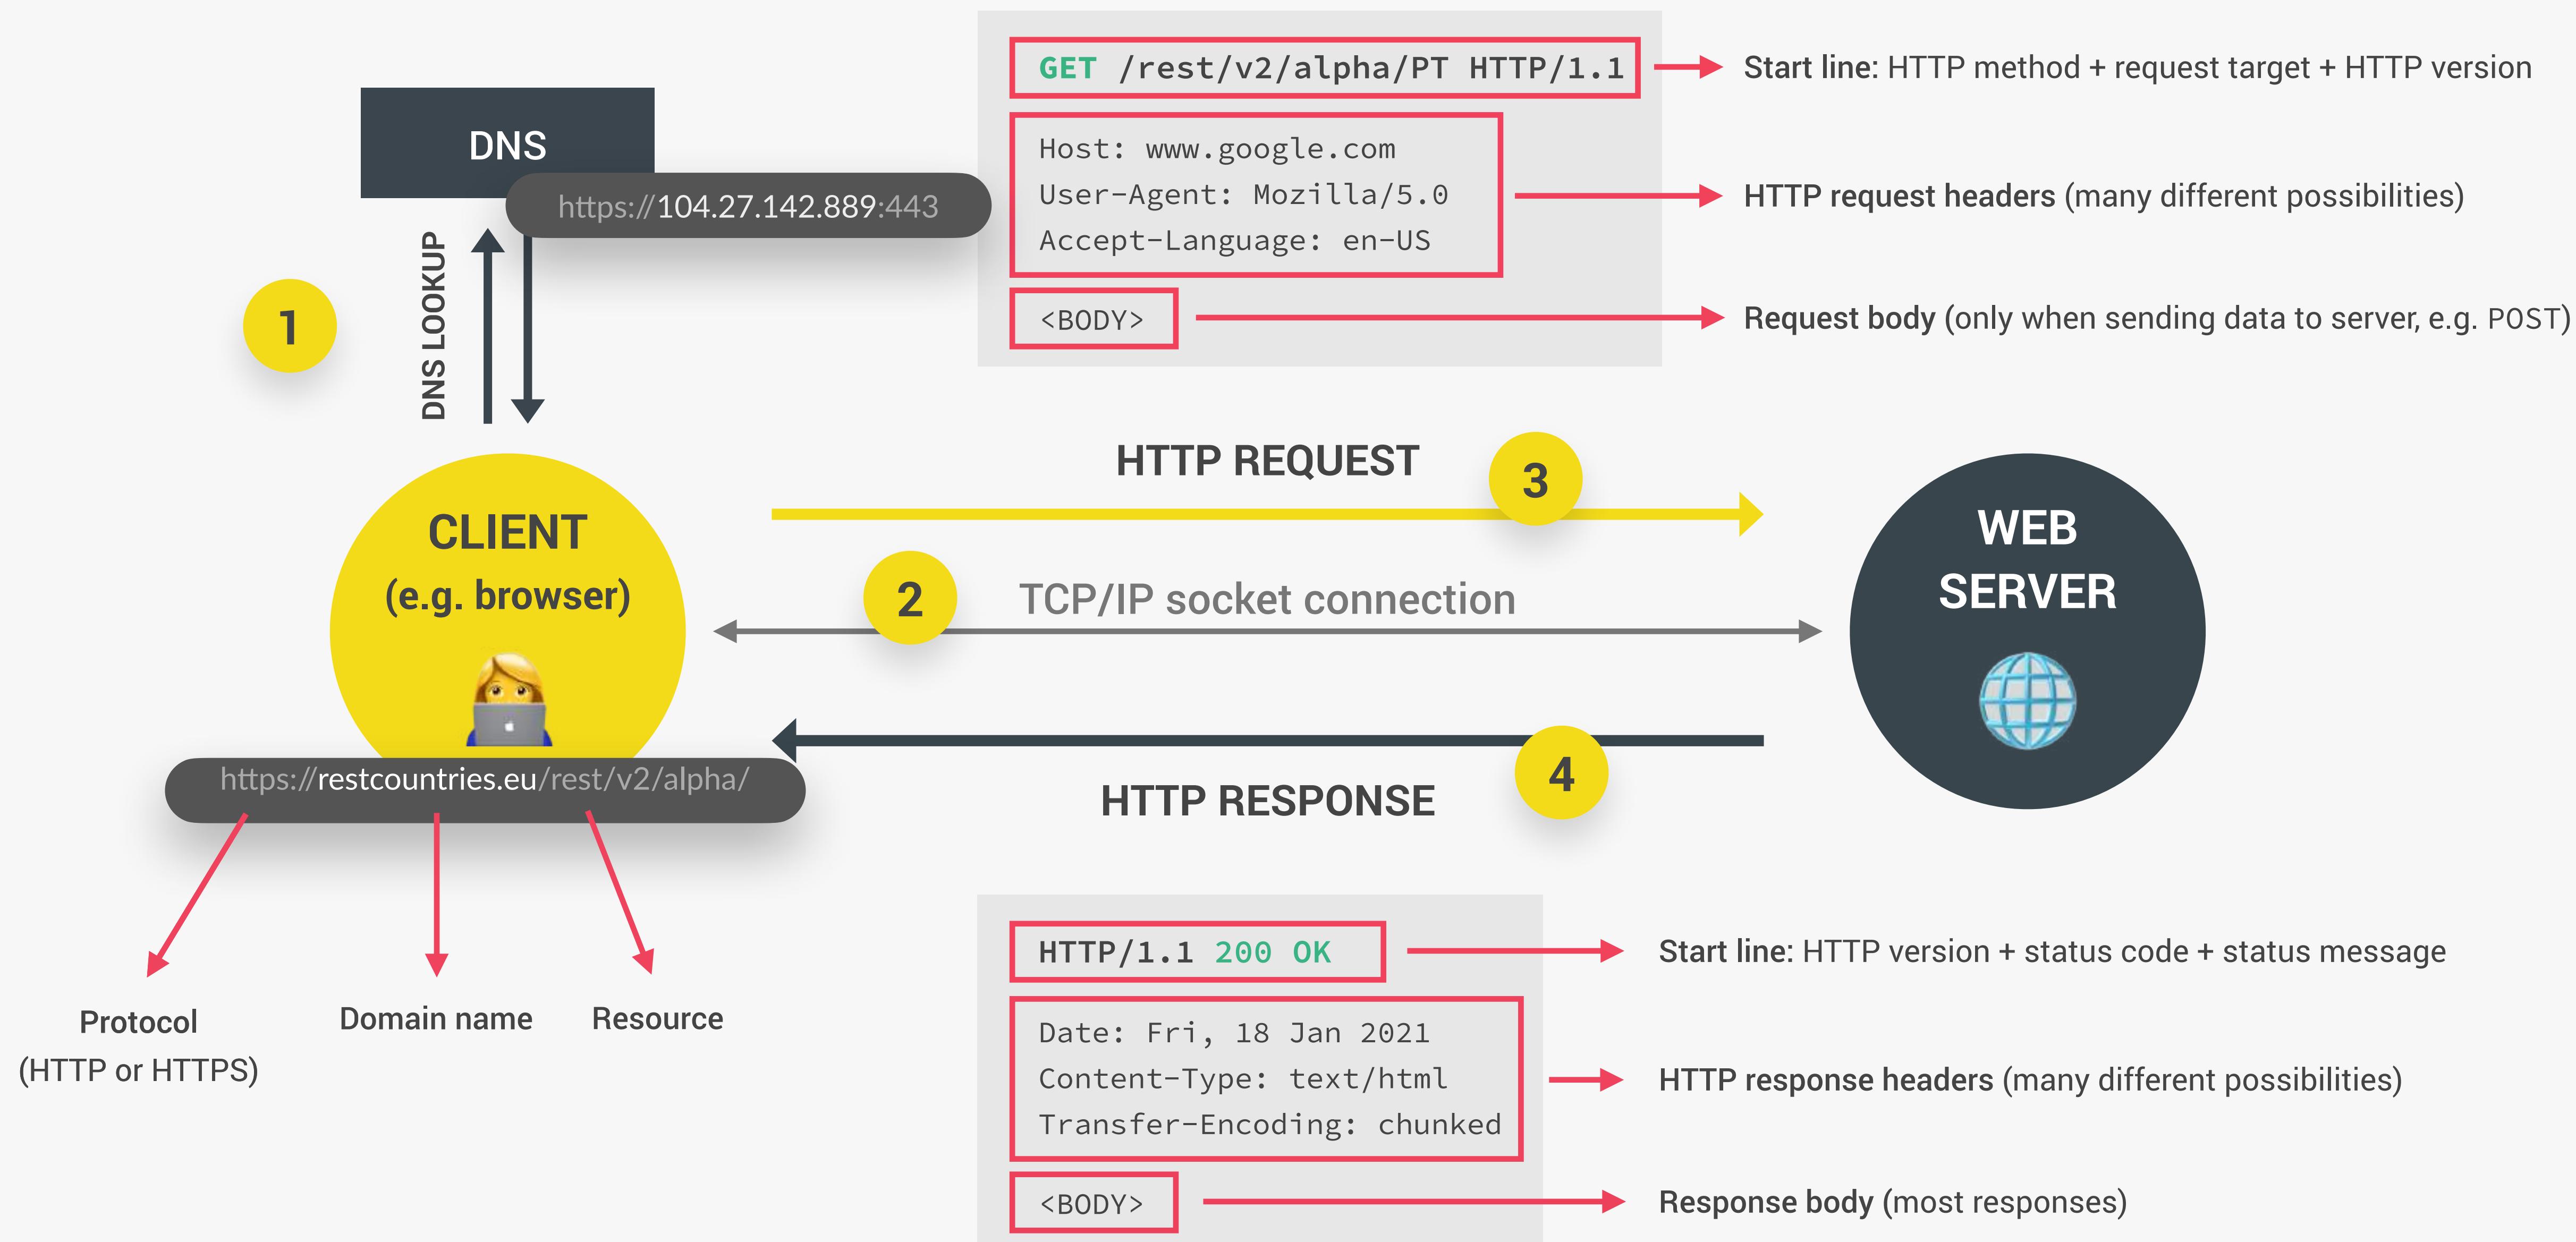



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

ASYNCHRONOUS JAVASCRIPT:
PROMISES, ASYNC/AWAIT AND AJAX

LECTURE

PROMISES AND THE FETCH API

JS

WHAT ARE PROMISES?

PROMISE

- 👉 **Promise:** An object that is used as a placeholder for the future result of an asynchronous operation.
 - ↓ Less formal
- 👉 **Promise:** A container for an asynchronously delivered value.
 - ↓ Less formal
- 👉 **Promise:** A container for a future value.
- 👉 We no longer need to rely on events and callbacks passed into asynchronous functions to handle asynchronous results;
- 👉 Instead of nesting callbacks, we can **chain promises** for a sequence of asynchronous operations: **escaping callback hell** 🎉


Example: Response from AJAX call



Promise that I will receive money if I guess correct outcome

- 👉 I buy lottery ticket (promise) right now
- 👉 Lottery draw happens asynchronously
- 👉 If correct outcome, I receive money, because it was promised

THE PROMISE LIFECYCLE

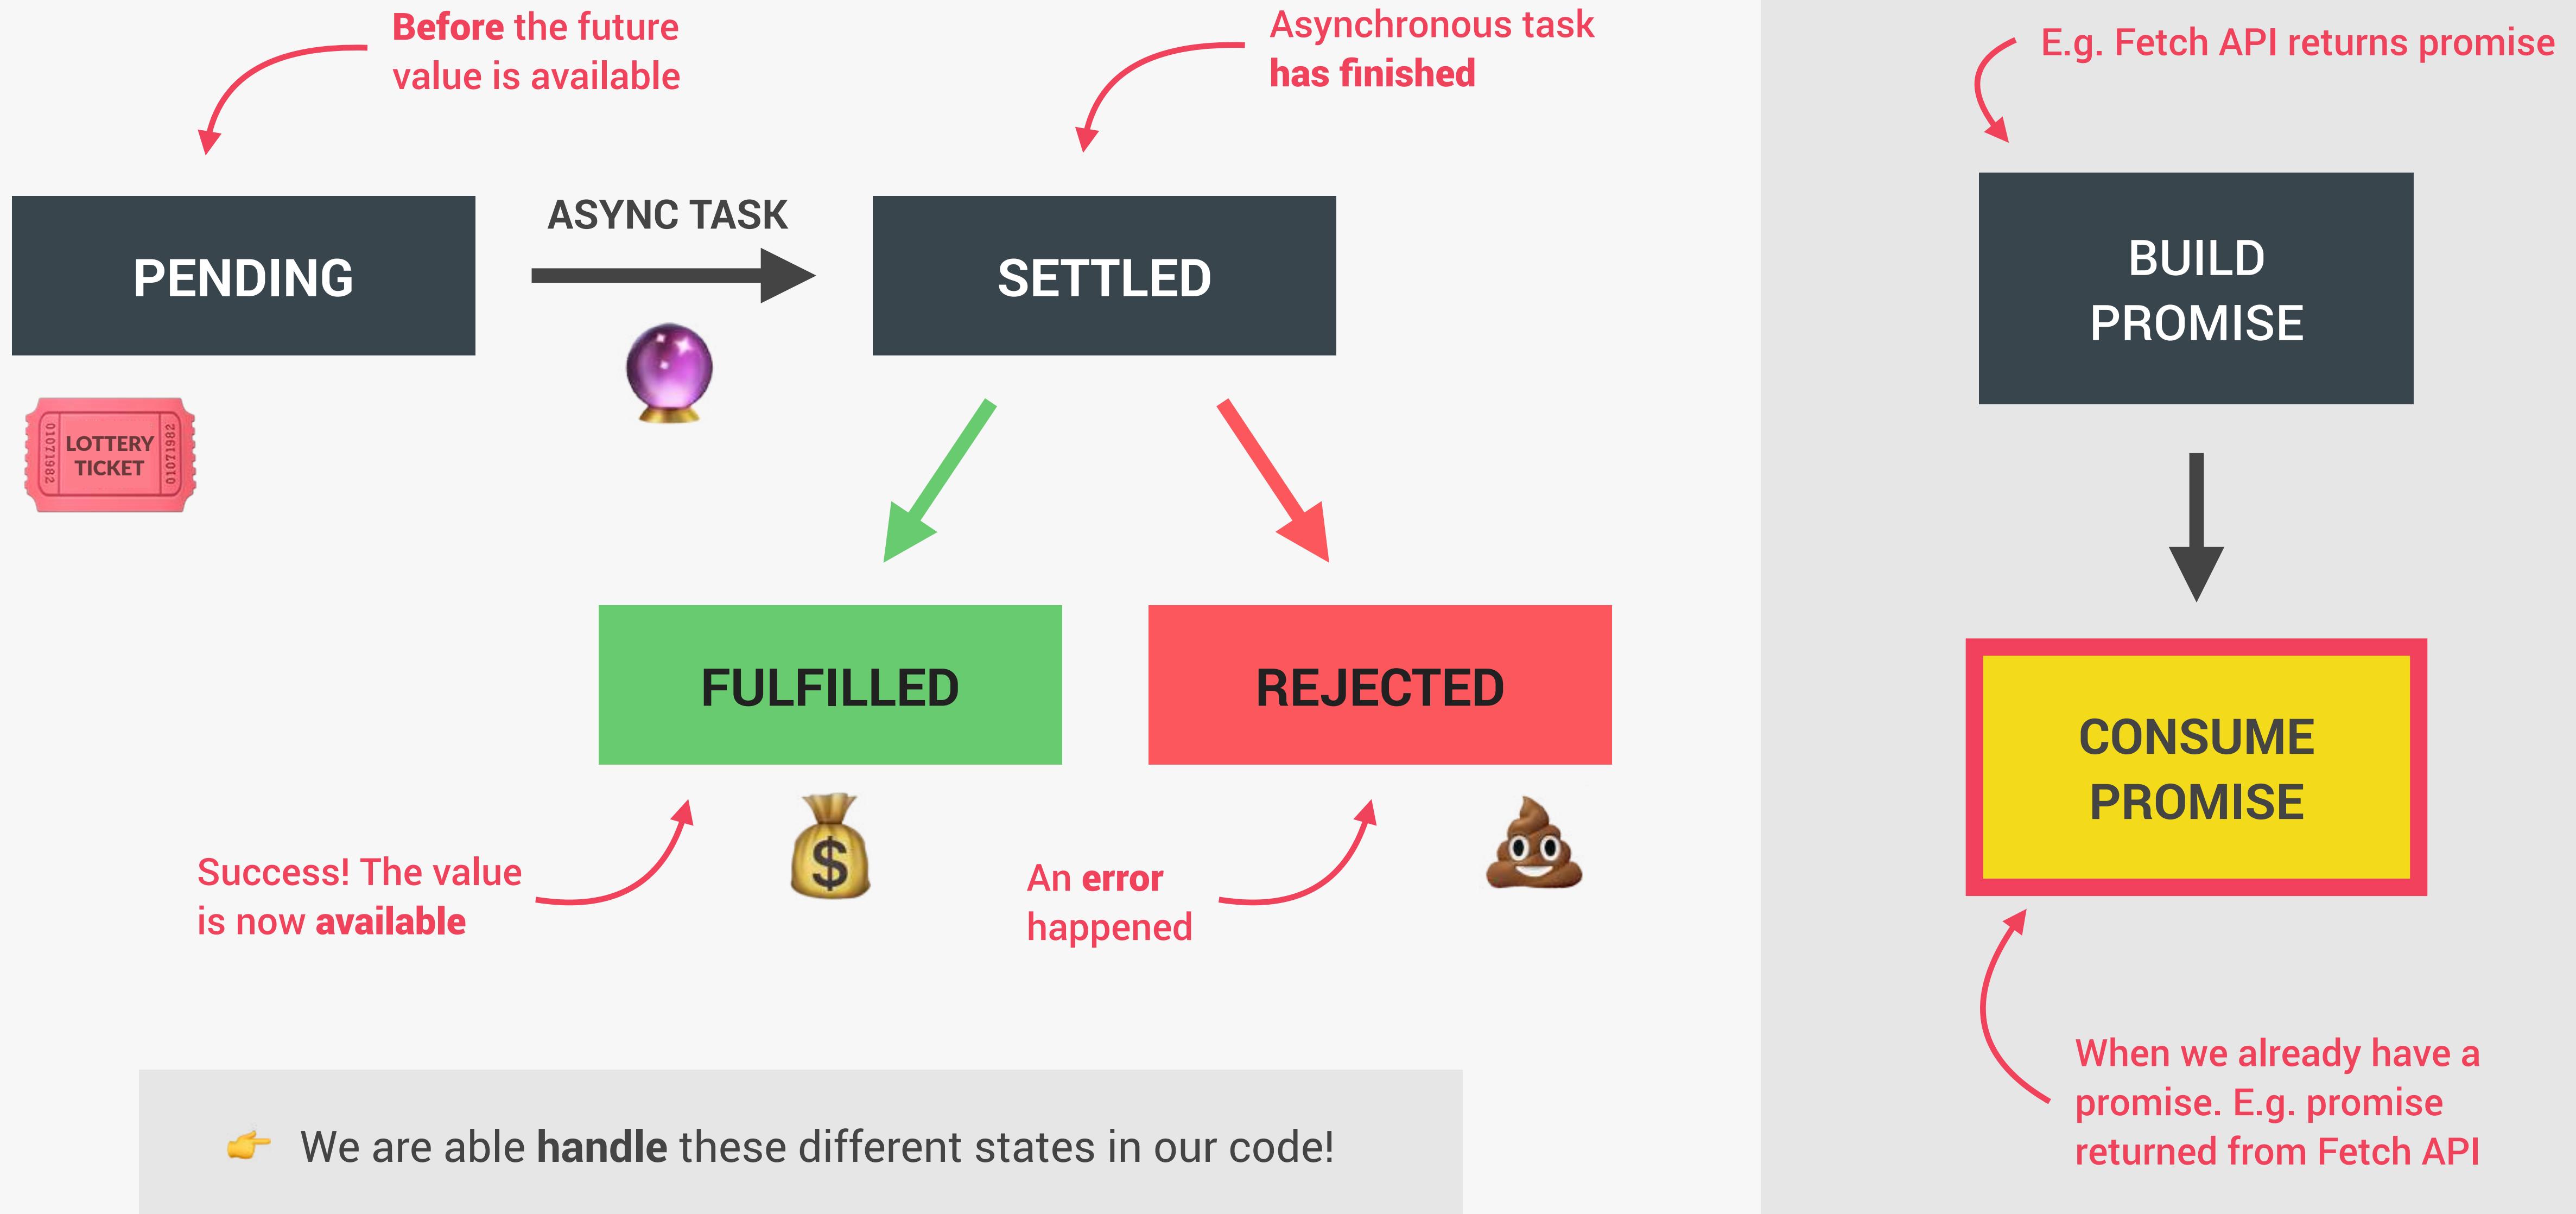



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

ASYNCHRONOUS JAVASCRIPT:
PROMISES, ASYNC/AWAIT AND AJAX


LECTURE

ASYNCHRONOUS BEHIND THE SCENES:
THE EVENT LOOP


JS

REVIEW: JAVASCRIPT RUNTIME

👉 **Concurrency model:** How JavaScript handles multiple tasks happening at the same time.

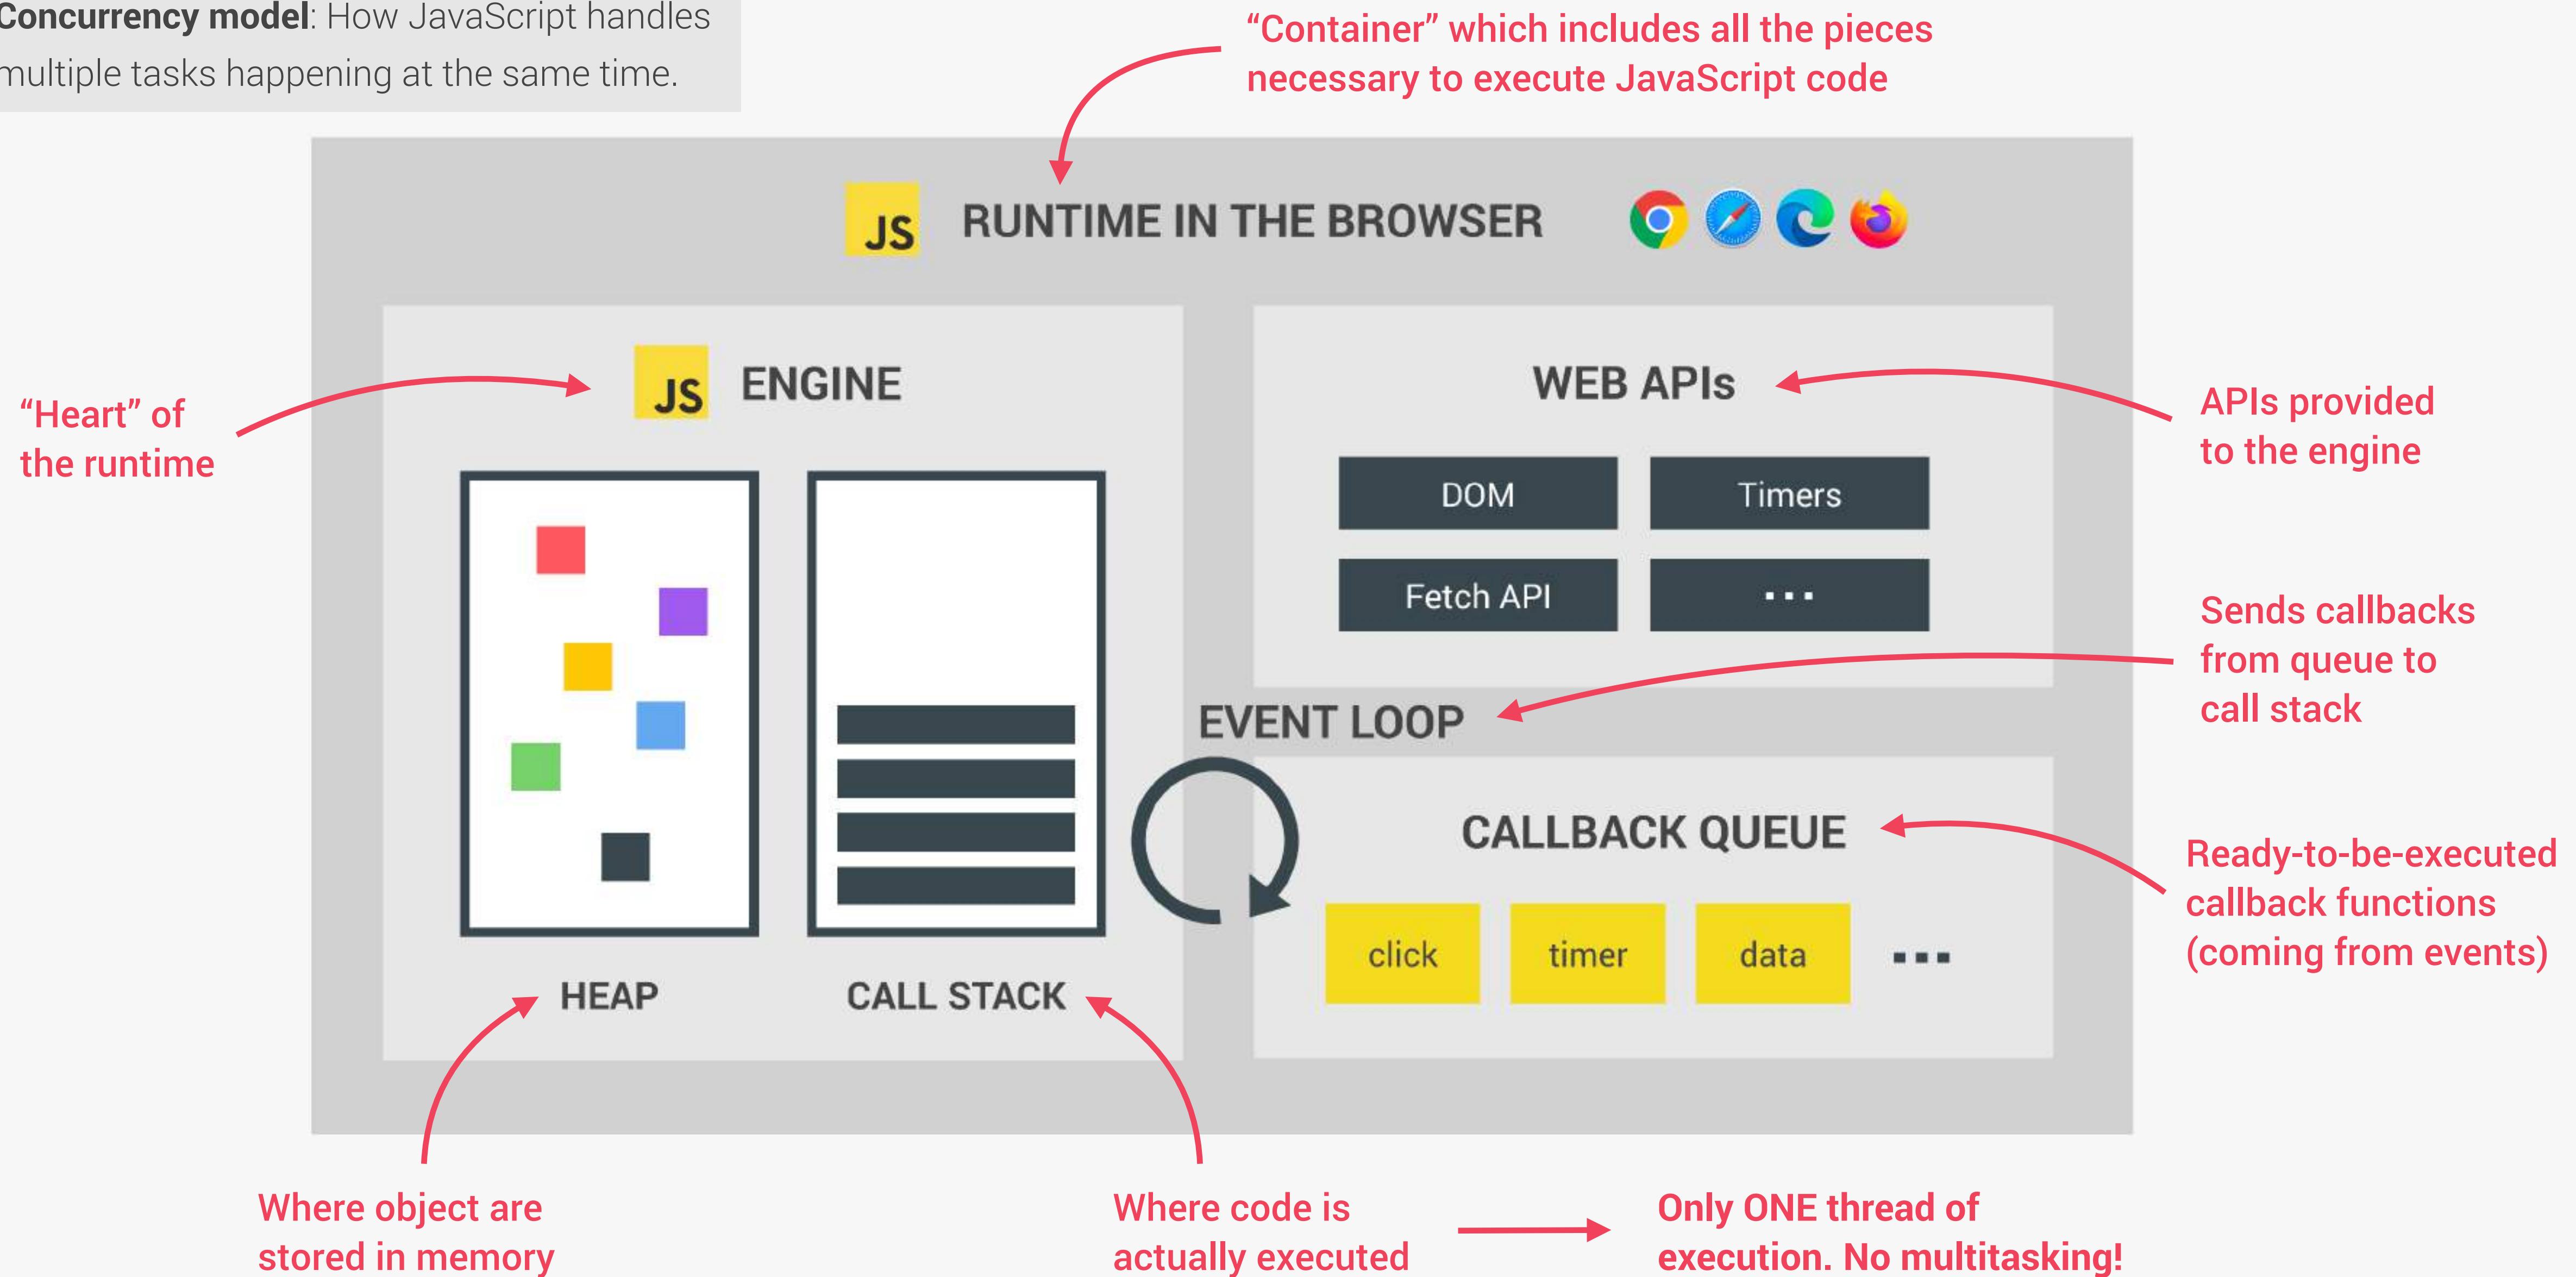

HOW ASYNCHRONOUS JAVASCRIPT WORKS BEHIND THE SCENES

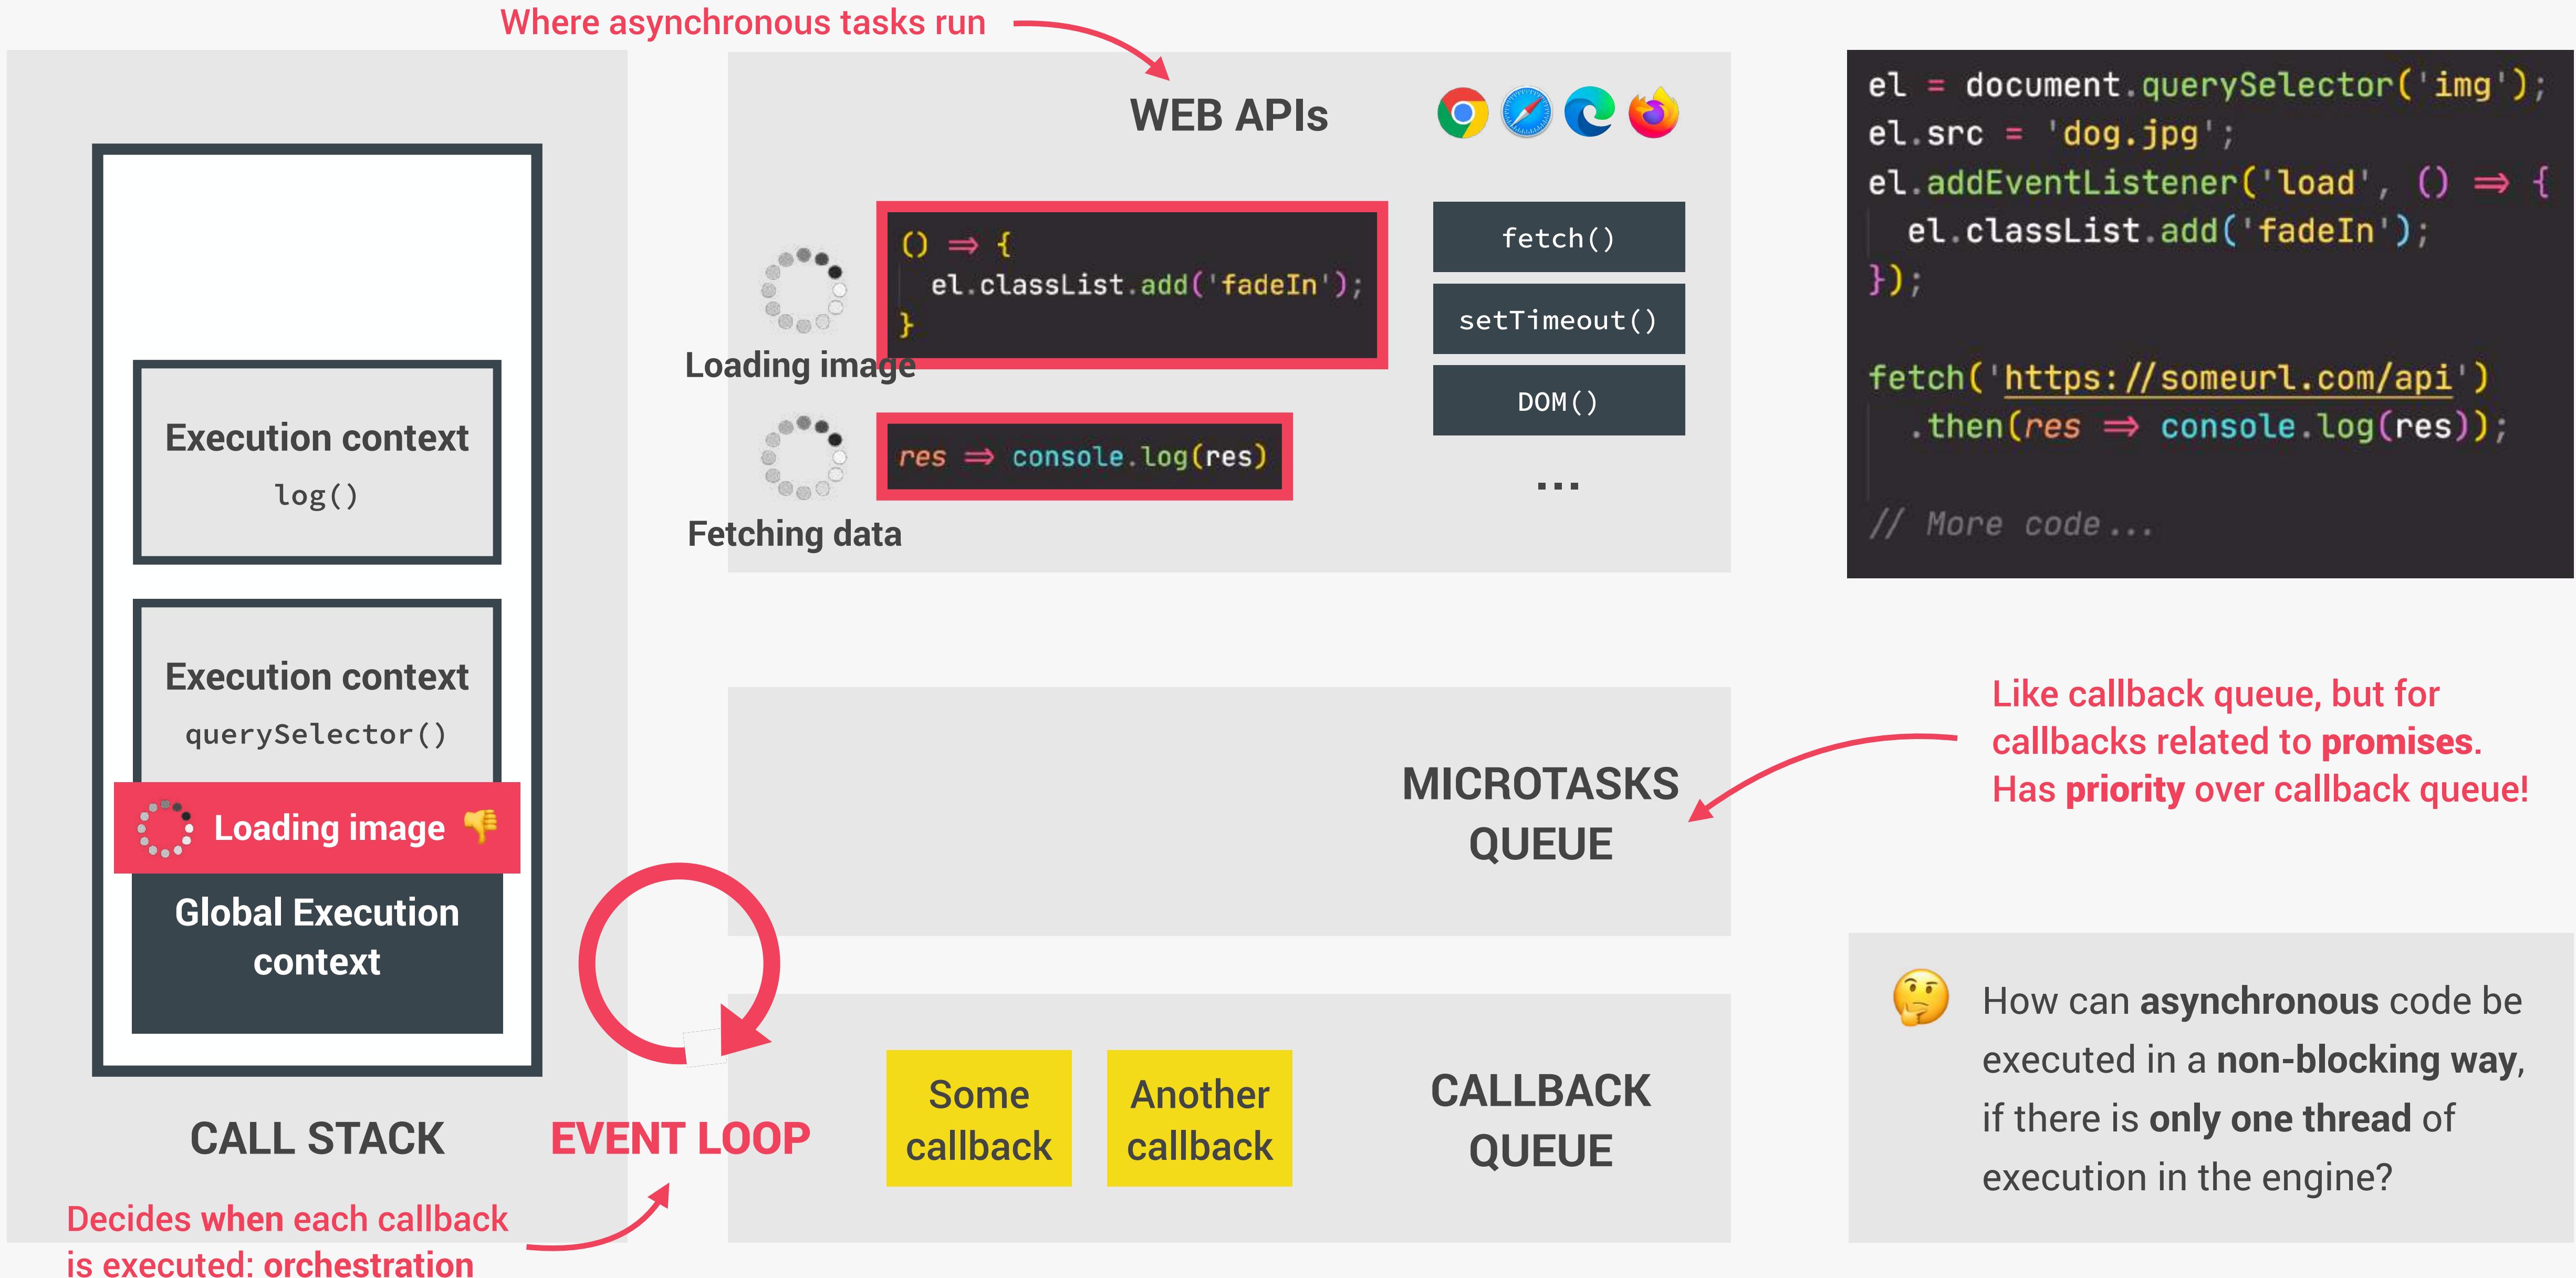

MODERN JAVASCRIPT
DEVELOPMENT:
MODULES AND
TOOLING



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


MODERN JAVASCRIPT DEVELOPMENT:
MODULES AND TOOLING

LECTURE

AN OVERVIEW OF MODERN
JAVASCRIPT DEVELOPMENT

JS

MODERN JAVASCRIPT DEVELOPMENT

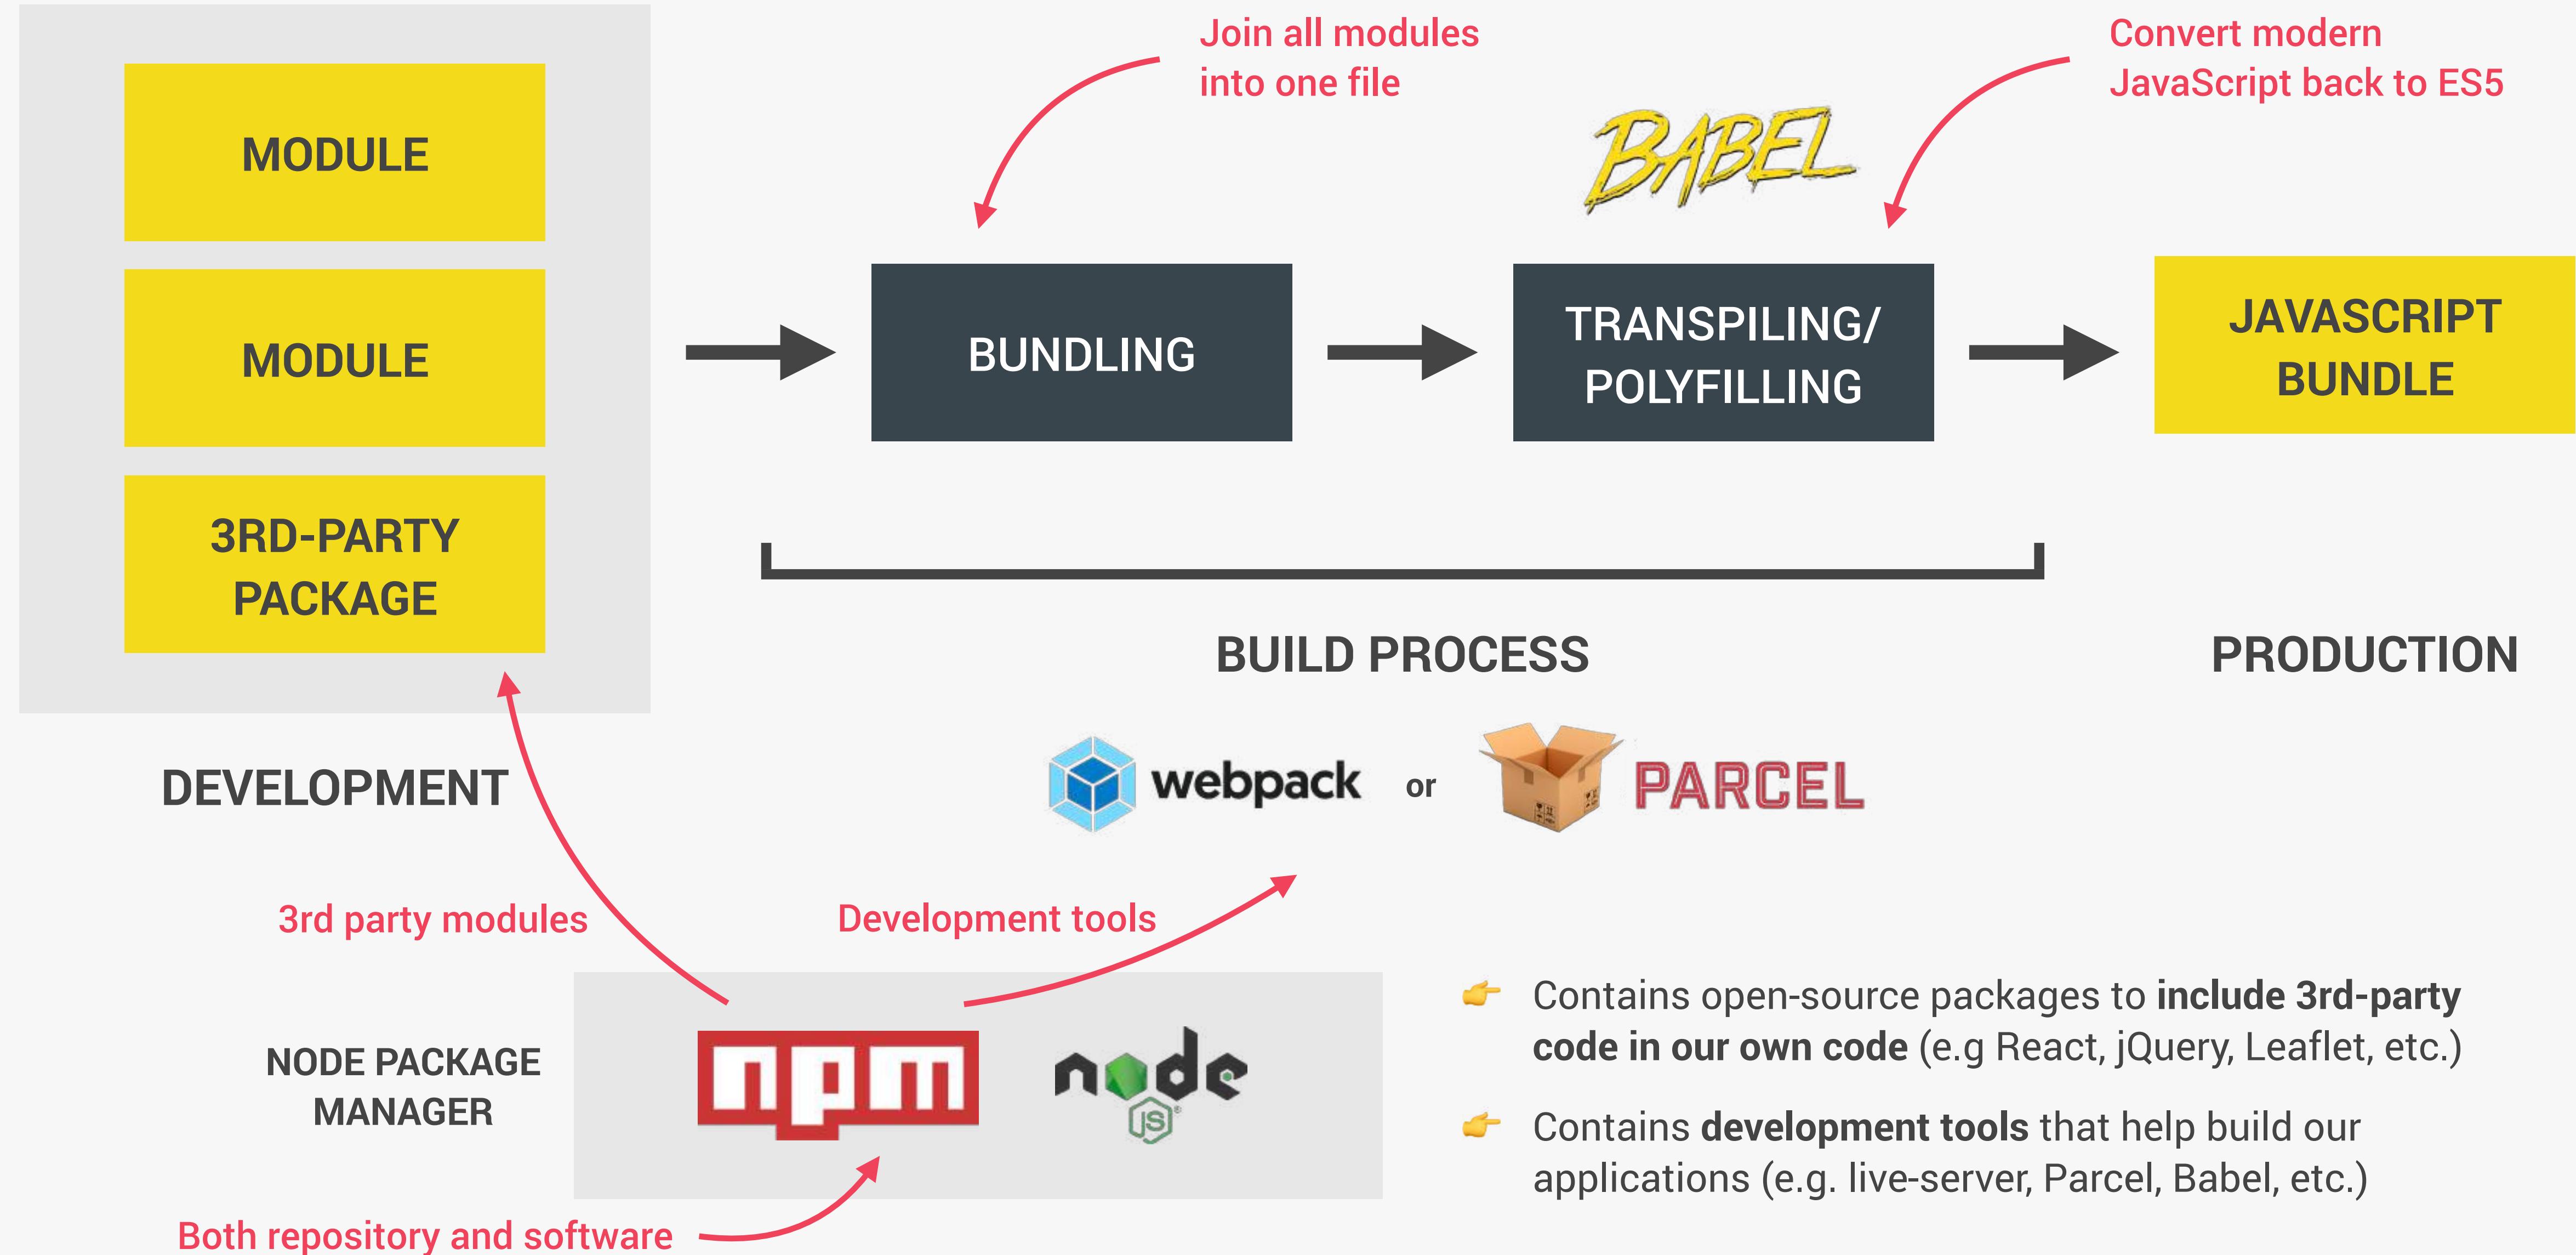



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

MODERN JAVASCRIPT DEVELOPMENT:
MODULES AND TOOLING

LECTURE

AN OVERVIEW OF MODULES IN
JAVASCRIPT

JS

AN OVERVIEW OF MODULES

MODULE

- 👉 Reusable piece of code that **encapsulates** implementation details;
- 👉 Usually a **standalone file**, but it doesn't have to be.

WHY
MODULES?

- 👉 **Compose software:** Modules are small building blocks that we put together to build complex applications;
- 👉 **Isolate components:** Modules can be developed in isolation without thinking about the entire codebase;
- 👉 **Abstract code:** Implement low-level code in modules and import these abstractions into other modules;
- 👉 **Organized code:** Modules naturally lead to a more organized codebase;
- 👉 **Reuse code:** Modules allow us to easily reuse the same code, even across multiple projects.

IMPORT
(DEPENDENCY)

MODULE

```
import { rand } from './math.js';
const diceP1 = rand(1, 6, 2);
const diceP2 = rand(1, 6, 2);
const scores = { diceP1, diceP2 };
export { scores };
```

Module code

EXPORT
(PUBLIC API)

NATIVE JAVASCRIPT (ES6) MODULES

ES6 MODULES

Modules stored in files, **exactly one module per file.**

```
import { rand } from './math.js';
const diceP1 = rand(1, 6, 2);
const diceP2 = rand(1, 6, 2);
const scores = { diceP1, diceP2 };
export { scores };
```

import and export syntax


ES6 MODULE

SCRIPT

👉 Top-level variables	Scoped to module	Global
👉 Default mode	Strict mode	“Sloppy” mode
👉 Top-level this	undefined	window
👉 Imports and exports	YES	NO
👉 HTML linking	<script type="module">	<script>
👉 File downloading	Asynchronous	Synchronous

👉 Need to happen at top-level
Imports are hoisted!

HOW ES6 MODULES ARE IMPORTED

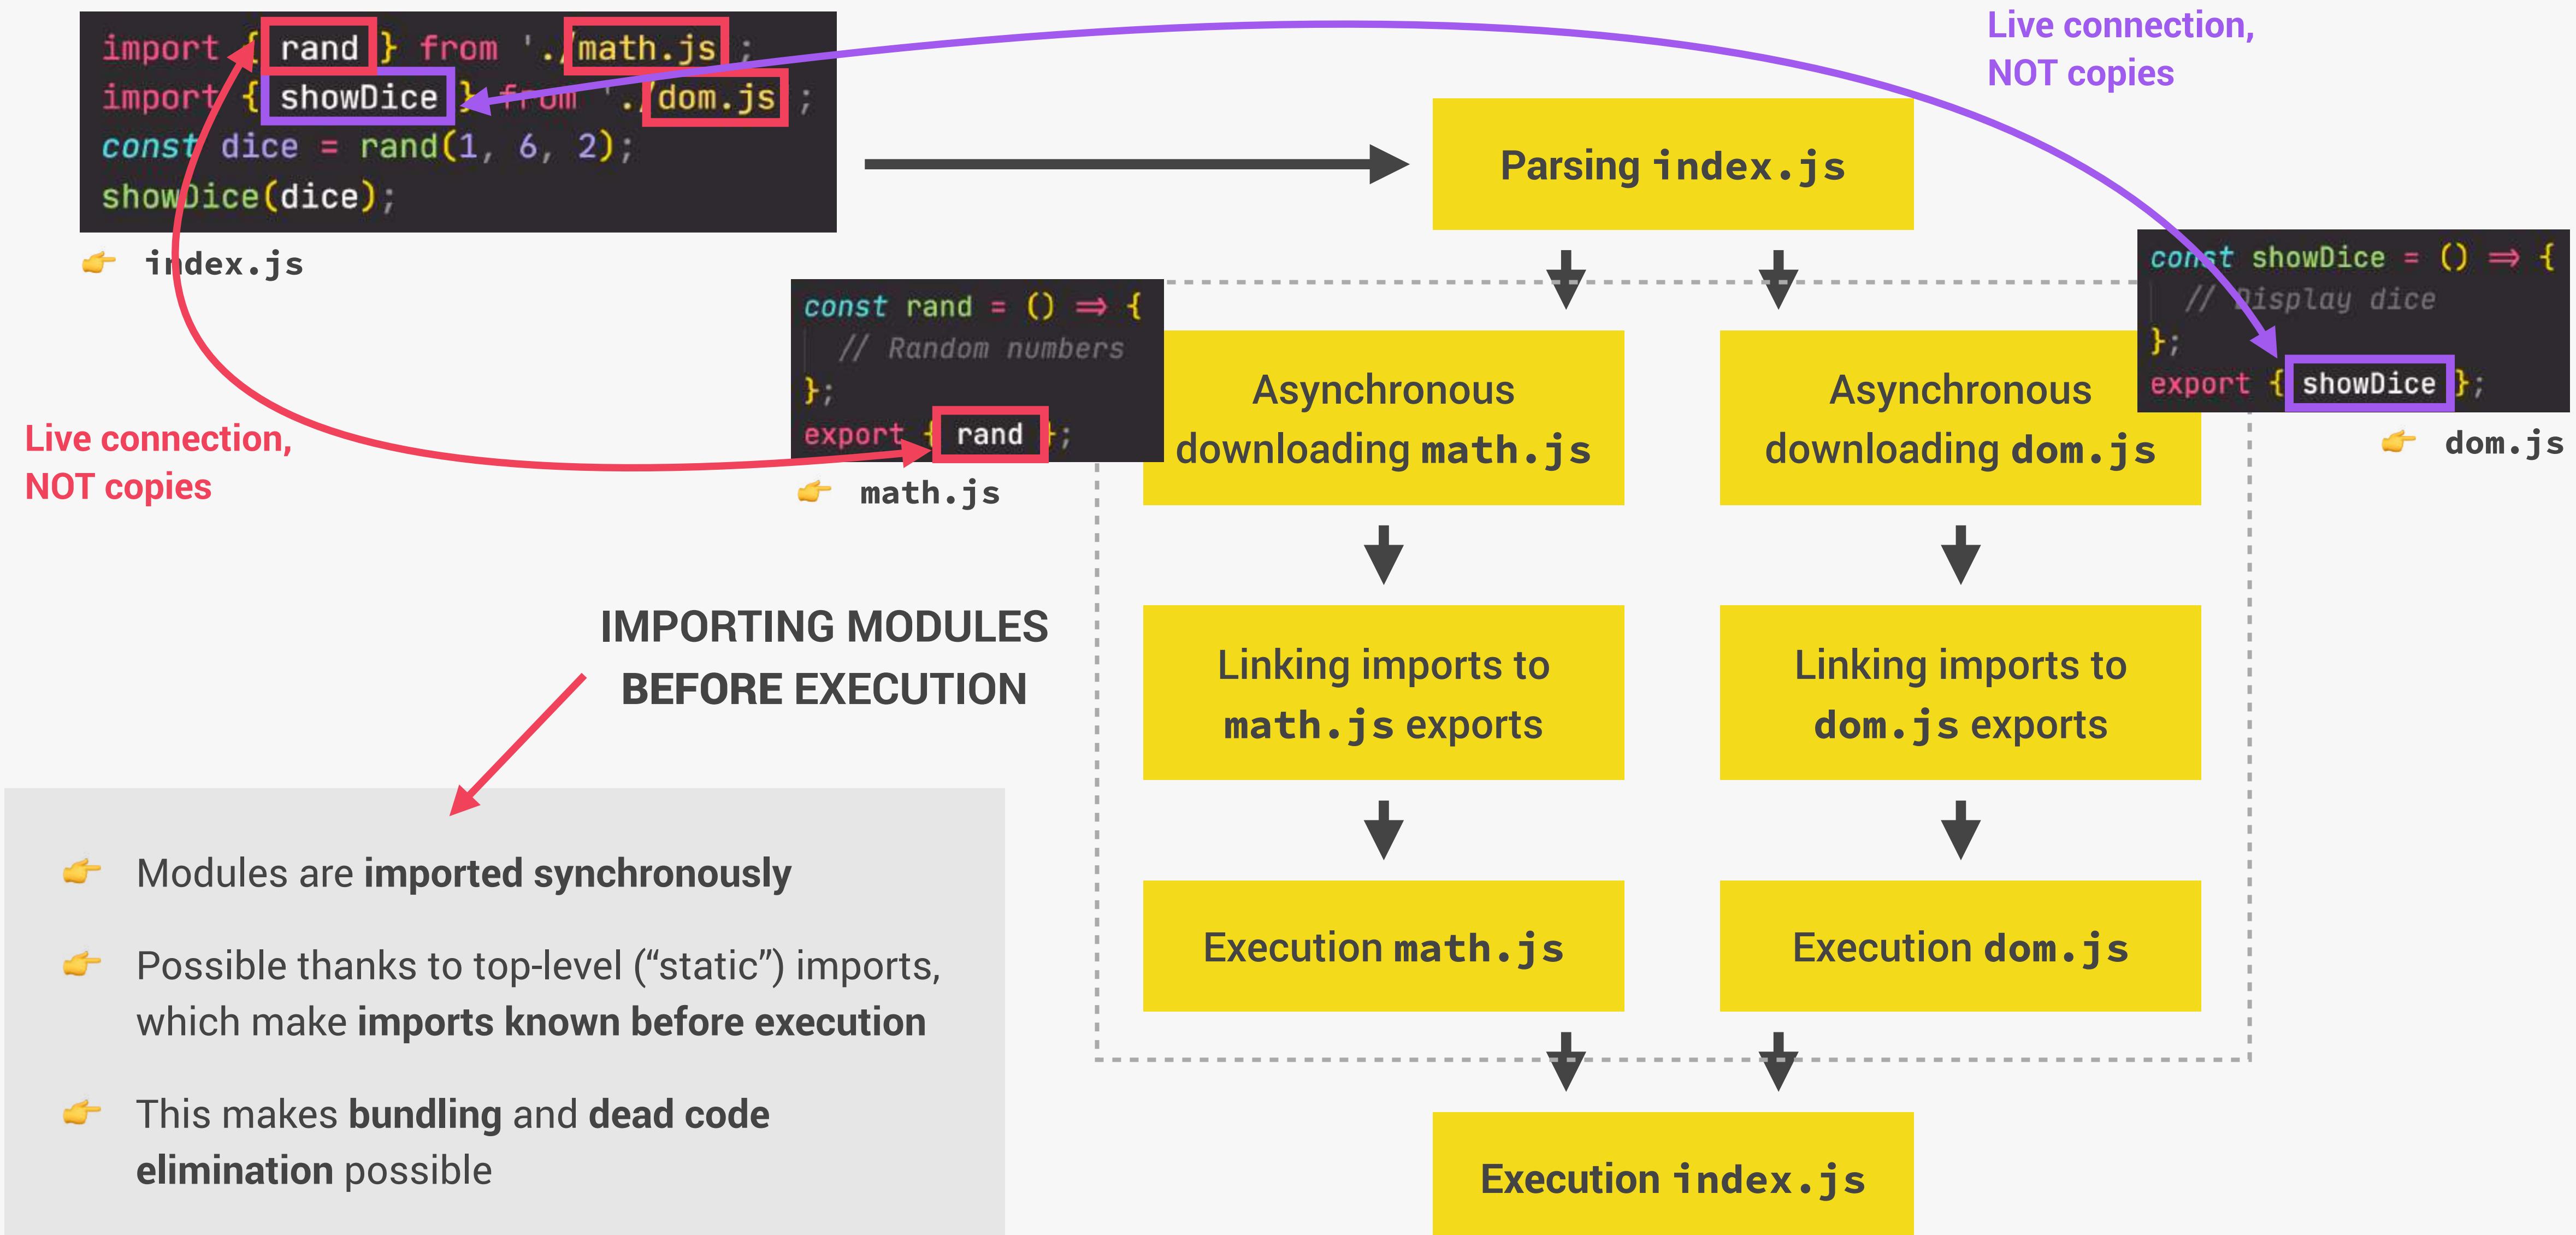



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

MODERN JAVASCRIPT DEVELOPMENT:
MODULES AND TOOLING

LECTURE

REVIEW: WRITING CLEAN AND
MODERN JAVASCRIPT

JS

REVIEW: MODERN AND CLEAN CODE

READABLE CODE

- 👉 Write code so that **others** can understand it
- 👉 Write code so that **you** can understand it in 1 year
- 👉 Avoid too “clever” and overcomplicated solutions
- 👉 Use descriptive variable names: **what they contain**
- 👉 Use descriptive function names: **what they do**

FUNCTIONS

- 👉 Generally, functions should do **only one thing**
- 👉 Don’t use more than 3 function parameters
- 👉 Use default parameters whenever possible
- 👉 Generally, return same data type as received
- 👉 Use arrow functions when they make code more readable

GENERAL

- 👉 Use DRY principle (refactor your code)
- 👉 Don’t pollute global namespace, encapsulate instead
- 👉 Don’t use `var`
- 👉 Use strong type checks (`==` and `!=`)

OOP

- 👉 Use ES6 classes
- 👉 Encapsulate data and **don’t mutate** it from outside the class
- 👉 Implement method chaining
- 👉 **Do not** use arrow functions as methods (in regular objects)

REVIEW: MODERN AND CLEAN CODE

AVOID NESTED CODE

- 👉 Use early `return` (guard clauses)
- 👉 Use ternary (conditional) or logical operators instead of `if`
- 👉 Use multiple `if` instead of `if/else-if`
- 👉 Avoid `for` loops, use array methods instead
- 👉 Avoid callback-based asynchronous APIs

ASYNCHRONOUS CODE

- 👉 Consume promises with `async/await` for best readability
- 👉 Whenever possible, run promises in **parallel** (`Promise.all`)
- 👉 Handle errors and promise rejections



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

MODERN JAVASCRIPT DEVELOPMENT:
MODULES AND TOOLING

LECTURE

DECLARATIVE AND FUNCTIONAL
JAVASCRIPT PRINCIPLES

JS

IMPERATIVE VS. DECLARATIVE CODE

Two fundamentally different ways
of writing code (paradigms)

IMPERATIVE

DECLARATIVE

- 👉 Programmer explains “**HOW** to do things”
- 👉 We explain the computer *every single step* it has to follow to achieve a result
- 👉 **Example:** Step-by-step recipe of a cake
- 👉 Programmer tells “**WHAT** do do”
- 👉 We simply *describe* the way the computer should achieve the result
- 👉 The **HOW** (step-by-step instructions) gets abstracted away
- 👉 **Example:** Description of a cake


```
const arr = [2, 4, 6, 8];
const doubled = [];
for (let i = 0; i < arr.length; i++)
  doubled[i] = arr[i] * 2;
```

```
const arr = [2, 4, 6, 8];
const doubled = arr.map(n => n * 2);
```

FUNCTIONAL PROGRAMMING PRINCIPLES

FUNCTIONAL PROGRAMMING

- 👉 **Declarative** programming paradigm
- 👉 Based on the idea of writing software by combining many **pure functions**, avoiding **side effects** and **mutating** data
- 👉 **Side effect:** Modification (mutation) of any data **outside** of the function (mutating external variables, logging to console, writing to DOM, etc.)
- 👉 **Pure function:** Function without side effects. Does not depend on external variables. **Given the same inputs, always returns the same outputs.**
- 👉 **Immutability:** State (data) is **never** modified! Instead, state is **copied** and the copy is mutated and returned.
- 👉 Examples:



React



Redux

FUNCTIONAL PROGRAMMING TECHNIQUES

- 👉 Try to avoid data mutations
- 👉 Use built-in methods that don't produce side effects
- 👉 Do data transformations with methods such as `.map()`, `.filter()` and `.reduce()`
- 👉 Try to avoid side effects in functions: this is of course not always possible!

DECLARATIVE SYNTAX

- 👉 Use array and object destructuring
- 👉 Use the spread operator (...)
- 👉 Use the ternary (conditional) operator
- 👉 Use template literals

FORKIFY APP.
BUILDING A MODERN
APPLICATION



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


FORKIFY APP: BUILDING A MODERN
APPLICATION

LECTURE

PROJECT OVERVIEW AND PLANNING

JS

PROJECT PLANNING

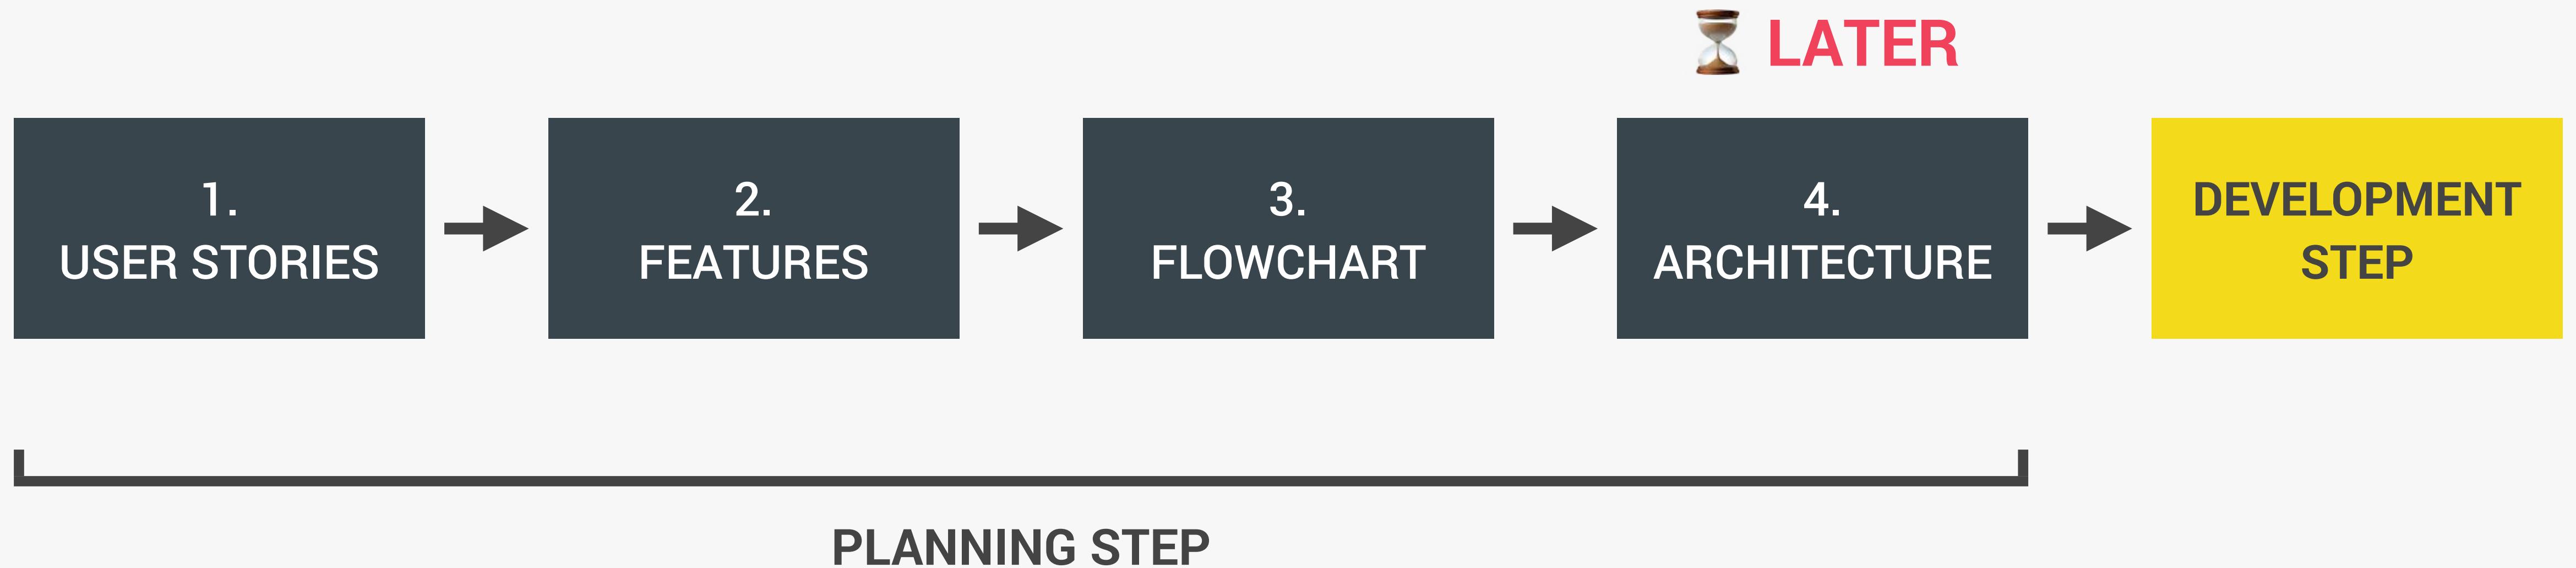

1. USER STORIES



- 👉 **User story:** Description of the application's functionality from the user's perspective.
- 👉 **Common format:** As a *[type of user]*, I want *[an action]* so that *[a benefit]*

- 1 As a user, I want to **search for recipes**, so that I can find new ideas for meals
- 2 As a user, I want to be able to **update the number of servings**, so that I can cook a meal for different number of people
- 3 As a user, I want to **bookmark recipes**, so that I can review them later
- 4 As a user, I want to be able to **create my own recipes**, so that I have them all organized in the same app
- 5 As a user, I want to be able to **see my bookmarks and own recipes when I leave the app and come back later**, so that I can close the app safely after cooking

2. FEATURES



USER STORIES

FEATURES

1 Search for recipes

2 Update the number of servings

3 Bookmark recipes

4 Create my own recipes

5 See my bookmarks and own recipes
when I leave the app and come back later

- 👉 Search functionality: input field to send request to API with searched keywords

- 👉 Display results with pagination

- 👉 Display recipe with cooking time, servings and ingredients

- 👉 Change servings functionality: update all ingredients according to current number of servings

- 👉 Bookmarking functionality: display list of all bookmarked recipes

- 👉 User can upload own recipes

- 👉 User recipes will automatically be bookmarked

- 👉 User can only see their own recipes, not recipes from other users

- 👉 Store bookmark data in the browser using local storage

- 👉 On page load, read saved bookmarks from local storage and display


3. FLOWCHART (PART 1)



FEATURES

1. Search functionality: API search request
2. Results with pagination
3. Display recipe

Other features later

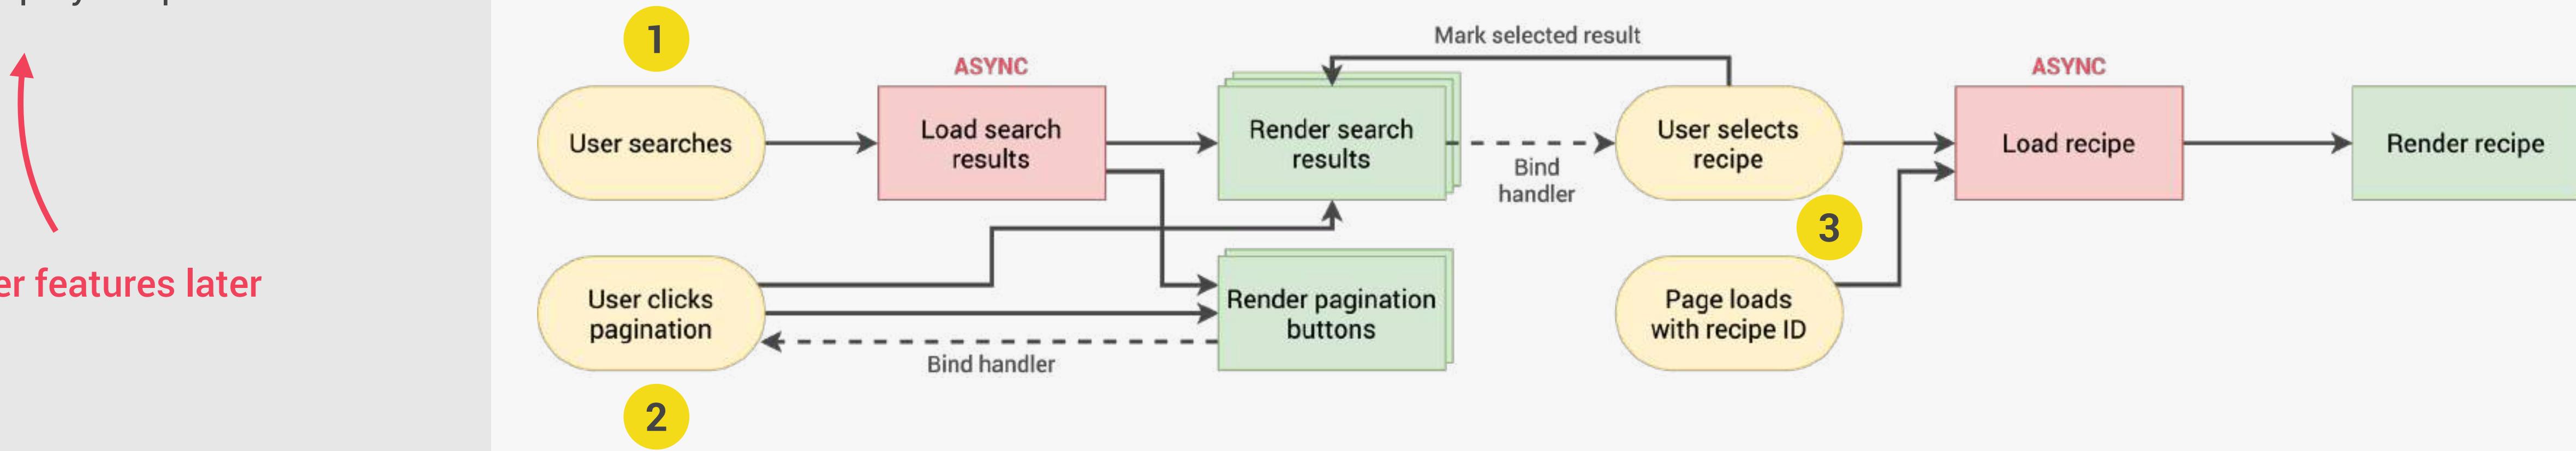



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


FORKIFY APP: BUILDING A MODERN
APPLICATION

LECTURE

THE MVC ARCHITECTURE

JS

WHY WORRY ABOUT ARCHITECTURE?

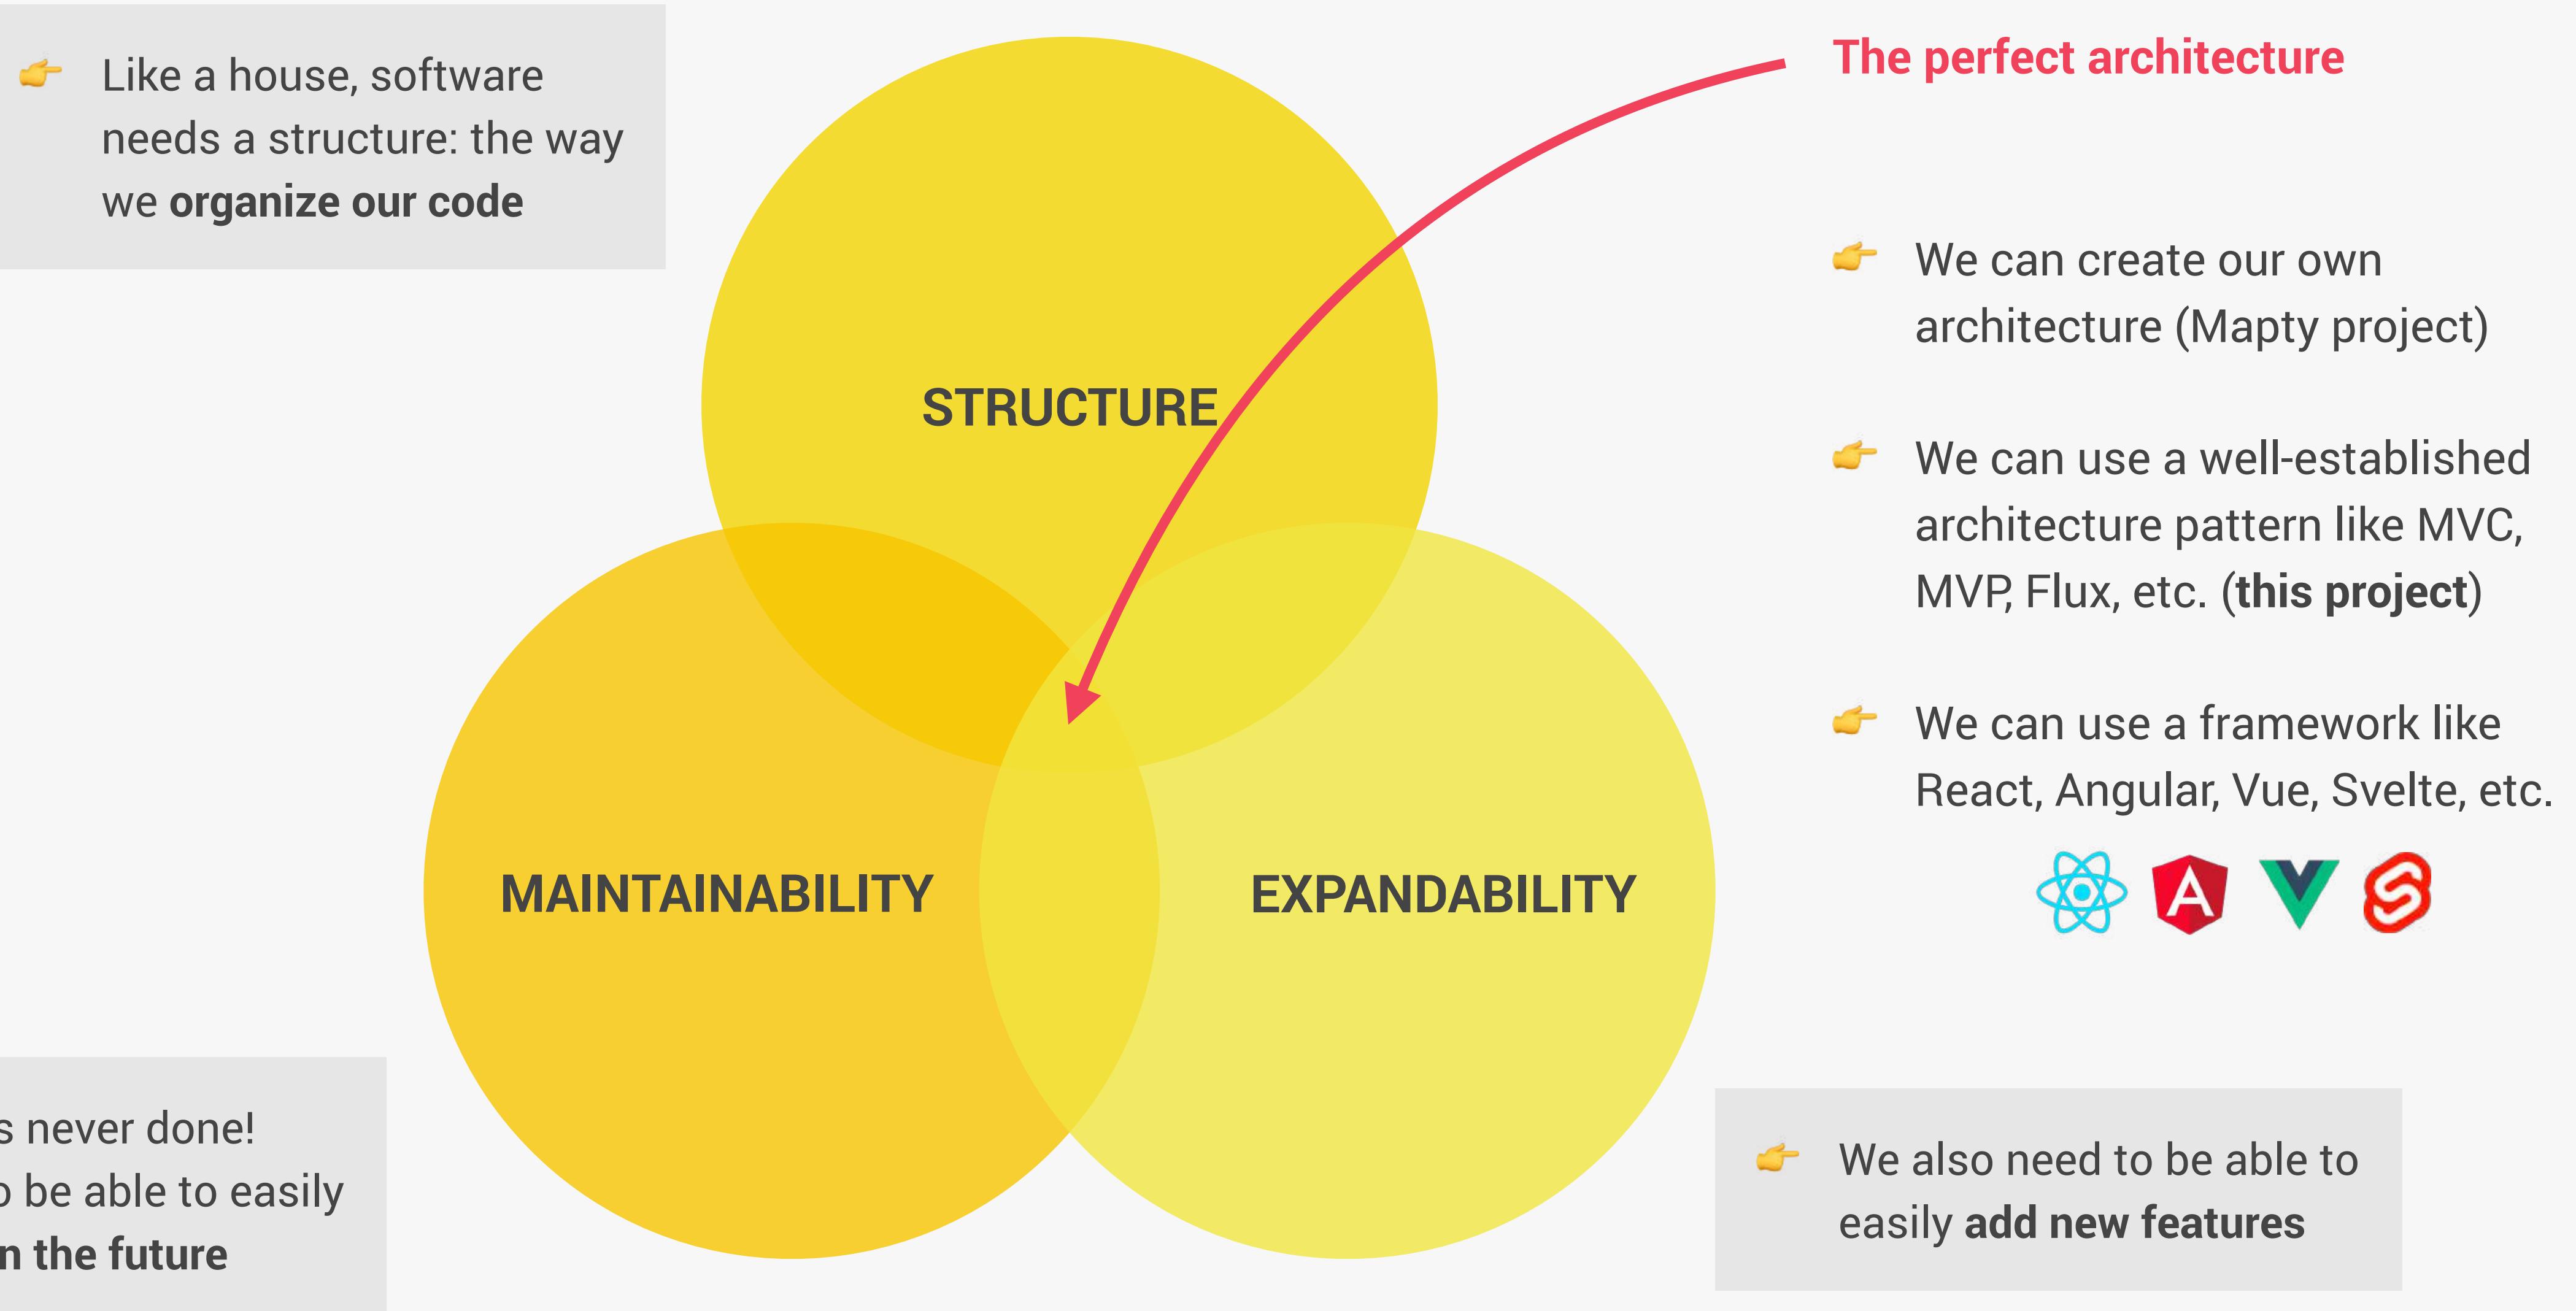

COMPONENTS OF ANY ARCHITECTURE

BUSINESS LOGIC

- 👉 Code that **solves the actual business problem**;
- 👉 Directly related to what business does and what it needs;
- 👉 **Example:** sending messages, storing transactions, calculating taxes, ...

STATE

- 👉 Essentially **stores all the data** about the application
- 👉 Should be the “single source of truth”
- 👉 UI should be kept in sync with the state
- 👉 State libraries exist



HTTP LIBRARY

- 👉 Responsible for making and receiving AJAX requests
- 👉 Optional but almost always necessary in real-world apps

APPLICATION LOGIC (ROUTER)



- 👉 Code that is only concerned about the **implementation of application itself**;
- 👉 Handles navigation and UI events

PRESENTATION LOGIC (UI LAYER)

- 👉 Code that is concerned about the **visible part** of the application
- 👉 Essentially displays application state

Keeping in sync



THE MODEL-VIEW-CONTROLLER (MVC) ARCHITECTURE

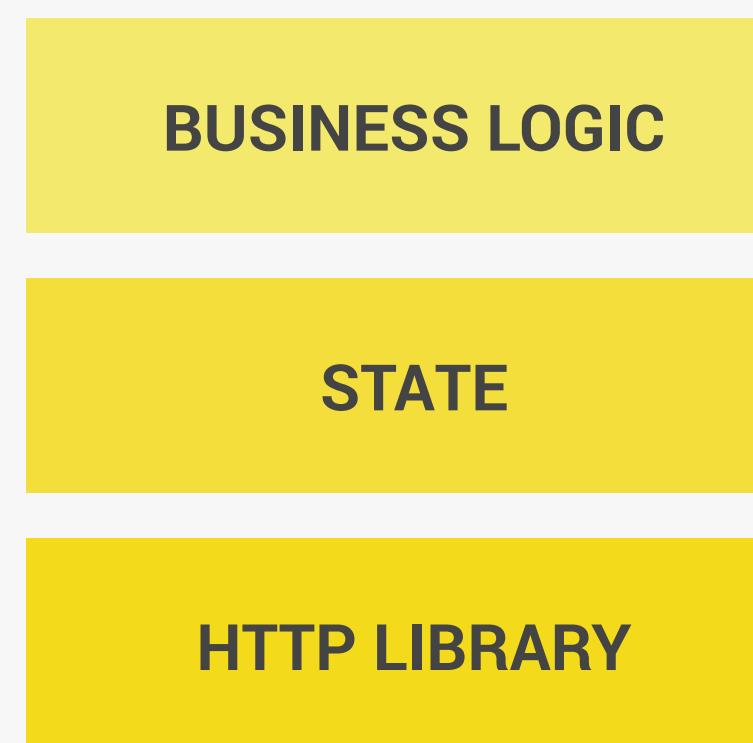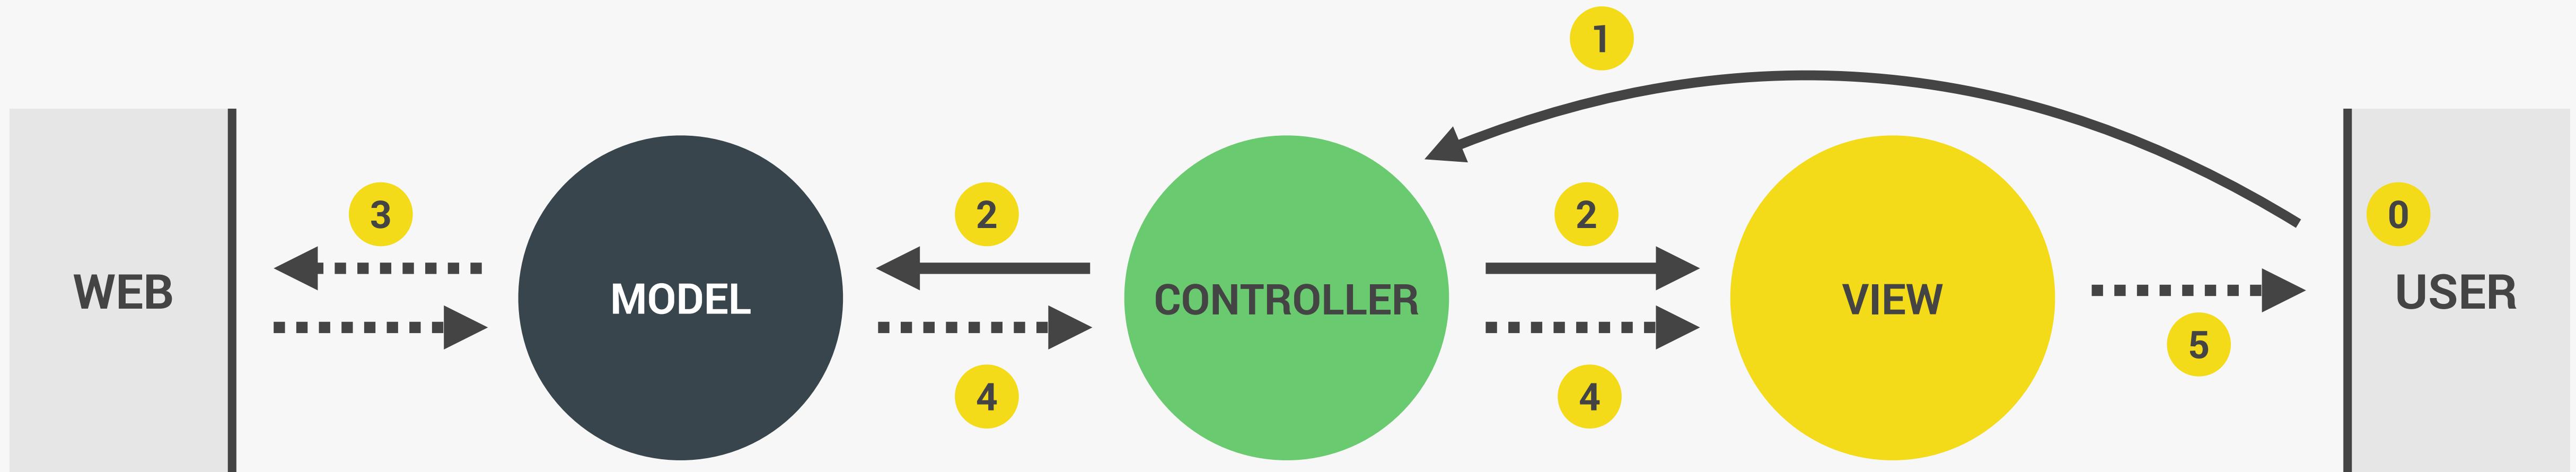



- 👉 Bridge between model and views (which don't know about one another)
- 👉 Handles UI events and **dispatches tasks to model and view**

→ Connected by function call and import
→ Data flow

MODEL, VIEW AND CONTROLLER IN FORKIFY (RECIPE DISPLAY ONLY)

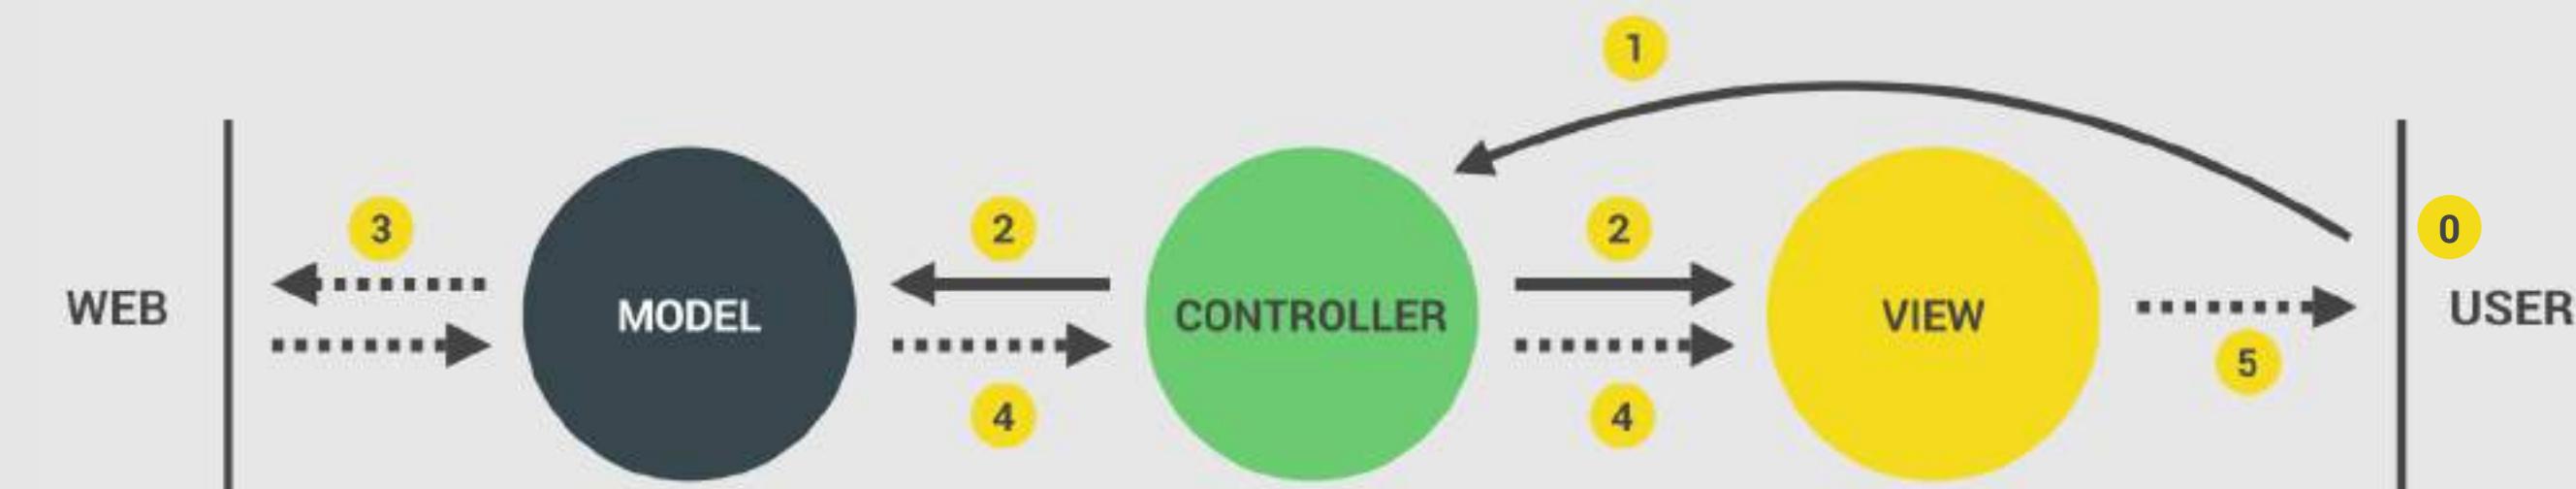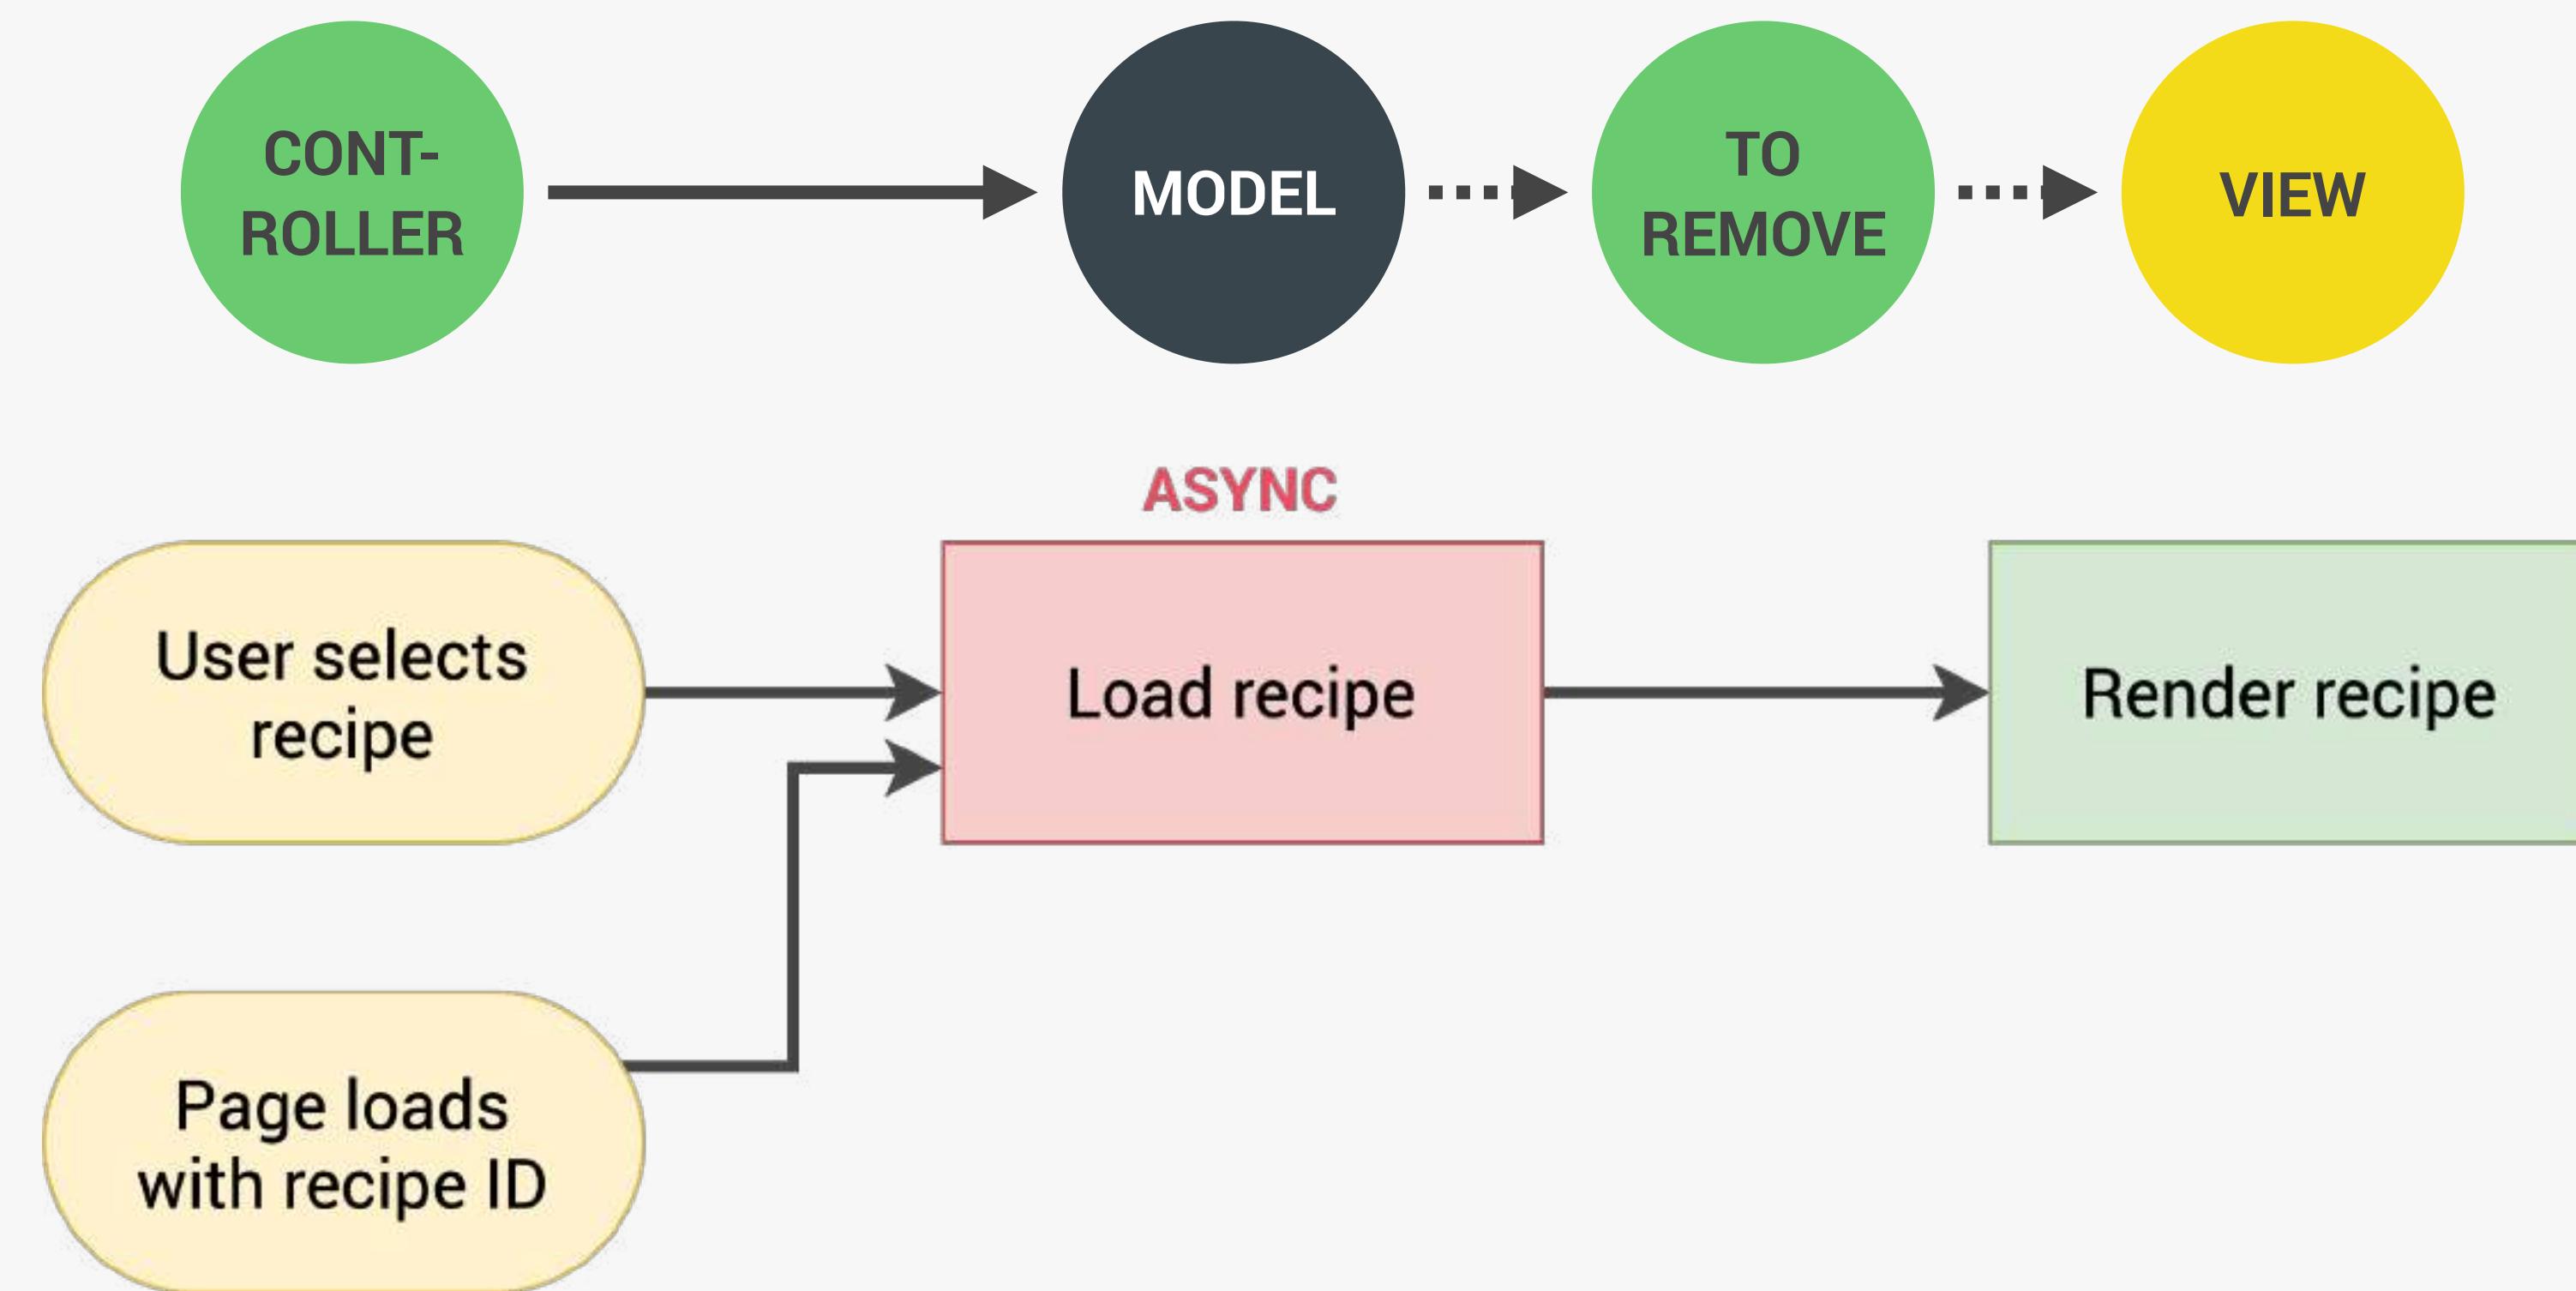

MVC IMPLEMENTATION (RECIPE DISPLAY ONLY)

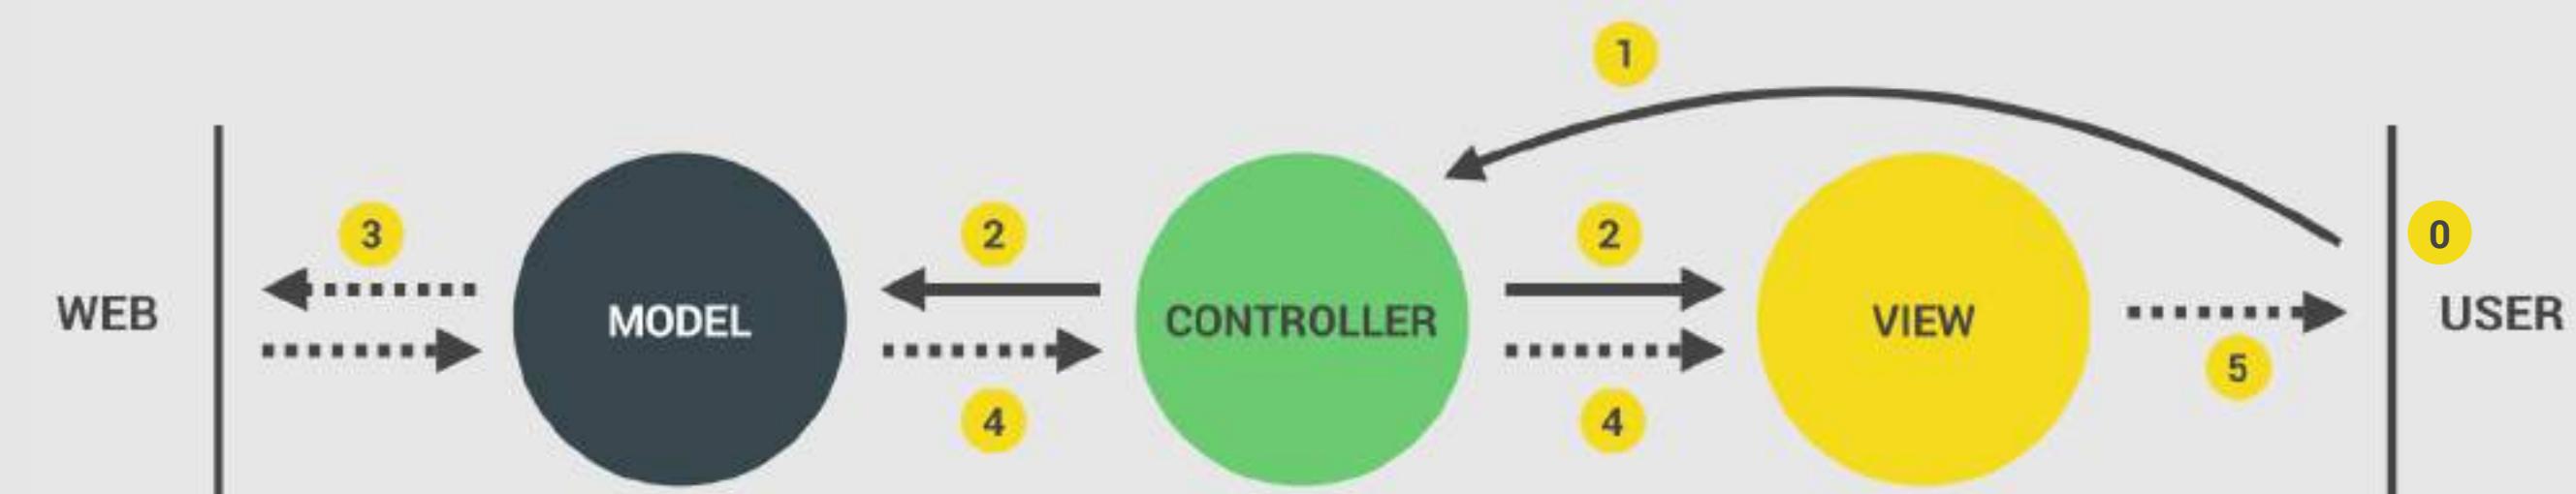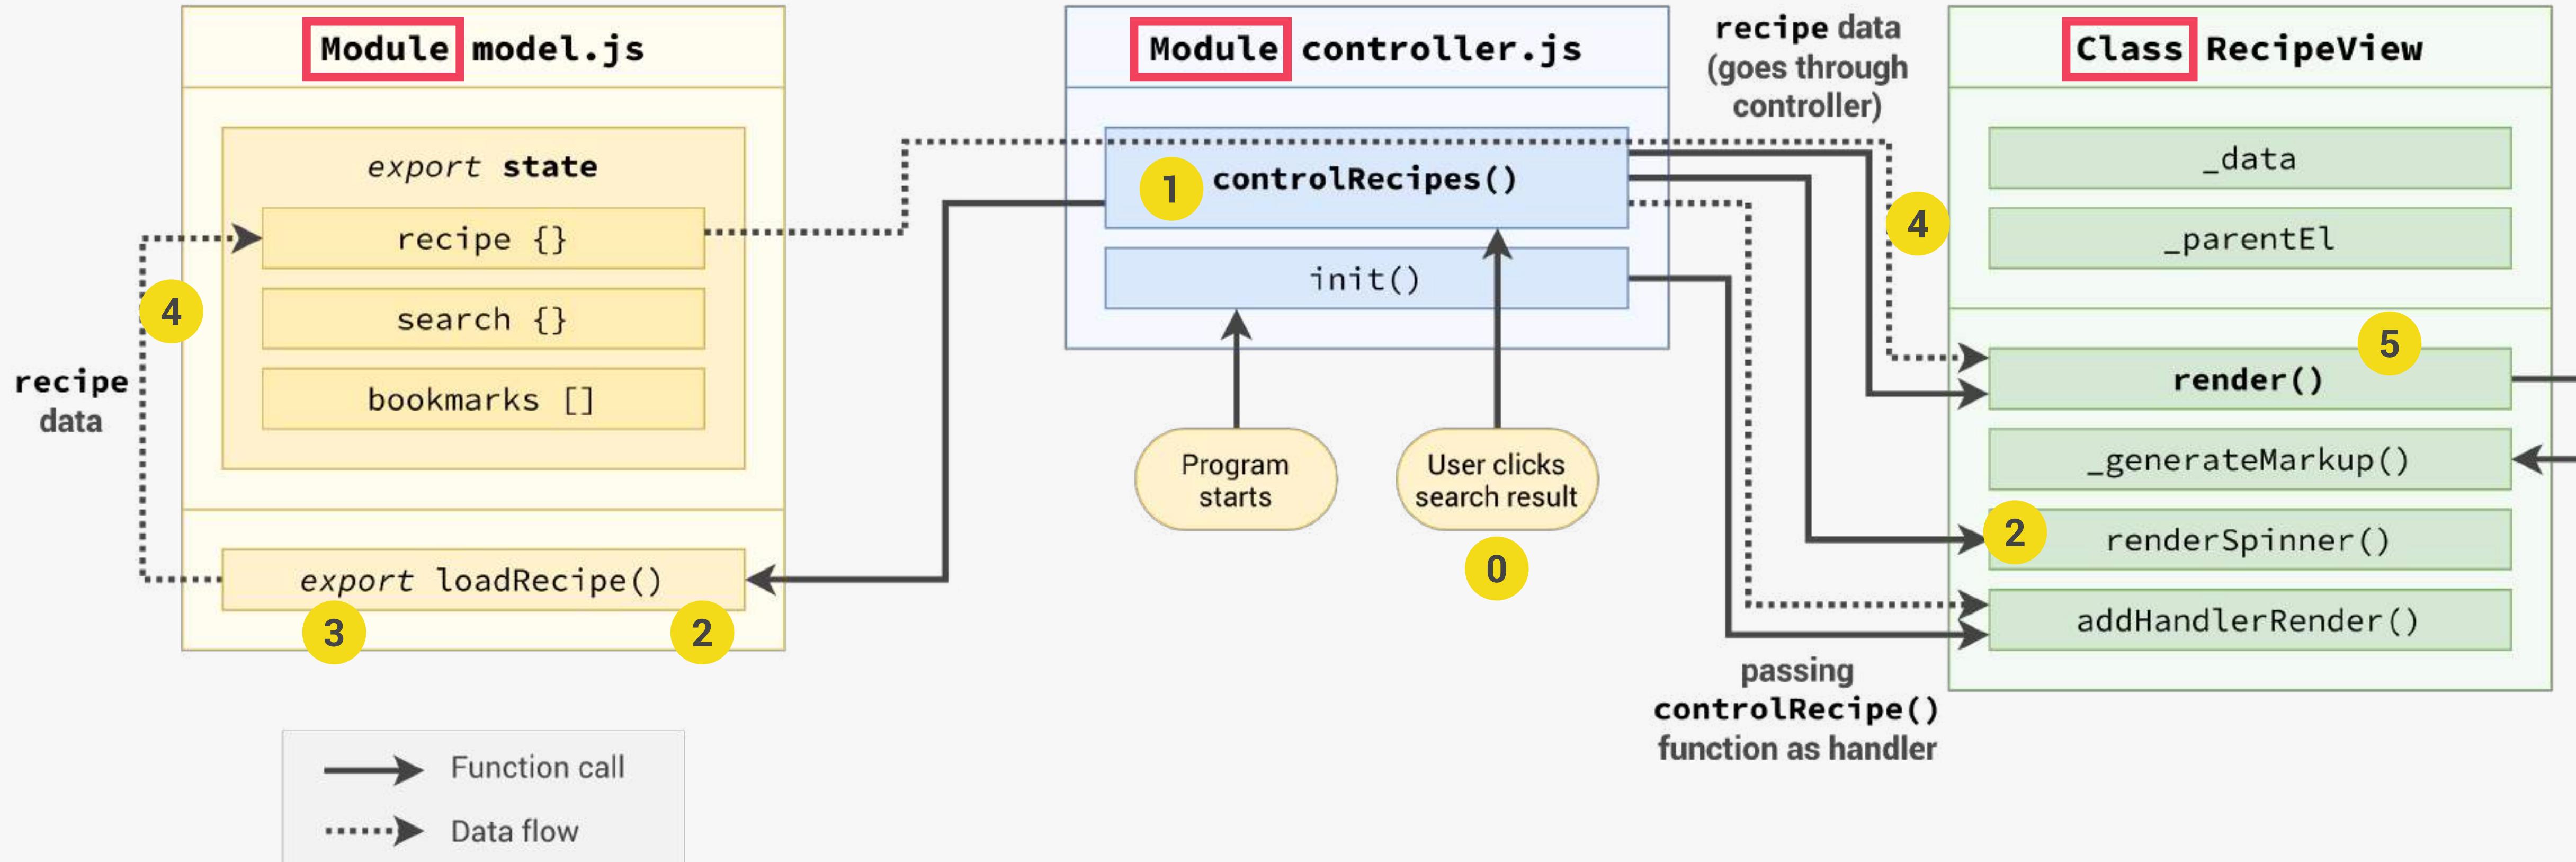



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION


FORKIFY APP: BUILDING A MODERN
APPLICATION

LECTURE

EVENT HANDLERS IN MVC:
PUBLISHER-SUBSCRIBER PATTERN

JS

EVENT HANDLING IN MVC: PUBLISHER-SUBSCRIBER PATTERN

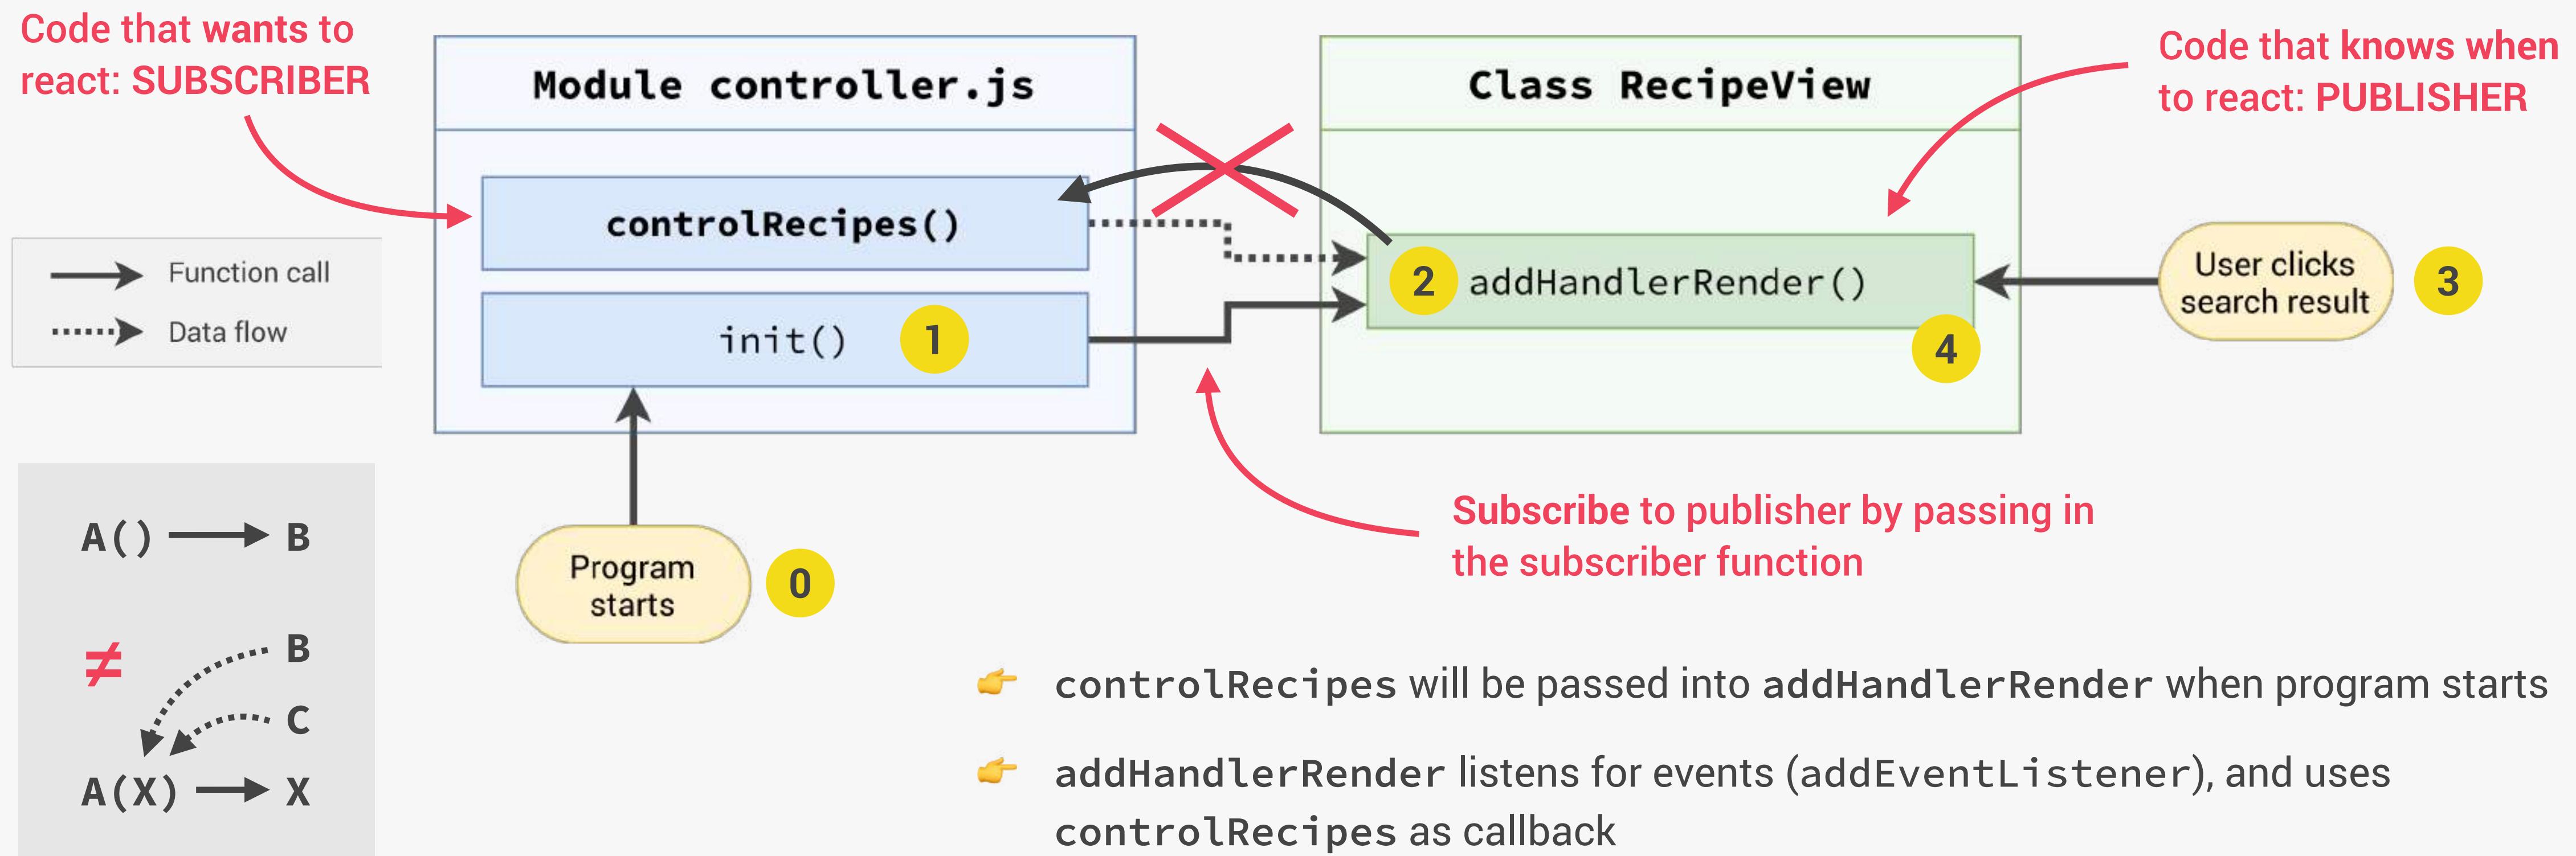

- 👉 Events should be **handled** in the **controller** (otherwise we would have application logic in the view)
- 👉 Events should be **listened for** in the **view** (otherwise we would need DOM elements in the controller)



JONAS.IO
SCHMEDTMANN

THE COMPLETE JAVASCRIPT COURSE

FROM ZERO TO EXPERT!



@JONASSCHMEDTMAN

SECTION

FORKIFY APP: BUILDING A MODERN
APPLICATION

LECTURE


WRAPPING UP: FINAL
CONSIDERATIONS

JS

IMPROVEMENT AND FEATURE IDEAS: CHALLENGES 😎



- 👉 Display **number of pages** between the pagination buttons;
- 👉 Ability to **sort** search results by duration or number of ingredients;
- 👉 Perform **ingredient validation** in view, before submitting the form;
- 👉 **Improve recipe ingredient input:** separate in multiple fields and allow more than 6 ingredients;
- 👉 **Shopping list feature:** button on recipe to add ingredients to a list;
- 👉 **Weekly meal planning feature:** assign recipes to the next 7 days and show on a weekly calendar;
- 👉 **Get nutrition data** on each ingredient from spoonacular API (<https://spoonacular.com/food-api>) and calculate total calories of recipe.

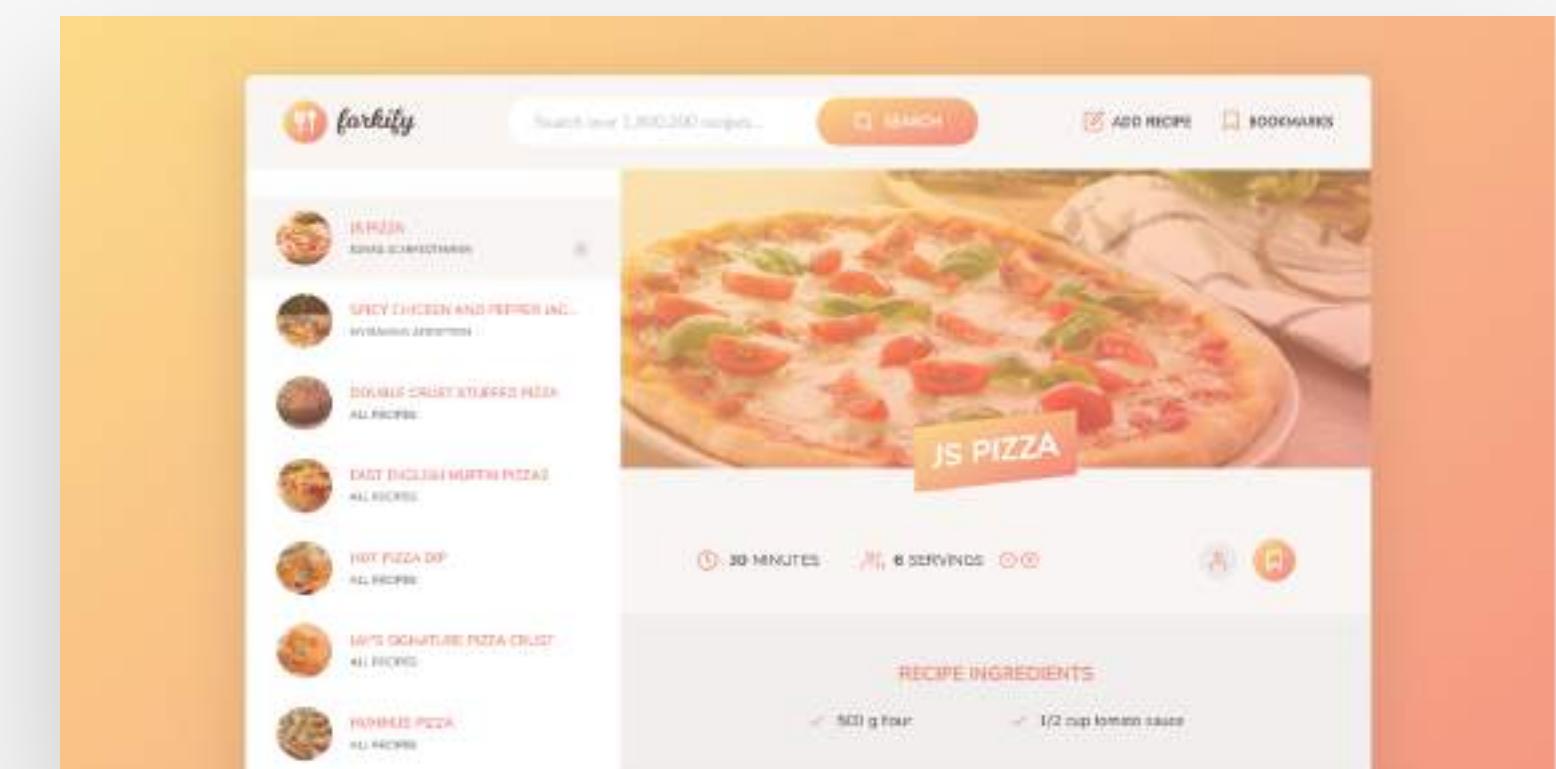

END