

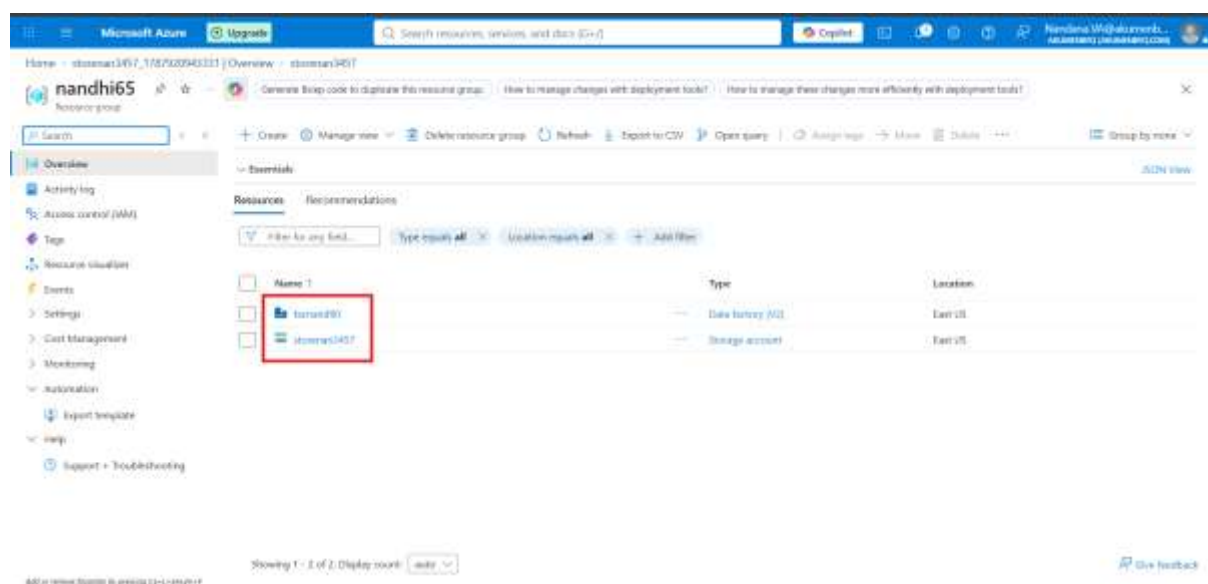



This project sets up an ETL pipeline in Azure Data Factory that pulls live headlines from the Google News API (via SearchApi) and lands the resulting JSON payload in an Azure Data Lake Storage Gen2 account, organized by dynamic, timestamped file paths. Review the SearchApi documentation for the Google News API to identify the endpoint (GET /api/v1/search?engine=google_news) and its query parameters




Launch Azure Data Factory Studio and open Manage > Linked services, which is empty until a new linked service is created .

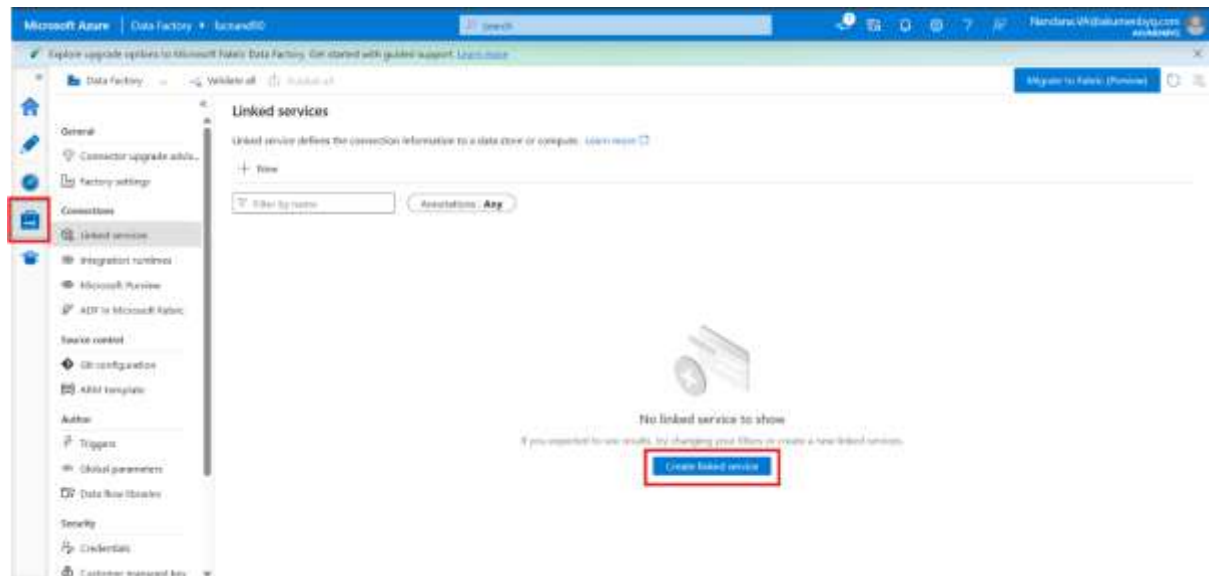


Create the two linked services the pipeline needs — LS_adls for the storage account and LS_rest for the REST API — both created successfully.

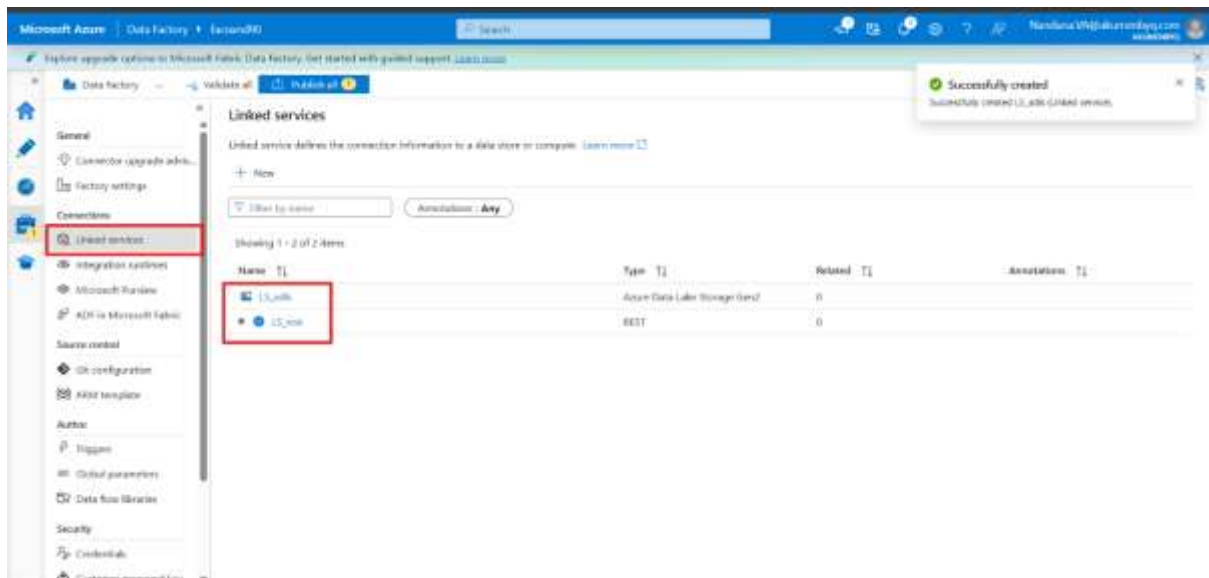


Configure the REST linked service with the Base URL <https://www.searchapi.io/api/v1> and set the Authentication type to Anonymous, since the API key is supplied as a query parameter rather than through an auth header

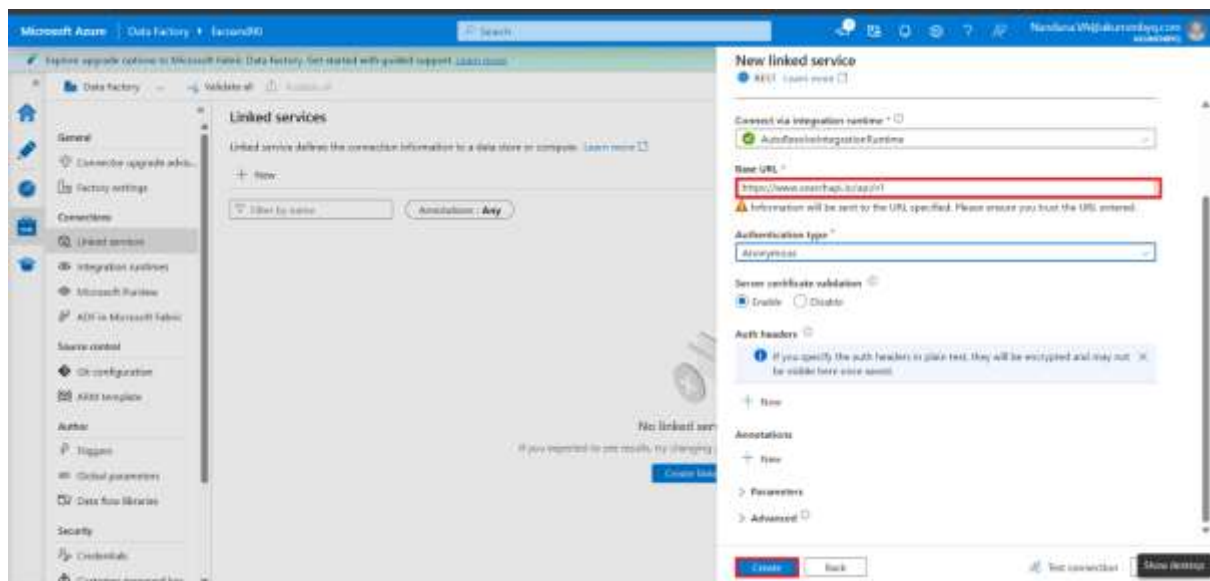


Create a pipeline with a Copy data activity . The REST dataset is set as the source on the activity's Source tab.

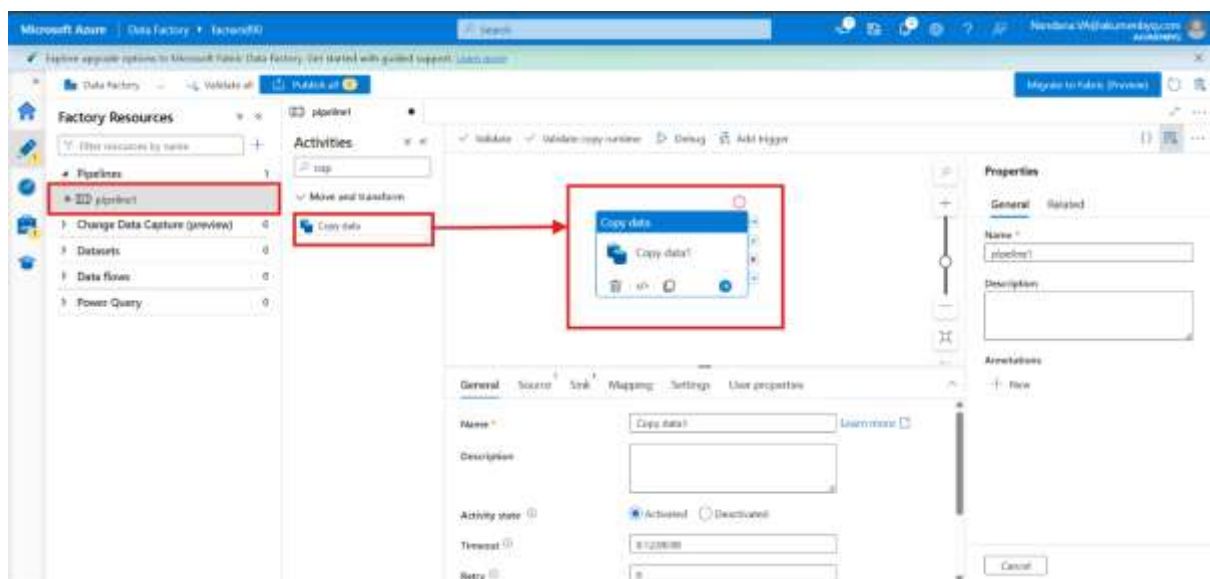



- Source Dataset configured
- Select Open this dataset

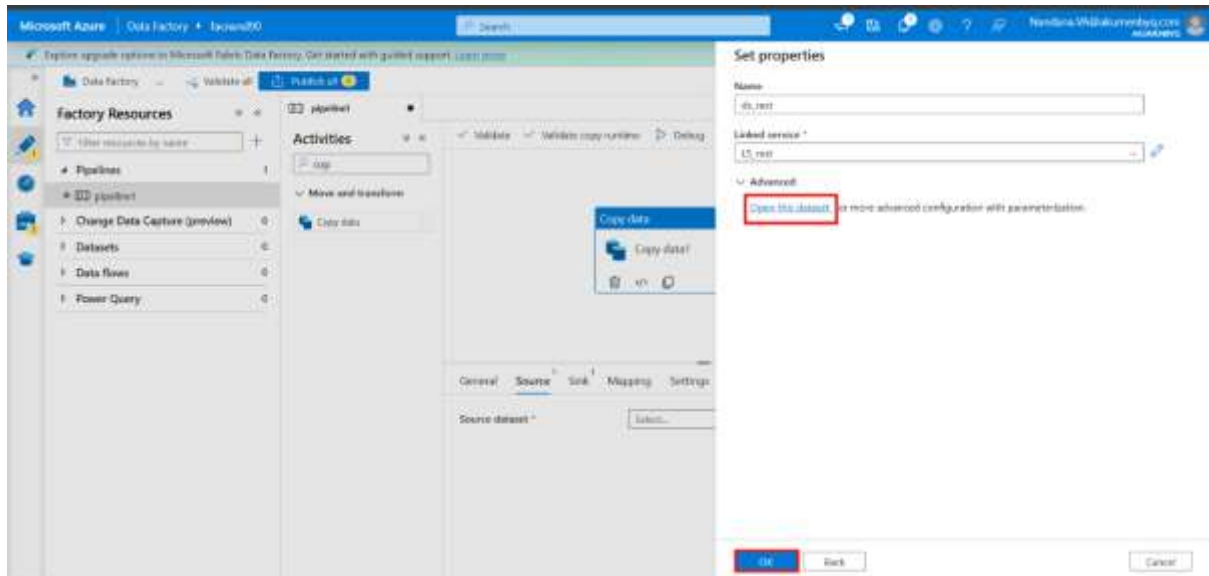


Configure Base URL and Relative URL from search API

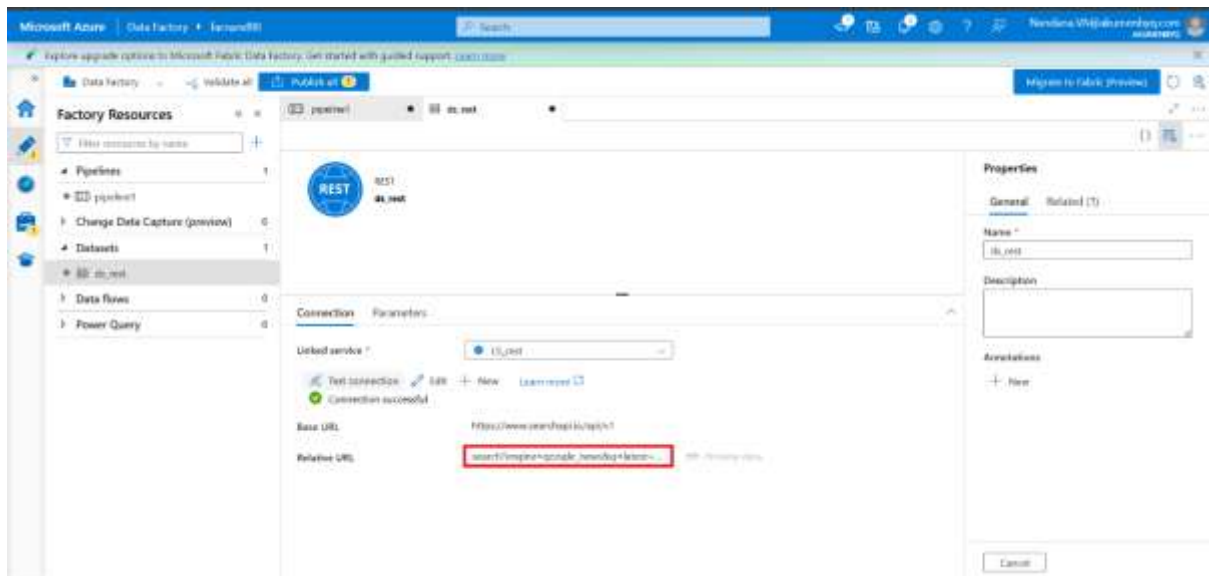


Configure the sink dataset on the Azure Data Lake linked service. Rather than a fixed path, the File path and file name are built dynamically with pipeline expressions — `@concat('searchapi/google/latest-news', formatDateTime(utcnow()), 'yyyy/MM/dd'))` for the folder, and `@concat('search_result_', formatDateTime(utcnow()), 'yyyyMMdd_HH-mm-ss'), '.json')` for the file name — so every run is organized by API/date and saved as its own timestamped JSON file.

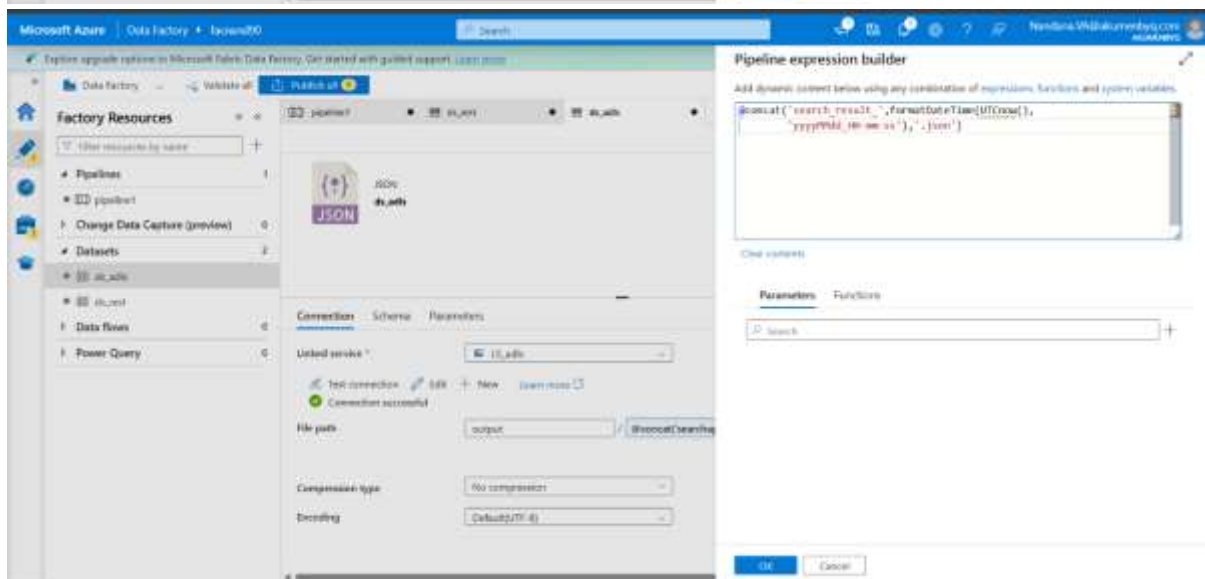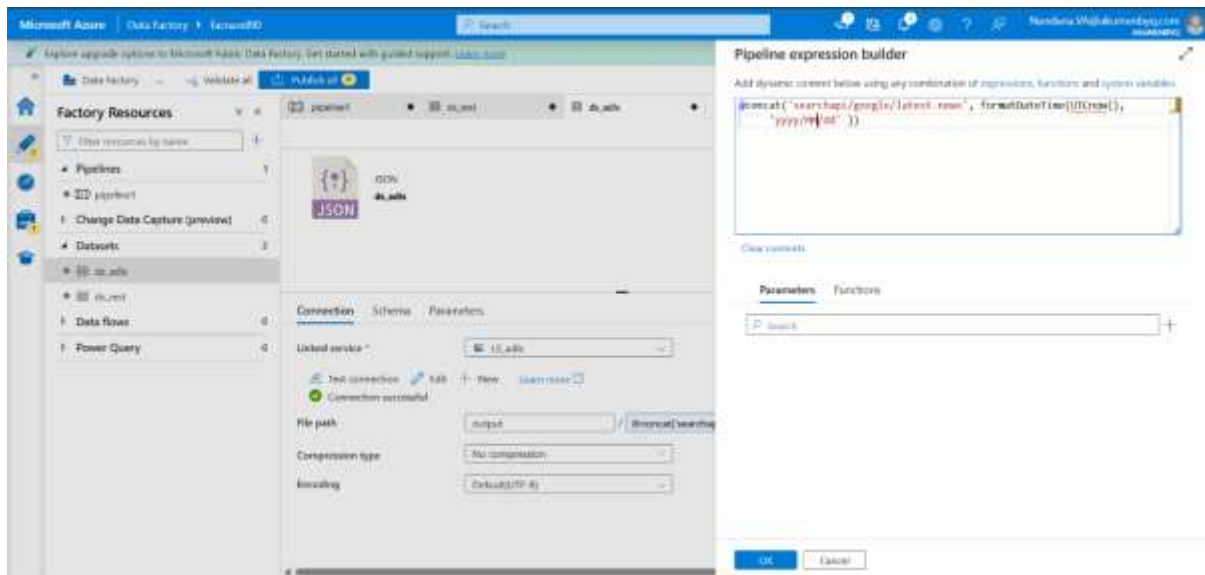


Validate and Debug the pipeline. The Copy data activity completes and the pipeline status shows Succeeded, confirming the API response was retrieved and written to storage without errors.

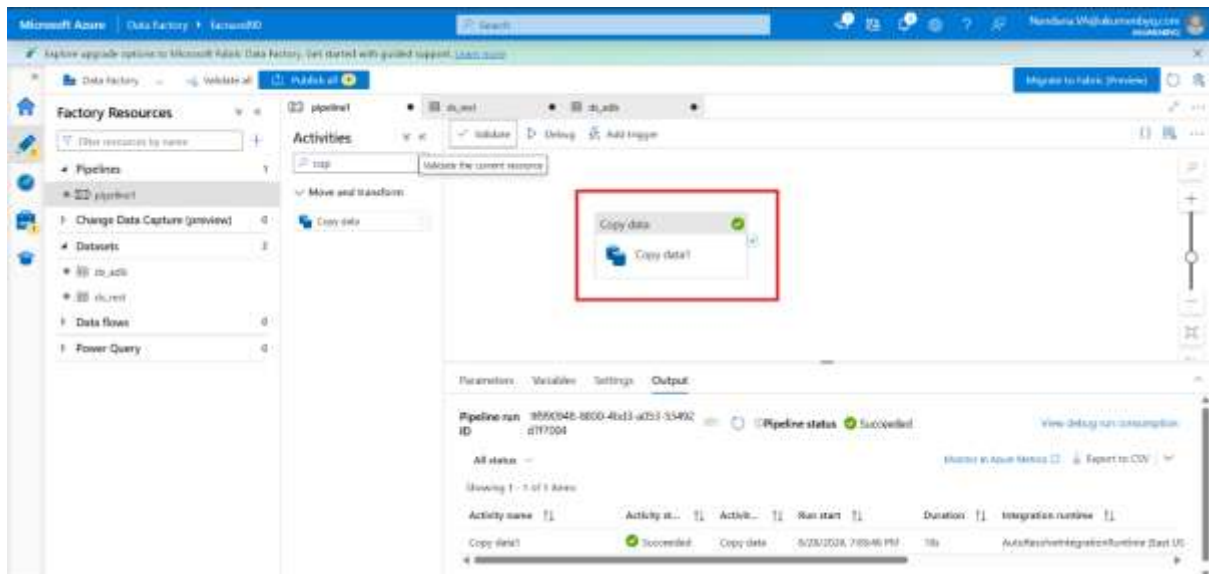


Return to the Storage Account and open the output container to verify the folder structure the pipeline created: output/searchapi/google/latest-news2026/..., matching the dynamic path defined on the sink dataset

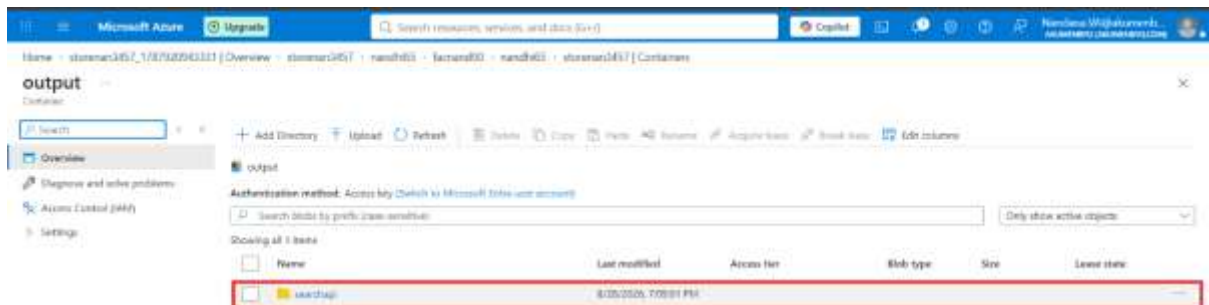

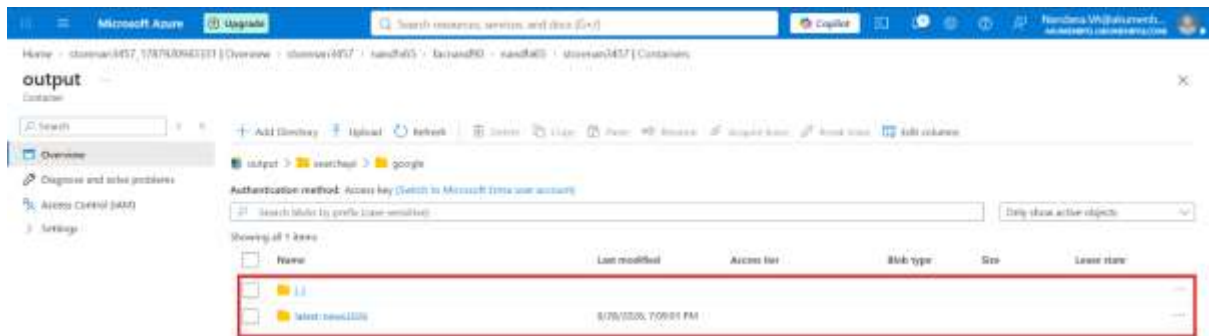

Add or remove blobs by pressing Ctrl+Shift+F

Open the generated blob (e.g. search_result_20260828_13-38-47.json) using the portal's Edit tab to inspect the raw JSON and confirm it matches the API response,

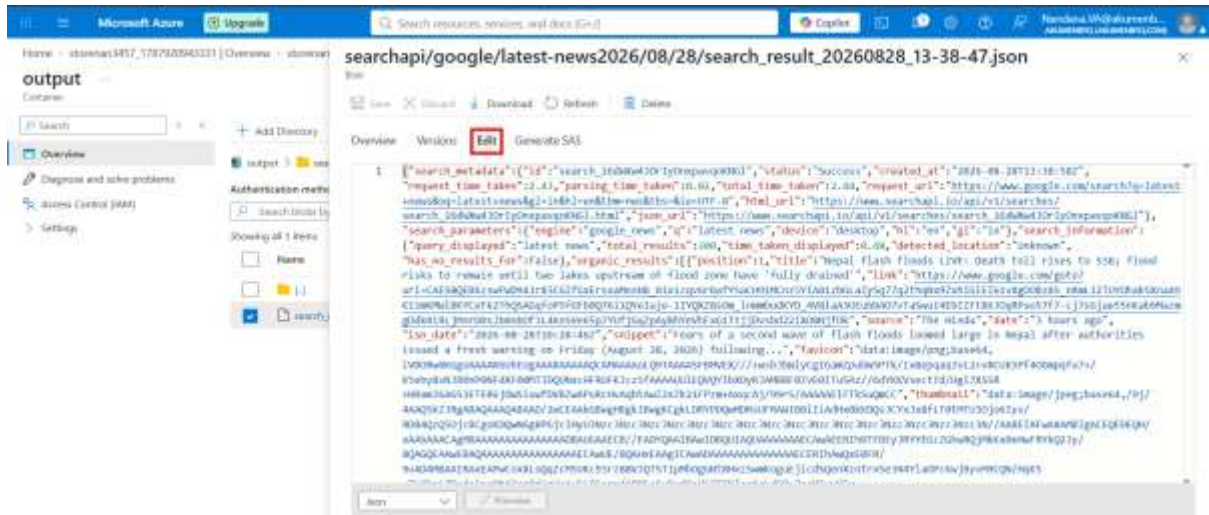

Add or remove blobs by pressing Ctrl+Shift+F

