

Q1 - Footprinting Tools


whois abc.com

theHarvester -d abc.com -b duckduckgo

whatweb https://abc.com

subfinder -d abc.com -silent

dig abc.com

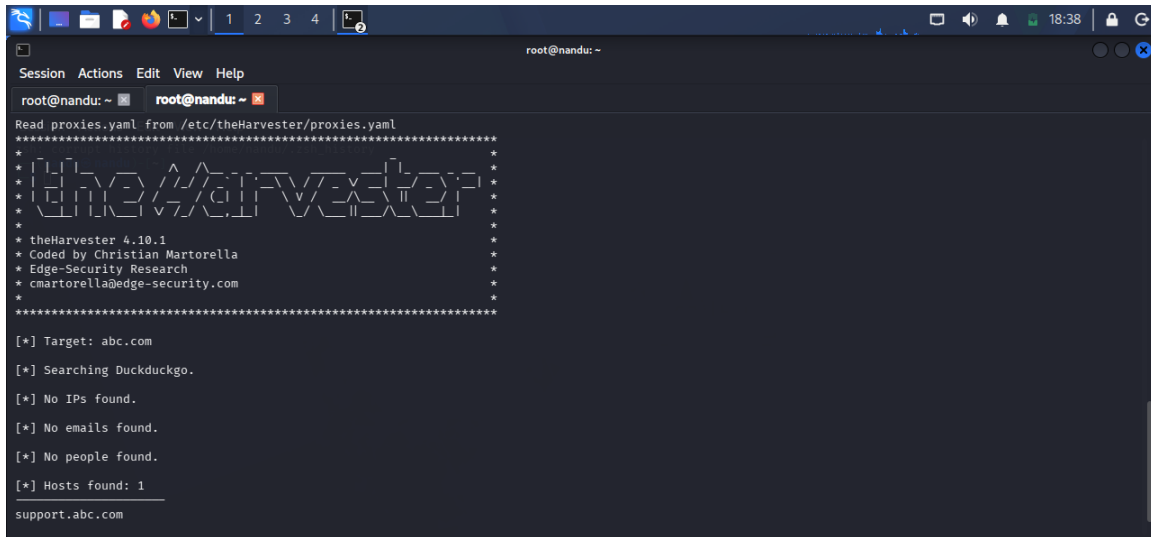A screenshot of a terminal window with a dark background. The window title is "root@nandu: ~". The terminal shows the output of the theHarvester tool. It starts with "Read proxies.yaml from /etc/theHarvester/proxies.yaml", followed by a large ASCII art logo for "theHarvester". Below the logo, it lists the version "4.10.1", the author "Coded by Christian Martorella", the organization "Edge-Security Research", and the email "cmartorella@edge-security.com". The main output shows the target "abc.com", a search using Duckduckgo, and results: "No IPs found", "No emails found", "No people found", and "Hosts found: 1". The host found is "support.abc.com".


```
root@nandu: ~  
root@nandu: ~  
Read proxies.yaml from /etc/theHarvester/proxies.yaml  
*****  
*  
* [ASCII Art Logo]  
*  
* theHarvester 4.10.1  
* Coded by Christian Martorella  
* Edge-Security Research  
* cmartorella@edge-security.com  
*  
*****  
[*] Target: abc.com  
[*] Searching Duckduckgo.  
[*] No IPs found.  
[*] No emails found.  
[*] No people found.  
[*] Hosts found: 1  
-----  
support.abc.com
```

Q2 - DNS Zone Transfer

dig NS abc.com

dig AXFR abc.com @ns1.abc.com

host -l abc.com ns1.abc.com

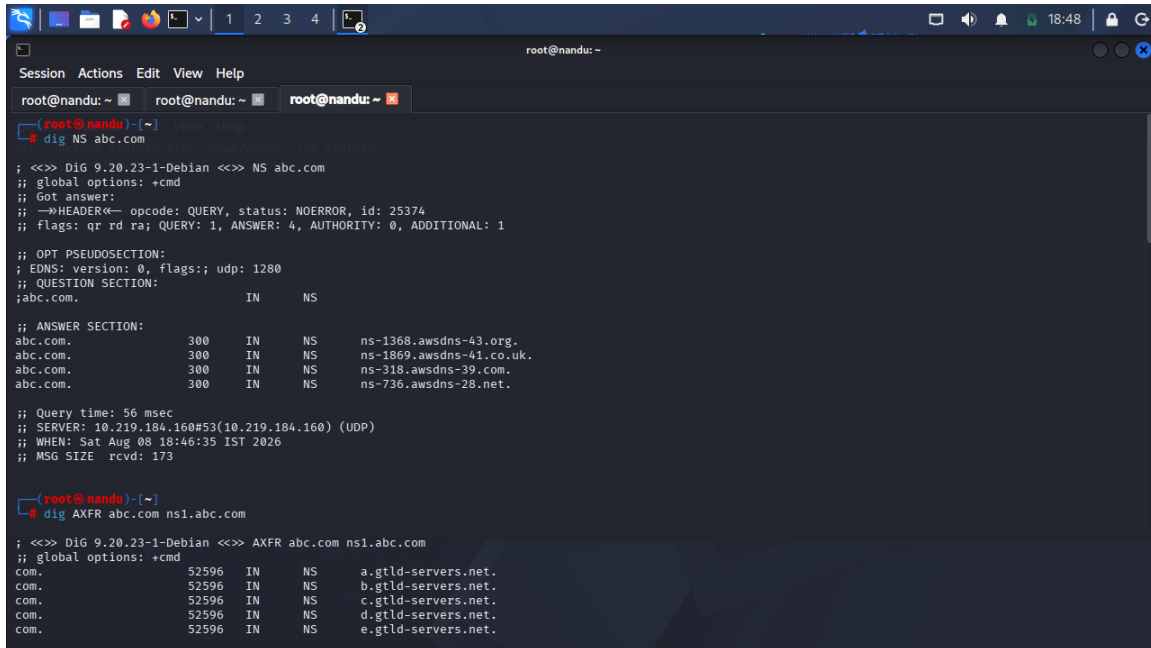

The screenshot shows a terminal window with the following output:

```
root@nandu: ~  
root@nandu: ~  
root@nandu: ~  
(root@nandu) ~  
# dig NS abc.com  
  
;<<>> Dig 9.20.23-1-Debian <<>> NS abc.com  
;; global options: +cmd  
;; Got answer:  
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 25374  
;; flags: qr rd ra; QUERY: 1, ANSWER: 4, AUTHORITY: 0, ADDITIONAL: 1  
  
;; OPT PSEUDOSECTION:  
; EDNS: version: 0, flags:; udp: 1280  
;; QUESTION SECTION:  
;abc.com. IN NS  
  
;; ANSWER SECTION:  
abc.com. 300 IN NS ns-1368.awsdns-43.org.  
abc.com. 300 IN NS ns-1869.awsdns-41.co.uk.  
abc.com. 300 IN NS ns-318.awsdns-39.com.  
abc.com. 300 IN NS ns-736.awsdns-28.net.  
  
;; Query time: 56 msec  
;; SERVER: 10.219.184.160#53(10.219.184.160) (UDP)  
;; WHEN: Sat Aug 08 18:46:35 IST 2026  
;; MSG SIZE rcvd: 173  
  
(root@nandu) ~  
# dig AXFR abc.com ns1.abc.com  
  
;<<>> Dig 9.20.23-1-Debian <<>> AXFR abc.com ns1.abc.com  
;; global options: +cmd  
com. 52596 IN NS a.gtld-servers.net.  
com. 52596 IN NS b.gtld-servers.net.  
com. 52596 IN NS c.gtld-servers.net.  
com. 52596 IN NS d.gtld-servers.net.  
com. 52596 IN NS e.gtld-servers.net.
```


Q3 - Social Engineering / Phishing

echo "https://example.com/login"

whois example.com

dig example.com

whatweb <https://example.com>

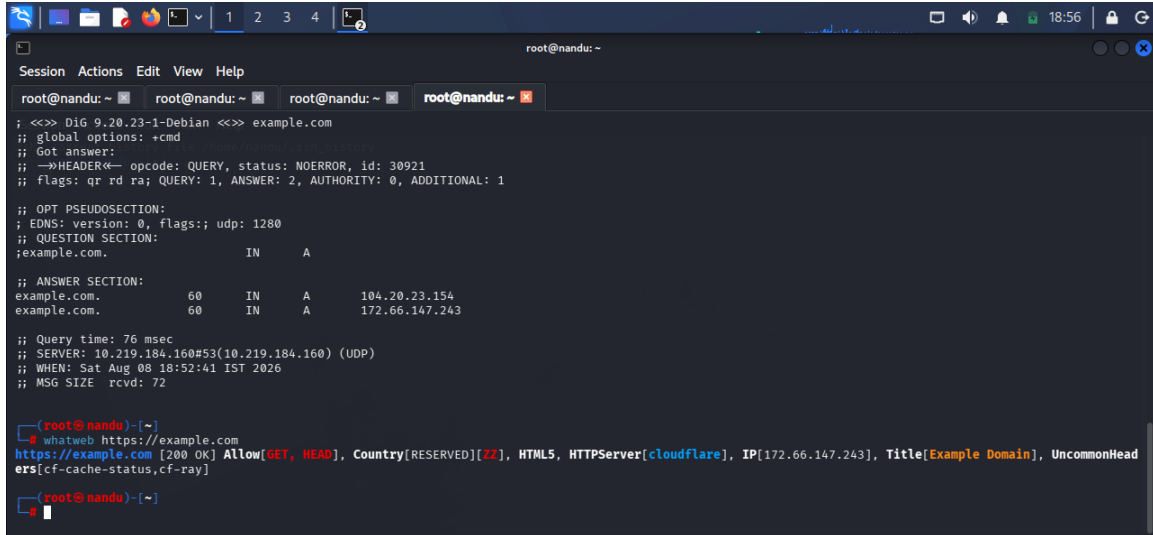

The screenshot shows a terminal window with the following content:

```
root@nandu: ~  
; <<>> Dig 9.20.23-1-Debian <<>> example.com  
;; global options: +cmd  
;; Got answer:  
;; ->HEADER<- opcode: QUERY, status: NOERROR, id: 30921  
;; flags: qr rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL: 1  
  
;; OPT PSEUDOSECTION:  
; EDNS: version: 0, flags:; udp: 1280  
;; QUESTION SECTION:  
;example.com. IN A  
  
;; ANSWER SECTION:  
example.com. 60 IN A 104.20.23.154  
example.com. 60 IN A 172.66.147.243  
  
;; Query time: 76 msec  
;; SERVER: 10.219.184.160#53(10.219.184.160) (UDP)  
;; WHEN: Sat Aug 08 18:52:41 IST 2026  
;; MSG SIZE rcvd: 72  
  
root@nandu: ~  
# whatweb https://example.com  
https://example.com [200 OK] Allow[GET, HEAD], Country[RESERVED][ZZ], HTML5, HTTPServer[cloudflare], IP[172.66.147.243], Title[Example Domain], UncommonHead  
ers[cf-cache-status,cf-ray]  
  
root@nandu: ~
```