


How NAPCO Nucleus runs the API Load Test

Same pattern for Functional (Newman) and Integration (pytest) — different runner function, same orchestration path.

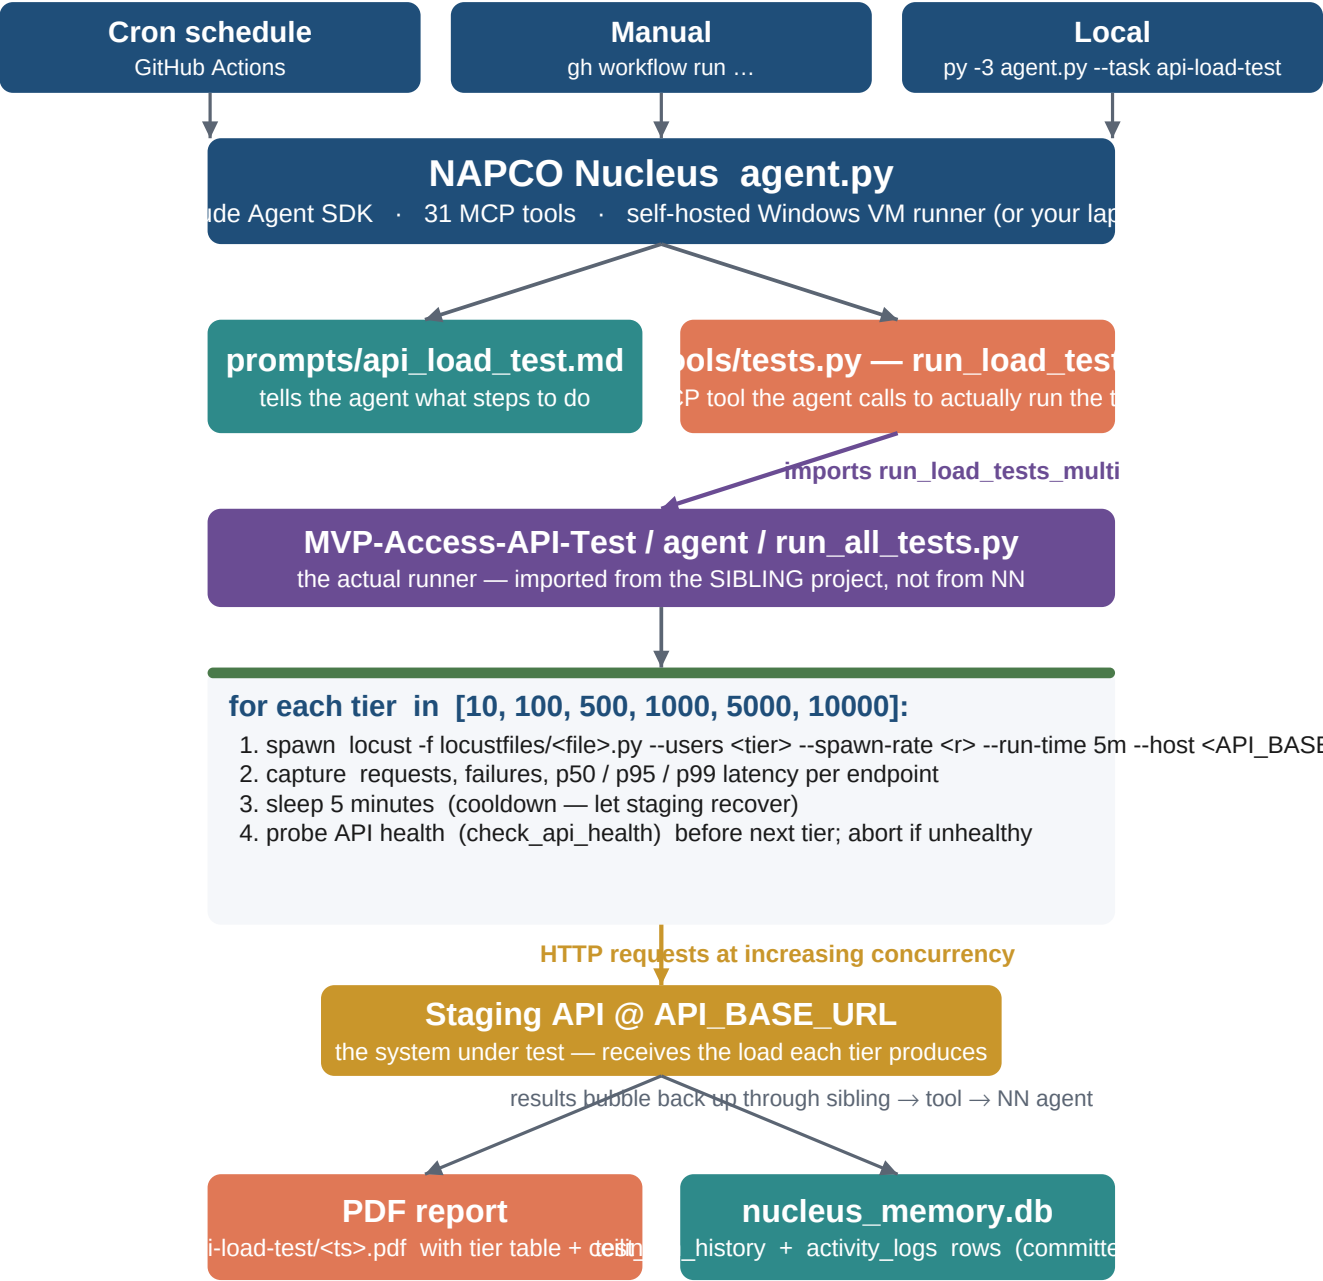

Functional + Integration — same path

tools/tests.py also exposes
run_api_tests (Newman + Postman)
run_integration_tests (pytest)
Each maps to its own NN workflow.

Why GHA failed earlier

GitHub Actions runner only checks out the napco-nucleus repo. Sibling at E:\Projects\MVP-Access-API-Test\ does not exist on the runner.
NN's import of run_load_tests_multi throws WinError 267. Agent aborts pre-flight before spawning Locust.

Why local works

Your laptop has BOTH projects at E:\Projects\NAPCO-Nucleus\ + E:\Projects\MVP-Access-API-Test\.
MVP_PROJECTS_ROOT in .env points PROJECT_PATHS at the right place.
Sibling import succeeds, Locust subprocess spawns, API gets hit.

Fix for GHA

Add actions/checkout@v5 step that pulls titucse/MVP-Access-API-Test into the workspace, then set MVP_PROJECTS_ROOT: \${{ github.workspace }}.
Same pattern requirement-management uses today.

Memory wins

Every successful run writes a row to test_run_history with tier results.
Next run can compare ceilings and produce a regression or not verdict
in the PDF without re-asking the user.