

DNS Lab 1 :

TITLE : DNS Configura on and Web Server Access Using Domain Name in Cisco Packet Student

Aim : To Configure a Domain Server in Cisco Packet Tracer So that users can access a web site using a domain name instead of an IP address.

NETWORK DEVICES USED :

1. Router	1
2. Server	1
3. Switch	1
4. PC	2

IP ADDRESSING :

Devices	Ip Address	SubnetMask	Default Gateway
1. Router	192.168.1.1	255.255.255.0	-
2. Server	192.168.1.2	255.255.255.0	192.168.1.1
3. PC0	192.168.1.10	255.255.255.0	192.168.1.1
4. PC1	192.168.1.11	255.255.255.0	192.168.1.1

- Int fa0/0
- ip address 192.168.1.1 255.255.255.0
- no shut
- exit

Step 3 : Configure Server IP

- Open Server
- Server → Desktop → IP Configura on

IP Address : 192.168.1.2

Subnet Mask : 255.255.255.0


Default Gateway : 192.168.1.1

DNS Server : 192.168.1.2

Step 4 : Configure DNS Server

- Server → Services → DNS
- Enable DNS and Add record

Ex : [abc technology](#) 192.168.1.2

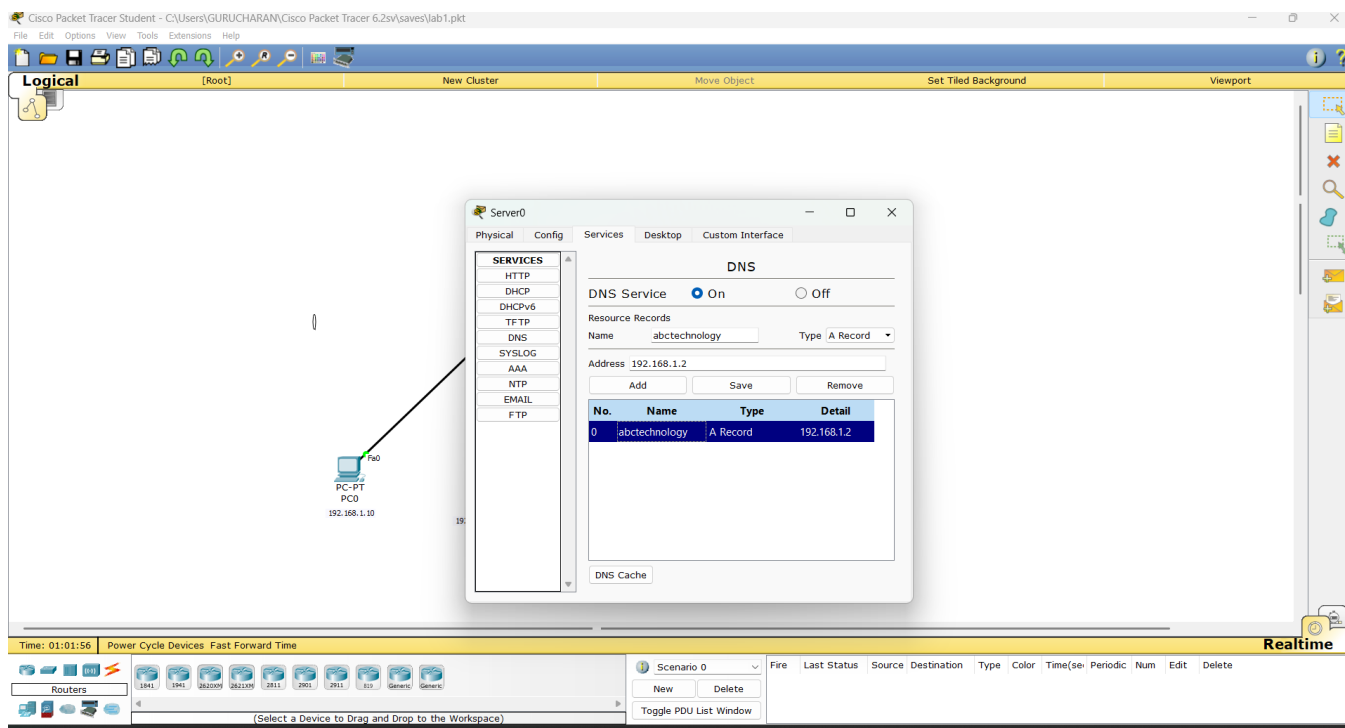

Step 5 : Enable web Server

- Server → Services → HTTP

- Turn HTTP = ON

Step 6 : Configure PC0

PC0 → Desktop → IP Configure

- IP Address : 192.168.1.10
- Subnet Mask : 255.255.255.0
- Default Gateway : 192.168.1.1
- DNS Server : 192.168.1.2

Step 7 : Configure PC1

PC1 → Desktop → IP Configure

IP Address : 192.168.1.11

Subnet Mask : 255.255.255.0


Default Gateway : 192.168.1.1

DNS Server : 192.168.1.2

Step 8.Verification :

➤ Ping Test

- Open PC0 Command Prompt and Type
- Ping [abc technology](#)
- Result : If Successful replies from 192.168.1.2

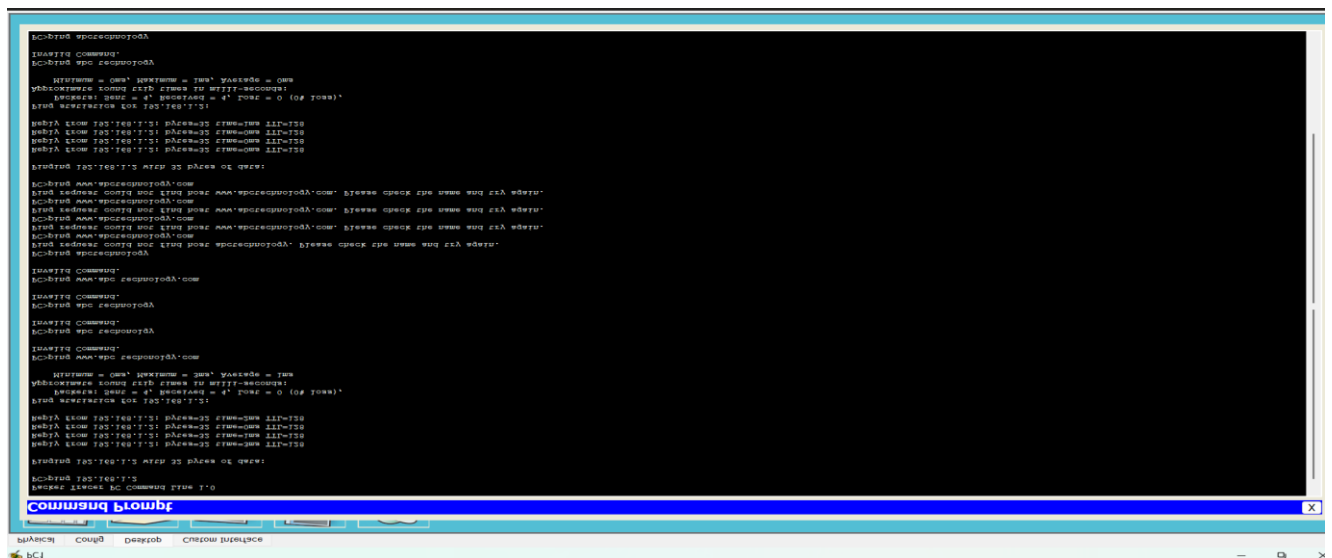

- Web Browser Test
 - Open PC0 Web Browser and Type “ abc technology”.
 - ABC webpage load sucessfully

