

HTML FULL COURSE NOTES

Page No. : 1

Date : __/__/__

PAGE 1 : INTRODUCTION TO HTML

★ HTML (HyperText Markup Language)

- HTML stands for HyperText Markup Language.
- It is the standard markup language used to create and structure web pages on the Internet.
- HTML tells the browser how content such as text, images, videos, links, and forms should be displayed.

★ Why Learn HTML?

- ① Foundation of Web Development
- ② Easy to Learn
- ③ Used to Create Websites
- ④ Works with CSS and JavaScript
- ⑤ Required for Frontend Development

★ Features of HTML

- Simple and Easy Language
- Platform Independent
- Supported by All Browsers
- Free and Open Standard
- Helps Structure Web Pages

★ HTML Versions

Version	Year	Version	Year
HTML 1.0	1993	HTML 4.01	1999
HTML 2.0	1995	XHTML	2000
HTML 3.2	1997	HTML5	2014

Output :

Hello World
Welcome to HTML.

★ Interview Question

Q. What is HTML?

Answer : HTML (HyperText Markup Language) is the standard markup language used to create and structure web pages on the Internet.

Real Life Example

A website is made of :

- **HTML** → **Structure** (Skeleton)
- **CSS** → **Design** (Beauty)
- **JavaScript** → **Functionality** (Brain)

Example : A House 

Bricks = **HTML**

Paint = **CSS**

Electricity = **JavaScript**

★ First HTML Program

```
<!DOCTYPE html>
<html>
  <head>
    <title> My First Web Page </title>
  </head>
  <body>
    <h1> Hello World </h1>
    <p> Welcome to HTML. </p>
  </body>
</html>
```

★ Important Point

- HTML is not a programming language.
- It is a markup language used to structure web pages.

Module 1 - Page 1
Completed ✓

HTML FULL COURSE NOTES

Page No.
1

★ 1. INTRODUCTION TO HTML

HTML stands for HyperText Markup Language.

It is the standard markup language used to create and structure web pages on the internet.

HTML tells the browser how content such as text, images, videos, links and forms should be displayed.

Why Learn HTML?

- ① Foundation of Web Development
- ② Easy to Learn
- ③ Used to Create Websites
- ④ Works with CSS and JavaScript
- ⑤ Required for Frontend Development

★ HTML Versions

Version	Year	Version	Year
HTML 1.0	1993	HTML 4.01	1999
HTML 2.0	1995	XHTML	2000
HTML 3.2	1997	HTML5	2014

Real Life Example

A website is made of :

- HTML → Structure (Skeleton)
- CSS → Design (Beauty)
- JavaScript → Functionality (Brain)

A House 🏠

Bricks = HTML

Paint = CSS

Electricity = JavaScript

★ First HTML Program

```
<!DOCTYPE html>
<html>
  <head>
    <title> My First Web Page </title>
  </head>
  <body>
    <h1> Hello World </h1>
    <p> Welcome to HTML. </p>
  </body>
</html>
```

Output :

Hello World
Welcome to HTML.

Important Point

HTML is not a programming language.
It is a markup language used to structure web pages.

Interview Question

Q. What is HTML?

Ans:

HTML (HyperText Markup Language) is the standard markup language used to create and structure web pages on the internet.

Module 1 - Page 1
Completed ✓

HTML FULL COURSE NOTES

Page No.
2

★ 2. HTML DOCUMENT STRUCTURE & BASIC TAGS

Every HTML document follows a standard structure.


Basic Syntax :

```
<!DOCTYPE html>
<html>
  <head>
    <title> My Website </title>
  </head>
  <body>
    <h1> Hello World </h1>
  </body>
</html>
```

Structure Explanation

1. **<!DOCTYPE html>**
Declares the document type.
Tells the browser that the document uses HTML5.
2. **<html> Tag**
Root element of an HTML page.
All HTML code is written inside this tag.
3. **<head> Tag**
Contains metadata about the webpage.
Information inside head is not directly visible on the webpage.
4. **<title> Tag**
Sets the title of the webpage.
Appears on the browser tab.
5. **<body> Tag**
Contains all visible content.
Everything displayed on the webpage is written inside the body tag.

Visual Representation

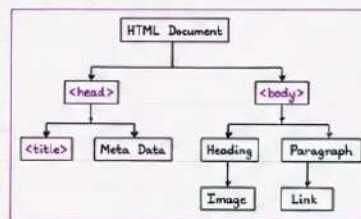

First Complete Example

```
<!DOCTYPE html>
<html>
  <head>
    <title> My First Website </title>
  </head>
  <body>
    <h1> Welcome to HTML </h1>
    <p> This is my first webpage. </p>
  </body>
</html>
```

Important Notes

- Every HTML page starts with **<!DOCTYPE html>**
- **<html>** is the root element.
- **<head>** stores webpage information.
- **<title>** appears in browser tab.
- **<body>** contains visible content.

Quick Revision Box

```
<!DOCTYPE html> → HTML5 Declaration
<html>           → Root Element
<head>           → Metadata
<title>          → Browser Tab Name
<body>           → Visible Content
```

Practice Task

Create a webpage with :

1. Title = My Portfolio
2. Heading = Welcome to My Website
3. Paragraph = I am learning HTML.

HTML FULL COURSE NOTES

Page No.
3

3. HTML TAGS, ELEMENTS & ATTRIBUTES

★ HTML uses Tags to define elements on a webpage.

A. HTML TAGS

- Tags are keywords surrounded by angle brackets `<>`.
- Most tags have opening and closing tags.
- Opening tag and closing tag are same, but closing tag has a slash `/`.

Example :

`<h1>` This is a Heading `</h1>`
↓ ↓ ↓
Opening Tag Content Closing Tag

Note :

Some tags do not have closing tag. These are called empty elements. Example : `<br>`, `<hr>`, `<img>`, `<input>` etc.

B. HTML ELEMENTS

- Everything from the start tag to the end tag is called an element.
- It includes tags and content both.

Example :

`<p>` Hello World `</p>`
This is an HTML element.

C. HTML ATTRIBUTES

- Attributes provide additional information about elements.
- They are written inside the opening tag.
- Format : `name = "value"`

Example :

``
↓ ↓ ↓
Attribute Attribute Attribute
(source) (alternative text) (width of image)

Key Points

- ★ Tag → Used to create element
- ★ Element → Combination of tag and content
- ★ Attribute → Gives extra information about element
- ★ Content → The actual text or data inside element.

Quick Tip

Always write closing tags for better code structure.



HTML FULL COURSE NOTES

Page No.
4

4. BASIC HTML TAGS

Some commonly used HTML tags are given below :

Tag	Description	Example	Output
<code><h1></code> to <code><h6></code>	Defines HTML headings. <code><h1></code> is highest and <code><h6></code> is lowest.	<code><h1>Hello</h1></code>	Hello
<code><p></code>	Defines a paragraph.	<code><p>This is a paragraph.</p></code>	This is a paragraph.
<code>
</code>	Inserts a single line break.	Line 1 <code>
</code> Line 2	Line 1 Line 2
<code><hr></code>	Creates a horizontal line.	<code><hr></code>	_____
<code></code>	Makes text bold.	<code>Bold Text</code>	Bold Text
<code><i></code>	Makes text italic.	<code><i>Italic Text</i></code>	<i>Italic Text</i>
<code><u></code>	Underlines the text.	<code><u>Underlined</u></code>	<u>Underlined</u>
<code><mark></code>	Highlights the text.	<code><mark>Important</mark></code>	Important
<code><small></code>	Makes text smaller.	<code><small>Small Text</small></code>	Small Text
<code></code>	Shows deleted text.	<code>Deleted</code>	Deleted
<code><ins></code>	Shows inserted text.	<code><ins>Inserted</ins></code>	<u>Inserted</u>
<code><sub></code>	Subscript text.	H <code><sub>2</sub></code> O	H ₂ O
<code><sup></code>	Superscript text.	a <code><sup>2</sup></code> +b <code><sup>2</sup></code>	a ² +b ²

Example of Some Tags Used Together :

`<h2>`My Introduction`</h2>`
`<p>`Hello, My name is `<b>`Rahul`</b>`.
I am `<i>`learning`</i>` HTML. `<br>`
This is `<u>`very`</u>` `<mark>`important`</mark>` for me.`<p>`
`<hr>`
H`<sub>2</sub>`O is water and a`<sup>2</sup>`+b`<sup>2</sup>`
`</sup>`=c`<sup>2</sup>`

Output :

My Introduction
Hello, My name is Rahul.
I am learning HTML.
This is very **important** for me.

H₂O is water and
a²+b²=c²

Interview Question

Q. What is the difference between tag and element?

Ans : Tag is just the keyword inside `<>`, while element is the combination of tag and content.

Practice Task

Write an HTML page using all the above basic tags.



HTML FULL COURSE NOTES

Page No.
7

7. IMAGES IN HTML

Images are used to add pictures on the webpage.

A. Basic Syntax

```
<img src = "image.jpg" alt = "Description of Image">
```

Image Source

Alternative Text

Note :

The tag is a self-closing tag. It does not have any closing tag.

B. Attributes of Tag

Attribute	Description	Example
src	Specifies the path of the image.	
alt	Provides alternative text if image cannot be loaded.	
width	Sets the width of the image.	
height	Sets the height of the image.	
title	Shows extra information about the image on hover.	

C. Examples

1. Basic Image

```
<img src = "nature.jpg" alt = "Nature Image">
```

2. Image with Width and Height

```
<img src = "nature.jpg" alt = "Nature Image" width = "400" height = "250">
```

3. Image with Title

```
<img src = "nature.jpg" alt = "Nature Image" title = "Beautiful Nature">
```

Important Points

- Always use alt attribute for images.
- Use width and height to control image size.
- Use title for extra information.
- Use appropriate image format like JPG, PNG, GIF, WEBP.

Common Image Formats

- JPG - For photos
- PNG - For graphics
- GIF - For animations
- WEBP - For better quality

HTML FULL COURSE NOTES

Page No.
8

8. LISTS IN HTML

Lists are used to display information in a list format.

A. Types of Lists

1. Ordered List - The list items are in a numbered format.
2. Unordered List - The list items are in bullet points.
3. Description List <dl> - The list items are in a description format.

B. Ordered List

```
<ol>  
<li> HTML </li>  
<li> CSS </li>  
<li> JavaScript </li>  
</ol>
```

Output :

1. HTML
2. CSS
3. JavaScript

We can change the numbering type using type attribute.
(1, A, a, I, i)

Example with type attribute

```
<ol type = "A">  
<li> HTML </li>  
<li> CSS </li>  
<li> JavaScript </li>  
</ol>
```

Output :

- A. HTML
- B. CSS
- C. JavaScript

C. Unordered List

```
<ul>  
<li> Apple </li>  
<li> Banana </li>  
<li> Mango </li>  
</ul>
```

Output :

- Apple
- Banana
- Mango

We can change the bullet style using type attribute.
(disc, circle, square)

Example with type attribute

```
<ul type = "square">  
<li> Apple </li>  
<li> Banana </li>  
<li> Mango </li>  
</ul>
```

Output :

- Apple
- Banana
- Mango

D. Description List

```
<dl>  
<dt> HTML </dt>  
<dd> It is a markup language. </dd>  
<dt> CSS </dt>  
<dd> It is used to design webpages. </dd>  
</dl>
```

Output :

HTML
It is a markup language.
CSS
It is used to design webpages.

Key Points

- = Ordered
- = Unordered
- <dl> = Description
- = List Item
- <dt> = Term
- <dd> = Description

HTML FULL COURSE NOTES

Page No. 9

9. TABLES IN HTML

Tables are used to display data in rows and columns.

A. Basic Table Syntax

```
<table border="1">
<tr>
<th>Name</th>
<th>Age</th>
<th>City</th>
</tr>
<tr>
<td>Rahul</td>
<td>21</td>
<td>Delhi</td>
</tr>
<tr>
<td>Sneha</td>
<td>20</td>
<td>Mumbai</td>
</tr>
</table>
```

Output :

Name	Age	City
Rahul	21	Delhi
Sneha	20	Mumbai

Key Points

- <table> creates a table.
- <tr> creates a table row.
- <th> creates table header.
- <td> creates table data.
- border="1" adds border.

B. Table Attributes

Attribute	Description	Example
border	Adds border to table	<table border="1">
cellpadding	Space inside the cell	<table cellpadding="10">
cellspacing	Space between cells	<table cellspacing="5">
width	Sets width of table	<table width="500">
align	Aligns table	<table align="center">

C. Table with Cellpadding and Cellspacing

```
<table border="1" cellpadding="10" cellspacing="5"
width="400" align="center">
<tr>
<th>Product</th>
<th>Price</th>
<th>Quantity</th>
</tr>
<tr>
<td>Pen</td>
<td>10</td>
<td>2</td>
</tr>
</table>
```

Output :

Product	Price	Quantity
Pen	10	2

Interview Question

Q. What are table tags in HTML?

Ans : <table> is used to create table,
<tr> for rows, <th> for header
and <td> for data.

Practice Task

Create a table to store the following data.

Roll No.	Name	Marks
1	Aman	85
2	Priya	90
3	Karan	78

HTML FULL COURSE NOTES

Page No. 10

10. TABLES (ADVANCED)

A. Colspan (Column Span)

Colspan is used to merge two or more columns into a single column.

```
<table border="1">
<tr>
<th colspan="3">Student Details</th>
</tr>
<tr>
<th>Name</th>
<th>Age</th>
<th>City</th>
</tr>
<tr>
<td>Ravi</td>
<td>22</td>
<td>Pune</td>
</tr>
</table>
```

Output :

Student Details		
Name	Age	City
Ravi	22	Pune

B. Rowspan (Row Span)

Rowspan is used to merge two or more rows into a single row.

```
<table border="1">
<tr>
<th>Subject</th>
<th>Marks</th>
</tr>
<tr>
<td rowspan="3">Computer</td>
<td>85</td>
</tr>
<tr>
<td>90</td>
</tr>
<tr>
<td>88</td>
</tr>
</table>
```

Output :

Subject	Marks
Computer	85
	90
	88

Note :

We can use both rowspan and colspan together in a table.

C. Colspan and Rowspan Together

```
<table border="1">
<tr>
<th rowspan="2">ID</th>
<th colspan="2">Details</th>
</tr>
<tr>
<th>Name</th>
<th>Age</th>
</tr>
<tr>
<td>101</td>
<td>Arjun</td>
<td>21</td>
</tr>
</table>
```

Output :

ID	Details	
	Name	Age
101	Arjun	21

Important Point

Tables are used for displaying data only, not for layout design.



Practice Task

Create a table using rowspan and colspan to display your class time table.



HTML FULL COURSE NOTES

Page No.
11

11. FORMS IN HTML

Forms are used to collect user input.

A. Basic Form Syntax

```
<form action="submit.php" method="post">
  <!-- Form elements -->
</form>
```

Note :
action = where to
send the data
method = GET or
POST

B. Common Form Elements

Element	Description	Example
<input type="text">	Single line text input	<input type="text">
<input type="password">	Password field	<input type="password">
<input type="email">	Email input field	<input type="email">
<input type="number">	Number input field	<input type="number">
<input type="date">	Date input field	<input type="date">
<textarea>	Multi-line text input	<textarea></textarea>
<select>	Drop-down list	<select></select>
<input type="radio">	Radio button (single choice)	<input type="radio">
<input type="checkbox">	Checkbox (multiple choice)	<input type="checkbox">
<input type="submit">	Submit button	<input type="submit">
<input type="reset">	Reset button	<input type="reset">
<input type="button">	Normal button	<input type="button">

C. Example

```
<form action="submit.php" method="post">
  Name : <input type="text" name="name"><br><br>
  Email : <input type="email" name="email"><br><br>
  Password : <input type="password" name="pass"><br><br>
  Gender : <input type="radio" name="gender"> Male
           <input type="radio" name="gender"> Female <br><br>
  Hobbies : <input type="checkbox" name="hobby"> Coding
            <input type="checkbox" name="hobby"> Reading <br><br>
  Comments : <textarea rows="4" cols="30"></textarea> <br><br>
  <input type="submit" value="Submit">
  <input type="reset" value="Reset">
</form>
```

Output Preview :

Name :

Email :

Password :

Gender : ☐ Male ☐ Female

Hobbies : ☐ Coding ☐ Reading

Comments :

Key Points

- <form> tag creates a form.
- action attribute specifies where data is sent.
- method can be GET or POST.
- Various input types are used to collect data.

Interview Question

Q. What is the use of <form> tag?

Ans : The <form> tag is used to create an HTML form to collect user input.



HTML FULL COURSE NOTES

Page No.
12

12. MULTIMEDIA IN HTML

HTML allows us to add multimedia elements like images, audio and video.

A. Image

Syntax :

```

```

Attributes :

- src = Image source
- alt = Alternative text
- width = Width of image
- height = Height of image

Example :

```

```

B. Audio

Syntax :

```
<audio controls>
  <source src="audio.mp3" type="audio/mpeg">
  Your browser does not support audio.
</audio>
```


Example :

```
<audio controls>
  <source src="song.mp3" type="audio/mpeg">
  Your browser does not support audio.
</audio>
```

Attributes :

- controls = Adds audio controls (play, pause, etc.)
- autoplay = Plays audio automatically
- loop = Loops the audio
- muted = Mutes the audio

Output Preview :



C. Video

Syntax :

```
<video width="400" controls>
  <source src="video.mp4" type="video/mp4">
  Your browser does not support video.
</video>
```


Example :

```
<video width="400" controls>
  <source src="movie.mp4" type="video/mp4">
  Your browser does not support video.
</video>
```

Attributes :

- controls = Adds video controls
- width = Sets video width
- autoplay = Plays video automatically
- loop = Loops the video
- muted = Mutes the video

Output Preview :

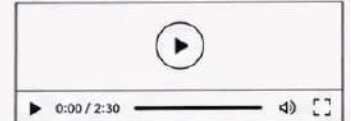

Key Points

- adds images.
- <audio> adds sound.
- <video> adds video.
- Always provide fallback text.

Practice Task

Add an image, an audio file and a video file in a single HTML page.



HTML FULL COURSE NOTES

Page No.
13

13. SEMANTIC HTML

Semantic HTML means using tags that clearly describe their meaning.

A. Common Semantic Tags

Tag	Description	Use
<header>	Represents the header of a section or page	Logo, title, navigation
<nav>	Defines navigation links	Menu, links
<main>	Specifies the main content of the document	Main section
<section>	Defines a section in a document	Chapters, sections
<article>	Represents independent content	Blog post, news
<aside>	Defines content aside from the content	Sidebar, ads
<footer>	Represents the footer of a section or page	Footer info, copyright

Note :
Semantic tags help in SEO, accessibility and make code more readable.



B. Example

```
<header>
  <h1>My Website </h1>
</header>
<nav>
  <a href="#">Home </a> | <a href="#">About </a> | <a href="#">Contact </a>
</nav>
<main>
  <section>
    <h2>About Us </h2>
    <p>We provide quality education. </p>
  </section>
  <article>
    <h2>Latest News </h2>
    <p>Our new course is launched! </p>
  </article>
  <aside>
    <h3>Quick Links </h3>
    <p><a href="#"> Privacy Policy </a> </p>
  </aside>
</main>
<footer>
  <p>© 2025 My Website. All rights reserved. </p>
</footer>
```

Output (Layout Idea)

My Website	
Home About Contact	
About Us (Main Content)	Quick Links (Aside)
Latest News (Article)	
© 2025 My Website. (Footer)	

Key Points

- Semantic tags describe meaning.
- Improves SEO.
- Better for accessibility.
- Code is more readable and organized.



Interview Question

Q. What is semantic HTML?

Ans: Semantic HTML uses tags that clearly describe the meaning of the content.



Practice Task

Create a simple webpage using all the semantic tags shown above.



HTML FULL COURSE NOTES

Page No.
14

14. HTML5 NEW FEATURES

HTML5 introduced many new features.

A. New Semantic Elements

- <header> - Defines a header for a document or section
- <footer> - Defines a footer for a document or section
- <nav> - Defines navigation links
- <section> - Defines a section in a document
- <article> - Defines independent, self-contained content
- <aside> - Defines content aside from the content
- <details> - Defines additional details that user can open/close
- <summary> - Defines a visible heading for <details>
- <figure> - Specifies self-contained content like images
- <figcaption> - Defines a caption for <figure>

These elements give better structure and make the code SEO friendly.



B. New Input Types in HTML5

Input Type	Use	Example
email	For email addresses	<input type="email">
tel	For telephone numbers	<input type="tel">
date	For date selection	<input type="date">
time	For time selection	<input type="time">
datetime-local	For date and time	<input type="datetime-local">
month	For month and year	<input type="month">
week	For week and year	<input type="week">
number	For numeric input	<input type="number">
range	For value in a range	<input type="range">
color	For color picker	<input type="color">
search	For search field	<input type="search">

C. Other HTML5 Features

- Video and Audio support using <video> and <audio> tags.
- Canvas for graphics using <canvas> tag.
- Local Storage and Session Storage.
- Geolocation API.
- Drag and Drop.
- Offline Web Applications.

Example: <video> Tag

```
<video width="320" controls>
  <source src="video.mp4" type="video/mp4">
  Your browser does not support video.
</video>
```


Output Preview:



Example: <audio> Tag

```
<audio controls>
  <source src="song.mp3" type="audio/mpeg">
  Your browser does not support audio.
</audio>
```

Output Preview:



Key Points

- HTML5 provides new semantic tags for better structure.
- New input types improve user experience.
- Multimedia is easier in HTML5.



Interview Question

Q. What are new input types in HTML5?

Ans: email, tel, date, time, number, range, color, search etc.



Practice Task

Create a form using at least 5 new input types in HTML5.



HTML FULL COURSE NOTES

Page No. 9

9. TABLES IN HTML

Tables are used to display data in rows and columns.

A. Basic Table Syntax

```
<table border="1">
<tr>
<th>Name </th>
<th>Age </th>
<th>City </th>
</tr>
<tr>
<td>Rahul </td>
<td>21 </td>
<td>Delhi </td>
</tr>
<tr>
<td>Sneha </td>
<td>20 </td>
<td>Mumbai </td>
</tr>
</table>
```

Output :

Name	Age	City
Rahul	21	Delhi
Sneha	20	Mumbai

Key Points

- <table> creates a table.
- <tr> creates a table row.
- <th> creates table header.
- <td> creates table data.
- border="1" adds border.

B. Table Attributes

Attribute	Description	Example
border	Adds border to table	<table border="1">
cellpadding	Space inside the cell	<table cellpadding="10">
cellspacing	Space between cells	<table cellspacing="5">
width	Sets width of table	<table width="500">
align	Aligns table	<table align="center">

C. Table with Cellpadding and Cellspacing

```
<table border="1" cellpadding="10" cellspacing="5"
width="400" align="center">
<tr>
<th>Product </th>
<th>Price </th>
<th>Quantity </th>
</tr>
<tr>
<td>Pen </td>
<td>10 </td>
<td>2 </td>
</tr>
</table>
```

Output :

Product	Price	Quantity
Pen	10	2

Interview Question

Q. What are table tags in HTML?

Ans : <table> is used to create table,
<tr> for rows, <th> for header
and <td> for data.

Practice Task

Create a table to store the following data.

Roll No.	Name	Marks
1	Aman	85
2	Priya	90
3	Karan	78

HTML FULL COURSE NOTES

Page No. 10

10. TABLES (ADVANCED)

A. Colspan (Column Span)

Colspan is used to merge two or more columns into a single column.

```
<table border="1">
<tr>
<th colspan="3">Student Details </th>
</tr>
<tr>
<th>Name </th>
<th>Age </th>
<th>City </th>
</tr>
<tr>
<td>Ravi </td>
<td>22 </td>
<td>Pune </td>
</tr>
</table>
```

Output :

Student Details		
Name	Age	City
Ravi	22	Pune

B. Rowspan (Row Span)

Rowspan is used to merge two or more rows into a single row.

```
<table border="1">
<tr>
<th>Subject </th>
<th>Marks </th>
</tr>
<tr>
<td rowspan="3">Computer </td>
<td>85 </td>
</tr>
<tr>
<td>90 </td>
</tr>
<tr>
<td>88 </td>
</tr>
</table>
```

Output :

Subject	Marks
Computer	85
	90
	88

Note :

We can use both rowspan and colspan together in a table.

C. Colspan and Rowspan Together

```
<table border="1">
<tr>
<th rowspan="2">ID </th>
<th colspan="2">Details </th>
</tr>
<tr>
<th>Name </th>
<th>Age </th>
</tr>
<tr>
<td>101 </td>
<td>Arjun </td>
<td>21 </td>
</tr>
</table>
```

Output :

ID	Details	
	Name	Age
101	Arjun	21

Important Point

Tables are used for displaying data only, not for layout design.



Practice Task

Create a table using rowspan and colspan to display your class time table.



HTML FULL COURSE NOTES

Page No.
7

7. IMAGES IN HTML

Images are used to add pictures on the webpage.

A. Basic Syntax

```
<img src = "image.jpg" alt = "Description of Image">
```

Image Source

Alternative Text

Note :

The tag is a self-closing tag. It does not have any closing tag.

B. Attributes of Tag

Attribute	Description	Example
src	Specifies the path of the image.	
alt	Provides alternative text if image cannot be loaded.	
width	Sets the width of the image.	
height	Sets the height of the image.	
title	Shows extra information about the image on hover.	

C. Examples

1. Basic Image

```
<img src = "nature.jpg" alt = "Nature Image">
```

2. Image with Width and Height

```
<img src = "nature.jpg" alt = "Nature Image" width = "400" height = "250">
```

3. Image with Title

```
<img src = "nature.jpg" alt = "Nature Image" title = "Beautiful Nature">
```

Important Points

- Always use alt attribute for images.
- Use width and height to control image size.
- Use title for extra information.
- Use appropriate image format like JPG, PNG, GIF, WEBP.

Common Image Formats

- JPG - For photos
- PNG - For graphics
- GIF - For animations
- WEBP - For better quality

HTML FULL COURSE NOTES

Page No.
8

8. LISTS IN HTML

Lists are used to display information in a list format.

A. Types of Lists

1. Ordered List - The list items are in a numbered format.
2. Unordered List - The list items are in bullet points.
3. Description List <dl> - The list items are in a description format.

B. Ordered List

```
<ol>  
<li> HTML </li>  
<li> CSS </li>  
<li> JavaScript </li>  
</ol>
```

Output :

1. HTML
2. CSS
3. JavaScript

We can change the numbering type using type attribute.
(1, A, a, I, i)

Example with type attribute

```
<ol type = "A">  
<li> HTML </li>  
<li> CSS </li>  
<li> JavaScript </li>  
</ol>
```

Output :

- A. HTML
- B. CSS
- C. JavaScript

C. Unordered List

```
<ul>  
<li> Apple </li>  
<li> Banana </li>  
<li> Mango </li>  
</ul>
```

Output :

- Apple
- Banana
- Mango

We can change the bullet style using type attribute.
(disc, circle, square)

Example with type attribute

```
<ul type = "square">  
<li> Apple </li>  
<li> Banana </li>  
<li> Mango </li>  
</ul>
```

Output :

- Apple
- Banana
- Mango

D. Description List

```
<dl>  
<dt> HTML </dt>  
<dd> It is a markup language. </dd>  
<dt> CSS </dt>  
<dd> It is used to design webpages. </dd>  
</dl>
```

Output :

HTML
It is a markup language.
CSS
It is used to design webpages.

Key Points

- = Ordered
- = Unordered
- <dl> = Description
- = List Item
- <dt> = Term
- <dd> = Description