

UNIVERSITY OF CALGARY

Characterization of Logging Usage:

An Application of Discovering Infrequent Patterns via anti-unification

by

Narges Zirkchianzadeh

A THESIS

SUBMITTED TO THE FACULTY OF GRADUATE STUDIES  
IN PARTIAL FULFILLMENT OF THE REQUIREMENTS FOR THE  
DEGREE OF MASTER OF SCIENCE

DEPARTMENT OF COMPUTER SCIENCE

CALGARY, ALBERTA

August, 2016

© Narges Zirkchianzadeh 2016

**UNIVERSITY OF CALGARY**  
**FACULTY OF GRADUATE STUDIES**

The undersigned certify that they have read, and recommend to the Faculty of Graduate Studies for acceptance, a thesis entitled “Characterization of Logging Usage: An Application of Discovering Infrequent Patterns via anti-unification” submitted by Narges Zirakchianzadeh in partial fulfillment of the requirements for the degree of MASTER OF SCIENCE.

---

Dr. Robert J. Walker  
Supervisor  
Department of Computer Science

---

Dr. Jörg Denzinger  
Examiner  
Department of Computer Science

---

Dr. Christian J Jacob  
Examiner  
Department of Computer Science

---

Date

# **Abstract**

## Acknowledgements

# Table of Contents

Abstract . . . . .	ii
Acknowledgements . . . . .	iii
Table of Contents . . . . .	iv
List of Tables . . . . .	vi
List of Figures . . . . .	vii
List of Symbols . . . . .	ix
1 Introduction . . . . .	1
1.1 Programmatic support for logging . . . . .	3
1.2 Broad thesis overview . . . . .	3
1.3 Thesis statement . . . . .	5
1.4 Thesis organization . . . . .	5
2 Motivational Scenario . . . . .	8
2.1 Summary . . . . .	12
3 Background . . . . .	15
3.1 Concrete syntax trees and abstract syntax trees . . . . .	15
3.2 First-order anti-unification . . . . .	18
3.3 Higher-order anti-unification modulo equational theories . . . . .	23
3.4 Eclipse JDT . . . . .	26
3.5 The Jigsaw framework . . . . .	29
3.6 Summary . . . . .	31
4 Determining Structural Correspondences . . . . .	33
4.1 Computing similarity . . . . .	33
4.2 Determining potential correspondences . . . . .	35
4.3 Constructing the AUAST . . . . .	36
4.4 The correspondence tool . . . . .	37
4.5 Evaluation . . . . .	39
4.5.1 Setup . . . . .	39
4.5.2 Results . . . . .	41
4.6 Summary . . . . .	43
5 Constructing Structural Generalization . . . . .	44
5.1 Determining best correspondences . . . . .	46
5.2 Computing similarity between AUASTs . . . . .	50
5.3 Constructing the anti-unifier . . . . .	51
5.4 The Anti-unifier building tool . . . . .	51
5.4.1 Constructing the detailed generalization view . . . . .	51
5.4.2 Java methods containing multiple logging calls . . . . .	54
5.5 Evaluation . . . . .	58
5.5.1 Setup . . . . .	58
5.5.2 Results . . . . .	59

5.6	Summary . . . . .	61
6	Clustering . . . . .	63
6.1	The hierarchical clustering algorithm . . . . .	64
6.2	Evaluaton . . . . .	66
6.2.1	Setup . . . . .	66
6.2.2	Results . . . . .	66
6.3	Summary . . . . .	67
7	Discussion . . . . .	68
7.1	Threats to validity . . . . .	68
7.2	The pitfalls of my tool . . . . .	69
7.2.1	Inaccurate node ordering . . . . .	69
7.2.2	Conflict resolution . . . . .	70
7.3	Applications of anti-unification . . . . .	70
7.4	Summary . . . . .	71
8	Related Work . . . . .	72
8.1	Usage of logging . . . . .	72
8.2	Correspondence . . . . .	74
8.3	API usages patterns . . . . .	74
8.4	Anti-unification . . . . .	75
8.5	Clustering . . . . .	76
8.6	Summary . . . . .	77
9	Conclusion . . . . .	79
9.1	Future Work . . . . .	80

## List of Tables

## List of Figures and Illustrations

1.1	Logging call examples from the log4j framework. . . . .	3
1.2	Overview of the approach. <b>[RW: I don't want to see mention of tools here. This should be focused on the concepts.]</b> . . . . .	6
2.1	The EditBus class. . . . .	10
2.2	The developer's initial determination of the usage of logging calls. . . . .	11
2.3	The developer's second determination of the usage of logging calls. . . . .	11
2.4	The developer's third determination of the usage of logging calls. . . . .	13
2.5	The developer's fourth determination of the usage of logging calls. . . . .	13
2.6	The developer's final determination of the usage of logging calls. . . . .	14
3.1	A simple example Java program. . . . .	16
3.2	The concrete syntax tree for the program of Figure 3.1. . . . .	17
3.3	The abstract syntax tree derived from the concrete syntax tree of Figure 3.2. . . . .	19
3.4	A more abstract AST derived from the concrete syntax tree of Figure 3.2. . . . .	20
3.5	Unification and anti-unification of the terms $f(X, b)$ and $f(a, Y)$ . . . . .	22
3.6	First-order anti-unification of the terms $f(a, b)$ and $g(a, b)$ . . . . .	23
3.7	Higher-order anti-unification of the terms $f(a, b)$ and $g(a, b)$ . . . . .	23
3.8	Higher-order anti-unification modulo theories of the terms $f(a, b)$ and $b$ . . . . .	24
3.9	Complex anti-unification of two structures demonstrating a NIL-theory. . . . .	25
3.10	Ambiguous higher-order anti-unification modulo theories of two terms. . . . .	25
3.11	Example 1: A Java method that uses a logging call. . . . .	27
3.12	Example 2: A Java method that uses a logging call. . . . .	27
3.13	Simple AST structure of the examples in Figures 3.11 and 3.12. . . . .	27
3.14	Simple CAST structure of the examples in Figures 3.11 and 3.12. . . . .	30
4.1	Simple CAST structure of the examples in Figures 3.11 and 3.12. . . . .	36
4.2	Anti-unification of the AUASTs of the logging calls in Examples 1 and 2. . . . .	38
4.3	Logged Java methods used as our test suite. . . . .	40
4.4	A similarity graph representing pairwise Jigsaw similarities between LJMs shown in Table 4.3. . . . .	42
4.5	Results from examining the Jigsaw similarity for 4 sample Java source code fragment pairs. . . . .	43
5.1	Overview of the anti-unification process. . . . .	45
5.2	Simple AUAST structure of examples in Figures 3.11 and 3.12. The links between AUAST nodes indicate structural correspondences selected as the best fit using the DETERMINE-BEST-CORRESPONDENCES algorithm. . . . .	49
5.3	Simple detailed view of the anti-unifier constructed from the AUASTs of the LJMs in Examples 1 and 2. . . . .	53
5.4	A Java method that utilizes multiple logging calls. . . . .	55
5.5	A Java method that utilizes multiple logging calls. . . . .	55



5.6	Simple AUAST structure of examples in Figures 5.4 and 5.5. Links between AUAST nodes indicate candidate structural correspondences detected by the Jigsaw framework. . . . .	56
5.7	Simple AUAST structure of examples in Figures 5.4 and 5.5. Links between AUAST nodes indicate structural correspondences selected as the best match using our greedy algorithm. . . . .	56
5.8	Create multiple copies of the LJM in Figure 5.4 for each logging call. . . . .	57
5.9	Create multiple copies of the LJM in Figure 5.5 for each logging call. . . . .	58
5.10	10 sample logged Java method pairs used as test cases. . . . .	60
5.11	Results of constructing anti-unifiers with a focus on logging calls for the 55 test cases. . . . .	60
5.12	A similarity graph representing pairwise similarities calculated by our tool between LJMs shown in Table 4.3. . . . .	61
6.1	The similarity matrix for a sample set of 5 AUASTs. . . . .	65
6.2	The agglomerative hierarchical clustering process on a sample set of 5 AUASTs using the initial similarity matrix shown in Figure 6.1. The threshold value indicates the number of clusters we will come up with. . . . .	65
6.3	Results from applying the clustering tool to the test suite described in Table 4.3 . . .	67

# List of Symbols, Abbreviations and Nomenclature

Abbreviation	Definition
AST	Abstract Syntax Tree
AU	Anti-unification
AUAST	Anti-unification Abstract Syntax Tree
HOAUMT	Higher-order Anti-unification Modulo Theories
LJM	Logged Java Method

# Chapter 1

## Introduction

Understanding the similarities and differences of a set of source code fragments is a potentially complex problem that has many actual or potential applications in various areas of software engineering, such as detecting code clones [Bulychev and Minea, 2009], automating source code reuse [Cottrell et al., 2008], recommending replacements for APIs among various versions of a software library [Cossette et al., 2014], collating application programming interface (API) usage patterns, and automating the merge operation of various branches in a version control system. As a specific application, the focus of this study is on characterizing where logging is used in source code via the determination of structural commonalities and differences of a set of source code fragments enclosing logging calls within a software system or from different software systems.

Logging is a conventional programming practice of recording an application's state and/or actions during the program's execution [Gupta, 2005], and log system analysis assist developers in diagnosing the presence or absence of a particular event, understanding the state of an application, and following a program's execution flow to find the root causes of an error. The importance of logging is notable in its various applications in software development and maintenance tasks such as problem diagnosis [Lou et al., 2010], system behavioural understanding [Fu et al., 2013], quick debugging [Gupta, 2005], performance diagnosis [Nagaraj et al., 2012], easy software maintenance [Gupta, 2005], and troubleshooting [Fu et al., 2009].

In practice, logging tasks can be performed in various ways, as developers may make different decisions about where and what to log. For example, they can apply logging to record the occurrence of every event of an application and so, they use logging calls at the start and end of the body of every method in the source code [Clarke et al., 1999a,b]. However, three main problems are associated with excessive logging. First, it can generate redundant information that might be

confusing and misleading for developers performing system log analysis, as it masks significant information. Second, excessive logging is costly. It requires extra time and effort to write, debug, and maintain the logging code. Third, it can generate system resource overhead and thus the application performance will be negatively affected. On the other hand, insufficient logging may result in the loss of run-time information necessary for software analysis. Therefore, logging should be done in an appropriate manner to be effective.

Despite the importance of logging for software development and maintenance, few studies have been conducted on understanding logging usage in real-world applications, since logging has been considered to be a trivial task [Clarke et al., 1999a,b]. However, the availability of several complex frameworks (e.g., log4j, SLF4J) that assist developers to log suggests that in practice effective logging is not a straightforward task to perform. In addition, a study by Yuan et al. [2012b] showed that developers expend great effort in modifying their logging practices as an afterthought. This indicates that it is not that simple for developers to perform logging efficiently on their first attempt.

Research on the problem of characterizing logging practices can be divided into two main topics: context and location of logging calls. The context refers to the log text messages and the location refers to where logging calls are used in the source code. A few studies have been conducted on characterizing log message modifications [Yuan et al., 2012b] and developing tools to automatically enhance the context of existing logging calls [Yuan et al., 2012c, 2010]. However, no research has been conducted on studying the location of logging calls in real-world software systems, though it has a great impact on the quality of logging as it helps developers to trace the code execution path to identify the root causes of an error for log system analysis. Through this research, I address this gap by developing an automated approach to detecting the detailed structural similarities and differences in the usage of logging, both within a system and between systems.

## 1.1 Programmatic support for logging

A typical logging call takes parameters including a log text message and a verbosity level. A log text message consists of static text to describe the logged event and some optional variables related to the event. The verbosity level is intended to classify the severity of a logged event such as a debugging note, a minor issue, or a fatal error. Figure 1.1 provides examples of logging calls from the log4j framework in descending order of severity. The fatal level designates a very severe error event that will likely lead the application to terminate. The error level indicates that a non-fatal but clearly erroneous situation has occurred. The warn level indicates that the application has encountered a potentially harmful situation. The info level designates important information that might be helpful in detecting root causes of an error or in understanding the application behaviour. The debug level provides useful information for debugging an application, and it is usually used by developers only during the development phase. In general, verbosity level is used for classification, in order to avoid the overhead of creating large log files in high performance code.

```
log.fatal("Fatal Message %s", variable);  
log.error("Error Message %s", variable);  
log.warn("Warn Message %s", variable);  
log.info("Info Message %s", variable);  
log.debug("Debug Message %s", variable);
```

Figure 1.1: Logging call examples from the log4j framework.

## 1.2 Broad thesis overview

I aim to create an approach that provides a concise description of where logging is used in the source code by constructing generalizations that represent the detailed structural similarities and differences between entities that make logging calls, which I call *logged methods* (LMs). In order

to evaluate this idea, I implement the approach to operate on programs written in the Java programming language; my study investigates the location of logging calls from the point of view of logged methods. To determine how to construct generalizations using the syntax and semantics of the Java programming language, I looked to previous research conducted by Cottrell et al. [2008] that determined the detailed structural correspondences between two Java source code fragments through the application of approximated anti-unification, such that one fragment can be integrated with the other one for small-scale code reuse. However, my problem context is different, as I need to generalize a set of source code fragments with special attention to logging calls. Therefore, my approach must take the logging calls into account when I perform the generalization task via the determination of structural correspondences.

**[RW: Your research is not about implementing a tool. Your research is about developing an approach, a concept, which you then implement in order to perform experiments. The concept does not depend on Java, or the JDT, or Jigsaw: these are implementation-level choices. If your implementation contains bugs, this does not immediately reflect on the concept. If the concept has bugs, this will be reflected in the implementation.]** My approach to characterizing logging usage proceeds in four steps (as shown in Figure 1.2). First, potential structural correspondences are determined between the abstract syntax trees (ASTs) of LMs in a pairwise manner, and stored in a novel structure: the *anti-unifier AST* (AUAST), which allows the application of anti-unification on AST structures.

Second, I use an approximated anti-unification algorithm to construct a structural generalization (an anti-unifier) representing the commonalities and differences between AUAST pairs, which employs a greedy selection algorithm to approximate the best anti-unifier for the problem by determining the most similar correspondence for each node. The anti-unification algorithm applies some constraints prior to determining the best correspondences, in order to prevent the anti-unification of logging calls with any other type of nodes in the tree structure. The anti-unifier is constructed through the anti-unification of each AUAST node with its best correspondences and then a mea-

sure of structural similarity is developed between the two AUASTs. **[RW: Is there no separate chapter on this?]** [NZ: NO, THEY ARE ALL EXPLAINED IN CHAPTER 5]

In the third step, I employ a hierarchical clustering algorithm to group the AUASTs into clusters using the structural similarity measure and I then create a structural generalization from each cluster. This step is realized by my clustering tool (Chapter 6).

The last step involves analyzing the structural generalizations to extract logging usage schemas that represent the structural commonalities of the set of LMs within each cluster.

To evaluate the approach, I implemented it in a tool written in the Java programming language. I use the Eclipse JDT framework to extract the AST of LMs from a Java program. My correspondence tool (Section 4.4) is employed to create AUASTs, and my anti-unifier tool (built atop the Jigsaw framework) is applied to find potential correspondence connections between AUAST nodes (Section 5.4).

### 1.3 Thesis statement

The thesis of this work is that the detailed structural similarities and differences between source code that makes use of logging calls can be determined via higher-order anti-unification modulo theories, providing a concise and accurate description of where logging calls do occur in real-world software systems.

### 1.4 Thesis organization

The remainder of the thesis is organized as follows.

Chapter 2 motivates the problem of understanding where to use logging calls in source code through a scenario in which a developer attempts to perform a logging task. This scenario outlines the potential problems she may encounter and illustrates that the current logging practice is insufficiently supported.

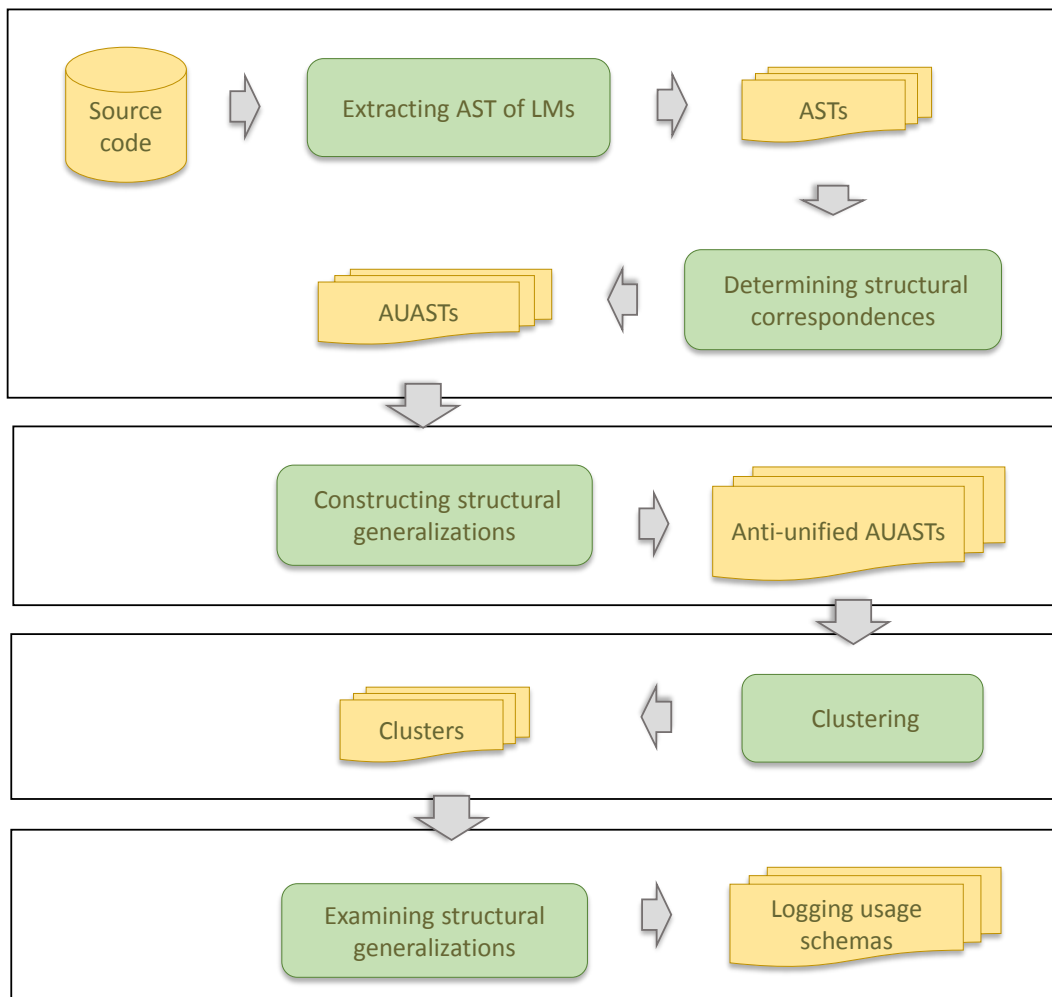


Figure 1.2: Overview of the approach. **[RW: I don't want to see mention of tools here. This should be focused on the concepts.]**

Chapter 3 provides background information that I build atop: abstract syntax trees (ASTs), which are the basic structure I will use for describing software source code; anti-unification, which is a theoretical approach for determining similarities and differences in tree structures; the Eclipse JDT, an industrial framework for producing and manipulating ASTs for source code written in the Java programming language; and on Jigsaw, a research tool based on the Eclipse JDT for performing anti-unification.

**[RW: This chapter needs to be clearer about what is new and what is not. By moving all background to the earlier chapter, this is better but not quite good enough. You can**



**then have this chapter be explicit about what you added and you can have the reader be less lost in the details. Currently, you start the chapter with an algorithm that they cannot possibly understand because you have not yet explained the background. That's bad. With the structure I specified above, the background will all be in the previous chapter. Now, the reader will be able to appreciate what you are trying to do. The following description will need to be modified.]**

Chapters 4, 5, and 6 present the first three steps of my approach to determining structural correspondences between AUASTs, constructing structural generalizations from an AUAST pair, and classifying a set of AUASTs into separate clusters, respectively. In each chapter, I discussed the implementation of my approach as an Eclipse plug-in, and conducted an experimental study to assess the effectiveness of my approach through the application of its tool support on a sample test suite extracted from a real software system.

Chapter ?? presents an empirical study I conducted to characterize the location of logging usage in three open-source software systems. Chapter 7 discusses the results and findings of my work, threats to its validity, and the remaining issues. Chapter 8 describes work related to my research problem and how it does not adequately address the problem. Chapter 9 concludes the dissertation and presents the contributions of this study and future work.

## Chapter 2

### Motivational Scenario

Printing messages to the console or to a log file is an integral part of software development and can be used to test, debug, and understand what is happening inside an application. In Java programming language, print statements are commonly used to print something on console. However, the availability of tools, frameworks, and APIs for logging that offers more powerful and advanced Java logging features, flexibility, and improvement in logging quality suggests that using print statements is not sufficient for real-world applications.

The logging framework offers many more features that are not possible using print statements. In most logging frameworks (e.g., log4j, SLF4j, java.util.logging), different verbosity levels of logging are available for use. That is, by logging at a particular log level, messages will get logged for that level and all levels above it and not for the levels below. As an example, debug log level messages can be used in a test environment, while error log level messages can be used in a production environment. This feature not only produces fewer log messages for each level, but also improves the performance of an application. In addition, most logging frameworks allow the production of formatted log messages, which makes it easier for a developer to monitor the behaviour of a system. Furthermore, when one is working on a server side application, the only way to know what is going on inside the server is by monitoring the log file. Although logging is a valuable practice for software development and maintenance, it imposes extra time and energy on developers to write, test, and run the code, while affecting the application performance. As latency and speed are major concerns for most software systems, it is necessary for a developer to understand and learn logging in great detail in order to perform it in an efficient manner.

To illustrate the inherent challenges of effectively performing logging practices in software systems, one may consider a scenario in which a developer is asked to log an event-based mechanism

of a text editor tool written in the Java programming language. In this scenario, the developer is trying to log a Java class of this system (Figure 2.1) using the log4j logging framework. She knows that components of this application register with the `EditBus` class to receive messages that reflect changes in the application's state, and that the `EditBus` class maintains a list of components that have requested to receive messages. That is, when a message is sent using this class, all registered components receive it in turn. Furthermore, any classes that subscribe to the `EditBus` and implement the `EBComponent` interface define the method `EBComponent.handleMessage(EBMessage)` to handle a message sent on the `EditBus`. To perform this logging task, the developer might ask herself several fundamental questions, mostly related to where and what to log.

Her first solution might be to simply log at the start and end of every method. However, she believes that logging at the start and end of the `addToBus(EBComponent)`, `removeFromBus(EBComponent)`, and `getComponents()` methods are useless, and will produce redundant information. She assumes that the more she logs, the more she performs file I/O, which slows down the application. Therefore, she decides to log only important information necessary to debug or troubleshoot potential problems. She proceeds to identify the information needed to be logged and then decides on where to use logging calls. She thinks that it is important to log the information related to a message sent to a registered component, including the message content and the transmission time, to find the root causes of potential errors in sending messages. She simply wants to begin by using a logging call at the start of the `send()` method (line 2 of Figure 2.2) to log the information. However, she realizes that this logging call does not allow her to log the information she wants, as the time variable is not initialized at the beginning of this method. Therefore, she proceeds to examine the body of the `send()` method line-by-line and uses another logging call after the time variable is initialized inside an **if** statement that checks that the value of the variable `time` is not invalid (shown in lines 9–11 of Figure 2.3).

She also believes that it is important to log an error if any problems occur in sending messages to the components. She decides to use a **try/catch** statement, as it is a common way to handle ex-

```

1 public class EditBus {
2     private static ArrayList components = new ArrayList();
3     private static EBComponent[] copyComponents;
4
5     private EditBus() {
6     }
7
8     public static void addToBus(EBComponent comp) {
9         synchronized(components) {
10             components.add(comp);
11             copyComponents = null;
12         }
13     }
14
15     public static void removeFromBus(EBComponent comp) {
16         synchronized(components) {
17             components.remove(comp);
18             copyComponents = null;
19         }
20     }
21
22     public static EBComponent[] getComponents() {
23         synchronized(components) {
24             if (copyComponents == null) {
25                 EBComponent[] arr = new EBComponent[components.size()];
26                 copyComponents =
27                     (EBComponent[])components.toArray(arr);
28             }
29         }
30         return copyComponents;
31     }
32
33     public static void send(EBMessage message) {
34         EBComponent[] comps = getComponents();
35         for(int i = 0; i < comps.length; i++) {
36             EBComponent comp = comps[i];
37             long start = System.currentTimeMillis();
38             comp.handleMessage(message);
39             long time = (System.currentTimeMillis() - start);
40         }
41     }
42 }

```

Figure 2.1: The EditBus class.

```

1 public static void send(EBMessage message){
2     //logging call
3     EBComponent[] comps = getComponents();
4     for (int i = 0; i < comps.length; i++) {
5         EBComponent comp = comps[i];
6         long start = System.currentTimeMillis();
7         comp.handleMessage(message);
8         long time = (System.currentTimeMillis() – start);
9     }
10 }

```

Figure 2.2: The developer’s initial determination of the usage of logging calls for the send(EBMessage) method.

```

1 public static void send(EBMessage message) {
2     // logging call
3     EBComponent[] comps = getComponents();
4     for(int i = 0; i < comps.length; i++) {
5         EBComponent comp = comps[i];
6         long start = System.currentTimeMillis();
7         comp.handleMessage(message);
8         long time = (System.currentTimeMillis() – start);
9         if (time != 0){
10             // logging call
11         }
12     }
13 }

```

Figure 2.3: The developer’s second determination of the usage of logging calls for the send(EBMessage) method.

ceptions in the Java programming language. She creates a **try/catch** block to capture the potential failure in sending messages, and uses a logging call inside the **catch** block to log the exception (shown in lines 2–16 of Figure 2.4). However, she realizes that using this logging call will not allow her to reach the desired functionality, as it does not reveal to which component the problem is related. Thus, she decides to relocate the **try/catch** block inside the **for** statement to log an error in case of a problem in sending messages to any components (shown in lines 5–15 of Figure 2.5).

Figure 2.6 shows the developer’s final determination to use logging calls to perform the logging task of the EditBus class. By making appropriate decisions about where to use logging calls, the developer is in a good position to proceed to write the logging messages by examining the remaining conceptually complex questions. What specific information should I log? How should I choose the log message format? Which information goes to which level of logging? If the developer had reached this point more easily and quickly, she would have had more time and energy to make decisions about the remaining issues and could have completed the logging practice in a timely and appropriate manner.

## 2.1 Summary

This motivational scenario highlights the problems a developer may encounter in performing a logging task. The core problem she faces in this scenario is the difficulty in understanding where to use logging calls that enable her to log the desired information. However, having an understanding of how developers usually log in similar situations might assist her to make informed decisions about where to use logging calls more quickly, and so she could pay more attention to the remaining, conceptually complex issues to complete the logging task.

```

1 public static void send(EBMessage message){
2     try {
3         // logging call
4         EBComponent[] comps = getComponents();
5         for(int i = 0; i < comps.length; i++) {
6             EBComponent comp = comps[i];
7             long start = System.currentTimeMillis();
8             comp.handleMessage(message);
9             long time = (System.currentTimeMillis() - start);
10            if (time != 0){
11                // logging call
12            }
13        }
14    } catch(Throwable t) {
15        // logging call
16    }
17 }

```

Figure 2.4: The developer's third determination of the usage of logging calls for the send(EBMessage) method.

```

1 public static void send(EBMessage message) {
2     // logging call
3     EBComponent[] comps = getComponents();
4     for (int i = 0; i < comps.length; i++) {
5         try {
6             EBComponent comp = comps[i];
7             long start = System.currentTimeMillis();
8             comp.handleMessage(message);
9             long time = (System.currentTimeMillis() - start);
10            if (time != 0) {
11                // logging call
12            }
13        } catch(Throwable t) {
14            // logging call
15        }
16    }
17 }

```

Figure 2.5: The developer's fourth determination of the usage of logging calls for the send(EBMessage) method.

```

1 public class EditBus {
2     private static ArrayList components = new ArrayList();
3     private static EBComponent[] copyComponents;
4
5     private EditBus() {
6     }
7
8     public static void addToBus(EBComponent comp) {
9         synchronized(components) {
10             components.add(comp);
11             copyComponents = null;
12         }
13     }
14
15     public static void removeFromBus(EBComponent comp) {
16         synchronized(components) {
17             components.remove(comp);
18             copyComponents = null;
19         }
20     }
21
22     public static EBComponent[] getComponents() {
23         synchronized(components) {
24             if (copyComponents == null) {
25                 EBComponent[] arr = new EBComponent[components.size()];
26                 copyComponents = (EBComponent[])components.toArray(arr);
27             }
28         }
29         return copyComponents;
30     }
31
32     public static void send(EBMessage message) {
33         // logging call
34         EBComponent[] comps = getComponents();
35         for(int i = 0; i < comps.length; i++) {
36             try {
37                 EBComponent comp = comps[i];
38                 long start = System.currentTimeMillis();
39                 comp.handleMessage(message);
40                 long time = (System.currentTimeMillis() - start);
41                 if (time != 0) {
42                     // logging call
43                 }
44             } catch(Throwable t) {
45                 // logging call
46             }
47         }
48     }
49 }

```

Figure 2.6: The developer's final determination of the usage of logging calls for the EditBus class.



# Chapter 3

## Background

A programming language is described by the combination of its syntax and semantics. The syntax concerns the legal structures of programs written in the programming language, while the semantics is about the meaning of every construct in that language. Furthermore, the abstract syntactic structure of source code written in a programming language can be represented as an *abstract syntax tree* (AST), in which nodes are occurrences of syntactic structures and edges represent nesting relationships. Since ASTs will be the form in which we represent and analyze source code, we need a means to generalize sets of ASTs in order to understand their commonalities while abstracting away their differences. The theoretical framework of anti-unification is presented as that means.

In this chapter, ASTs are described in Section 3.1, along with their more concrete counterparts, concrete syntax trees. Anti-unification is summarized in Section 3.2, starting with its most basic form, first-order anti-unification, and progressing to the form that we will make use of, higher-order anti-unification modulo equational theories. A specific, industrial framework for creating and manipulating ASTs for source code written in the Java programming language — the Eclipse JDT — is described in Section 3.4. A research approach, built atop the Eclipse JDT, for performing anti-unification on Java ASTs — the Jigsaw framework — is described in Section 3.5.

### 3.1 Concrete syntax trees and abstract syntax trees

A concrete syntax tree is a tree (i.e., a kind of graph)  $T = (V, E)$  whose vertices  $V$  (equivalently, nodes) represent the syntactic structures (equivalently, syntactic elements) of a specific program written in a specific programming language and whose directed edges  $E$  represent the nesting relationships amongst those syntactic structures. Non-leaf nodes in a concrete syntax tree (also called a parse tree) represent the grammar productions that were satisfied in parsing the program it

```

1 public class HelloWorld {
2     public static void main(String[] args) {
3         System.out.println("Hello world!");
4     }
5 }

```

Figure 3.1: A simple example Java program.

represents; leaf nodes represent the concrete lexemes, such as literals and keywords.

We focus on the Java programming language and we make use of the grammar in the language specification [Gosling et al., 2012, Chapter 18] to determine the form of the concrete syntax trees. Non-leaf node names are represented by names in “camel-case” written in *italics*. Consider the trivial program in Figure 3.1; its concrete syntax tree is represented in Figure 3.2.

Beyond the fact that the concrete syntax tree is rather verbose and thus occupies a lot of space even for a trivial example, we can see two key problems with it: (1) there are a multitude of redundant nodes such as *expression1*, *expression2*, and *expression3* that are present solely for purposes of creating an unambiguous grammar; and (2) there are no nodes that express the concepts of “method declaration” and “method invocation” that should be obviously present in the example program.

To address these problems, concrete syntax trees are converted to abstract syntax trees (ASTs). An AST is similar in concept to a concrete syntax tree but it does not generally represent the parsing steps typed to differentiate different kinds of syntactic structure. The node types are chosen to represent syntactical concepts; we use the grammar presented for exposition by Gosling et al. [2012], which differs markedly from the grammar they propose in Chapter 18 for efficient parsing. Note that a given node type constrains the kinds and numbers of child nodes that it possesses. The AST derived from the concrete syntax tree of Figure 3.2 is shown in Figure 3.3. Note that, although we know that (for any normal program), `System` refers to the class `java.lang.System` and `out` is a static field on that class; however, non-normal programs can occur and a pure syntactic analysis cannot rule out that `System` is a package and that `out` is a class therein declaring a static method



Figure 3.2: The concrete syntax tree for the program of Figure 3.1.

`println (String).`

This is still verbose, so in practice we elide details that are implied or otherwise trivial, to arrive at a more abstract AST as shown in Figure 3.4.

## 3.2 First-order anti-unification

This section defines terms, substitutions, applying a substitution to a term, and instances and anti-instances of a term, as the requirements needed to describe anti-unification theory (and its dual, unification theory).

**Definition 3.2.1** (Term). A term is defined to be a variable, a constant, or a function symbol followed by a list of terms as the arguments of the function. [Note that function symbols without the subsequent list of terms do not constitute terms.]

Function symbols taking  $n$  arguments are called  $n$ -ary function symbols; 0-ary function symbols are called constants. The identifiers starting with a lowercase letter are used to represent function symbols (e.g.,  $f(a, b)$ ,  $g(a, b)$ ) and constants (e.g.,  $a$ ,  $b$ ), while variables are represented by identifiers starting with an uppercase letter (e.g.,  $X$ ,  $Y$ ). The following are examples of a term:

- $Y$
- $a$
- $f(X, c)$
- $f(g(X, b), Y, g(a, Z))$

Note that for any term there is a unique, equivalent tree and vice versa: constants and (first-order) variables are leaf nodes, while function symbols are non-leaf nodes; a function with given arguments is represented by a non-leaf node (representing the function symbol) with directed edges pointing to leaf nodes representing each argument. For example:

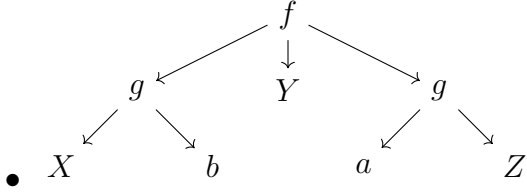


Figure 3.3: The abstract syntax tree derived from the concrete syntax tree of Figure 3.2.



Figure 3.4: A more abstract AST derived from the concrete syntax tree of Figure 3.2.

- $Y$
- $a$
- $X \leftarrow f \rightarrow c$



**Definition 3.2.2** (Substitution). A substitution is a set of mappings, each from a variable to a term.

[RW: Note that this definition will not work for higher-order AU.]

**Definition 3.2.3** (Applying a substitution). Applying a substitution to a term results in the replacement of all occurrences of each variable in the term, by its corresponding term as defined in the substitution.

As an example, applying the substitution  $\Theta = (X \rightarrow a, Y \rightarrow b)$  to the term  $f(X, Y)$  results in the replacement of all occurrences of the variable  $X$  by the term  $a$  and all occurrences of the variable  $Y$  by the term  $b$ , and thus  $f(X, Y) \xrightarrow{\Theta} f(a, b)$ .

**Definition 3.2.4** (Instance & anti-instance).  $a$  is an instance of a term  $X$  and  $X$  is an anti-instance of  $a$ , if there is a substitution  $\Theta$  such that the application of  $\Theta$  on  $X$  results in  $a$  ( $X \xrightarrow{\Theta} a$ ).

**Definition 3.2.5** (Unifier). A unifier is a common instance of two given terms.

Unification usually aims to create the *most general unifier* (MGU); that is,  $U$  is the MGU of two terms such that for all unifiers  $U'$  there exists a substitution  $\Theta$  such that  $U \xrightarrow{\Theta} U'$ . Unification aims to make a more concrete structure in essence, whereas what we need is a more generalized structure, which leads to the use of the dual of unification, called *anti-unification*.

**Definition 3.2.6** (Anti-unifier).  $X$  is an anti-unifier (or generalization) for  $a$  and  $b$ , if  $X$  is an anti-instance for  $a$  and an anti-instance for  $b$  under substitutions  $\Theta_1$  and  $\Theta_2$ , respectively ( $X \xrightarrow{\Theta_1} a$  and  $X \xrightarrow{\Theta_2} b$ ).

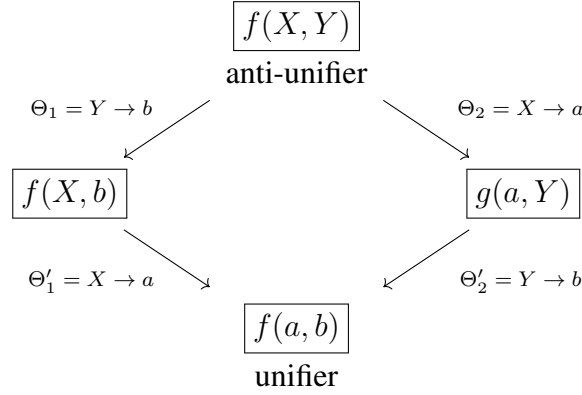


Figure 3.5: Unification and anti-unification of the terms  $f(X, b)$  and  $f(a, Y)$ .

An anti-unifier contains common pieces of the original terms, while the differences are abstracted away using variables. An anti-unifier for a pair of terms always exists since we can anti-unify any two terms by the anti-instance  $X$ , i.e., a single variable. However, anti-unification usually aims to find the *most specific anti-unifier* (MSA), that is,  $A$  is the MSA of two structures where there exists no anti-unifier  $A'$  such that  $A \xrightarrow{\Theta} A'$ .

As an example, the anti-unifier of two given terms  $f(X, b)$  and  $f(a, Y)$  is the new term  $f(X, Y)$ , containing common pieces of the two original terms. The variable  $Y$  in the anti-unifier  $f(X, Y)$  can be substituted by the term  $b$  to re-create  $f(X, b)$  (with  $\Theta_1 = Y \rightarrow b$ ) and the variable  $X$  in the anti-unifier can be substituted by the term  $a$  to re-create  $f(a, Y)$  (with  $\Theta_2 = X \xrightarrow{\Theta} a$ ), as depicted in Figure 3.5. In addition, the unifier  $f(a, b)$  of the two terms can be instantiated by applying the substitutions  $\Theta'_1 = X \xrightarrow{\Theta} a$  and  $\Theta'_2 = Y \xrightarrow{\Theta} b$  on the terms  $f(X, b)$  and  $f(a, Y)$ , respectively.

The MSA should preserve as much of common pieces of both original terms as possible; however, first-order anti-unification fails to capture complex commonalities as it restricts substitutions to only replace first-order variables by terms. That is, when two terms differ in function symbols, first-order anti-unification fails to capture common details of them. For example, the first-order anti-unifier of the terms  $f(a, b)$  and  $g(a, b)$  is  $X$  as depicted in Figure 3.6.

Higher-order anti-unification would allow us to create the MSA by extending the set of possible



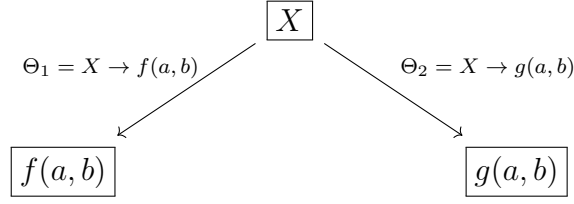


Figure 3.6: First-order anti-unification of the terms  $f(a, b)$  and  $g(a, b)$ .

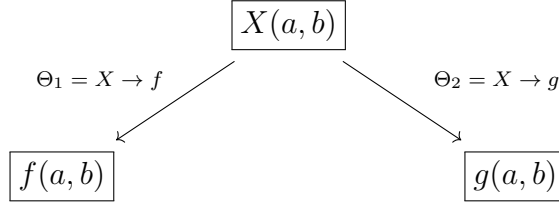


Figure 3.7: Higher-order anti-unification of the terms  $f(a, b)$  and  $g(a, b)$ .

substitutions such that variables can be replaced not only by terms but also by function symbols in order to retain the detailed commonalities. For example, the higher-order anti-unifier of the terms  $f(a, b)$  and  $g(a, b)$  is  $X(a, b)$  as depicted in Figure 3.7.

### 3.3 Higher-order anti-unification modulo equational theories

In higher-order anti-unification modulo (equational) theories, a set of equational theories, which treat different structures as equivalent, is defined to incorporate background knowledge. Each equational theory  $=_E$  determines which terms are considered equal and a set of these equations can be applied on higher-order extended structures to determine structural equivalences. For example, we have introduced an equivalence equation  $=_E$ , such that  $f(X, Y) =_E f(Y, X)$  to indicate that the ordering of arguments does not matter in our context.

We have also introduced a theory, called NIL-theory, that adds the concept of a NIL structure, which permits a structure to be equated with nothing, and defines an equivalence equation  $=_E$  for it. The NIL structure can be used to anti-unify two structures when a substructure exists in one but is missing from the other. However, some requirements should be taken to avoid the overuse of NIL structures such that the original structures must have common substructures but vary in the

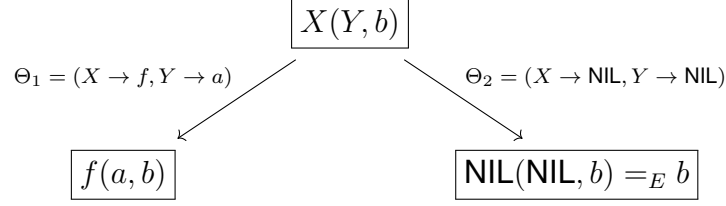


Figure 3.8: Higher-order anti-unification modulo theories of the terms  $f(a, b)$  and  $b$ .

size for dissimilar substructures. For example, we can anti-unify the two structures  $b$  and  $f(a, b)$  through the application of NIL-theory by creating the term  $\text{NIL}(\text{NIL}, b)$  which is  $=_E$  to  $f(b)$  and anti-unifying  $\text{NIL}(\text{NIL}, b)$  with  $f(a, b)$  as depicted in Figure 3.8.

We have also defined a set of equivalence equations to incorporate semantic knowledge of structural equivalences supported by the Java language specification, as it provides various ways to define the same language specifications. These theories should be applied on higher-order extended structures to anti-unify AST structures that are not identical but are semantically equivalent. For example, consider **for**- and **while**-statements that are two types of looping structure in Java programming language: they have different syntax but semantically cover the same concept. Let us look at the code snippets **for**( $i=0; i<10; i++$ ) and **while**( $i<10$ ), whose ASTs can be represented as **for**(*Initializer*( $i, 0$ ); *lessThanExpression*( $i, 10$ ); *updaters*(*postIncrementExpression*( $i$ ))) and **while**(*lessThanExpression*( $i, 10$ )), respectively. We could define an equivalence equation  $=_E$  that allows the anti-unification of **for**- and **while**-statements. We also need to utilize the NIL-theory to handle the varying number of arguments as the **for**-loop has three arguments whereas the **while**-loop only has one. Using the NIL-theory we can create the structure **while**( $\text{NIL}(\text{NIL}, \text{NIL}), \text{lessThanExpression}(i, 10), \text{NIL}(\text{NIL}, \text{NIL}))$  that is  $=_E$  to **while**(*lessThanExpression*( $i, 10$ )) and construct the anti-unifier,  $V_0(V_1(V_2, V_3), \text{lessThanExpression}(i, 10), V_4(V_5(V_2)))$ , as depicted in Figure 3.9.

However, defining complex substitutions in higher-order anti-unification modulo theories results in losing the uniqueness of the MSA. For example, consider the terms  $f(g(a, e))$  and  $f(g(a, b), g(d, e))$ . As described in Figure 3.10, two MSAs exist for these terms: we can anti-unify  $g(a, e)$  and  $g(a, b)$  to create the anti-unifier  $g(a, X_0)$  and anti-unify  $g(d, e)$  with the NIL structure to create

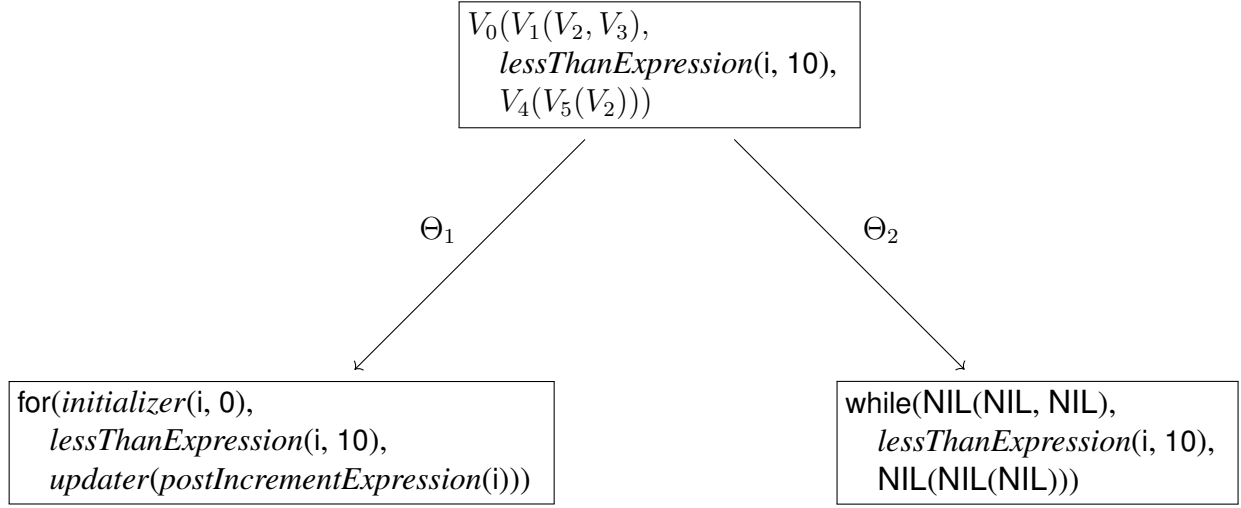


Figure 3.9: Anti-unification of the structures **for**(*initializer*(*i*, 0), *lessThanExpression*(*i*, 10), *updater*(*postIncrementExpression*(*i*))) and **while**(*NIL*(*NIL*, *NIL*), *lessThanExpression*(*i*, 10), *NIL*(*NIL*, *NIL*)). The substitutions are defined as follows:  $\Theta_1 = (V_0 \rightarrow \text{for}, V_1 \rightarrow \text{initializer}, V_2 \rightarrow i, V_3 \rightarrow 0, V_4 \rightarrow \text{updater}, V_5 \rightarrow \text{postIncrementExpression})$ ; and  $\Theta_2 = (V_0 \rightarrow \text{while}, V_1 \rightarrow \text{NIL}, V_2 \rightarrow \text{NIL}, V_3 \rightarrow \text{NIL}, V_4 \rightarrow \text{NIL}, V_5 \rightarrow \text{NIL})$

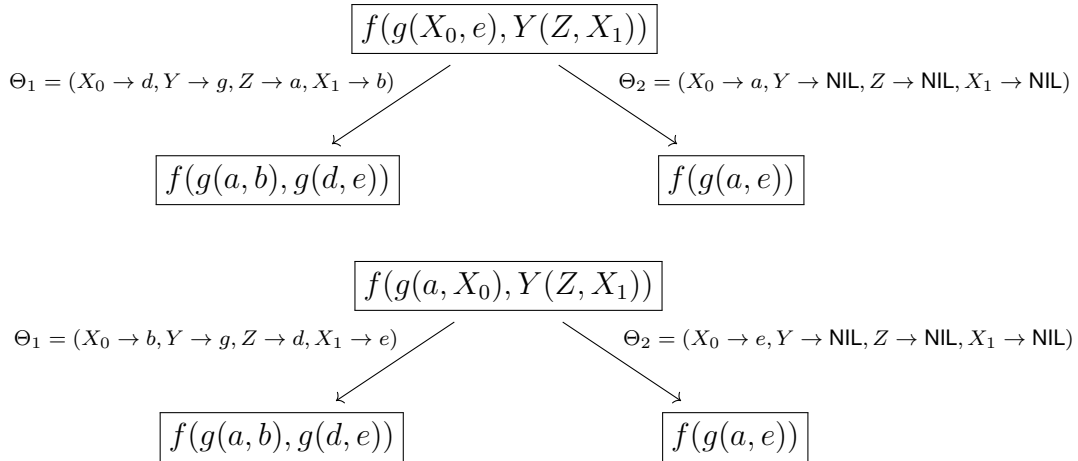


Figure 3.10: Ambiguous higher-order anti-unification modulo theories of the terms  $f(g(a, b), g(d, e))$  and  $f(g(a, e))$ , creating multiple MSAs.

the anti-unifier  $Y(Z, X_1)$ ; or we can anti-unify  $g(a, e)$  and  $g(d, e)$  to create the anti-unifier  $g(X_0, e)$  and anti-unify  $g(a, b)$  with the NIL structure to create the anti-unifier  $Y(Z, X_1)$ .

Despite having multiple potential MSAs, we need to determine one single MSA that is the most appropriate in our context. However, the complexity of finding an optimal MSA is undecidable in general [Cottrell et al., 2008] since an infinite number of possible substitutions can be applied to variables in a term. Therefore, we need to use an approximation technique to construct one of the best MSAs that can sufficiently solve our problem.

### 3.4 Eclipse JDT

The Eclipse Java Development Tools (JDT) framework provides APIs to access and manipulate Java source code via ASTs. An AST represents Java source code in a tree form, where the typed nodes represent instances of certain syntactic structures from the Java programming language. Each node type (in general) takes a set of child nodes, also typed and with certain constraints on their properties. Groups of children are named on the basis of the conceptual purpose of those groups; optional groups can be empty, which we can represent with the NIL element. Thus, any Java source code can be represented as a tree of AST nodes. For example, the simple AST structure of two sample LMs in Figures 3.11 and 3.12 is shown in Figure 3.13.

In the JDT framework, structural properties of each AST node can be used to obtain specific information about the Java element that it represents. These properties are stored in a map data structure that associates each property to its value; this data is divided into three types:

- *Simple structural properties:* These contain a simple value which has a primitive or simple type or a basic AST constant (e.g., identifier property of a name node whose value is a String). For example, all the *identifier* nodes in Figure 3.3 fall in this case; each references an instance of String representing the string that constitutes the identifier.
- *Child structural properties:* These involve situations where the value is a single AST

```

1 public void handleMessage(EBMessage message) {
2     if (seenWarning) return;
3     seenWarning = true;
4     Log.log(Log.WARNING, this, getClassName() + " should extend EditPlugin not
        EBPlugin since it has an empty " + handleMessage());
5 }

```

Figure 3.11: A Java method that uses a logging call. This will be referred to as Example 1.

```

1 public void actionPerformed(ActionEvent evt) {
2     EditAction action = context.getAction(actionName);
3     if (action == null) {
4         Log.log(Log.ERROR, this, "Unknown action: " + actionName);
5     }
6     else
7         context.invokeAction(evt, action);
8 }

```

Figure 3.12: A Java method that uses a logging call. This will be referred to as Example 2.

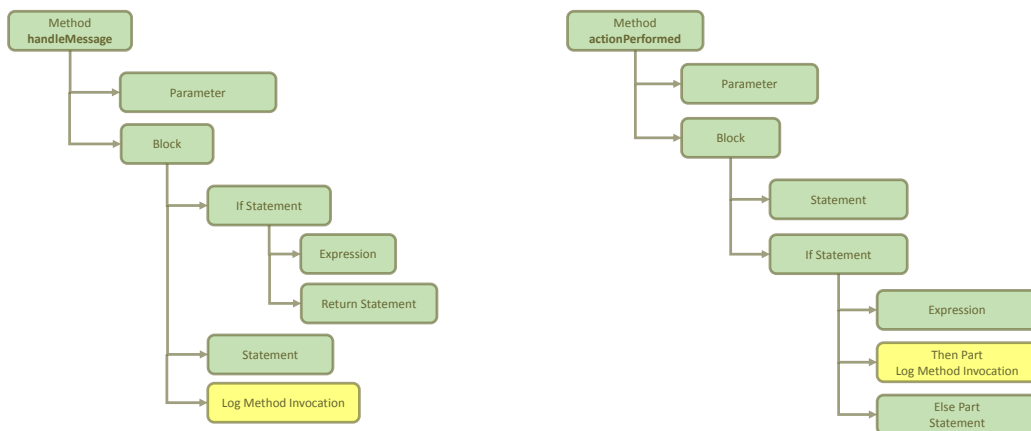


Figure 3.13: Simple AST structure of the examples in Figures 3.11 and 3.12.

node (e.g., name property of a method declaration node). For example, the *classDeclaration* node in Figure 3.3 has a single child that represents its name as an *identifier* node; this would be a child structural property.

- *Child list structural properties*: These involve situations where the value is a list of child nodes. For example, the *classDeclaration* node in Figure 3.3 can possess multiple *modifiers*; these are recorded in the *classDeclaration* as a child list structural property.

As an example, the ASTs of the logging calls at line 4 of Figure 3.11 and Figure 3.12 can be represented respectively as:

- *methodInvocation*(  
    *qualifiedName*(Log, *identifier*(log)),  
    *arguments*(  
        *qualifiedName*(Log, *identifier*(WARNING)),  
        *thisExpression*(),  
        *additionExpression*(  
            *methodInvocation*(*identifier*(getClassName), *arguments*()),  
            *stringLiteral*(" should extend EditPlugin not EBPlugin since it has an empty "),  
            *methodInvocation*(*identifier*(handleMessage), *arguments*()))))
- *methodInvocation*(  
    *qualifiedName*(Log, *identifier*(log)),  
    *arguments*(  
        *qualifiedName*(Log, *identifier*(ERROR)),  
        *thisExpression*(),  
        *additionExpression*(  
            *stringLiteral*("Unknown action: "),

*identifier(actionName))))*

### 3.5 The Jigsaw framework

The Jigsaw tool was developed by Cottrell et al. [2008] to support small-scale source code reuse via structural correspondence. Small-scale reuse task can be divided into two phases. The first phase involves the developer identifying a source code snippet that implements a functionality that is missing within a target system. The second phase involves modifying the source code snippet to fit in the target system. To perform a reuse task, developers mostly copy and paste the reused code snippet and then fit it to the hole of the target context by performing some modifications. Jigsaw support the small scale reuse task by identifying structural correspondences between the copied code snippet and the context in which the code wants to be pasted into, in order to suggest to developers what parts already exist within the target system, what parts are missing, and what parts need to be modified to fit into the context. Jigsaw determines the structural correspondences between two Java source code fragments through the application of higher-order anti-unification modulo equational theories such that one fragment can be integrated to the other one for small-scale code reuse.

### 3.6 Summary

I described abstract syntax trees (ASTs) as a standard syntactic representation of source code. Every AST can also be represented in a function format (and vice versa) which constitute the standard theoretical concept of terms. I presented Eclipse JDT as a concrete framework that can be used to manipulate ASTs of a source code written in the Java programming language.

I demonstrated how the theoretical framework of anti-unification as a technique to construct a common generalization of two given terms, and hence of two ASTs. First-order anti-unification permits terms to be replaced with variables and vice versa, but it is limited in that low-level com-

monality can be discarded due to high-level differences. Higher-order anti-unification overcomes this by permit substitution relative to function symbols as well as terms. A further extension allows for insertion and deletion by declaring equivalence with the NIL structure, as well as other arbitrary equational theories to embed knowledge of semantic equivalence. Unfortunately, this higher-order anti-unification modulo theories approach leads to ambiguity and the potential for an infinite number of possible substitutions for every structural variable. To make use of that technique despite its weakness, we must apply an approximation technique to select amongst the best MSAs in order to reach a solution that is reasonable in practice. I also introduced Jigsaw, an existing framework I used for determining structural correspondences between ASTs and why it does not adequately address my problem.



## Chapter 4

### Determining Structural Correspondences

In order to construct a structural generalization describing the commonalities and differences between ASTs of two given logged methods (LMs), we first need to find structural correspondences between their nodes. My approach to determining correspondences proceeds in three steps: first, computing similarity between AST nodes (Section 4.1); second, determining potential structural correspondences between AST nodes (Section 5.1); third, constructing an extended form of ASTs, called AUASTs (anti-unifier ASTs) to allow the creation of an anti-unified structure (Section 5.1) in a later phase. To evaluate my approach, I implemented it as an Eclipse plug-in, named the correspondence tool, which is built atop Jigsaw. Then I conducted an experimental study to validate its effectiveness for my application. Section 4.5 describes my experimental setup, present my study, and discuss the results.

To develop the correspondence tool, I first needed a concrete framework for constructing and manipulating ASTs. The Eclipse integrated development environment provides such a framework in its Java Development Tools (JDT) component (as explained in Section ??). I also utilized Jigsaw [Cottrell et al., 2008], which is an existing framework for creating structural correspondence connections among ASTs based on the structural similarity between their nodes (Section ??). I then constructed the AUAST structure to allow the insertion of variables in place of any nodes. I built atop this work in order to create anti-unifiers.

#### 4.1 Computing similarity

To compute similarity between AST nodes, I re-used a function developed by Cottrell et al. [2008] that relies on syntactic similarity along simple knowledge of semantic equivalences supported by a program language specifications. It returns a value in  $[0, 1]$  where zero indicates complete

lack of similarity and one indicates perfect similarity. In general, this function returns a value above zero if the compared nodes are of identical type, and thus it returns a similarity of 0 for nodes of different types. However, it uses several heuristics to improve the accuracy of similarity measurement by defining an arbitrary value for the nodes that are syntactically different but are semantically relevant. For example, the similarity between names of AST nodes is measured using a normalized computation based on the length of the longest common substring. The comparison of the **int** and **long** nodes is another example, where an arbitrary value of 0.5 is defined as the similarity, since they are not of syntactically identical types but have semantic equivalences. The function also detects the structural correspondence between **for**-, enhanced-**for**-, **while**-, and **do**-loop statements; and **if** and **switch** conditional statements.

Cottrell et al. [2008] computed the similarity between non-leaf nodes not only based on the node types, but also pairwise similarities of their children nodes, as described via the NON-LEAF-NODE-SIMILARITY algorithm. In this algorithm, the children of the subtrees  $astA$  and  $astB$  are compared exhaustively in a pairwise manner (Lines 1–10). For each child node of the subtree  $astA$ , the highest similarity with any child node of the subtree  $astB$  is determined (Lines 4–9). All these maximum similarities are summed up and divided by the size of the largest subtree (Lines 11–12).

---

**Algorithm 4.1** NON-LEAF-NODE-SIMILARITY( $astA, astB$ ) computes the similarity between two non-leaf nodes.

---

```

NON-LEAF-NODE-SIMILARITY( $astA, astB$ )
1:  $sum \leftarrow 0$ 
2: for  $childA \in children[astA]$  do
3:    $max \leftarrow 0$ 
4:   for  $childB \in children[astB]$  do
5:      $sim \leftarrow \text{SIMILARITY}(childA, childB)$ 
6:     if  $sim > max$  then
7:        $max \leftarrow sim$ 
8:     end if
9:   end for
10: end for
11:  $sum \leftarrow sum + max$ 
12: return  $sum / max(|auastA| + |auastB|)$ 

```

---

## 4.2 Determining potential correspondences

The similarity function can be used to determine potential structural correspondences amongst nodes of two given ASTs. To find correspondences, I used an algorithm proposed by Cottrell et al. [2008] that generates an augmented form of AST, called *correspondence AST* (CAST), where each node holds a list of candidate correspondence connections, each implicitly representing an anti-unifier. The DETERMINE-POTENTIAL-CORRESPONDENCES algorithm computes the similarity for all pairs of nodes in the two ASTs (Lines 1–3). If similarity value for a pair is above zero, a correspondence connection will be created and added to the list of correspondence connections of the two corresponding nodes (Lines 4–8). As an example, Figure 4.1 shows candidate structural correspondence connections created via the DETERMINE-POTENTIAL-CORRESPONDENCES algorithm on ASTs of Examples 1 and 2.

---

**Algorithm 4.2** DETERMINE-POTENTIAL-CORRESPONDENCES( $astA, astB$ ) determines the candidate correspondence connections between the nodes of  $astA$  and  $astB$ .

---

**DETERMINE-POTENTIAL-CORRESPONDENCE**( $astA, astB$ )

```
1: for  $nodeA \in astA$  do
2:   for  $nodeB \in astB$  do
3:      $sim \leftarrow \text{SIMILARITY}(nodeA, nodeB)$ 
4:     if  $sim > 0$  then
5:        $corr \leftarrow \text{CREATE-CORRESPONDENCE-CONNECTION}(nodeA, nodeB, sim)$ 
6:        $\text{APPEND}(corrs[nodeA], corr)$ 
7:        $\text{APPEND}(corrs[nodeB], corr)$ 
8:     end if
9:   end for
10: end for
```

---

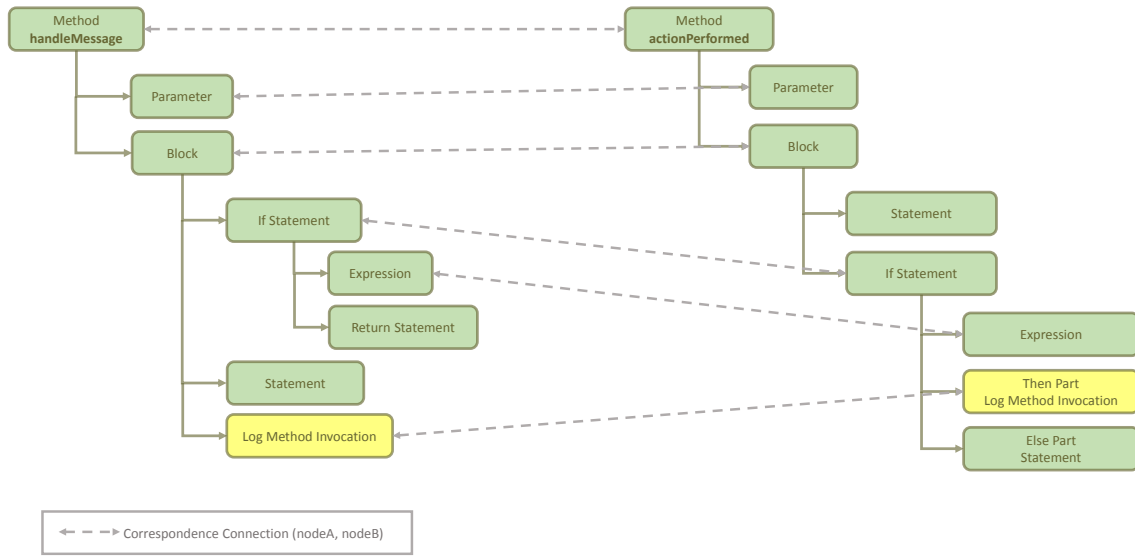


Figure 4.1: Simple CAST structure of the examples in Figures 3.11 and 3.12. The links between CAST nodes indicate structural correspondence connections created using the DETERMINE-POTENTIAL-CORRESPONDENCES algorithm.

### 4.3 Constructing the AUAST

**[RW: This is a concrete implementation, not a generic idea, at least not the way it is described. I strongly suggest that you give a generic description of your assumptions about ASTs then relate AUASTs to those, then talk about implementation details.]** [NZ: I TRIED TO EXPLAIN THE CONCEPT.]

As described in Section 3.3, an anti-unified structure utilizes variables that must be substituted with proper substructures to regain original structures. However, the CAST structure presented by Cottrell et al. [2008] would allow the creation of an anti-unified structure, as it does not contain any variables. Therefore, an extended form of it is required, namely the AUAST (anti-unifier AST), that would allow the insertion of variables in place of any node in the tree structure, including both subtrees and leaves, to indicate variations between the original structures.

To provide an example to demonstrate this structure, the anti-unified AUAST constructed from

the AUASTs of logging calls in Figures 3.11 and 3.12 is depicted in Figure 4.2. The structural variables  $X$  and  $Y$  are used to indicate the structural variations, where the  $X$  structural variable refers to two simple names and the  $Y$  structural variable refers to two subtrees. The substitutions are defined in Equations 4.1 and 4.2.

$$\begin{aligned} \Theta_1 = (X \rightarrow \text{WARNING}, Y \rightarrow \text{additionExpression}(\text{methodCall}(\text{simpleName}(\text{getClassName}), \text{arguments()}), \\ \text{stringLiteral}(\text{"should extend ..."}), \\ \text{methodCall}(\text{simpleName}(\text{handleMessage}), \text{arguments()}))) \end{aligned} \quad (4.1)$$

$$\begin{aligned} \Theta_2 = (X \rightarrow \text{ERROR}, Y \rightarrow \text{additionExpression}(\text{stringLiteral}(\text{"Unknown action: "}), \\ \text{simpleName}(\text{actionName}))) \end{aligned} \quad (4.2)$$

#### 4.4 The correspondence tool

The correspondence tool is a proof-of-concept implementation of the proposed approach to determining potential structural correspondences, which is an Eclipse plug-in that inputs a Java program, extracts ASTs of logged methods in it using the Eclipse JDT framework, applies a part of the implementation of Jigsaw to identify structural correspondences between ASTs in a pairwise manner and reuses the Jigsaw similarity function to measure the similarity between nodes involved in each correspondence connection. It also creates an extended form of CAST, called AUAST, which addresses the limitations of the CAST structure to constructing an anti-unifier by adding the following structural properties:

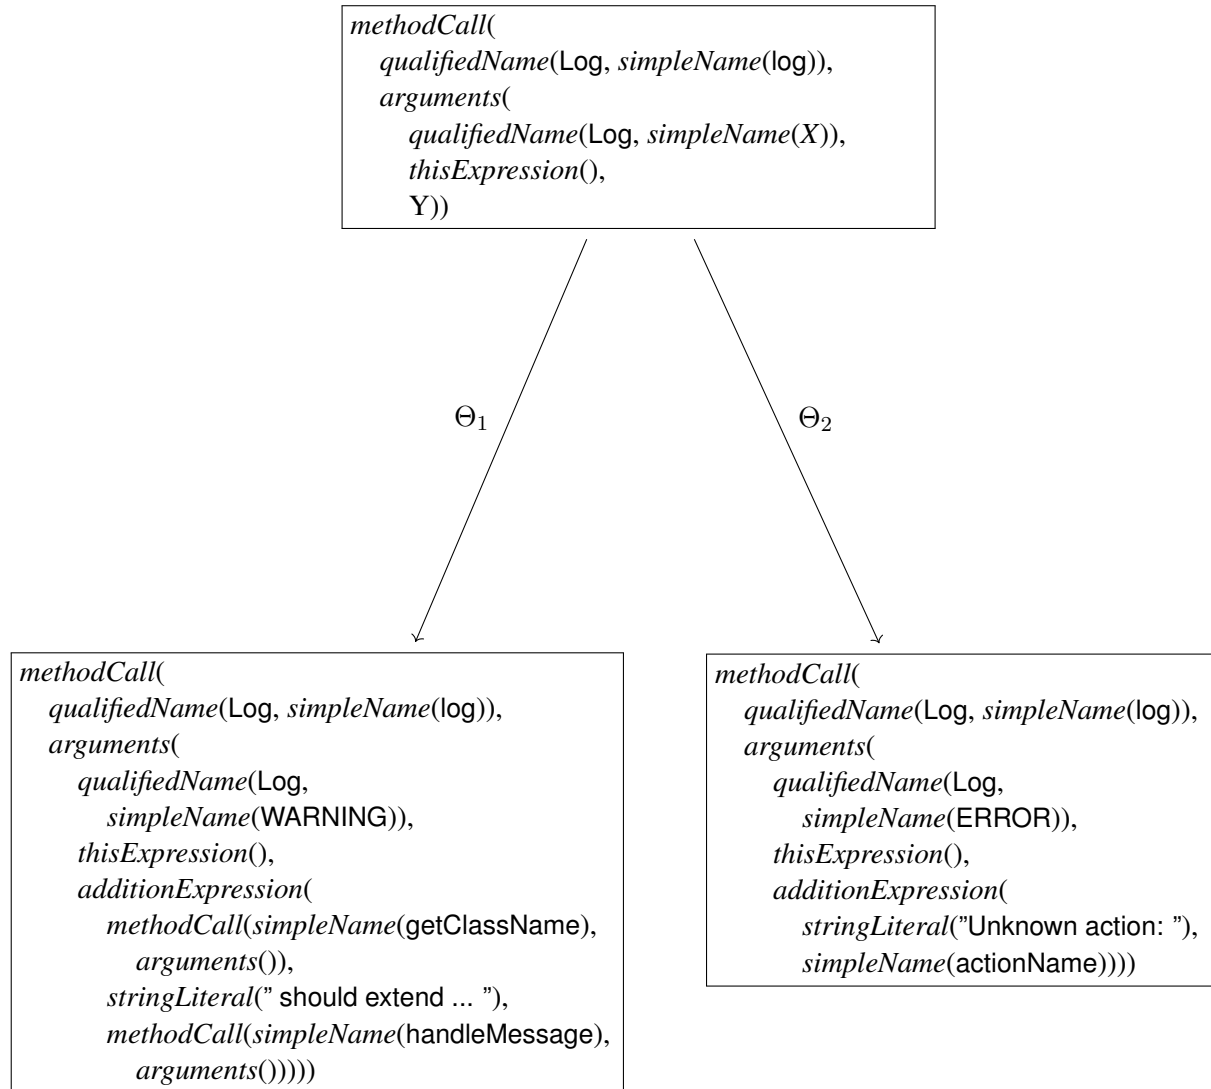


Figure 4.2: Anti-unification of the AUASTs of the logging calls in Examples 1 and 2.

- *Simple structural variable Properties*: an extension of simple structural properties referring to two simple values to allow the insertion of variables in place of leaves.
- *Child structural variable properties*: an extension of child structural properties referring to two child AST nodes to allow the insertion of variables in place of subtrees.

## 4.5 Evaluation

**[RW: Describe here the procedure you used to select the examples, etc., how you tested Jigsaw, and what your findings were. At some point, you complained that Cottrell had not done something right ... do you have any evidence to demonstrate it? How does this affect your work? Such points can go in a discussion section towards the end of this chapter if they don't fit otherwise. Full details of examples can go in an appendix; here, just describe enough so people can get the point.]**

[NZ: I THINK THIS EXPERIMENT IS NOT MUCH ABOUT EVALUATING JIGSAW (THE EVALUATION WAS CONDUCTED BY COTTRELL), BUT IT IS MORE ABOUT UNDERSTANDING WHAT JIGSAW DOES AND HOW TO USE IT FOR MY APPLICATION . WHAT I HAVE MENTIONED WAS ABOUT DETECTING RELEVANCE LINKS WHICH IS NOT RELATED TO MY WORK. DURING MY DEVELOPMENT, I ADDED SOME STATEMENTS TO JIGSAW FOR THE CASES THAT WAS NOT COVERED IN HIS WORK COMPLETELY (E.G, JIGSAW DID NOT DETECT THE CORRESPONDENCE BETWEEN INNER TYPE DECLARATIONS OF TWO NESTED TYPE DECLARATIONS WHEN COMPARING THE TWO UPPER TYPE DECLARATIONS ]

To evaluate the proposed approach and the tool support, I conducted an experiment on a set of LJMs extracted from a real-world software system to assess how Jigsaw could effectively help us determine potential correspondences between AST nodes and measure similarity between them.

#### 4.5.1 Setup

As a subject for our study, we used jEdit, a programmers text editor tool written in Java programming language. We chose this subject because it is a real program that has been used constantly by many developers, and it employs real usage of logging calls. Our tool extracts all LJMs within the source code of this program. However, a subset of them was selected containing 9 LJMs that showed varying levels of similarity on manual examination, and it has been used as a test suite throughout this study (see Table 4.3). The `org.gjt.sp.jedit.EditBus.send(...)` method contains two logging calls. To handle this case we split it into two cases: case 3 contained the first logging call while the second one was removed; case 4 contained only the second logging call. We will describe our approach for LJMs containing multiple logging calls in details in Section 5.4.2. The last three LJMs were manually modified by adding some statements for the sake of dealing with important cases that we otherwise would have missed testing. Case 8 simulates the addition of an **if** – statement that formed a nested **if** – statement enclosing a logging call. Cases 9 and 10 simulate the addition of statements to improve the test coverage.



Case	Logged Java methods	Size(LOC)
1	org.gjt.sp.jedit.PluginJAR.generateCache()	104
2	org.gjt.sp.jedit.MiscUtilities.isSupportedEncoding(...)	9
3	org.gjt.sp.jedit.EditBus.send(...)	14
4	org.gjt.sp.jedit.EditBus.send(...)*	14
5	org.gjt.sp.jedit.EditAction.Wrapper.actionPerformed(...)	5
6	org.gjt.sp.jedit.EBPlugin.handleMessage(...)	6
7	org.gjt.sp.jedit.BufferHistory.RecentHandler.doctypeDecl(...)	3
8	org.gjt.sp.jedit.JARClassLoader.loadClass(...)	32
9	org.gjt.sp.jedit.io.VFS.DirectoryEntry.RootsEntry.rootEntry(...)	36
10	org.gjt.sp.jedit.ServiceManager.loadServices(...)	20

Figure 4.3: Logged Java methods used as our test suite; all are contained in the org.gjt.sp.jedit package.

Our tool was used to compare LJMs of our test suite in a pairwise manner (55 test cases in total, including self-comparisons) and to produce the CASTs of each pair. The Jigsaw similarity was also measured for each of these test cases. We examined the generated CASTs of these test cases and selected a subset of 4 cases with various levels of correspondences as depicted in the Table 4.5. Case 1 contains the comparison of a Java element with itself. Case 2 contains the comparison of two Java elements that are both syntactically and semantically dissimilar. Case 3 contains the correspondence between two Java elements that are syntactically dissimilar but are semantically relevant. Case 4 contains the comparison of a logging call with another Java element that is not logging call but is syntactically relevant.

#### 4.5.2 Results

The results of the pairwise comparison between LJMs of the test suite is visualized in Figure 4.4. As it is shown, the Jigsaw similarity for all self-comparisons is 1, while the level of Jigsaw similarity is different for pairs containing distinct LJMs as our manual examination.

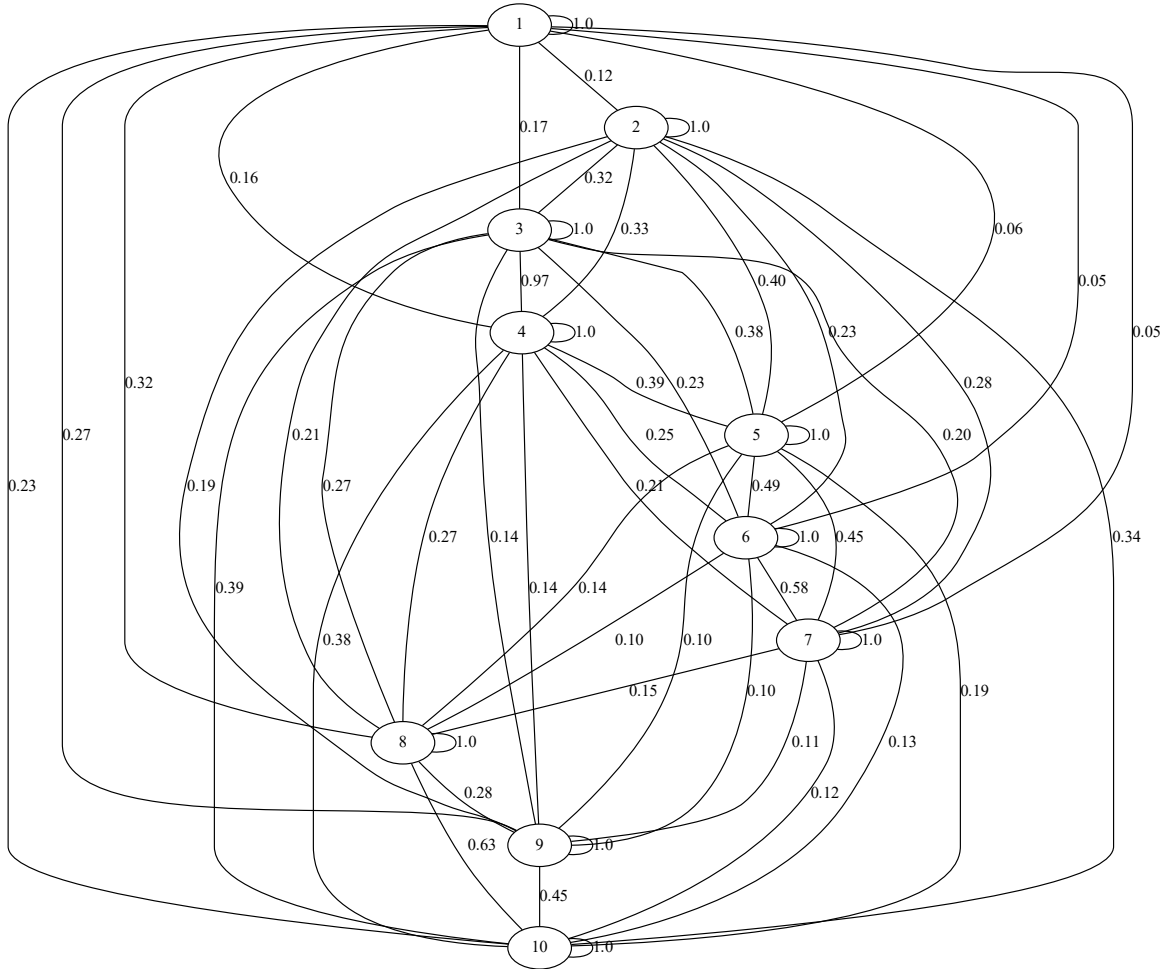


Figure 4.4: A similarity graph representing pairwise Jigsaw similarities between LJMs shown in Table 4.3.

The analysis of the 4 test cases is shown in Table 4.5. Test Case 1 shows that a Java element that is compared with itself has a Jigsaw similarity of 1. Test Case 2 indicates that no correspondence connection is created when a Java element is compared with another Java element that is

Test case	Java source code fragment	Jigsaw similarity
1	Log.log(Log.WARNING,this,"Unknown action: " + actionName);	1
	Log.log(Log.WARNING,this,"Unknown action: " + actionName);	
2	return entry	No correspondence connection
	int i=0;	
3	for (int i=0; i < comps.length; i++) ...	
	while (entries.hasMoreElements()) ...	
4	Log.log(Log.WARNING,this,"Unknown action: " + actionName);	0.33
	EditBus.removeFromBus(this);	

Figure 4.5: Results from examining the Jigsaw similarity for 4 sample Java source code fragment pairs.

utterly dissimilar. Test Case 3 indicates that the similarity between a **for**– statement and a **while**– statement is non-zero, and that Jigsaw is able to detect semantic correspondences between Java elements. Test Case 4 shows that a logging call has non-zero similarity with another Java element that is not a logging call but is syntactically relevant. This case will be handled via the removal of this kind of correspondence connection, as will be described in Section ??.

#### 4.5.3 discussion

Though the results of this experiment validates Jigsaw’s functionality in determining potential correspondences between ASTs nodes, it does not suffice to construct structural generalizations needed in my context. As the problem of this study is different, I should build atop this tool to address the following issues:

- The CAST structure does not allow the creation of an anti-unified structure, as it does not allow the insertion of variables in place of any nodes in the tree structure.
- The Jigsaw tool does not create a detailed view of the anti-unifier describing the commonalities and differences between logged Java methods.
- The Jigsaw tool does not determine the best correspondences with special attention to logging calls to construct an approximation of the best anti-unifier for my problem.

- The Jigsaw similarity function does not measure the similarity among the usage of logging calls in Java methods.

In the following chapter, I will discuss my approach to construct structural generalization and its implementation by means of the higher-order anti-unification modulo theories.

## 4.6 Summary

We described Eclipse JDT as a concrete framework that can be used to manipulate ASTs of a source code written in the Java programming language. We also introduced Jigsaw, an existing framework for determining structural correspondences between AST nodes and measuring similarity between them. Furthermore, we assess the Jigsaw functionality to address our problem through an empirical study on a set of LJMs selected from a real- world software system.

## Chapter 5

### Constructing Structural Generalization

**[RW: Lots of this stuff is now moved to earlier chapters. This chapter needs to be reworked as a result. It's not clear to me that "chapter3-2.tex" needs to be separate from this.] [RW: New intro blurb needed. Basically, you need to point out how Jigsaw does not suffice, which hopefully you will have demonstrated in the previous chapter. It's not clear to me why this is separate from the next chapter. Perhaps combine them?] [NZ: I COMBINED THEM.]**

[NZ: IN THE PREVIOUS SECTIONS I EXPLAINED WHY JIGSAW DOES NOT SUFFICIENTLY ADDRESS OUR PROBLEM.]

In Chapter 3, I provided background information on higher-order anti-unification modulo theories, a theoretical framework that can be used to construct a generalization from two given ASTs. I also presented the algorithm proposed by Cottrell et al. [2008] to construct an extended form of AST, where each node holds a list of candidate structural correspondences, implicitly representing an anti-unifier. We now consider how these frameworks could help us (1) to construct an approximation of the best anti-unifier to my problem from AUASTs of two given logged methods with special attention to logging calls and (2) to develop a similarity measure between the two AUASTs, which can provide us with useful information for clustering a set of AUASTs in a later phase. The constructed anti-unifier can be viewed as a structural generalization that represents the commonalities and differences between the two AUASTs.

To approximate the best anti-unifier for my problem, we should develop a greedy selection algorithm that determines the best correspondence for each node. My approach contains a sequence of 2 actions to find the best correspondences between two AUASTs: (1) it applies several constraints to prevent the anti-unification of log statement nodes with any other types of nodes; and (2) it determines the best correspondence for each AUAST node with the highest similarity and

then removes the other correspondence connections involving those nodes (Section ??). However, to construct an anti-unifier, a further step should be taken, which is the anti-unification of each AUAST node with its best correspondence (Section 5.3). Furthermore, I developed an algorithm to measure similarity between the usage of logging calls in methods based on the selected correspondences (Section 5.2). An overview of the proposed anti-unification approach is shown in Figure 5.1.

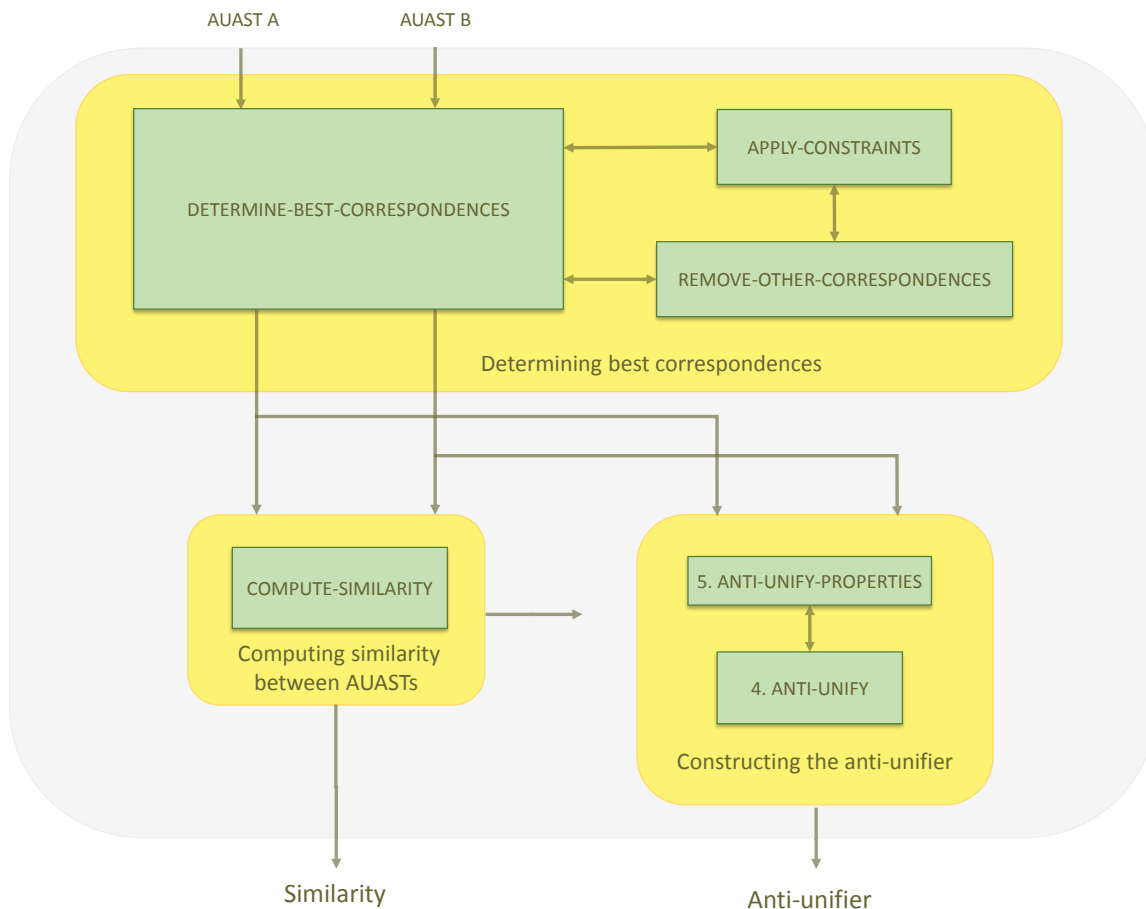


Figure 5.1: Overview of the anti-unification process.

To evaluate my approach, I developed the anti-unifier-building tool atop the correspondence tool, and conducted an experimental study on the test suite introduced in Section 4.5.1. In Section 5.4, I discuss the algorithms and decisions I made to implementing the anti-unifier-building

tool and constructing the detailed view of structural generalizations. I also describe my experimental setup, present the study, and discuss the results in Section 5.5.

## 5.1 Determining best correspondences

As described in Section 3.3, the complexity of determining the best anti-unifier is undecidable in general. Therefore, to find one single anti-unifier that is an approximation of the best fit to my problem, I developed the DETERMINE-BEST-CORRESPONDENCES algorithm that greedily selects the most similar correspondence as the best fit for each AUAST node. Therefore, each AUAST node can either be anti-unified with its best correspondence in the other AUAST or with “nothing”. This algorithm takes one of the AUASTs, visiting the AUAST nodes therein to store all candidate correspondence connections between the two AUAST nodes in a list, which is sorted in descending order based on the similarity measure (lines 1–7). To prevent the anti-unification of log statement nodes with any other types of nodes, some constraints should be applied on the selection of correspondence connections prior to determining the best correspondences via the APPLY-CONSTRAINTS algorithm (Line 9). Then the correspondence connection with the highest similarity value is determined as the best fit for the two nodes involved (lines 10–12); all other correspondence connections involving these two nodes are removed using REMOVE-OTHER-CORRESPONDENCES algorithm (line 11). This process terminates when no more correspondence connections are left in the list.

To construct an anti-unifier of two AUASTs with a focus on logging calls, some constraints should be applied in determining correspondences. The first constraint (as described below) should be applied to prevent the anti-unification of log statement nodes with any other types of nodes.

**Constraint 1.** A logging call should either be anti-unified with another logging call or should be anti-unified with “nothing”.

This constraint creates a further constraint:

**Constraint 2.** A structure containing a logging call should be anti-unified with a corresponding structure containing another logging call or should be anti-unified with “nothing”.

---

**Algorithm 5.1** DETERMINE-BEST-CORRESPONDENCES(*auastA*) takes in an AUAST and determines the best correspondence connection with the highest similarity for each AUAST node.

---

```

DETERMINE-BEST-CORRESPONDENCES(auastA)
1: list  $\leftarrow$  ()
2: nodes  $\leftarrow$  VISITOR(auastA)
3: for nodeA  $\in$  auastA do
4:   for corr  $\in$  corrs[nodeA] do
5:     APPEND(corr, list)
6:   end for
7: end for
8: SORT(list)
9: APPLY-CONSTRAINTS(list)
10: for corr  $\in$  list do
11:   REMOVE-OTHER-CORRESPONDENCES(corr, list)
12: end for

```

---

As an illustration consider AUASTs of two Java methods in Figure 4.1. Jigsaw creates a correspondence connection between the two log method invocation nodes and the two **if** statements. As is clear, the second **if** statement contains a logging call, while there is no corresponding logging call in the first one. According to the first constraint, two log method invocation nodes should be anti-unified together. On the other hand, a correspondence connection is created between the two **if** statements; however, anti-unification of these statements includes anti-unifying their children nodes as well. Thus, statements inside the body of the **if** statements must be anti-unified with each other, indicating that log method invocation inside the body of **if** statement in the second example should be anti-unified with “nothing”, which is contrary to our first assumption. In order to comply with the first constraint, the correspondence connection between two **if** statements should be deleted, leading us to apply the second constraint. My approach applies these constraints by taking the following steps prior to determining the best correspondences:

1. Augment a property to the AUAST node to mark log statement nodes and structures enclosing them as “logged”.
2. Remove correspondence connections where one node is marked as “logged” and the corresponding node is not via the APPLY-CONSTRAINTS algorithm.



The APPLY-CONSTRAINTS algorithm takes the list of correspondence connections, and removes the ones involving two nodes where one is “logged” and the corresponding node is not, using the REMOVE-OTHER-CORRESPONDENCES algorithm (lines 1–9).

---

**Algorithm 5.2** APPLY-CONSTRAINTS(*list*) applies the constraints on the list of correspondence connections.

---

```

APPLY-CONSTRAINTS(list)
1: for corr  $\in$  list do
2:   nodeA  $\leftarrow$  node1[corr]
3:   nodeB  $\leftarrow$  node2[corr]
4:   if nodeA instanceof Logged & nodeB instanceof Non-Logged then
5:     REMOVE-OTHER-CORRESPONDENCES(corr, list)
6:   else if nodeA instanceof Non-Logged & nodeB instanceof Logged then
7:     REMOVE-OTHER-CORRESPONDENCES(corr, list)
8:   end if
9: end for

```

---

REMOVE-OTHER-CORRESPONDENCES algorithm removes correspondence connections that are not selected as the best fit from three lists: the list of all correspondence connections (Line 5 and Line 12); the list of correspondence connections of the first node involved in the connection (Line 6 and Line 13); the list of correspondence connections of the second node involved in the connection (Line 7 and Line 14). As an example, Figure 5.2 shows the correspondence connections between AUAST nodes after applying the DETERMINE-BEST-CORRESPONDENCE algorithm on the list of potential correspondence connections.

**Algorithm 5.3** REMOVE-OTHER-CORRESPONDENCES(*corr*, *list*) removes all other correspondences involving the nodes of a particular correspondence connection (*corr*) from the lists of correspondences.

---

**REMOVE-OTHER-CORRESPONDENCES**(*corr*, *list*)

```

1: listA  $\leftarrow$  corrs[node1[corr]]
2: listB  $\leftarrow$  corrs[node2[corr]]
3: for corrA  $\in$  listA do
4:   if corrA  $\neq$  corr then
5:     REMOVE(corrA, listA)
6:     REMOVE(corrA, corrs[node1[corrA]])
7:     REMOVE(corrA, corrs[node2[corrA]])
8:   end if
9: end for
10: for corrB  $\in$  listB do
11:   if corrB  $\neq$  corr then
12:     REMOVE(corrB, listB)
13:     REMOVE(corrB, corrs[node1[corrB]])
14:     REMOVE(corrB, corrs[node2[corrB]])
15:   end if
16: end for

```

---

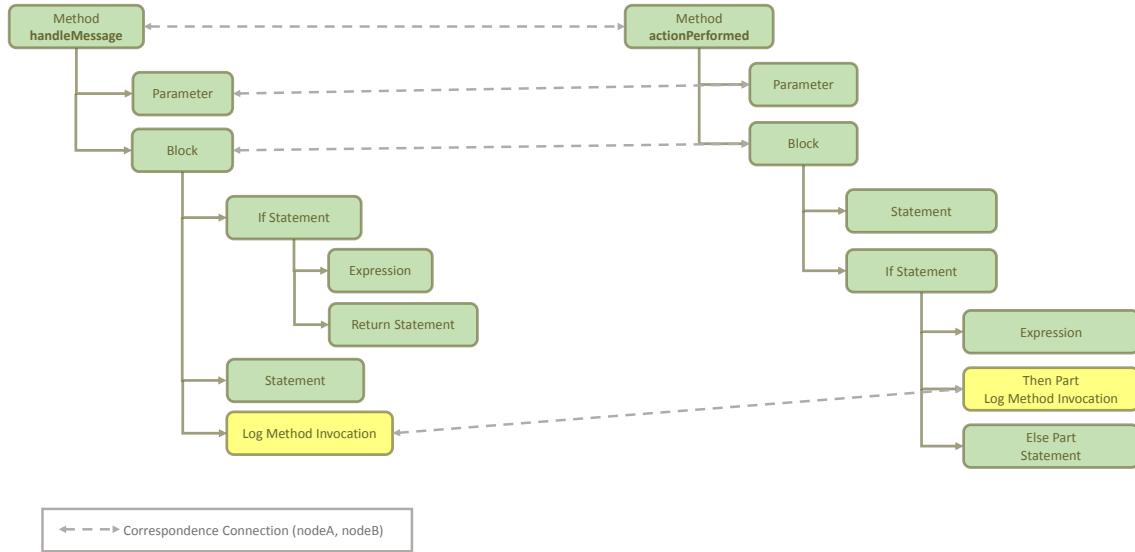


Figure 5.2: Simple AUAST structure of examples in Figures 3.11 and 3.12. The links between AUAST nodes indicate structural correspondences selected as the best fit using the DETERMINE-BEST-CORRESPONDENCES algorithm.

## 5.2 Computing similarity between AUASTs

Similarity computation is particularly important for clustering phase that relies on accurate estimation of similarity between logged Java methods (Chapter 6). The notion of similarity can differ depending on the given context. That is, similarity between certain features could be highly important for a particular application, while it is not for another. The utility of a similarity function can be determined based on how well it enables us to produce accurate results for a particular task. In this study, a similarity measure is needed to classify logged methods based on the structural similarity in the usage of logging calls. This similarity can be defined as the number of common elements over the total number of elements of the anti-unifier constructed based on the selected correspondences from the previous step.

The COMPUTE-SIMILARITY algorithm computes similarity between the two AUAST *auastA* and *auastB*. If the two AUASTs are of leaf nodes, the similarity will be computed using the similarity function proposed by Cottrell et al. [2008] (Lines 2–3). Otherwise, the similarity between each children of the subtree *auastA* and its best corresponding node in the subtree *auastB* is computed. All these similarities are summed, multiplied by two, and normalized by the total size of the two AUASTs (Lines 4–8).

---

**Algorithm 5.4** COMPUTE-SIMILARITY(*auastA*, *auastB*) determines structural similarity between *auastA* and *auastB* based on the correspondences selected as the best fit.

---

```
COMPUTE-SIMILARITY(auastA, auastB)
1: sum  $\leftarrow$  0
2: if auastA instanceof Leaf-Node then
3:   sum  $\leftarrow$  sum + SIMILARITY(auastA, auastA)
4: else if auastA instanceof Non-Leaf-Node then
5:   for child  $\in$  children[auastA] do
6:     sum  $\leftarrow$  sum + COMPUTE-SIMILARITY(child, corr[child])
7:   end for
8: end if
9: return ( $2 * \textit{sum}$ ) / ( $|\textit{auastA}| + |\textit{auastB}|$ )
```

---

### 5.3 Constructing the anti-unifier

Once the best correspondences have been determined between AUAST nodes, we construct a new anti-unified AUAST by traversing AUAST structures recursively and anti-unifying each node with its best correspondence. The new anti-unified structure is a generalization of two original structures, called anti-unifier, where common structural properties are represented by copies and differences are represented by structural variables. The variables may be inserted in place of any node in AUAST, including both subtrees and leaves, and can be substituted with proper original substructures to regain original structures.

Anti-unification of two AUASTs is performed via the `ANTIUNIFY` algorithm. If the two AUASTs are of leaf nodes, the anti-unifier will be created through the anti-unification of the two nodes (Lines 2–3). Otherwise, the anti-unified subtree is created by anti-unifying each children of one subtree with its best corresponding node in the other subtree. If there is no correspondence for a node, the anti-unified node will be created through the anti-unification of the node with the `NIL` structure. All these anti-unified nodes are appended to the list of children of the anti-unifier (Lines 4–21). The details of constructing the detailed view of an anti-unifier for my application is explained in Section 5.4.1.

### 5.4 The Anti-unifier building tool

The anti-unifier building tool is a proof-of-concept implementation of my anti-unification approach, which is developed atop the correspondence tool to construct the detailed view of structural generalizations. However, I needed to make several algorithms and decisions to create the detailed generalization view suited for my application, which will be described in the following sections.

#### 5.4.1 Constructing the detailed generalization view

To understand the structural commonalities and differences amongst logged methods, we need to develop an algorithm to construct a generalization view of their anti-unifier. Figure 5.3 shows a

---

**Algorithm 5.5**  $\text{ANTIUNIFY}(auastA, auastB)$  creates the anti-unifier of two AUASTs through the anti-unification of each node with its best correspondence.

---

```

ANTIUNIFY(auastA, auastB)
1: antiunifier  $\leftarrow$  Null
2: if auastA instanceof Leaf-Node then
3:   antiunifier  $\leftarrow$  CREATE-ANTIUNIFIER(auastA, auastB)
4: else if auastA instanceof Non-Leaf-Node then
5:   for childA  $\in$  children[auastA] do
6:     if corr[childA] = NULL then
7:       child  $\leftarrow$  ANTIUNIFY(childA, NIL)
8:     else
9:       child  $\leftarrow$  ANTIUNIFY(childA, corr[childA])
10:    end if
11:    APPEND(child, children[antiunifier])
12:  end for
13: end if
14: if auastB instanceof Non-Leaf-Node then
15:   for childB  $\in$  children[auastB] do
16:     if corr[childB] = NULL then
17:       child  $\leftarrow$  ANTIUNIFY(childB, NIL)
18:     end if
19:     APPEND(child, children[antiunifier])
20:   end for
21: end if
22: return antiunifier

```

---

simple detailed view I used to represent the anti-unifier constructed from the AUASTs of logged methods of Examples 1 and 2, where “*a-or-b*” represents a structural variable that must be substituted with either the *a* or *b* substructures to recover each original structure, and “*a*” represents that the *a* substructure is common between the two AUASTs.

```
method(modifiers(public),returntype2(void),name(actionPerformed-or-
handleMessage),parameters(type(ActionEvent-or-EBMessage),name(evt-or-
message)),body(statements(if-or-NIL(expression-or-NIL(leftoperand-or-NIL(action-or-NIL),==
-or-NIL),thenstatement-or-NIL(statements-or-
NIL(expression(expression(Log),name(log),arguments(leftoperand(actionName-or-
message),+,rightoperand("is an unknown action"-or-" is
empty"),qualifier(Log),name(WARNING))))),elsestatement-or-NIL(expression-or-
NIL(expression-or-NIL(context-or-NIL),name-or-NIL(invokedAction-or-NIL),arguments-or-
NIL(evt-or-NIL,action-or-NIL))),type-or-NIL(EditAction-or-NIL),fragments-or-NIL(name-or-
NIL(action-or-NIL),initializer-or-NIL(expression-or-NIL(context-or-NIL),name-or-NIL(getAction-
or-NIL),arguments-or-NIL(actionName-or-NIL)),expression-or-NIL(leftside-or-
NIL(seenWarning-or-NIL),=-or-NIL,righthandside-or-NIL(true-or-NIL)),if-or-NIL(expression-or-
NIL(seenWarning-or-NIL))))),method(modifiers(public-or-NIL,protected-or-NIL),name(Wrapper-
or-EBPlugin),parameters-or-NIL(type-or-NIL(ActionContext-or-NIL),name-or-NIL(context-or-
NIL),type-or-NIL(String-or-NIL),name-or-NIL(actionName-or-NIL)),body(statements-or-
NIL(expression-or-NIL(leftside-or-NIL(name-or-NIL(context-or-NIL)),=-or-
NIL,righthandside-or-NIL(context-or-NIL)),expression-or-NIL(leftside-or-NIL(name-or-
NIL(actionName-or-NIL)),=-or-NIL,righthandside-or-NIL(actionName-or-NIL))))))
```

Figure 5.3: Simple detailed view of the anti-unifier constructed from the AUASTs of the LJMs in Examples 1 and 2.

To create a structural generalization from two given AUASTs, I applied the ANTIUNIFY algorithm presented in Section 5.3. However, to create the detailed view of structural generalizations, a further should be taken to anti-unify structural properties of AST nodes, since Eclipse JDT utilizes structural properties to record structural information of each Java element ( as explained in Section refJDT). Anti-unification of structural properties *propA* and *propB* is performed via the ANTIUNIFY-PROPERTIES algorithm. If *propA* is a simple property, a simple variable property is constructed referring to two simple values (Lines 2-3); if structural property is a child property,

a child variable structure is constructed (Lines 4-5); if structural property is a child list property, for each child of  $propA$  and  $propB$ , where there is no correspondence in the other AUAST, an anti-unified node is created through the anti-unification of the child node with the NIL structure via the ANTIUNIFY algorithm and added to the value of the anti-unified child list property; otherwise, the child node is anti-unified with its best correspondence (Lines 6-21).

---

**Algorithm 5.6** ANTIUNIFY-PROPERTIES( $propA$ ,  $propB$ ) takes two structural properties and constructs an anti-unified structural property.

---

```

ANTIUNIFY-PROPERTIES( $propA$ ,  $propB$ )
1:  $property \leftarrow \text{Null}$ 
2: if  $propA$  instanceof SimpleProperty then
3:    $property \leftarrow \text{CREATE-SIMPLE-VARIABLE-PROPERTY}(propA, propB)$ 
4: else if  $propA$  instanceof ChildProperty then
5:    $property \leftarrow \text{CREATE-CHILD-VARIABLE-PROPERTY}(propA, propB)$ 
6: else if  $propA$  instanceof ChildListProperty then
7:    $children \leftarrow \text{Null}$ 
8:   for  $child \in \text{value}[propA]$  do
9:     if  $\text{correspondence}[child] \neq \text{NULL}$  then
10:       $\text{APPEND}(children, \text{ANTIUNIFY}(child, \text{correspondence}[child]))$ 
11:     else
12:       $\text{APPEND}(children, \text{ANTIUNIFY}(child, \text{NIL}))$ 
13:     end if
14:   end for
15:   for  $child \in \text{value}[propB]$  do
16:     if  $\text{correspondence}[child] = \text{NULL}$  then
17:       $\text{APPEND}(children, \text{ANTIUNIFY}(child, \text{NIL}))$ 
18:     end if
19:   end for
20:    $property \leftarrow \text{CREATE-CHILD-LIST-PROPERTY}(id[propA], children)$ 
21: end if
22: return  $property$ 

```

---

#### 5.4.2 Java methods containing multiple logging calls

There might be some cases in which our approach is not able to anti-unify logging calls in two input seeds, when there is more than one logging call in a LJM. For example, consider the LJMs in Figures 5.4 and 5.5. Figure 5.6 shows the simple AUASTs for these examples and potential correspondence connections between the AUAST nodes. Figure 5.7 shows the correspondence

connections selected as the best match using our greedy algorithm. To anti-unify **if** statement 1 with **if** statement 3, we should anti-unify their structural properties. Thus, log1 should be anti-unified with log3, and log4 should be anti-unified with NIL since there is no corresponding logging call in the body of **if** statement 1, while there is a corresponding logging call for log4 in the body of **if** statement 2 (log2).

```
1 public void method1(){
2     ...
3     if (condition1){
4         Log.log();
5     }
6     ...
7     if (condition2){
8         Log.log();
9     }
10    ...
11 }
```

Figure 5.4: A Java method that utilizes multiple logging calls.

```
1 public void method2(){
2     ...
3     if (condition3){
4         Log.log();
5         Log.log();
6     }
7     ...
8 }
```

Figure 5.5: A Java method that utilizes multiple logging calls.



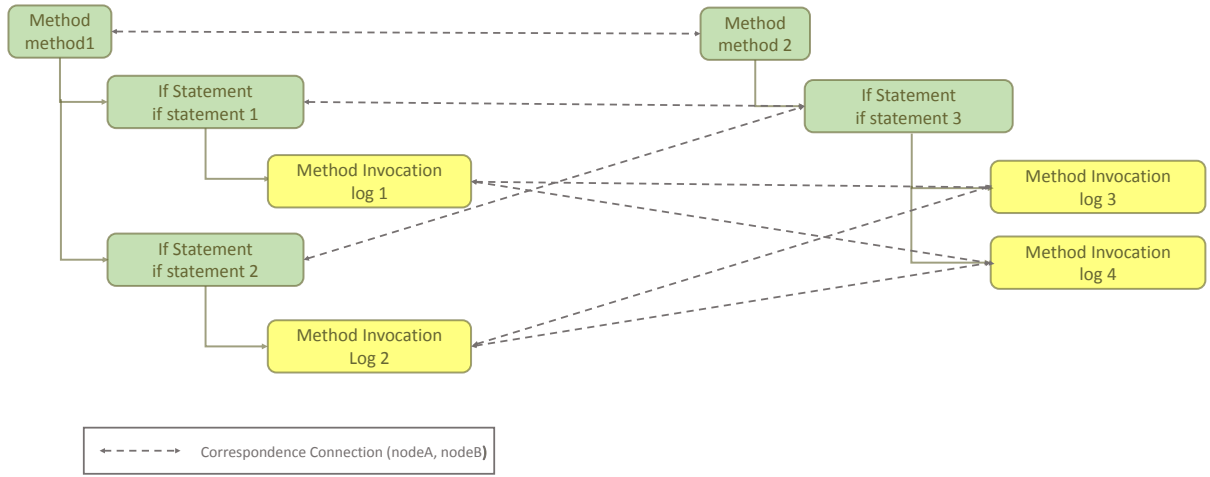


Figure 5.6: Simple AUAST structure of examples in Figures 5.4 and 5.5. Links between AUAST nodes indicate candidate structural correspondences detected by the Jigsaw framework.

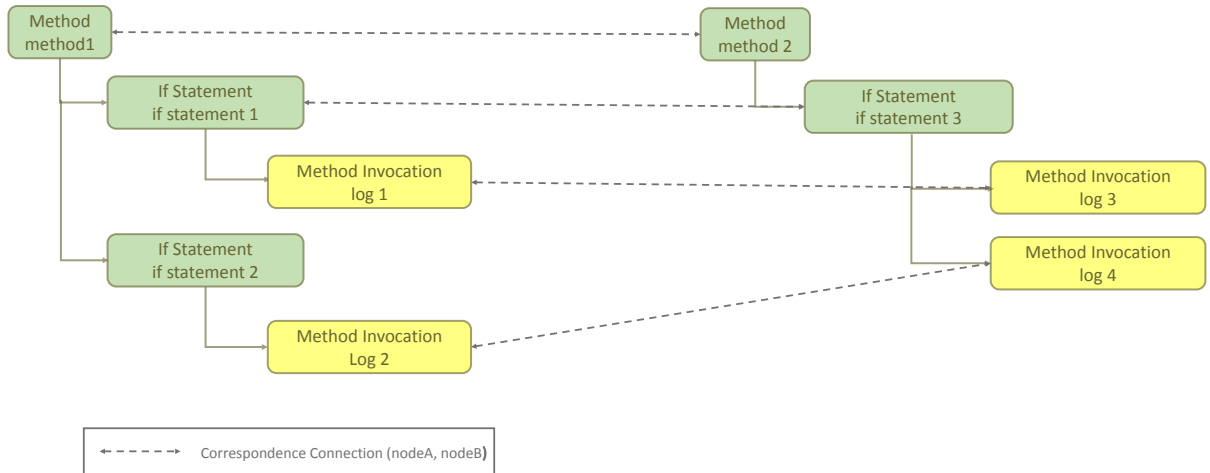


Figure 5.7: Simple AUAST structure of examples in Figures 5.4 and 5.5. Links between AUAST nodes indicate structural correspondences selected as the best match using our greedy algorithm.

To handle these cases, we can split them into more than one case, where each LJM contains only

one logging call. To do so, we need to create a copy of LJM for each logging call by maintaining that logging call and removing the other ones. For example, we need to create two copies for each logged Java method of examples in Figures 5.4 and 5.5 as depicted in Figures 5.8 and 5.9, respectively.

```
1
2 public void method1(){
3     ...
4     if (condition1){
5         Log.log();
6     }
7     ...
8     if (condition2){
9         //removed
10    }
11    ...
12 }
13
14 public void method1(){
15     ...
16     if (condition1){
17         //removed
18     }
19     ...
20     if (condition2){
21         Log.log();
22     }
23     ...
24 }
```

Figure 5.8: Create multiple copies of the LJM in Figure 5.4 for each logging call.

```

1 public void method2(){
2     ...
3     if (condition3){
4         //removed
5         Log.log();
6     }
7     ...
8 }
9
10 public void method2(){
11     ...
12     if (condition3){
13         Log.log();
14         //removed
15     }
16     ...
17 }

```

Figure 5.9: Create multiple copies of the LJM in Figure 5.5 for each logging call.

## 5.5 Evaluation

To assess the effectiveness of my anti-unification algorithm and the supporting tool, I conducted an experiment on the test suite described in Section 4.5.1.

### 5.5.1 Setup

In this study, we manually attempted to create the detailed anti-unifier view for each pair of LJMs in the test suite (55 test cases in total). We first identified corresponding and non-corresponding Java elements for each LJM pair with a focus on preventing the correspondence of logging calls with anything else and then represented the anti-unifier in the detailed view (i.e., formatted as in Figure 5.3). We also computed the ratio of common Java elements in the detailed anti-unifier view to total number of Java elements of the two LJMs to measure the similarity. We also ran the anti-unifier-building tool on each pair of LJM to construct the detailed anti-unifier view for each pair with special attention to logging calls and to measure the similarity between the two LJMs. Furthermore, we used Eclemma, which is a Java code coverage tool for Eclipse, to measure the

test coverage. Test coverage is defined as a measure of the completeness of the set of test cases.

### 5.5.2 Results

We present the results of our analysis for a subset of 10 test cases (see Table 5.10) in Table 5.11. The analysis of the output has been divided into two categories: correspondence and similarity. "Correspondence" refers to the number of corresponding lines-of-code (LOC) detected by our tool that were found to be corresponded by our manual examination as well, and the number of LOC detected as corresponded by our tool but were not found to be corresponded in our manual inspection. We also present the percentage of the correct corresponding LOC to the total number of LOC of the two LJMs. "Similarity" refers to the similarity that is computed based on the the detected correspondences. It is calculated using both our tool and manual experiment.

In Test Case 8, `rootEntry` method contains a nested **if** – statement enclosing a logging call and `actionPerformed` method contains an **if** – statement enclosing another logging call. The analysis showed that a correct correspondence was detected between the inner **if** – statement inside the nested **if** and the single **if** – statement. Test Cases 3 and 10 contain statements that are not found to be corresponded by our tool even though correspondences exist. For example, in Test Case 3, `isSupportedEncoding` method contains an assignment statement enclosed by an **if** – statement that does not have any correspondences and `send` method contains another assignment statement inside a **for** – statement without any correspondences as well. However, no correspondence was detected between the two assignment statements since their parent nodes are not corresponded.

The results of the pairwise comparison between LJMs of the test suite is visualized in Figure 5.12. Our anti-unifier-building tool succeeded in detecting correspondences with special attention to anti-unifying logging calls and calculating pairwise similarities in 48 out of 55 test cases. In addition, the test coverage of our test cases was measured 82% using EclEmma.

Test case	Logged Java methods
1	org.gjt.sp.jedit.PluginJAR.generateCache()
	org.gjt.sp.jedit.PluginJAR.generateCache()
2	org.gjt.sp.jedit.PluginJAR.generateCache()
	org.gjt.sp.jedit.EditBus.send(...)*
3	oorg.gjt.sp.jedit.MiscUtilities.isSupportedEncoding(...)
	org.gjt.sp.jedit.EditBus.send(...)
4	org.gjt.sp.jedit.EditBus.send(...)
	org.gjt.sp.jedit.EditBus.send(...)*
5	org.gjt.sp.jedit.EditBus.send(...)*
	org.gjt.sp.jedit.EditAction.Wrapper.actionPerformed(...)
6	org.gjt.sp.jedit.EditBus.send(...)*
	org.gjt.sp.jedit.BufferHistory.RecentHandler.doctypeDecl(...)
7	org.gjt.sp.jedit.EditAction.Wrapper.actionPerformed(...)
	org.gjt.sp.jedit.JARClassLoader.loadClass(...)
8	org.gjt.sp.jedit.EditAction.Wrapper.actionPerformed(...)
	org.gjt.sp.jedit.io.VFS.DirectoryEntry.RootsEntry.rootEntry(...)
9	org.gjt.sp.jedit.PluginJAR.generateCache()
	org.gjt.sp.jedit.BufferHistory.RecentHandler.doctypeDecl(...)
10	org.gjt.sp.jedit.io.VFS.DirectoryEntry.RootsEntry.rootEntry(...)
	org.gjt.sp.jedit.ServiceManager.loadServices(...)

Figure 5.10: 10 sample logged Java method pairs used as test cases.

Test case	Correspondence		Similarity	
	Correct (%)	Incorrect	human	tool
1	104(100)	0	1.0	1.0
2	8(100)	0	0.13	0.13
3	6(85)	1	0.19	0.16
4	4(100)	0	0.29	0.29
5	5(100)	0	0.21	0.21
6	3(100)	0	0.2	0.2
7	5(100)	0	0.11	0.11
8	7(100)	0	0.1	0.1
9	3(100)	0	0.03	0.03
10	14(87)	2	0.27	0.22

Figure 5.11: Results of constructing anti-unifiers with a focus on logging calls for the 55 test cases.

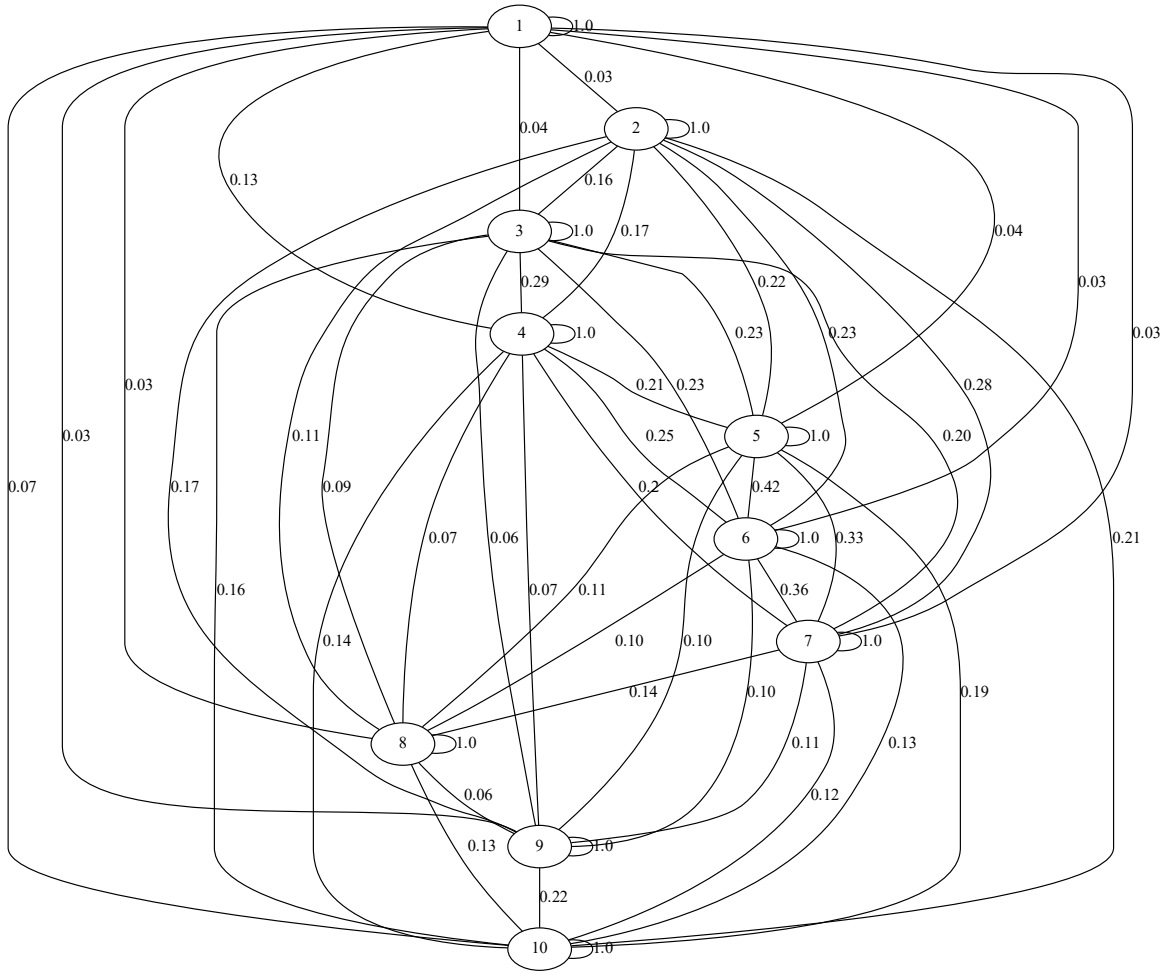


Figure 5.12: A similarity graph representing pairwise similarities calculated by our tool between LJMs shown in Table 4.3.

## 5.6 Summary

I have presented an approach for constructing a generalization from AUASTs of two LJMs with special attention to logging calls via structural correspondence. This approach proceeds in three steps. First, several constraints have been applied on the selection of correspondences to prevent anti-unifying log method invocation nodes with any other types of nodes. Second, an approximation technique is employed to find the best correspondence for each AUAST node. Third, the

anti-unification of two AUASTs is performed through the application of higher-order modulo theories over the AUAST structures. Furthermore, a measure of similarity has been developed that would provide us with useful information for the clustering phase.

An experimental study was conducted to evaluate the effectiveness of our anti-unification algorithm and the tool support in constructing an anti-unifier from AUASTs of each LJM pair in our test suite with a focus on logging calls and measuring similarity between them.

## Chapter 6

### Clustering

In Chapter 5, I described our anti-unification algorithm to construct an anti-unifier from AUASTs of a pair of LJMs with special attention to logging calls. Recall that the general point of this study is to provide a concise description of where logging calls happen in source code by constructing structural generalizations that represent the detailed commonalities and differences between AUASTs of LJMs. To this end, we should develop an algorithm that:

- clustering Java methods showing different usages of logging calls into separate clusters.
- abstracts AUASTs of LJMs of each group into a structural generalization representing the commonalities and differences between them.

Clustering is the classification of a collection of unlabelled data items into meaningful groups [?], where category labels are obtained from the similarities between data items. Therefore, before the use a clustering algorithm to classify a set of AUASTs, I need to first define a similarity metric. To develop a measure of similarity between AUASTs, I used the similarity function described in Section 5.2. To perform clustering on a set of AUASTs of LJMs, I developed a modified version of an agglomerative hierarchical clustering algorithm suited to my application. The clustering algorithm is a bottom-up approach that starts with singleton clusters, each contains one AUAST, and then it repeatedly merges the closest clusters that are the ones with maximum similarity between their AUASTs. To evaluate my approach, I have implemented the clustering tool (Section ??) and conducted an experimental study through the application of it on the test suite introduced in Section 4.5.1. I will describe my experimental study and discuss the results in Section ??.



## 6.1 The hierarchical clustering algorithm

To anti-unify a set of AUASTs, I have developed a modified version of an agglomerative hierarchical clustering algorithm as described below:

1. Start with singleton clusters, each contains one AUAST
  2. Create a similarity matrix by computing pairwise similarities between clusters
  3. Find the closest clusters (a cluster pair with maximum similarity)
  4. Merge the closest cluster pair and replace them with a new cluster containing the anti-unifier of AUASTs of the two clusters
  5. Update the similarity matrix by computing the similarity between new cluster and all remaining clusters
- Repeat steps 3, 4, and 5 until the similarity between closest clusters becomes below a predetermined threshold value

The hierarchical algorithms use a similarity matrix. It employs a  $n \times n$  similarity matrix for a set of  $n$  AUASTs, where an element in row  $i$  and column  $j$  represents the similarity between the  $i^{\text{th}}$  and the  $j^{\text{th}}$  clusters. In this algorithm, the similarity between a pair of clusters is defined as the similarity between their AUASTs, which is computed through the algorithm described in Section 5.2. However, to prevent the combination of a cluster pair when the usage of logging is different, I adjusted the similarity between them to zero. That is, if the anti-unification of AUASTs of a cluster pair does not allow the anti-unification of log statements with each other (as the structures enclosing them are not corresponded), they should be in separate clusters. I also used the anti-unification algorithm described in Section 5.3 to construct structural generalizations.

Figure 6.2 illustrates the clustering process for a sample set of 5 AUASTs using the initial similarity matrix depicted in Figure 6.1. In the first and second iterations, clusters 1 and 2, and then

clusters 4 and 5 are selected as the closest clusters, merged, and replaced by clusters 6 and 7, respectively. If threshold value is determined as  $ThresholdA = 0.20$ , the process will be terminated as the similarity between the closest clusters, which are clusters 3 and 6 is below this threshold; otherwise, these clusters will be merged and replaced by cluster 8. However, the similarity between AUASTs of clusters 7 and 8 is zero, and thus they should not be merged with each other. In this study, the similarity threshold is determined through informal experimentation.

$$similarity = \begin{bmatrix} 1.00 & & & & \\ 0.28 & 1.00 & & & \\ 0.12 & 0.17 & 1.0 & & \\ 0.00 & 0.00 & 0.00 & 1.0 & \\ 0.00 & 0.00 & 0.00 & 0.21 & 1.00 \end{bmatrix}$$

Figure 6.1: The similarity matrix for a sample set of 5 AUASTs.

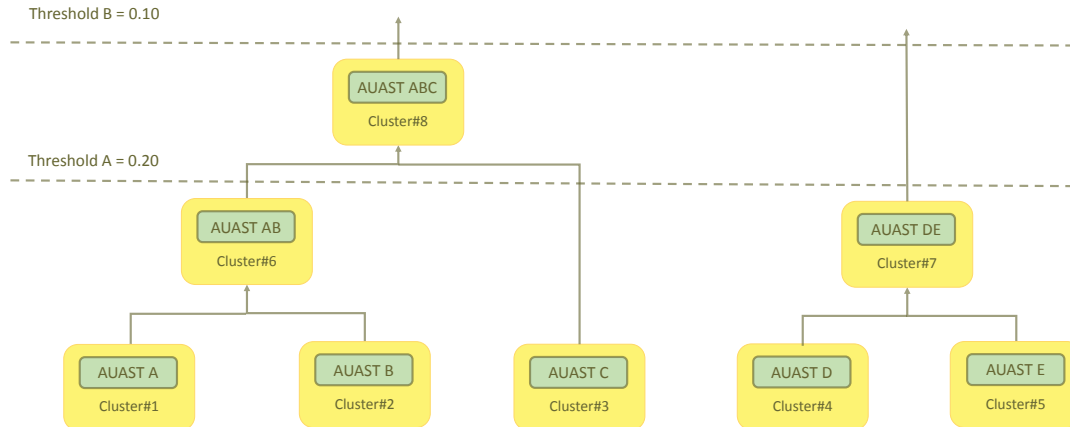


Figure 6.2: The agglomerative hierarchical clustering process on a sample set of 5 AUASTs using the initial similarity matrix shown in Figure 6.1. The threshold value indicates the number of clusters we will come up with.

## 6.2 Evaluaton

To evaluate the clustering approach, I have implemented a tool, and conducted an experiment on the set of AUASTs of LJMs described in Table 4.3. The clustering tool is an Eclipse plug-in built atop the anti-unifier building tool that inputs a set of AUASTs of LJMs extracted from the source code, applies the clustering algorithm on them, and outputs a structural generalization for each cluster.

### 6.2.1 Setup

I manually attempted to perform the hierarchical clustering on the set AUASTs of LJMs in the test suite and constructed the detailed anti-unifier view for each cluster. Anti-unifiers were discarded when the anti-unification of LJMs did not allow the anti-unification of logging calls with one another, as the Java elements enclosing them were not found to be corresponded. I also measured the level of similarity between AUASTs in each cluster by computing the ratio of common Java elements in the detailed anti-unifier view to the total number of Java elements of all AUASTs in that cluster. I also ran the clustering tool on the set of AUASTs to classify them using the similarity measurement.

### 6.2.2 Results

I present the results of my analysis in Table 6.3. The analysis of the output has been divided into three categories: correspondence, similarity, and separateness. The analysis of correspondence and similarity was described in Section 5.5.2. "Separateness" refers to my tools' ability to cluster Java method with different usages of logging calls into separate groups, and the ones with similar usages of logging calls into the same clusters. By similar usage of logging calls, I mean the anti-unification of AUASTs of Java methods in each cluster allows the anti-unification of their log statement nodes with one another, as well.

Cluster	Correspondence		Similarity		Separateness
	Correct (%)	Incorrect	human	tool	
1	28(100)	0	0.09	0.09	✓
3	24(92)	2	0.19	0.2	✓
2	9(100)	0	0.25	0.25	✓

Figure 6.3: Results from applying the clustering tool to the test suite described in Table 4.3

The clustering tool succeeded in detecting the separateness amongst AUASTs of test cases correctly. Clusters 1, 2, and 3 contain logged Java methods of cases (1, 3, 5, 8), (4, 6, 7), and (2, 9, 10), respectively, as detected by my manual inspection. It also successfully calculated the similarity between LJMs of 2 clusters out of 3. In Cluster 2, the error in detecting correspondences originated from the previous study and propagated to the clustering study. However, it is trivial (0.01) and would have a low impact on our final results.

### 6.3 Summary

I have presented a modified version of the agglomerative hierarchical clustering algorithm to classify Java methods with different usages of logging calls into separate groups. This algorithm is implemented as an Eclipse plug-in that takes a set of AUASTs of LJMs, clusters them via the application of the anti-unifier building tool to measure pairwise similarities between the AUASTs of cluster pairs, and generates a structural generalization for each cluster. Furthermore, an experimental study was conducted to validate the effectiveness of my clustering algorithm and the tool support on a test suite.

# Chapter 7

## Discussion

In this chapter, I discuss the validity of my evaluation and the characterization study (Section 7.1), and a number of remaining issues, including the limitations and pitfalls of my approach and the tool support (Section 7.2), and the usage of anti-unification theory for other applications (Section 7.3).

### 7.1 Threats to validity

Prior to applying our tool for characterizing logging usage in real-world software systems, I have conducted three experiments to investigate the effectiveness of the proposed approach. However, there are several potential threats regarding the validity of these experiments. First, the results of my manual examination might be biased, as I determined the correct correspondences between AUASTs and the correct way of classifying the set of AUASTs in our test suite based on a similarity measurement. To limit the bias, other people can be involved to double check the accuracy of my manual inspection in a future work. Secondly, the experiments have examined one test suite containing a set of LJMs from a real-world software system, though different test suites may generate different results. Although I cannot claim that the LJMs in my test suite are a good representative of all LJMs in real-world software systems, the results are still promising, as logging calls are used in various ways in Java methods of my test suite, and have sufficed to indicate the effectiveness of my approach in constructing structural generalizations. Another potential thread is that the successful rate of detecting correspondences by our tool might happened accidentally only for our test suite. To resolve this doubt, I examined the cases where our tool fails to detect correct correspondences, and I found that the failures are due to the fundamental limitations and complexities in the construction of structural generalization through the use of structural correspondence. That is, our tool creates structural generalizations successfully with regard to what

our algorithm should generate. A potential thread to the validity of our characterization study is the degree to which our sample set of software systems is a good representation of all real-world logging usage. To address this issue, we selected various open-source software projects in terms of application, including a programming text editor, a web server, and an application server. These software systems are among the most popular applications in their own product category, and they all have at least 10 years of history in software development. However, our findings might not be able to reflect the characteristics of logging usage in other types of systems such as commercial software systems, or software written in other programming languages.

## 7.2 The pitfalls of my tool

There are some issues that the approximation approach and my tool support is not able to handle perfectly, including inaccurate node ordering, and the resolution of conflicts happened in constructing the anti-unifiers.

### 7.2.1 Inaccurate node ordering

Our anti-unification algorithm does not guarantee to maintain the correct sequence of statements in the body of methods when anti-unifying two method declaration nodes, since the order of statement nodes is not considered in determining the best correspondences. For example, consider we have two corresponding methods  $method_1$  and  $method_2$  embodying  $a_1, a_2, a_3$  and  $b_1, b_2$  sequences of statements, respectively. If our tool finds that the  $b_1$  and  $b_2$  nodes are the best correspondences for the  $a_3$  and  $a_1$  nodes respectively, the output generalization view for the set of statement nodes would be  $a_1$ -or- $b_2$ ,  $a_2$ -or-NIL,  $a_3$ -or- $b_1$ . Therefore, the generalization view does not preserve the correct ordering of nodes in the original structures.

### 7.2.2 Conflict resolution

The decisions I have made to resolve the conflicts occurred in constructing structural generalizations might affect the accuracy of our results. For example, in situations where I have two correspondences with the same similarity value in the ordered list of correspondence connections, my approach picks the one which involves two subtrees with higher number of leaves, though it might be not the best choice for all cases. In addition, I consider AST hierarchies to perform anti-unification. That is, my algorithm does not anti-unify two nodes if their parent nodes are not found to be corresponded. As a result, situations can occur where in fact two nodes should be anti-unified with each other, while they are not anti-unified by the tool. Though these decisions led me to get approximate results, they helped to limit the complexity of my approach allowing the implementation of it as a practical solution.

## 7.3 Applications of anti-unification

Our study demonstrates the application of an extended form of anti-unification (HOAUMT) to infer usage patterns of log statements in source code via the creation of structural generalizations. Anti-unification and its extensions have been already applied to solve several theoretical and practical problems, such as analogy making [?], determining lemma generation in equational inductive proofs [?], and detecting the construction laws for a sequence of structures [?].

Higher-order anti-unification modulo theories can be used to create generalizations in different contexts, and therefore the set of equational theories should be developed particularly for the higher-order structure used in each problem context. That is, the utility of these theories are highly dependent on how well they allow the incorporation of semantic knowledge of structures. In addition, these theories should ensure that only a finite number of anti-instances exist for each structure. Taking all these considerations into account enables HOAUMT to anti-unify sets of structures in a particular context. The practical tests I have conducted through the application of my tool on a test suite demonstrate that our approximation of HOAUMT was successful in constructing structural

generalizations required to solve our problem.

## 7.4 Summary

I discussed the potential threats to validity of my evaluation and characterization study. To limit the bias of the experiments I conducted to evaluate the effectiveness of my approach and the tool support, I selected the test cases from a real system with various levels of similarity in the usage of logging calls. Furthermore, I examined the failed test cases to assure that our tool works when it should work with regard to the proposed algorithm. I will also make our test suite available for public examination to further check the accuracy of our manual inspection. For the characterization study, I selected various software systems in terms of functionality that are widely used by many developers for a long period of time. I also discussed the remaining issues with the tool support, including inaccurate node ordering and handling the conflicts happened in the construction of anti-unifiers.

This work aims to provide a detailed view of structural generalizations constructed from a set of source code fragments that use log statements via the application of an approximated anti-unification and clustering. However, I argued how higher-order anti-unification modulo theories can be effectively approximated for various applications by means of developing an appropriate set of equational theories particularly for the higher-order structure used in each problem context.



# Chapter 8

## Related Work

In this chapter, we review related work to the topics of our study including: the application of logging in real-world software systems (Section 8.1), determining correspondences in source code (Section 8.2), data mining approaches to extract API usage patterns (Section 8.3), anti-unification and its application to detect structural correspondences and construct generalizations (Section 8.4), and clustering (Section 8.5).

### 8.1 Usage of logging

Logging is a conventional programming practice to record a software system's runtime information that can be used in post-modern analysis to trace the root causes of systems' activities. Log analysis is most often performed for failure diagnosis, system behavioral understanding, system security monitoring, and performance diagnostics purposes as described below:

- **Log analysis for failure diagnosis:** Xu et al. [2009] use statistical techniques to learn a decision tree based signature from console logs and then utilize the signature to diagnose anomalies. SherLog [Yuan et al., 2010] uses failure log messages to infer the source code paths that might have been executed during a failure.
- **Log analysis for system behavior understanding:** Fu et al. [2013] present an approach for understanding system behavior through contextual analysis of logs. They first extracted execution patterns reflected by a sequence of system logs and then utilized the patterns to find contextual factors from logs that causes a specific system behavior. The Linux Trace Toolkit [Yaghmour and Dagenais, 2000] was created to record and analyze system behavior by providing an efficient kernel-level event logging infrastructure. A more flexible

approach is taken by DTrace [Cantrill et al., 2004] which allows dynamic modification of kernel code.

- **Log analysis for system security monitoring:** Bishop [1989] proposes a formal model of system's security monitoring using logging and auditing. Peisert et al. [2007] have developed a model that demonstrates a mechanism for extracting logging information to detect how an intrusion occurs in software systems.
- **Log analysis for performance diagnosis:** Nagaraj et al. [2012] developed an automated tool to assist developers in diagnosis and correction of performance issues in distributed systems by analyzing system behaviors extracted from the log data.

Jiang et al. [2009] study the effectiveness of logging in problem diagnosis. Their study shows that customer problems in software systems with logging resolve faster than those without logging by investigating the correlations between failure root causes and diagnosis time. Despite the importance of logging for software development and maintenance, few studies have been conducted in pursuit of understanding logging usage in real-world software. Yuan et al. [2012b] provides a quantitative characteristic study to investigate log message modifications on four open-source software systems by mining their revision history. Their study shows that developers spend great effort modifying log statements as after-thoughts, which indicates that they are not satisfied with the log quality in their first attempt. They also characterize where developers spend most of their time in modifying the log messages.

Yuan et al. [2012a] study the problem of lack of log messages for error diagnosis and suggests to log when generic error conditions happens. LogEnhancer [Yuan et al., 2012c] automatically enhances existing log messages by detecting variables containing important values and inserting them into the log messages. However, these studies only consider source code fragments containing bugs that are needed to be logged and do not consider the other code fragments with no bugs but still needed to be logged. Moreover, these studies mainly research log message modifications

and potential enhancements of them, however, the focus of this study is on understanding where logging calls are used in source code.

## 8.2 Correspondence

Several studies have been conducted to find the similarities and differences between source code fragments. Baxter et al. [1998] develop an algorithm to detect code clones in source code that uses hash functions to partition subtrees of ASTs of a program and then find common subtrees in the same partition through a tree comparison algorithm. Apiwattanapong et al. [2004] present a top-down approach to detect differences and correspondences between two versions of a Java program, through comparison of the control flow graphs created from source code. Holmes et al. [2005] recommend relevant code snippet examples from a source code repository for the sake of helping developers to find examples of how to use an API by heuristically matching the structure of the code under development with the code in the repository. Coogle [Sager et al., 2006] is developed to detect similar Java classes by converting ASTs to a normalized format and then comparing them through tree similarity algorithms. However, none of these approaches construct a detailed view of structural generalizations needed in our context.

Cossette et al. [2014] present a new approach, called Matching via Structural generalization (MSG), to recommend replacements for API migration. They used Jigsaw to find structural correspondences, however, the proposed algorithm does not suffice to construct structural generalizations that represent the detailed commonalities and differences of a set of source code fragments with special attention to log statements, which is required to solve our problem.

## 8.3 API usages patterns

Various data mining approaches have been used to extract API usages patterns out of source code such as unordered pattern mining and sequential pattern mining [Robillard et al., 2013]. Unordered pattern mining, such as association rule mining and itemset mining, extracts a set of API usage

rules without considering their order [Agrawal et al., 1994]. CodeWeb [Michail, 2000] uses data mining association rules to identify reuse patterns between a source code under development and a specific library. PR-Miner [Li and Zhou, 2005] uses frequent itemset mining to extract implicit programming rules from source code and detect violations. The sequential pattern mining technique is different from the unordered one in the way that it considers the order of API usage. As an example, MAPO [Xie and Pei, 2006] combines frequent subsequence mining with clustering to extract API usage patterns from source code.

Another technique for extracting API usage patterns is through statistical source code analysis. For example, PopCon [Holmes and Walker, 2008] is a tool developed to help developers understanding how to use APIs in their source code through calculating popularity statistics for each API of a library. Acharya et al. [2007] present a framework to extract API usage scenarios as partial orders, as specifications were extracted from frequent partial orders. They adapted a compile time model checker to generate control-flow-sensitive static traces of APIs, from which API usage scenarios were extracted. However, none of these approaches suffice to construct detailed structural generalizations needed in our context.

## 8.4 Anti-unification

Anti-unification is the problem of finding the most specific generalization of two terms. First-order syntactical anti-unification was introduced by Plotkin [1970] and Reynolds [1970], independently. Burghardt and Heinz [1996] extend the notion of anti-unification to E-anti-unification to incorporate background knowledge to syntactical anti-unification, which is required for some applications. Anti-unification and its extensions have been applied in various studies for program analysis. Bulychiev and Minea [2009] suggest an anti-unification algorithm to detect clones in ASTs. Their approach consists of three stages: first, identifying similar statements through anti-unification and grouping them into clusters; second, determining similar sequences of statements with the same cluster identifier; third, refining candidate statement sequences using an anti-unification based sim-

ilarity measurement to generate final clones. However, their approach does not construct structural generalizations.

Cottrell et al. [2007] propose Breakaway to automatically determine structural correspondences between a pair of ASTs to create a generalized correspondence view. However, their approach does not allow the determination of the best structural correspondence for each AST node required to our context. Cottrell et al. [2008] develop Jigsaw to help developers integrate small-scale reused code into their own source code by determining structural correspondences through the application of higher-order anti-unification modulo theories. Though I used the Jigsaw framework to find potential correspondences between AST nodes, their approach does not suffice to construct structural generalizations of a set of source code fragments by considering the limitations of this study in determining correspondences.

## 8.5 Clustering

Clustering is an unsupervised machine mining technique that aims to organize a collection of data into clusters, such that intra-cluster similarity is maximized and the inter-cluster similarity is minimized [Karypis et al., 1999, Grira et al., 2004]. We divided existing clustering approaches into two major categories: partitional clustering and hierarchical clustering. Partitional clustering try to classify a data set into  $k$  clusters such that the partition optimizes a pre-determined criterion [Karypis et al., 1999]. The most popular partitional clustering algorithm is k-means, which repeatedly assigns each data point to a cluster with the nearest centroid and computes the new cluster centroids accordingly until a pre-determined number of clusters is obtained [Bouguettaya et al., 2015]. However, k-means clustering algorithm is not a good fit to our problem, as it requires to predefine the number of clusters we need to come up with, which is not reasonable in our context.

Hierarchical clustering algorithms produce a nested grouping of clusters, with single point clusters at the bottom and an all-inclusive cluster at the top [Karypis et al., 1999]. Agglomerative hierarchical clustering is one of the main stream clustering methods [Day and Edelsbrunner, 1984]

and has applications in document retrieval [Voorhees, 1986] and information retrieval from a search engine query log [Beeferman and Berger, 2000]. It starts with singleton clusters, where each contains one data point. Then it repeatedly merges the two most similar clusters to form a bigger one until a pre-determined number of clusters is obtained or the similarity between the closest clusters becomes below a pre-determined threshold value. Hierarchical clustering algorithms work implicitly or explicitly with the  $n \times n$  similarity matrix such that an element in row  $i$  and column  $j$  represents the similarity between the  $i^{\text{th}}$  and the  $j^{\text{th}}$  clusters [Karypis et al., 1999].

There are various versions of agglomerative hierarchical algorithms that mainly differ in how they update the similarity between clusters. There are various methods to measure the similarity between clusters, such as single linkage, complete linkage, average linkage, and centroids [Rasmussen, 1992]. In the single linkage method, the similarity is measured by the similarity of the closest pair of data points of two clusters. In the complete linkage method, the similarity is computed by the similarity of the farthest pair of data points of two clusters. In the average linkage method, the similarity is measured by the average of all pairwise similarities between data points of two clusters. In the centroids methods, each cluster is represented by a centroid of all data points in the cluster, and the similarity between two clusters is measured by the similarity of the clusters' centroids. However, in our application, each cluster is composed of one AUAST, and the similarity between two clusters is measured by the similarity between the clusters' AUASTs, which is the ratio of the number of common pieces over the total number of pieces of their anti-unifier.

## 8.6 Summary

Despite the great importance of logging and its various applications in software development and maintenance, few studies have focused on understanding logging usage in source code. Some work has been done on characterizing log messages modifications made by developers and to help them enhance the content of log messages. However, to my knowledge, no study has been conducted on characterizing where logging is used in source code via structural generalization and

clustering. Several data mining and statistical source code analysis techniques have been used to extract API usage patterns, however, none of them enable us to construct the detailed structural generalizations of a set of source code fragments. On the other hand, using higher-order anti-unification modulo theories and an agglomerative hierarchical clustering algorithm allow us to construct generalizations representing the commonalities and differences between ASTs of logged Java methods and grouping them into clusters based on structural correspondence.

## Chapter 9

### Conclusion

Determining the detailed structural similarities and differences between a set of source code fragments is a complex task that can be applied to solve several source code analysis problems. As a specific application, the focus of this study is on detecting usage patterns of logging calls in source code via structural generalization and clustering.

Logging is a pervasive practice and has various applications in software development and maintenance. However, it is a challenging task for developers to understand how to use logging calls in source code. I have presented an approach to automatically characterize where logging calls happen in source code. I have developed a prototype tool implementing my proposed approach that proceeds in three steps. First, it extracts the ASTs of logged Java methods using the Eclipse JDT framework, extends the AST structures to AUAST, and determines potential structural correspondences between AUAST nodes via the Jigsaw framework. Second, it constructs an anti-unifier from AUASTs of two given LJMs with a focus on logging calls through the implementation of higher-order anti-unification modulo theories. Due to the problem of undecidability of HOAUMT, it employs an approximation technique which greedily determines the best correspondence for each node with the highest similarity. It applies several constraints prior to determining the best correspondences to prevent the anti-unification of logging calls with anything else. It also develops a measure of structural similarity that determines how similar is the usage of logging calls in these Java methods. Third, it classifies a set of logged Java methods via a hierarchical clustering algorithm suited to our application.

The application of HOAUMT to construct generalizations via determining structural correspondences is novel to the problem of extracting usage patterns of log statements in source code. To evaluate the effectiveness of this approach in constructing generalizations and clustering logged



Java methods, three experiments were conducted on a sample test suite. I found that my tool was successful in determining correct correspondences for my application in % of test cases. It was also successful in clustering logged Java methods of our test suite. This work also shows how the Jigsaw framework could be effectively used to construct structural generalizations for a particular problem context by determining structural correspondences.

Furthermore, an study was conducted to infer logging usage patterns of the source code of three software systems on a method-granularity basis via my tool that generates a detailed view of structural generalizations describing the commonalities and differences between the usage of logging calls in Java methods. Our characterization study shows

In summary, our study makes the following contributions:

- An approach to constructing a structural generalization from ASTs of two logged Java methods with special attention to log statements by determining structural correspondences and developing an approximation of higher-order anti-unification modulo theories for our context.
- An approach to developing a similarity measure that indicates the level of similarity between the usage of logging calls in two Java methods.
- A hierarchical clustering algorithm to clustering a set of Java methods showing different usages of logging calls into different clusters.
- An approach to detecting usage patterns of log statements in source code via structural generalization and clustering.

## 9.1 Future Work

Future work could be directed to address the remaining issues of this study as described below:

- **Improving logging practices:** characterizing logging usage could be a huge step towards improving logging practices through the provision of some guidelines that might help de-

developers in making decisions about where to log. Further studies could be conducted to investigate the feasibility of predicting the location of logging calls based on the detected usage patterns. Future work can also be done to develop recommendation tool supports that not only save developers time and effort for making decisions about where to log, but also improve the quality of logging practices.

- **Further validation of this study:** The characterization study can be conducted on more software systems to further validate the findings of my study. In addition, a survey can be conducted to ask developers on the factors they consider to decide on where to log. It might also be helpful to recognize important structural and semantic information that should be taken into account for characterizing logging usage.
- **Further extensions to my approach and the tool support:** data flow analysis can be performed to detect the problems related to node ordering in the construction of anti-unifiers. This approach can also be extended to examine more advanced semantical and contextual information of source code fragments enclosing logging calls in addition to structural information. In addition, further analyses can be done to detect and resolve all the conflicts happen in deciding the best correspondences to construct an approximation of the best anti-unifier for our problem. However, the complexity of applying all these extensions must be kept restricted to maintain the approach as a practical one.
- **Other applications:** any applications that are involved in the inference of structural patterns in source code even infrequently-used patterns might benefit from my tools underlying framework. Furthermore, understanding the commonalities and differences among source code fragments has application in several areas of software engineering, such as API usage pattern collation, code clone detection, recommending replacements for API migration, and merging different branches of version control systems. Our tool's functionality to construct a detailed view of structural generalizations of a set of source code fragments via structural correspondence and clustering could be used to improve the results of these studies as well.

## Bibliography

- Mithun Acharya, Tao Xie, Jian Pei, and Jun Xu. Mining api patterns as partial orders from source code: from usage scenarios to specifications. In *Proceedings of the the 6th joint meeting of the European software engineering conference and the ACM SIGSOFT symposium on The foundations of software engineering*, pages 25–34. ACM, 2007.
- Rakesh Agrawal, Ramakrishnan Srikant, et al. Fast algorithms for mining association rules. In *Proc. 20th int. conf. very large data bases, VLDB*, volume 1215, pages 487–499, 1994.
- Taweessup Apiwattanapong, Alessandro Orso, and Mary Jean Harrold. A differencing algorithm for object-oriented programs. In *Proceedings of the 19th IEEE international conference on Automated software engineering*, pages 2–13. IEEE Computer Society, 2004.
- Ira D Baxter, Andrew Yahin, Leonardo Moura, Marcelo Sant’Anna, and Lorraine Bier. Clone detection using abstract syntax trees. In *Software Maintenance, 1998. Proceedings., International Conference on*, pages 368–377. IEEE, 1998.
- Doug Beeferman and Adam Berger. Agglomerative clustering of a search engine query log. In *Proceedings of the sixth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 407–416. ACM, 2000.
- Matt Bishop. A model of security monitoring. In *Computer Security Applications Conference, 1989., Fifth Annual*, pages 46–52. IEEE, 1989.
- Athman Bouguettaya, Qi Yu, Xumin Liu, Xiangmin Zhou, and Andy Song. Efficient agglomerative hierarchical clustering. *Expert Systems with Applications*, 42(5):2785–2797, 2015.
- Peter Bulychiev and Marius Minea. An evaluation of duplicate code detection using anti-unification. In *Proc. 3rd International Workshop on Software Clones*. Citeseer, 2009.

- Jochen Burghardt and Birgit Heinz. Implementing anti-unification modulo equational theory. arbeitspapier 1006, 1996.
- Bryan Cantrill, Michael W Shapiro, Adam H Leventhal, et al. Dynamic instrumentation of production systems. In *USENIX Annual Technical Conference, General Track*, pages 15–28, 2004.
- Siobhán Clarke, William Harrison, Harold Ossher, and Peri Tarr. The dimension of separating requirements concerns for the duration of the development lifecycle. In *First Workshop on Multi-Dimensional Separation of Concerns in Object-oriented Systems (at OOPSLA)*, 1999a.
- Siobhán Clarke, William Harrison, Harold Ossher, and Peri Tarr. Subject-oriented design: towards improved alignment of requirements, design, and code. *ACM SIGPLAN Notices*, 34(10):325–339, 1999b.
- Bradley Cossette, Robert Walker, and Rylan Cottrell. Using structural generalization to discover replacement functionality for API evolution. Technical Report 2014-745-10, Department of Computer Science, University of Calgary, Calgary, Canada, May 2014.
- Rylan Cottrell, Joseph J. C. Chang, Robert J. Walker, and Jörg Denzinger. Determining detailed structural correspondence for generalization tasks. In *Proceedings of the European Software Engineering Conference/ACM SIGSOFT International Symposium on Foundations of Software Engineering*, pages 165–174, 2007. doi: 10.1145/1287624.1287649.
- Rylan Cottrell, Robert J. Walker, and Jörg Denzinger. Semi-automating small-scale source code reuse via structural correspondence. In *Proceedings of the ACM SIGSOFT International Symposium on Foundations of Software Engineering*, pages 214–225, 2008. doi: 10.1145/1453101.1453130.
- William HE Day and Herbert Edelsbrunner. Efficient algorithms for agglomerative hierarchical clustering methods. *Journal of classification*, 1(1):7–24, 1984.

- Qiang Fu, Jian-Guang Lou, Yi Wang, and Jiang Li. Execution anomaly detection in distributed systems through unstructured log analysis. In *ICDM*, volume 9, pages 149–158, 2009.
- Qiang Fu, Jian-Guang Lou, Qingwei Lin, Rui Ding, Dongmei Zhang, and Tao Xie. Contextual analysis of program logs for understanding system behaviors. In *Proceedings of the 10th Working Conference on Mining Software Repositories*, pages 397–400. IEEE Press, 2013.
- James Gosling, Bill Joy, Guy Steele, Gilad Bracha, and Alex Buckley. *The Java Language Specification*. Addison-Wesley, Java SE 7 edition, 2012. URL <http://docs.oracle.com/javase/specs/jls/se7/html/index.html>.
- Nizar Grira, Michel Crucianu, and Nozha Boujemaa. Unsupervised and semi-supervised clustering: a brief survey. *A review of machine learning techniques for processing multimedia content*, 1:9–16, 2004.
- Samudra Gupta. Pro apache log4j: Java application logging using the open source apache log4j api. *Apress®*, USA, 2005.
- Reid Holmes and Robert J Walker. A newbie’s guide to eclipse apis. In *Proceedings of the 2008 international working conference on Mining software repositories*, pages 149–152. ACM, 2008.
- Reid Holmes, Robert J Walker, and Gail C Murphy. Strathcona example recommendation tool. In *ACM SIGSOFT Software Engineering Notes*, volume 30, pages 237–240. ACM, 2005.
- Weihang Jiang, Chongfeng Hu, Shankar Pasupathy, Arkady Kanevsky, Zhenmin Li, and Yuanyuan Zhou. Understanding customer problem troubleshooting from storage system logs. In *FAST*, volume 9, pages 43–56, 2009.
- George Karypis, Eui-Hong Han, and Vipin Kumar. Chameleon: Hierarchical clustering using dynamic modeling. *Computer*, 32(8):68–75, 1999.

- Zhenmin Li and Yuanyuan Zhou. Pr-miner: automatically extracting implicit programming rules and detecting violations in large software code. In *ACM SIGSOFT Software Engineering Notes*, volume 30, pages 306–315. ACM, 2005.
- Jian-Guang Lou, Qiang Fu, Shengqi Yang, Ye Xu, and Jiang Li. Mining invariants from console logs for system problem detection. In *USENIX Annual Technical Conference*, 2010.
- Amir Michail. Data mining library reuse patterns using generalized association rules. In *Proceedings of the 22nd international conference on Software engineering*, pages 167–176. ACM, 2000.
- Karthik Nagaraj, Charles Killian, and Jennifer Neville. Structured comparative analysis of systems logs to diagnose performance problems. In *Presented as part of the 9th USENIX Symposium on Networked Systems Design and Implementation (NSDI 12)*, pages 353–366, 2012.
- Sean Peisert, Matt Bishop, Sidney Karin, and Keith Marzullo. Toward models for forensic analysis. In *Systematic Approaches to Digital Forensic Engineering, 2007. SADFE 2007. Second International Workshop on*, pages 3–15. IEEE, 2007.
- Gordon D Plotkin. A note on inductive generalization. *Machine intelligence*, 5(1):153–163, 1970.
- John C Reynolds. Transformational systems and the algebraic structure of atomic formulas. *Machine intelligence*, 5(1):135–151, 1970.
- Martin P Robillard, Eric Bodden, David Kawrykow, Mira Mezini, and Tristan Ratchford. Automated api property inference techniques. *Software Engineering, IEEE Transactions on*, 39(5): 613–637, 2013.
- Tobias Sager, Abraham Bernstein, Martin Pinzger, and Christoph Kiefer. Detecting similar java classes using tree algorithms. In *Proceedings of the 2006 international workshop on Mining software repositories*, pages 65–71. ACM, 2006.

- Ellen M Voorhees. Implementing agglomerative hierarchic clustering algorithms for use in document retrieval. *Information Processing & Management*, 22(6):465–476, 1986.
- Tao Xie and Jian Pei. Mapo: Mining api usages from open source repositories. In *Proceedings of the 2006 international workshop on Mining software repositories*, pages 54–57. ACM, 2006.
- Wei Xu, Ling Huang, Armando Fox, David Patterson, and Michael I Jordan. Detecting large-scale system problems by mining console logs. In *Proceedings of the ACM SIGOPS 22nd symposium on Operating systems principles*, pages 117–132. ACM, 2009.
- Karim Yaghmour and Michel R Dagenais. Measuring and characterizing system behavior using kernel-level event logging. 2000.
- Ding Yuan, Haohui Mai, Weiwei Xiong, Lin Tan, Yuanyuan Zhou, and Shankar Pasupathy. Sherlock: error diagnosis by connecting clues from run-time logs. In *ACM SIGARCH computer architecture news*, volume 38, pages 143–154. ACM, 2010.
- Ding Yuan, Soyeon Park, Peng Huang, Yang Liu, Michael M Lee, Xiaoming Tang, Yuanyuan Zhou, and Stefan Savage. Be conservative: enhancing failure diagnosis with proactive logging. In *Presented as part of the 10th USENIX Symposium on Operating Systems Design and Implementation (OSDI 12)*, pages 293–306, 2012a.
- Ding Yuan, Soyeon Park, and Yuanyuan Zhou. Characterizing logging practices in open-source software. In *Proceedings of the 34th International Conference on Software Engineering*, pages 102–112. IEEE Press, 2012b.
- Ding Yuan, Jing Zheng, Soyeon Park, Yuanyuan Zhou, and Stefan Savage. Improving software diagnosability via log enhancement. *ACM Transactions on Computer Systems (TOCS)*, 30(1):4, 2012c.