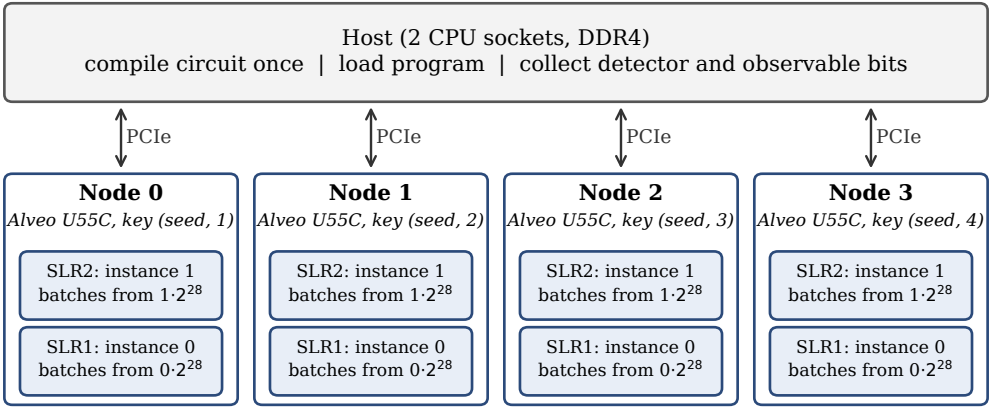

the nodes exchange no data; each returns its own detector and observable bits to the host