

Лекция 11

1. Прогон программы получения атрибутов файла

```
✓ #include <windows.h>
[ #include <stdio.h>
✓ void main(void) {
    DWORD dwFileAttributes;
    dwFileAttributes = GetFileAttributes(L"tmp");
    if (dwFileAttributes == -1) printf(" GetFileAttributes Error\n");
    if (dwFileAttributes & FILE_ATTRIBUTE_NORMAL)
        printf("This file is normal\n");
    if (dwFileAttributes & FILE_ATTRIBUTE_DIRECTORY)
        printf("This file is directory\n");
    if (dwFileAttributes & FILE_ATTRIBUTE_REPARSE_POINT)
        printf("This file is reparse point\n");
}
```

Результат:

```
GetFileAttributes Error
This file is normal
This file is directory
This file is reparse point
```


2. Прогон программы, осуществляющей асинхронное чтение из уже существующего файла

```

#include <windows.h>
#include <stdio.h>
void main(void) {
    HANDLE hFile, hHeap;
    int iRet = 0;
    void* pMem;
    long BufSize = 512;
    DWORD iRead = 10;
    char* String;
    OVERLAPPED ov = { 0 };
    hFile = CreateFile(L"MYFILE.TXT", GENERIC_READ |
        GENERIC_WRITE, 0, NULL, OPEN_EXISTING,
        FILE_ATTRIBUTE_NORMAL | FILE_FLAG_OVERLAPPED, NULL);
    if (hFile == INVALID_HANDLE_VALUE) printf("Could not open file.");
    hHeap = GetProcessHeap();
    pMem = HeapAlloc(hHeap, HEAP_ZERO_MEMORY, BufSize);
    String = (char*)pMem;
    ov.Offset = 3;
    ReadFile(hFile, pMem, iRead, &iRead, &ov);
    WaitForSingleObject(hFile, INFINITE);
    printf("Read %d bytes: %s\n", iRead, String);
    printf("Read %d bytes: %s\n", ov.InternalHigh, String);
    HeapFree(hHeap, 0, pMem);
    CloseHandle(hFile);
}

```

Результат:

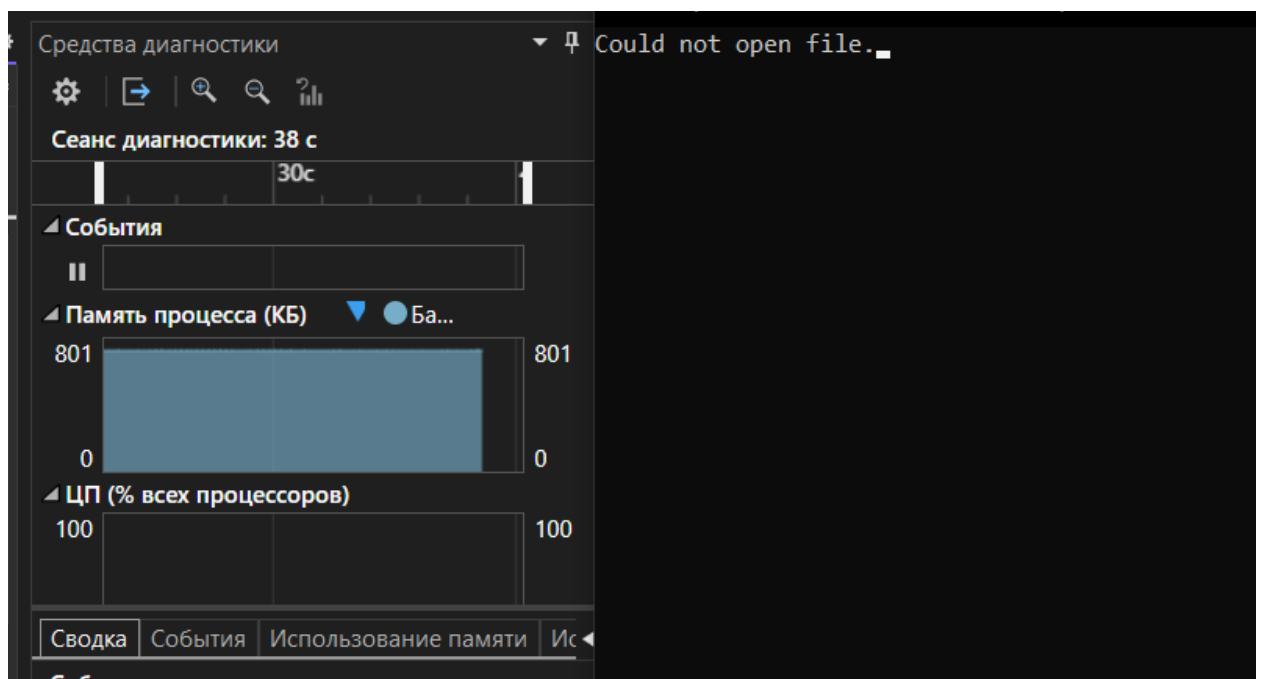

3. Прогон программы, задача которой создать каталог на диске и сделать его текущим

```

#include <windows.h>
#include <stdio.h>
void main(void) {
    int iRet = 0;
    TCHAR Buf[512];
    int bufSize = 512;
    iRet = GetCurrentDirectory(bufSize, Buf);
    printf("iRet = %d, current directory %s\n", iRet, Buf);
    iRet = CreateDirectory(L"f:\\tmp1", NULL);
    if (!iRet) printf("CreateDirectory error\n");
    iRet = SetCurrentDirectory(L"f:\\tmp1");
    if (!iRet) printf("SetCurrentDirectory error\n");
    iRet = GetCurrentDirectory(bufSize, Buf);
    printf("iRet = %d, current directory %s\n", iRet, Buf);
}

```

Результат:

```

iRet = 51, current directory C
CreateDirectory error
SetCurrentDirectory error
iRet = 51, current directory C

```