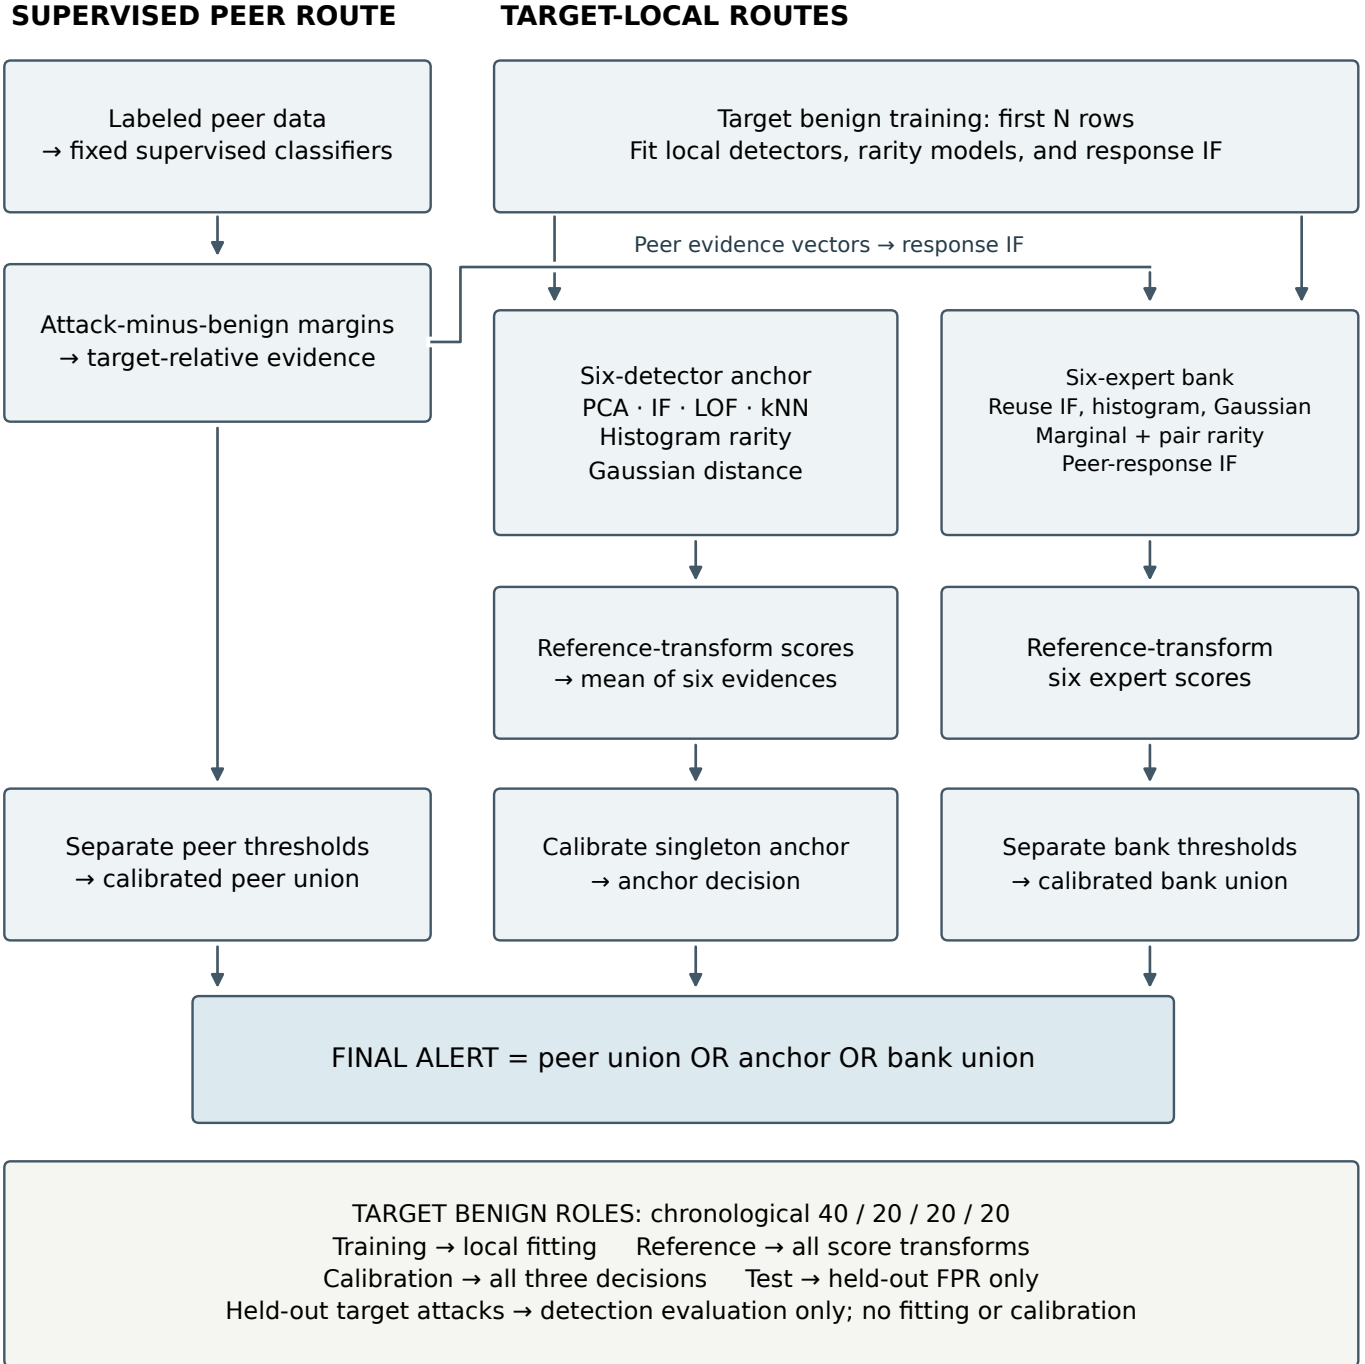
SUPERVISED PEER ROUTE
TARGET-LOCAL ROUTES
Labeled peer data
→ fixed supervised classifiers
Target benign training: first N rows
Fit local detectors, rarity models, and response IF
Peer evidence vectors → response IF
Attack-minus-benign margins
→ target-relative evidence
Six-detector anchor
PCA · IF · LOF · kNN
Histogram rarity
Gaussian distance
Six-expert bank
Reuse IF, histogram, Gaussian
Marginal + pair rarity
Peer-response IF
Reference-transform scores
→ mean of six evidences
Reference-transform
six expert scores
Separate peer thresholds
→ calibrated peer union
Calibrate singleton anchor
→ anchor decision
Separate bank thresholds
→ calibrated bank union
FINAL ALERT = peer union OR anchor OR bank union
TARGET BENIGN ROLES: chronological 40 / 20 / 20 / 20
Training → local fitting
Reference → all score transforms
Calibration → all three decisions
Test → held-out FPR only
Held-out target attacks → detection evaluation only; no fitting or calibration