

DATABASE PROJECT

Zoo Management

STUDENT: Pogar Denisa Natalia

GROUP: 151

Table of Contents

1. Description of the real-world model.....	2
2. Presentation of constraints.....	3
3. Design of the Entity-Relationship Diagram	4
3.1 Description of the entities	6
3.2 Description of the relationships	6
3.3 Description of the attributes.....	7
4. Transformation of the ER Diagram into the Conceptual Diagram.....	9
5. Relational schemas	12
6. Creating the tables in SQL and inserting the data	12
6.1 Creating the tables.....	12
6.2 Inserting the data.....	18

1. Description of the Real-World Model

Describe the real-world model, its usefulness and its operating rules. Describe in natural language the real-world model together with all operating rules.

The data model will manage information regarding the administration, animal care and visitor interaction of a Zoo.

Several types of employees work at the institution, the most important being: trainers, caretakers and veterinarians. Each employee is uniquely identified and holds a single employment contract; an employee cannot work without a valid contract.

The Zoo houses several types of animals, classified as mammals, birds and fish. This classification is needed in order to store unique attributes, such as wingspan for birds or water type for fish.

The space is structured into climate sectors. Each animal is assigned to a single sector in which it lives, while a sector can house several animals. Their health is monitored through consultations provided by veterinarians. A consultation is performed by a single veterinarian for a single animal, resulting in a diagnosis and other necessary observations.

Interaction with the public takes place through shows organized periodically. A show necessarily involves the participation of at least one trainer and one animal. A trainer can coordinate several shows, and an animal can be featured in several events.

From a logistical point of view, the animals are fed various types of food, supplied by external partners (suppliers). A supplier can provide several types of food, and a type of food can be purchased from several suppliers.

Visitors' access to the premises is based on a ticket. A visitor can purchase one or more tickets. To ensure a high standard of service, visitors can leave reviews about the sectors they visited.

2. Presentation of Constraints


Present the constraints (restrictions, rules) imposed on the model. Describe the constraints imposed on the model, taking cardinalities into account.

- The Zoo contains exclusively **mammals**, **fish** and **birds**.
- Only **employees** with the position “Veterinarian” are authorized to provide medical consultations or treatments to the **animals**. A veterinarian can appear in the system without yet having interventions or patient animals assigned at a given time (if newly hired).
- Each animal receives a **consultation** when needed, and a consultation is provided to a **single animal**.

- Employees with the position “Caretaker” are responsible for the daily care of the animals. Each animal must have **at least one caretaker** responsible for it (and may have several). At the same time, a caretaker can look after **several animals** or may not yet have any assigned, for example if newly hired.
- Each **visitor** in the database has purchased **at least one ticket**, and each ticket is purchased by a single visitor. Also, each visitor can leave **feedback** (one comment, several comments or none) regarding the Zoo's **sectors**, in order to help improve the services.
- Only employees with the position “Trainer” can participate in **shows**. A show can involve **several animals**, but at least one, and **several trainers**, but at least one. Not all animals are required to take part in a show (the young are always spared this stress), and not all trainers must have shows scheduled (they may be in a training period).
- Each type of **food** in the system is supplied **by at least one supplier**, but some suppliers may be inactive for a period (not supplying any type of food).
- Each **employee** must hold **a single** valid **contract** registered in the system, and a contract belongs to **a single employee**.
- A **sector** of the Zoo can house **several animals**, but each animal lives in **only one place**, which best imitates its natural habitat.
- The available quantity of food must be a **positive number**.
- Each employee is identified by their id, and the personal numeric code (CNP) must be **unique**.
- Consultation dates must be **later** than the dates of arrival at the Zoo, which must be **later** than or **coincide** with the animals' birth dates.

3. Design of the Entity-Relationship Diagram

Design the Entity-Relationship Diagram, on the basis of which you will solve the following exercises.

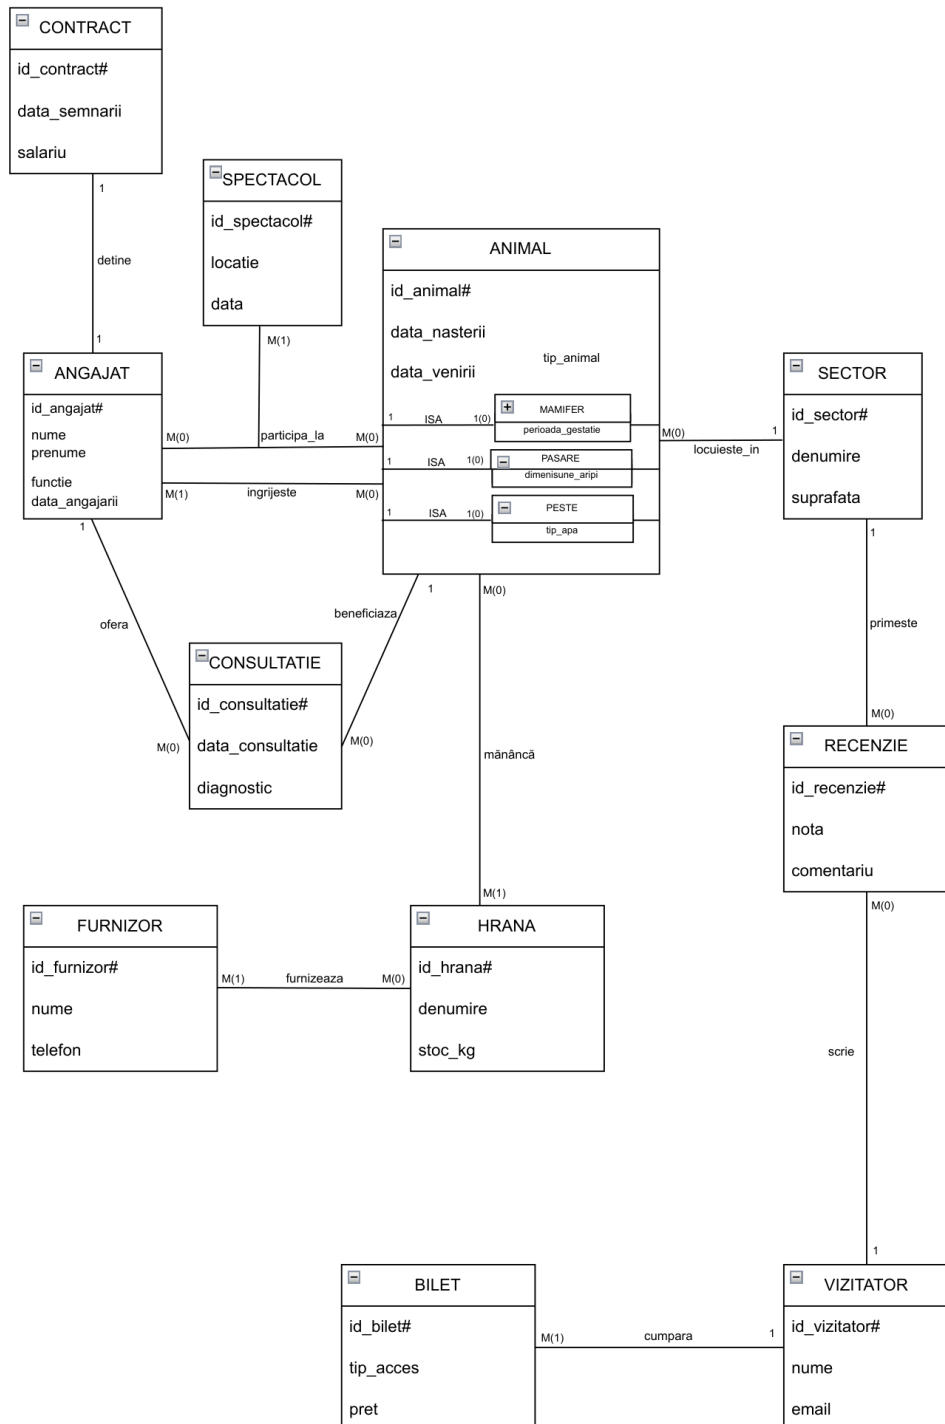

3.1 Description of the entities

Describe, of your choice, one independent entity, one dependent entity and one subentity, specifying the primary key.

1. Independent entity

SECTOR = a physical, fenced place that is part of the Zoo's territory and houses several animals. The primary key of this entity is `id_sector`.

2. Dependent entity

BILET (TICKET) = an object that grants access to the Zoo; it is dependent on the VIZITATOR (VISITOR) entity, since only visitors can purchase tickets. The primary key of the entity is `id_bilet`.

3. Subentity

PESTE (FISH) = a subentity of the ANIMAL entity, containing information specific to this subcategory of animals. The primary key of the entity is `id_animal`.

3.2 Description of the relationships

Describe the relationships, specifying their cardinality. One many-to-many relationship, one type-3 relationship, one one-to-one relationship and one one-to-many relationship will be described, of your choice.

1. One-to-one relationship

ANGAJAT_detine_CONTRACT (EMPLOYEE_holds_CONTRACT) = a relationship between the ANGAJAT (EMPLOYEE) and CONTRACT entities, representing the employment contract held by each employee. The relationship has minimum and maximum cardinality 1:1 (each employee must have a valid employment contract).

2. One-to-many relationship

VIZITATOR_scrie_RECENZIE (VISITOR_writes_REVIEW) = a relationship between the VIZITATOR (VISITOR) and RECENZIE (REVIEW) entities, representing the feedback that visitors can leave. The relationship has minimum cardinality 1:0 (a visitor

may leave no comment, but a review must have a visitor who wrote it) and maximum cardinality 1:n (a visitor can leave several pieces of feedback).

3. Many-to-many relationship

ANIMAL_mananca_HRANĂ (ANIMAL_eats_FOOD) = a relationship between the ANIMAL and HRANĂ (FOOD) entities, representing the types of food that an animal eats. The relationship has minimum cardinality 0:1 (a type of food may not be eaten by any animal at a given time, but an animal must always have food available) and maximum cardinality n:n (an animal's diet can contain several foods, and a type of food can be eaten by several animals).

4. Type-3 relationship

ANIMAL_insotit_de_ANGAJAT_participa_la_SPECTACOL
(ANIMAL_accompanied_by_EMPLOYEE_takes_part_in_SHOW) = a type-3 relationship linking the ANIMAL, ANGAJAT (EMPLOYEE) and SPECTACOL (SHOW) entities, reflecting the employees who support performances with animals during a show. The relationship has minimum cardinality 0:0:1 (not all animals and not all employees are required to take part in performances, but a show is needed for this relationship to exist) and maximum cardinality n:n:n (several animals can take part, together with several trainers, in different shows). The name of this relationship is participa_la (takes_part_in).

3.3 Description of the attributes

Describe the attributes, specifying the data type and any constraints, default values and possible values of the attributes. Describe, of your choice, the attributes of an independent entity, the attributes of a subentity and the attributes of a relationship.

1. Attributes of an independent entity

The independent entity CONSULTATIE (CONSULTATION) has the following attributes:

id_consultatie = an integer variable, of maximum length 5, representing the unique code of the consultation NUMBER(5). This attribute is the primary key of the entity (constraints: NOT NULL; possible values: positive integers)

id_medic = an integer variable, of maximum length 5, representing the code of the doctor who performed the consultation NUMBER(5). This attribute is a foreign key that must match the value of the primary key in the ANGAJAT (EMPLOYEE) table (constraints: NOT NULL)

id_animal = an integer variable, of maximum length 5, representing the code of the consulted animal NUMBER(5). This attribute is a foreign key that must match the value of the primary key in the ANIMAL table (constraints: NOT NULL)

data_consultatie = a calendar date variable, representing the date the consultation was performed (constraints: NOT NULL, default value: SYSDATE)

diagnostic = a character variable, of maximum length 100, representing the diagnosis received VARCHAR2(100)

tratament = a character variable, of maximum length 100, representing the treatment plan VARCHAR2(100)

greutate_masurata = a real number variable, of maximum length 10 (with two decimals), representing the animal's weight NUMBER(10, 2) (constraints: CHECK > 0)

observatii = a character variable, of maximum length 200, representing the doctor's additional notes: VARCHAR2(200).

2. Attributes of a subentity

The subentity PESTE (FISH) has the following attributes:

id_animal = an integer variable, of maximum length 5, representing the unique code of the animal: NUMBER(5). This attribute is the primary key of the entity (constraints: NOT NULL; possible values: positive integers)

tip_apă = a character variable, of maximum length 10, representing the fish's aquatic environment (e.g. 'Dulce' [freshwater], 'Sarata' [saltwater]): VARCHAR2(10) (constraints: CHECK IN, NOT NULL)

temp_apă = a real variable, of maximum length 4 (with one decimal), representing the water temperature: NUMBER(3, 1) (constraints: NOT NULL)

adancime_minima = a real variable, of maximum length 7 (with 2 decimals), representing the minimum required depth: NUMBER(5, 2) (constraints: NOT NULL, CHECK>=0).

3. Attributes of a relationship

The relationship ANGAJAT_ingrijeste_ANIMAL (EMPLOYEE_cares_for_ANIMAL) has the following attributes:

id_ingrijitor = an integer variable, of maximum length 5, representing the code of an employee NUMBER(5); this attribute must match the value of the primary key in the ANGAJAT (EMPLOYEE) table (constraints: NOT NULL)

id_animal = an integer variable, of maximum length 5, representing the code of an animal NUMBER(5); this attribute must match the value of the primary key in the ANIMAL table (constraints: NOT NULL)

ore_pe_sap = an integer variable, of maximum length 5, representing how many hours per week the caretaker must spend with the animals NUMBER(3)


data_inceput = a calendar date variable, representing the date on which the employee started working with the animals


tip_activitate = a character variable, of maximum length 25, representing the type of activity performed by the employee VARCHAR2(25)

The primary key of this relationship is a composite one, made up of the attributes (id_angajat, id_animal, data_inceput).

4. Transformation of the ER Diagram into the Conceptual Diagram

Transform the Entity-Relationship Diagram into the Conceptual Diagram.

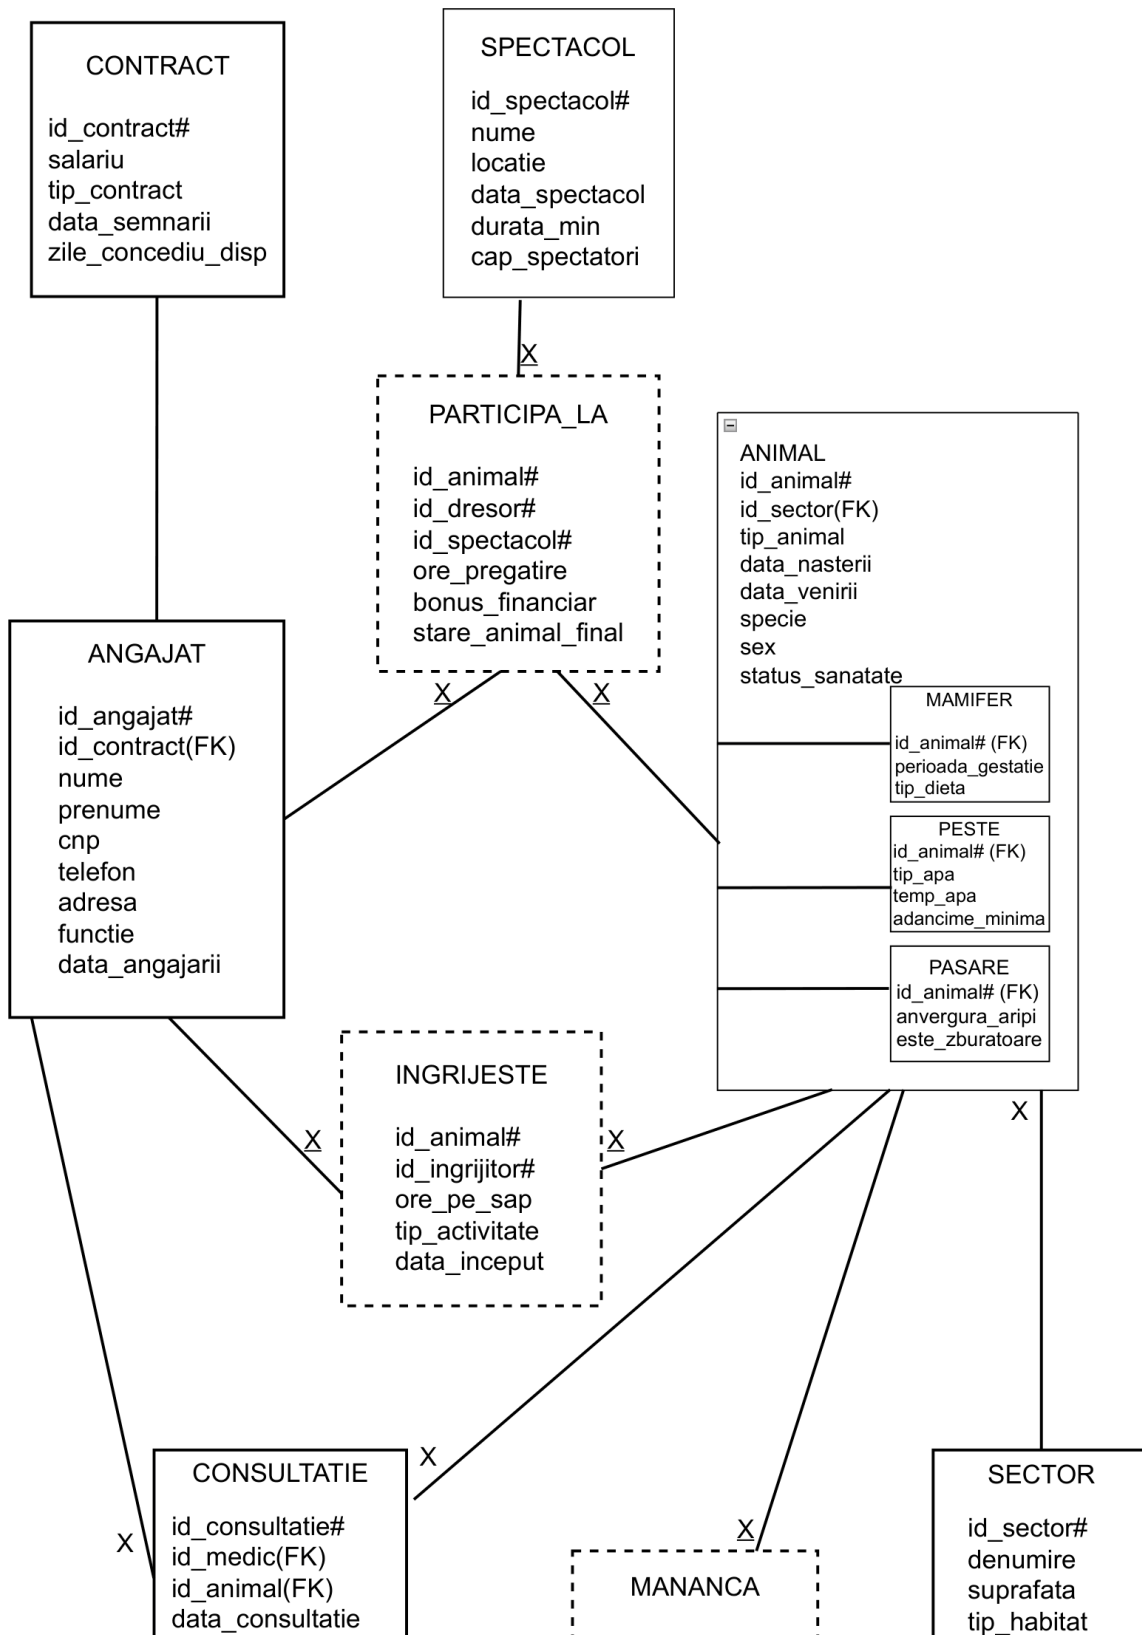

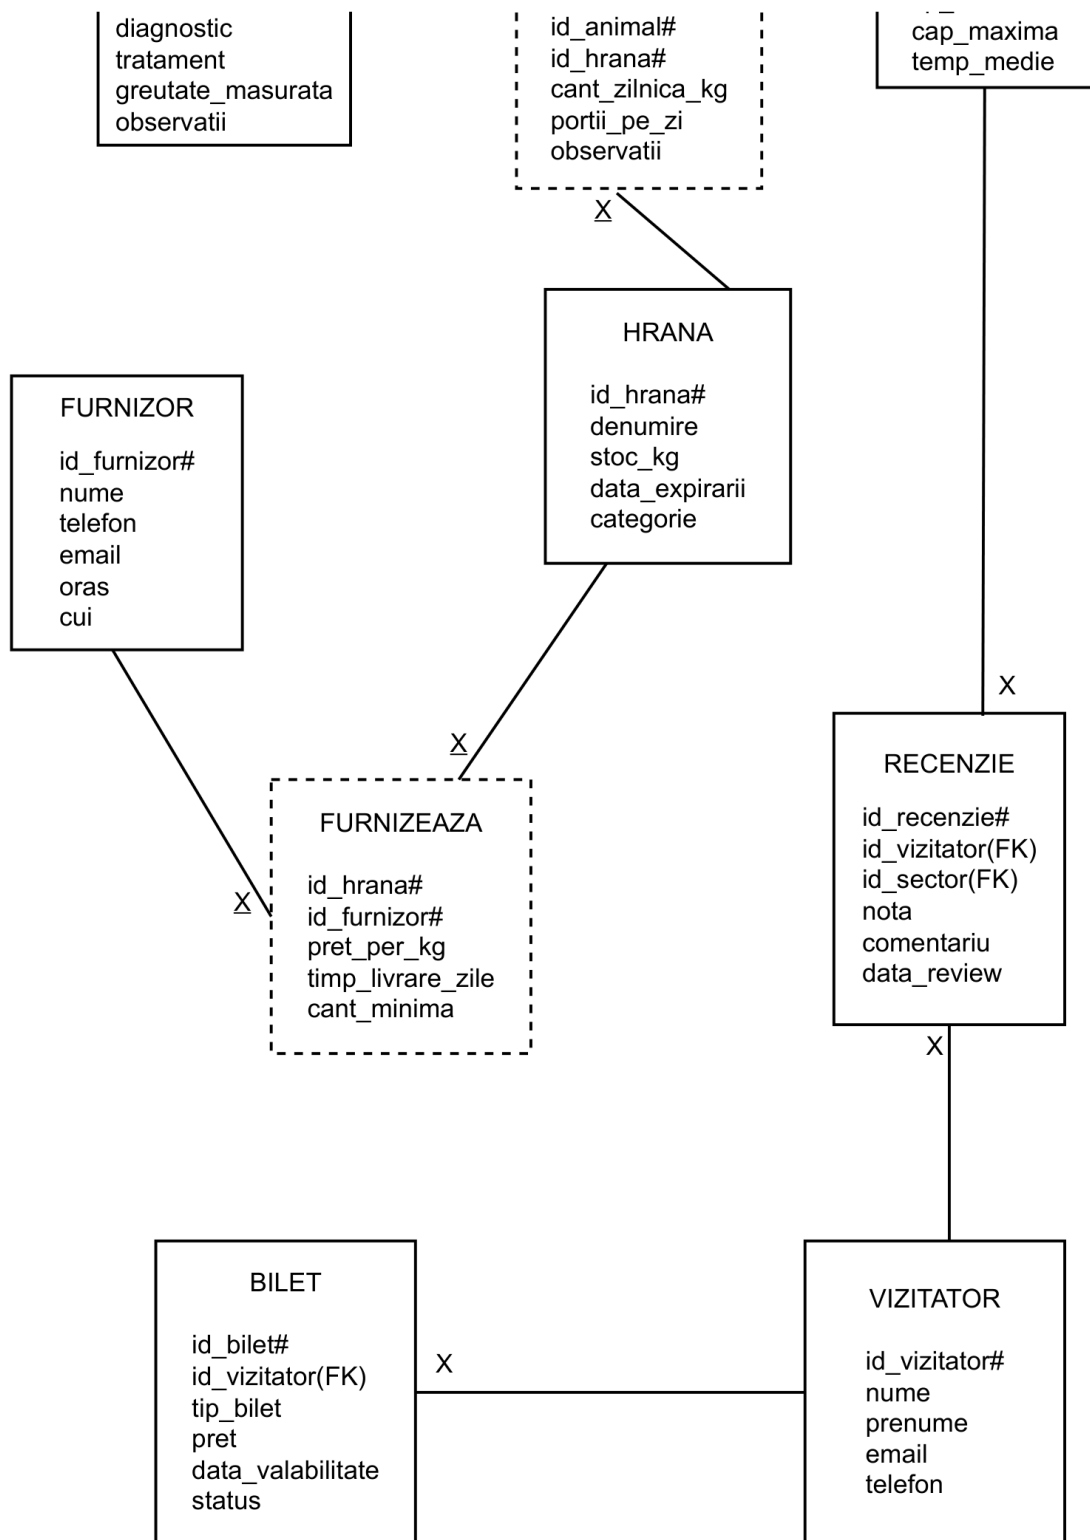

5. Relational Schemas

1. Relational schema – independent table

CONTRACT (id_contract#, salariu, tip_contract, data_semnarii, zile_concediu_disp)

2. Relational schema – subtable

MAMIFER (id_animal# (FK), perioada_gestatie, tip_dieta)


3. Relational schema – associative table

MANANCA (id_animal# (FK), id_hrana# (FK), cant_zilnica_kg, portii_pe_zi, observatii)

6. Creating the Tables in SQL and Inserting the Data

6.1 Creating the tables

The name of the table is specified and a screenshot from the IDE with the full code is added. The same procedure is followed for all tables.

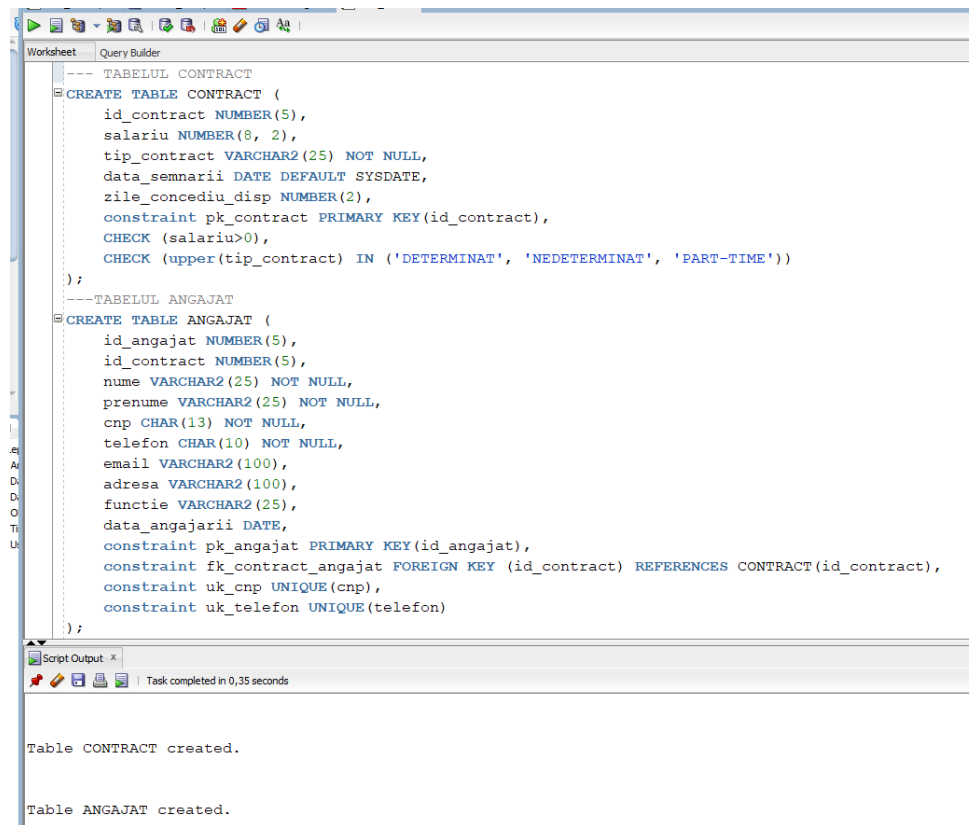


```
--- TABELUL CONTRACT
CREATE TABLE CONTRACT (
    id_contract NUMBER(5),
    salariu NUMBER(8, 2),
    tip_contract VARCHAR2(25) NOT NULL,
    data_semnarii DATE DEFAULT SYSDATE,
    zile_concediu_disp NUMBER(2),
    constraint pk_contract PRIMARY KEY(id_contract),
    CHECK (salariu>0),
    CHECK (upper(tip_contract) IN ('DETERMINAT', 'NEDETERMINAT', 'PART-TIME'))
);

---TABELUL ANGAJAT
CREATE TABLE ANGAJAT (
    id_angajat NUMBER(5),
    id_contract NUMBER(5),
    nume VARCHAR2(25) NOT NULL,
    prenume VARCHAR2(25) NOT NULL,
    cnp CHAR(13) NOT NULL,
    telefon CHAR(10) NOT NULL,
    email VARCHAR2(100),
    adresa VARCHAR2(100),
    functie VARCHAR2(25),
    data_angajarii DATE,
    constraint pk_angajat PRIMARY KEY(id_angajat),
    constraint fk_contract_angajat FOREIGN KEY (id_contract) REFERENCES CONTRACT(id_contract),
    constraint uk_cnp UNIQUE(cnp),
    constraint uk_telefon UNIQUE(telefon)
);
```

Table CONTRACT created.

Table ANGAJAT created.

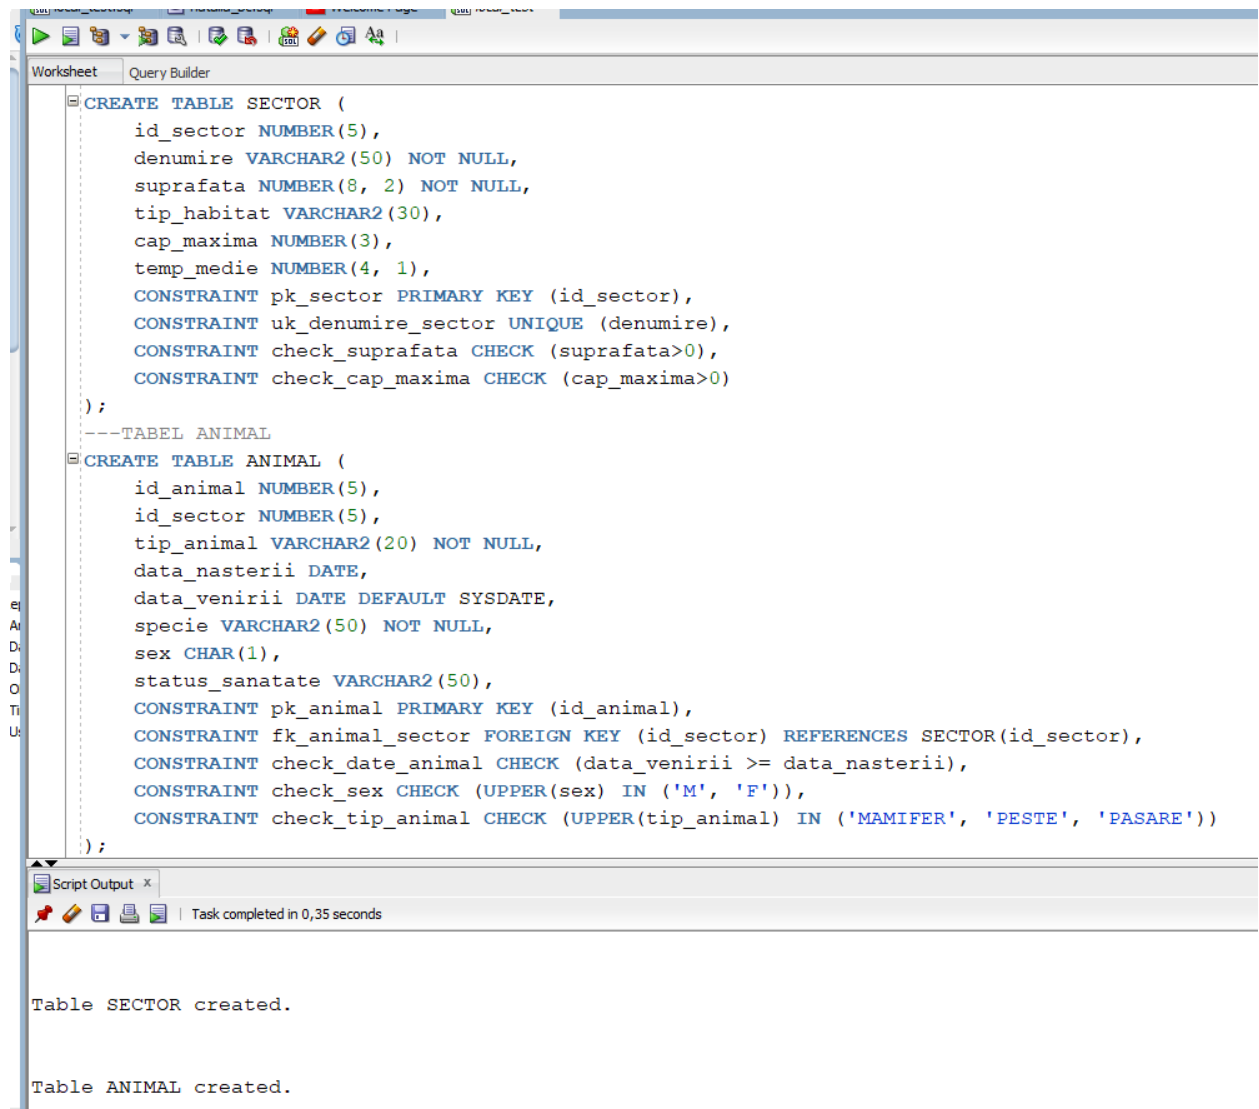

```
CREATE TABLE SECTOR (
    id_sector NUMBER(5),
    denumire VARCHAR2(50) NOT NULL,
    suprafata NUMBER(8, 2) NOT NULL,
    tip_habitat VARCHAR2(30),
    cap_maxima NUMBER(3),
    temp_medie NUMBER(4, 1),
    CONSTRAINT pk_sector PRIMARY KEY (id_sector),
    CONSTRAINT uk_denumire_sector UNIQUE (denumire),
    CONSTRAINT check_suprafata CHECK (suprafata>0),
    CONSTRAINT check_cap_maxima CHECK (cap_maxima>0)
);

---TABEL ANIMAL
CREATE TABLE ANIMAL (
    id_animal NUMBER(5),
    id_sector NUMBER(5),
    tip_animal VARCHAR2(20) NOT NULL,
    data_nasterii DATE,
    data_venirii DATE DEFAULT SYSDATE,
    specie VARCHAR2(50) NOT NULL,
    sex CHAR(1),
    status_sanatate VARCHAR2(50),
    CONSTRAINT pk_animal PRIMARY KEY (id_animal),
    CONSTRAINT fk_animal_sector FOREIGN KEY (id_sector) REFERENCES SECTOR(id_sector),
    CONSTRAINT check_date_animal CHECK (data_venirii >= data_nasterii),
    CONSTRAINT check_sex CHECK (UPPER(sex) IN ('M', 'F')),
    CONSTRAINT check_tip_animal CHECK (UPPER(tip_animal) IN ('MAMIFER', 'PESTE', 'PASARE'))
);
```

Script Output x

Task completed in 0,35 seconds

Table SECTOR created.

Table ANIMAL created.

```

---SUBTABEL MAMIFER
CREATE TABLE MAMIFER (
    id_animal NUMBER(5),
    perioada_gestatie NUMBER(3),
    tip_dieta VARCHAR2(30),
    CONSTRAINT pk_mamifer PRIMARY KEY (id_animal),
    CONSTRAINT fk_mamifer_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal) ON DELETE CASCADE,
    CONSTRAINT check_gestatie CHECK (perioada_gestatie>0),
    CONSTRAINT check_dieta_mamifer CHECK (UPPER(tip_dieta) IN ('ERBIVOR', 'CARNIVOR', 'OMNIVOR'))
);

---SUBTABEL PASARE
CREATE TABLE PASARE (
    id_animal NUMBER(5),
    anvergura_aripi NUMBER(5, 2),
    este_zburatoare CHAR(2),
    CONSTRAINT pk_pasare PRIMARY KEY (id_animal),
    CONSTRAINT fk_pasare_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal) ON DELETE CASCADE,
    CONSTRAINT check_zburatoare CHECK (UPPER(este_zburatoare) IN ('DA', 'NU')),
    CONSTRAINT check_anvergura CHECK (anvergura_aripi>0)
);

---SUBTABEL PESTE
CREATE TABLE PESTE (

```




Table MAMIFER created.

Table PASARE created.

```

---SUBTABEL PESTE
CREATE TABLE PESTE (
    id_animal NUMBER(5),
    tip_apa VARCHAR2(25),
    temp_apa NUMBER(4, 1),
    adancime_minima NUMBER(5, 2), -- în metri
    CONSTRAINT pk_pestes PRIMARY KEY (id_animal),
    CONSTRAINT fk_pestes_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal) ON DELETE CASCADE,
    CONSTRAINT check_tip_apa CHECK (UPPER(tip_apa) IN ('DULCE', 'SARATA')),
    CONSTRAINT check_adancime CHECK (adancime_minima>=0)
);

---TABEL HRANA
CREATE TABLE HRANA (
    id_hrana NUMBER(5),
    denumire VARCHAR2(50) NOT NULL,
    stoc_kg NUMBER(10, 2) DEFAULT 0,
    pret_per_kg NUMBER(8, 2),
    data_expirarii DATE,
    categorii VARCHAR2(30),
    CONSTRAINT pk_hrana PRIMARY KEY (id_hrana),
    CONSTRAINT check_stoc CHECK (stoc_kg>=0),
    CONSTRAINT check_pret CHECK (pret_per_kg>0)
);

---TABEL FURNIZOR

```




Table PESTE created.

Table HRANA created.

```
Worksheet Query Builder

---TABEL FURNIZOR
CREATE TABLE FURNIZOR (
    id_furnizor NUMBER(5),
    nume VARCHAR2(100) NOT NULL,
    telefon CHAR(10),
    email VARCHAR2(100),
    oras VARCHAR2(50),
    cui VARCHAR2(15) NOT NULL,
    CONSTRAINT pk_furnizor PRIMARY KEY (id_furnizor),
    CONSTRAINT uk_cui UNIQUE (cui),
    CONSTRAINT uk_email_furnizor UNIQUE (email)
);

---TABEL SPECTACOL
CREATE TABLE SPECTACOL (
    id_spectacol NUMBER(5),
    nume VARCHAR2(100) NOT NULL,
    locatie VARCHAR2(50) NOT NULL,
    data_spectacol DATE NOT NULL,
    durata_min NUMBER(3),
    cap_spectatori NUMBER(4),
    CONSTRAINT pk_spectacol PRIMARY KEY (id_spectacol),
    CONSTRAINT check_durata CHECK (durata_min>0),
    CONSTRAINT check_capacitate CHECK (cap_spectatori>0)
);

---TABEL VIIZTATOR
CREATE TABLE VIZITATOR (
    id_vizitator NUMBER(5),
    nume VARCHAR2(50) NOT NULL,
    prenume VARCHAR2(50) NOT NULL,
    email VARCHAR2(100),
    telefon CHAR(10),
    CONSTRAINT pk_vizitator PRIMARY KEY (id_vizitator),
    CONSTRAINT uk_email_vizitator UNIQUE (email),
    CONSTRAINT uk_tel_vizitator UNIQUE (telefon)
);

Script Output x
Task completed in 0,35 seconds

Table FURNIZOR created.

Table SPECTACOL created.
```

```
---TABEL VIIZTATOR
CREATE TABLE VIZITATOR (
    id_vizitator NUMBER(5),
    nume VARCHAR2(50) NOT NULL,
    prenume VARCHAR2(50) NOT NULL,
    email VARCHAR2(100),
    telefon CHAR(10),
    CONSTRAINT pk_vizitator PRIMARY KEY (id_vizitator),
    CONSTRAINT uk_email_vizitator UNIQUE (email),
    CONSTRAINT uk_tel_vizitator UNIQUE (telefon)
);

Script Output x
Task completed in 0,35 seconds

Table VIZITATOR created.
```

```
---TABEL BILET
CREATE TABLE BILET (
    id_bilet NUMBER(5),
    id_vizitator NUMBER(5) NOT NULL,
    tip_bilet VARCHAR2(20),
    pret NUMBER(6, 2) NOT NULL,
    data_valabilitate DATE NOT NULL,
    status VARCHAR2(20),
    CONSTRAINT pk_bilet PRIMARY KEY (id_bilet),
    CONSTRAINT fk_bilet_vizitator FOREIGN KEY (id_vizitator)
        REFERENCES VIZITATOR(id_vizitator) ON DELETE CASCADE,
    CONSTRAINT check_pret_bilet CHECK (pret>=0),
    CONSTRAINT check_tip_bilet CHECK (UPPER(tip_bilet) IN ('ADULT', 'COPIL', 'STUDENT', 'PENSIONAR', 'GRUP')),
    CONSTRAINT check_status_bilet CHECK (UPPER(status) IN ('VALID', 'UTILIZAT', 'ANULAT', 'EXPIRAT'))
);

---TABEL RECENZIE
CREATE TABLE RECENZIE (
```

Script Output x
Task completed in 0,35 seconds

Table BILET created.

```
---TABEL RECENZIE
CREATE TABLE RECENZIE (
    id_recenzie NUMBER(5),
    id_vizitator NUMBER(5) NOT NULL,
    id_sector NUMBER(5) NOT NULL,
    nota NUMBER(1) NOT NULL,
    comentariu VARCHAR2(500),
    data_review DATE DEFAULT SYSDATE,
    CONSTRAINT pk_recenzie PRIMARY KEY (id_recenzie),
    CONSTRAINT fk_recenzie_vizitator FOREIGN KEY (id_vizitator)
        REFERENCES VIZITATOR(id_vizitator) ON DELETE CASCADE,
    CONSTRAINT fk_recenzie_sector FOREIGN KEY (id_sector)
        REFERENCES SECTOR(id_sector) ON DELETE CASCADE,
    CONSTRAINT check_nota CHECK (nota BETWEEN 1 AND 5)
);
```

Script Output x
Task completed in 0,35 seconds

Table RECENZIE created.

```
---TABEL CONSULTATIE
CREATE TABLE CONSULTATIE (
    id_consultatie NUMBER(5),
    id_medic NUMBER(5) NOT NULL,
    id_animal NUMBER(5) NOT NULL,
    data_consultatie DATE DEFAULT SYSDATE NOT NULL,
    diagnostic VARCHAR2(100),
    tratament VARCHAR2(100),
    greutate_masurata NUMBER(10, 2),
    observatii VARCHAR2(200),
    CONSTRAINT pk_consultatie PRIMARY KEY (id_consultatie),
    CONSTRAINT fk_cons_medic FOREIGN KEY (id_medic) REFERENCES ANGAJAT(id_angajat),
    CONSTRAINT fk_cons_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal),
    CONSTRAINT check_greutate CHECK (greutate_masurata>0)
);
```

Script Output x
Task completed in 0,35 seconds

Table CONSULTATIE created.

```
CREATE TABLE PARTICIPA_LA (
    id_animal NUMBER(5),
    id_dresor NUMBER(5),
    id_spectacol NUMBER(5),
    ore_pregatire NUMBER(4, 1),
    bonus_financiar NUMBER(8, 2),
    stare_animal_final VARCHAR2(100),
    CONSTRAINT pk_participa_la PRIMARY KEY (id_animal, id_dresor, id_spectacol),
    CONSTRAINT fk_part_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal),
    CONSTRAINT fk_part_dresor FOREIGN KEY (id_dresor) REFERENCES ANGAJAT(id_angajat),
    CONSTRAINT fk_part_spectacol FOREIGN KEY (id_spectacol) REFERENCES SPECTACOL(id_spectacol)
);

CREATE TABLE INGRIJESTE (
    id_animal NUMBER(5),
    id_ingrijitor NUMBER(5),
    ore_pe_sap NUMBER(3),
    tip_activitate VARCHAR2(50),
    data_inceput DATE DEFAULT SYSDATE,
    CONSTRAINT pk_ingrijeste PRIMARY KEY (id_animal, id_ingrijitor),
    CONSTRAINT fk_ingr_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal),
    CONSTRAINT fk_ingr_angajat FOREIGN KEY (id_ingrijitor) REFERENCES ANGAJAT(id_angajat)
);
```

Script Output x

Task completed in 0,135 seconds

Table PARTICIPA_LA created.

Table INGRIJESTE created.

```
CREATE TABLE MANANCA (
    id_animal NUMBER(5),
    id_hrana NUMBER(5),
    cant_zilnica_kg NUMBER(6, 2),
    portii_pe_zi NUMBER(2),
    observatii VARCHAR2(200),
    CONSTRAINT pk_mananca PRIMARY KEY (id_animal, id_hrana),
    CONSTRAINT fk_mananca_animal FOREIGN KEY (id_animal) REFERENCES ANIMAL(id_animal),
    CONSTRAINT fk_mananca_hrana FOREIGN KEY (id_hrana) REFERENCES HRANA(id_hrana),
    CONSTRAINT check_cantitate CHECK (cant_zilnica_kg > 0)
);

CREATE TABLE FURNIZEAZA (
    id_hrana NUMBER(5),
    id_furnizor NUMBER(5),
    pret_per_kg NUMBER(8, 2),
    timp_livrare_zile NUMBER(3),
    cant_minima NUMBER(10, 2),
    CONSTRAINT pk_furnizeaza PRIMARY KEY (id_hrana, id_furnizor),
    CONSTRAINT fk_furn_hrana FOREIGN KEY (id_hrana) REFERENCES HRANA(id_hrana),
    CONSTRAINT fk_furn_furnizor FOREIGN KEY (id_furnizor) REFERENCES FURNIZOR(id_furnizor),
    CONSTRAINT check_pret_furniza CHECK (pret_per_kg > 0)
);
```

Script Output x

Task completed in 0,135 seconds

Table MANANCA created.

Table FURNIZEAZA created.

6.2 Inserting the data

The name of the table for which the data is inserted is specified, after which a screenshot from the IDE with the full code is attached.

```
Worksheet  Query Builder
---TABLE CONTRACT
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (1, 4500.00, 'NEDETERMINAT', TO_DATE('2020-05-10', 'YYYY-MM-DD'), 21);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (2, 3200.50, 'DETERMINAT', TO_DATE('2023-01-15', 'YYYY-MM-DD'), 20);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (3, 2100.00, 'PART-TIME', TO_DATE('2023-06-01', 'YYYY-MM-DD'), 10);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (4, 6000.00, 'NEDETERMINAT', TO_DATE('2018-11-20', 'YYYY-MM-DD'), 25);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, zile_concediu_disp)
VALUES (5, 5200.00, 'NEDETERMINAT', NULL);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (6, 2800.00, 'PART-TIME', TO_DATE('2024-02-15', 'YYYY-MM-DD'), 12);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (7, 4100.00, 'DETERMINAT', TO_DATE('2022-08-01', 'YYYY-MM-DD'), 21);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (8, 3900.00, 'NEDETERMINAT', NULL, 21);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (9, 7500.00, 'NEDETERMINAT', TO_DATE('2015-04-10', 'YYYY-MM-DD'), 28);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (10, 3100.00, 'DETERMINAT', TO_DATE('2023-11-01', 'YYYY-MM-DD'), NULL);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (11, 4800.00, 'NEDETERMINAT', TO_DATE('2021-09-17', 'YYYY-MM-DD'), 21);
INSERT INTO CONTRACT (id_contract, salariu, tip_contract, data_semnarii, zile_concediu_disp)
VALUES (12, 2500.00, 'PART-TIME', NULL, NULL);

SELECT * FROM CONTRACT;
```

Script Output x

Task completed in 0,128 seconds

12 2500 PART-TIME

12 rows selected.

```
SELECT * FROM CONTRACT;
```

Script Output x Query Result x

All Rows Fetched: 12 in 0,002 seconds

	ID_CONTRACT	SALARIU	TIP_CONTRACT	DATA_SEMNARII	ZILE_CONCEDIU_DISP
1	1	4500	NEDETERMINAT	10-05-2020	21
2	2	3200,5	DETERMINAT	15-01-2023	20
3	3	2100	PART-TIME	01-06-2023	10
4	4	6000	NEDETERMINAT	20-11-2018	25
5	5	5200	NEDETERMINAT	15-04-2026	(null)
6	6	2800	PART-TIME	15-02-2024	12
7	7	4100	DETERMINAT	01-08-2022	21
8	8	3900	NEDETERMINAT	(null)	21
9	9	7500	NEDETERMINAT	10-04-2015	28
10	10	3100	DETERMINAT	01-11-2023	(null)
11	11	4800	NEDETERMINAT	17-09-2021	21
12	12	2500	PART-TIME	(null)	(null)

Worksheet | Query Builder

```
---TABEL ANGAJAT
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (1, 1, 'Popescu', 'Ion', '1800512123456', '0722111001', 'ion.popescu@zoo.ro', 'Str. Lunga 1, Bucuresti', 'Medic Veterinar', TO_DATE('2020-05-15', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (2, 2, 'Ionescu', 'Maria', '2850314123456', '0722111002', 'maria.ionescu@zoo.ro', 'Blv. Unirii 45', 'Ingrijitor', TO_DATE('2023-01-20', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (3, 3, 'Marin', 'Andrei', '1950718123456', '0722111003', NULL, NULL, NULL, TO_DATE('2023-06-05', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (4, 4, 'Stan', 'Elena', '2901111123456', '0722111004', 'elena.stan@zoo.ro', 'Str. Florilor 2', 'Sef Sector', TO_DATE('2018-12-01', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (5, 5, 'Dumitru', 'Alexandru', '1880922123456', '0722111005', 'alex.dumitru@zoo.ro', 'Str. Plevnei 9', 'Dresor', TO_DATE('2019-01-10', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (6, 6, 'Gheorghe', 'Alina', '2980415123456', '0722111006', NULL, 'Calea Vitan 100', 'Asistent Veterinar', TO_DATE('2024-02-20', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (7, 7, 'Stoica', 'Mihai', '1920830123456', '0722111007', NULL, 'Ingrijitor', TO_DATE('2022-08-05', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (8, 8, 'Radu', 'Ioana', '2801212123456', '0722111008', 'ioana.radu@zoo.ro', 'Str. Soarelui 5', 'Ghid', TO_DATE('2021-03-10', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (9, 9, 'Ilie', 'George', '1750606123456', '0722111009', 'george.ilie@zoo.ro', 'Str. Muncii 8', 'Director', TO_DATE('2015-05-01', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (10, 10, 'Vasile', 'Cristina', '2941010123456', '0722111010', NULL, NULL, 'Ingrijitor', TO_DATE('2023-11-05', 'YYYY-MM-DD'));
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (11, 11, 'Constantin', 'Bogdan', '1890228123456', '0722111011', 'bogdan.c@zoo.ro', 'Blv. Dacia 33', 'Nutritionist', NULL);
INSERT INTO ANGAJAT (id_angajat, id_contract, nume, prenume, cnp, telefon, email, adresa, functie, data_angajarii)
VALUES (12, 12, 'Munteanu', 'Diana', '2990714123456', '0722111012', 'diana.m@zoo.ro', 'Str. Lalelelor 4', NULL, TO_DATE('2024-01-10', 'YYYY-MM-DD'));
```

Script Output x | Query Result x

Task completed in 0,106 seconds

1 row inserted.

1 row inserted.

1 row inserted.

```
SELECT * FROM ANGAJAT;
```

Script Output x | Query Result x

All Rows Fetched: 12 in 0,002 seconds

ID_ANGAJAT	ID_CONTRACT	NUME	PRENUME	CNP	TELEFON	EMAIL	ADRESA	FUNCTIE	DATA_ANGAJARII
1	1	Popescu	Ion	1800512123456	0722111001	ion.popescu@zoo.ro	Str. Lunga 1, Bucuresti	Medic Veterinar	15-05-2020
2	2	Ionescu	Maria	2850314123456	0722111002	maria.ionescu@zoo.ro	Blv. Unirii 45	Ingrijitor	20-01-2023
3	3	Marin	Andrei	1950718123456	0722111003	(null)	(null)	(null)	05-06-2023
4	4	Stan	Elena	2901111123456	0722111004	elena.stan@zoo.ro	Str. Florilor 2	Sef Sector	01-12-2018
5	5	Dumitru	Alexandru	1880922123456	0722111005	alex.dumitru@zoo.ro	Str. Plevnei 9	Dresor	10-01-2019
6	6	Gheorghe	Alina	2980415123456	0722111006	(null)	Calea Vitan 100	Asistent Veterinar	20-02-2024
7	7	Stoica	Mihai	1920830123456	0722111007	mihai.stoica@zoo.ro	(null)	Ingrijitor	05-08-2022
8	8	Radu	Ioana	2801212123456	0722111008	ioana.radu@zoo.ro	Str. Soarelui 5	Ghid	10-03-2021
9	9	Ilie	George	1750606123456	0722111009	george.ilie@zoo.ro	Str. Muncii 8	Director	01-05-2015
10	10	Vasile	Cristina	2941010123456	0722111010	(null)	(null)	Ingrijitor	05-11-2023
11	11	Constantin	Bogdan	1890228123456	0722111011	bogdan.c@zoo.ro	Blv. Dacia 33	Nutritionist	(null)
12	12	Munteanu	Diana	2990714123456	0722111012	diana.m@zoo.ro	Str. Lalelelor 4	(null)	10-01-2024

form "Go to Declaration"

```

---TABEL SECTOR
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (1, 'Savana Africana', 8500.00, 'Terestru', 50, 26.5);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (2, 'Jungla Tropicala', 4200.50, 'Terestru-Arboricol', 30, 28.0);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (3, 'Acvariu Oceanic', 1500.00, 'Acvatic', 200, 22.0);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (4, 'Bazin Apa Dulce', 800.00, 'Acvatic', 300, 18.5);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (5, 'Voliera Pasari Exotice', 2000.00, 'Aerian', 150, 24.0);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (6, 'Zona Arctica', 1200.00, 'Mixt', 20, -5.0);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (7, 'Reptilariu', 600.00, 'Terestru', 100, 30.0);
-- Inserări cu valori NULL (acolo unde este permis)
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (8, 'Ferma Animalelor', 3500.00, NULL, 80, NULL);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (9, 'Zona Carantina', 300.00, 'Interior', NULL, 22.5);
INSERT INTO SECTOR (id_sector, denumire, suprafata, tip_habitat, cap_maxima, temp_medie)
VALUES (10, 'Centru Recuperare', 450.00, NULL, 10, NULL);

SELECT * FROM SECTOR;

```

Script Output x Query Result x
Task completed in 0,097 seconds

10 Centru Recuperare

450

10

10 rows selected.

```
SELECT * FROM SECTOR;
```

Script Output x Query Result x
SQL | All Rows Fetched: 10 in 0,002 seconds

ID_SECTOR	DENUMIRE	SUPRAFATA	TIP_HABITAT	CAP_MAXIMA	TEMP_MEDIE
1	1 Savana Africana	8500	Terestru	50	26,5
2	2 Jungla Tropicala	4200,5	Terestru-Arboricol	30	28
3	3 Acvariu Oceanic	1500	Acvatic	200	22
4	4 Bazin Apa Dulce	800	Acvatic	300	18,5
5	5 Voliera Pasari Exotice	2000	Aerian	150	24
6	6 Zona Arctica	1200	Mixt	20	-5
7	7 Reptilariu	600	Terestru	100	30
8	8 Ferma Animalelor	3500	(null)	80	(null)
9	9 Zona Carantina	300	Interior	(null)	22,5
10	10 Centru Recuperare	450	(null)	10	(null)

```

---TABEL ANIMAL
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (1, 1, 'MAMIFER', TO_DATE('2015-04-12', 'YYYY-MM-DD'), TO_DATE('2016-05-10', 'YYYY-MM-DD'), 'Leu', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (2, 1, 'MAMIFER', TO_DATE('2017-08-22', 'YYYY-MM-DD'), TO_DATE('2018-09-01', 'YYYY-MM-DD'), 'Zebra', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (3, 2, 'MAMIFER', TO_DATE('2019-11-05', 'YYYY-MM-DD'), TO_DATE('2020-02-15', 'YYYY-MM-DD'), 'Maimuta Capucin', 'M', 'Rana usoara');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (4, 1, 'MAMIFER', NULL, TO_DATE('2021-03-10', 'YYYY-MM-DD'), 'Girafa', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (5, 6, 'MAMIFER', TO_DATE('2014-12-01', 'YYYY-MM-DD'), TO_DATE('2015-11-20', 'YYYY-MM-DD'), 'Urs Polar', 'M', 'In observatie');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (6, 8, 'MAMIFER', TO_DATE('2022-05-14', 'YYYY-MM-DD'), TO_DATE('2022-05-14', 'YYYY-MM-DD'), 'Iepure', 'F', NULL);
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (7, 1, 'MAMIFER', TO_DATE('2010-02-28', 'YYYY-MM-DD'), TO_DATE('2012-07-15', 'YYYY-MM-DD'), 'Elefant', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (8, 2, 'MAMIFER', NULL, TO_DATE('2023-08-10', 'YYYY-MM-DD'), 'Jaguar', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (9, 9, 'MAMIFER', TO_DATE('2024-01-10', 'YYYY-MM-DD'), TO_DATE('2024-01-15', 'YYYY-MM-DD'), 'Lup', NULL, 'Carantina');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (10, 8, 'MAMIFER', TO_DATE('2020-09-09', 'YYYY-MM-DD'), TO_DATE('2021-04-05', 'YYYY-MM-DD'), 'Ponei', 'M', 'Sanatos');

INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (11, 5, 'PASARE', TO_DATE('2021-06-15', 'YYYY-MM-DD'), TO_DATE('2021-10-01', 'YYYY-MM-DD'), 'Papagal Ara', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (12, 5, 'PASARE', TO_DATE('2022-04-10', 'YYYY-MM-DD'), TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'Tucan', 'F', 'Sanatos');

Script Output x Query Result x
Task completed in 0,24 seconds

29      4 PESTE      09-09-2015 10-10-2016 Morun      F In observatie
30      9 PESTE      10-02-2024 25-02-2024 Somon      Carantina

30 rows selected.

```

```

INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (11, 5, 'PASARE', TO_DATE('2021-06-15', 'YYYY-MM-DD'), TO_DATE('2021-10-01', 'YYYY-MM-DD'), 'Papagal Ara', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (12, 5, 'PASARE', TO_DATE('2022-04-10', 'YYYY-MM-DD'), TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'Tucan', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (13, 6, 'PASARE', TO_DATE('2018-11-25', 'YYYY-MM-DD'), TO_DATE('2019-03-15', 'YYYY-MM-DD'), 'Pinguin Imperial', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (14, 1, 'PASARE', NULL, TO_DATE('2020-05-10', 'YYYY-MM-DD'), 'Strut', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (15, 5, 'PASARE', TO_DATE('2019-07-07', 'YYYY-MM-DD'), TO_DATE('2020-01-11', 'YYYY-MM-DD'), 'Paun', 'M', NULL);
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (16, 5, 'PASARE', TO_DATE('2023-02-14', 'YYYY-MM-DD'), TO_DATE('2023-06-01', 'YYYY-MM-DD'), 'Bufnita', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (17, 4, 'PASARE', TO_DATE('2020-10-10', 'YYYY-MM-DD'), TO_DATE('2021-02-28', 'YYYY-MM-DD'), 'Pelican', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (18, 4, 'PASARE', NULL, TO_DATE('2018-09-09', 'YYYY-MM-DD'), 'Flamingo', 'F', 'In observatie');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (19, 5, 'PASARE', TO_DATE('2017-03-03', 'YYYY-MM-DD'), TO_DATE('2017-09-15', 'YYYY-MM-DD'), 'Vultur Plesuv', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (20, 9, 'PASARE', TO_DATE('2024-03-01', 'YYYY-MM-DD'), TO_DATE('2024-03-05', 'YYYY-MM-DD'), 'Soim', NULL, 'Carantina');

INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (21, 3, 'PESTE', TO_DATE('2016-08-20', 'YYYY-MM-DD'), TO_DATE('2017-01-10', 'YYYY-MM-DD'), 'Rechin Alb', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (22, 3, 'PESTE', TO_DATE('2021-12-05', 'YYYY-MM-DD'), TO_DATE('2022-04-15', 'YYYY-MM-DD'), 'Peste Clown', 'F', 'Sanatos');

Script Output x Query Result x
Task completed in 0,24 seconds

29      4 PESTE      09-09-2015 10-10-2016 Morun      F In observatie
30      9 PESTE      10-02-2024 25-02-2024 Somon      Carantina

30 rows selected.

```

```

INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (21, 3, 'PESTE', TO_DATE('2016-08-20', 'YYYY-MM-DD'), TO_DATE('2017-01-10', 'YYYY-MM-DD'), 'Rechin Alb', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (22, 3, 'PESTE', TO_DATE('2021-12-05', 'YYYY-MM-DD'), TO_DATE('2022-04-15', 'YYYY-MM-DD'), 'Peste Clovn', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (23, 4, 'PESTE', TO_DATE('2022-01-15', 'YYYY-MM-DD'), TO_DATE('2022-05-20', 'YYYY-MM-DD'), 'Crap', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (24, 3, 'PESTE', NULL, TO_DATE('2019-11-11', 'YYYY-MM-DD'), 'Pisica de Mare', 'F', NULL);
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (25, 4, 'PESTE', TO_DATE('2023-05-10', 'YYYY-MM-DD'), TO_DATE('2023-09-01', 'YYYY-MM-DD'), 'Piranha', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (26, 3, 'PESTE', TO_DATE('2020-07-22', 'YYYY-MM-DD'), TO_DATE('2020-12-10', 'YYYY-MM-DD'), 'Calut de Mare', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (27, 4, 'PESTE', TO_DATE('2021-02-18', 'YYYY-MM-DD'), TO_DATE('2021-06-05', 'YYYY-MM-DD'), 'Pastrav', 'F', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (28, 3, 'PESTE', NULL, TO_DATE('2018-04-30', 'YYYY-MM-DD'), 'Ton', 'M', 'Sanatos');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (29, 4, 'PESTE', TO_DATE('2015-09-09', 'YYYY-MM-DD'), TO_DATE('2016-10-10', 'YYYY-MM-DD'), 'Morun', 'F', 'In observatie');
INSERT INTO ANIMAL (id_animal, id_sector, tip_animal, data_nasterii, data_venirii, specie, sex, status_sanatate)
VALUES (30, 9, 'PESTE', TO_DATE('2024-02-10', 'YYYY-MM-DD'), TO_DATE('2024-02-25', 'YYYY-MM-DD'), 'Somon', NULL, 'Carantina');

SELECT * FROM ANIMAL;

```

29	4	PESTE	09-09-2015	10-10-2016	Morun		F	In observatie
30	9	PESTE	10-02-2024	25-02-2024	Somon			Carantina

30 rows selected.

```
SELECT * FROM ANIMAL;
```

ID_ANIMAL	ID_SECTOR	TIP_ANIMAL	DATA_NASTERII	DATA_VENIRII	SPECIE	SEX	STATUS_SANATATE
1	1	1 MAMIFER	12-04-2015	10-05-2016	Leu	M	Sanatos
2	2	1 MAMIFER	22-08-2017	01-09-2018	Zebra	F	Sanatos
3	3	2 MAMIFER	05-11-2019	15-02-2020	Maimuta Capucin	M	Rana usoara
4	4	1 MAMIFER	(null)	10-03-2021	Girafa	F	Sanatos
5	5	6 MAMIFER	01-12-2014	20-11-2015	Urs Polar	M	In observatie
6	6	8 MAMIFER	14-05-2022	14-05-2022	Iepure	F	(null)
7	7	1 MAMIFER	28-02-2010	15-07-2012	Elefant	F	Sanatos
8	8	2 MAMIFER	(null)	10-08-2023	Jaguar	M	Sanatos
9	9	9 MAMIFER	10-01-2024	15-01-2024	Lup	(null)	Carantina
10	10	8 MAMIFER	09-09-2020	05-04-2021	Ponei	M	Sanatos
11	11	5 PASARE	15-06-2021	01-10-2021	Papagal Ara	M	Sanatos
12	12	5 PASARE	10-04-2022	20-08-2022	Tucan	F	Sanatos
13	13	6 PASARE	25-11-2018	15-03-2019	Pinguin Imperial	M	Sanatos
14	14	1 PASARE	(null)	10-05-2020	Strut	F	Sanatos
15	15	5 PASARE	07-07-2019	11-01-2020	Paun	M	(null)
16	16	5 PASARE	14-02-2023	01-06-2023	Bufnita	F	Sanatos
17	17	4 PASARE	10-10-2020	28-02-2021	Pelican	M	Sanatos
18	18	4 PASARE	(null)	09-09-2018	Flamingo	F	In observatie
19	19	5 PASARE	03-03-2017	15-09-2017	Vultur Plesuv	M	Sanatos
20	20	9 PASARE	01-03-2024	05-03-2024	Soim	(null)	Carantina
21	21	3 PESTE	20-08-2016	10-01-2017	Rechin Alb	M	Sanatos
22	22	3 PESTE	05-12-2021	15-04-2022	Peste Clovn	F	Sanatos
23	23	4 PESTE	15-01-2022	20-05-2022	Crap	M	Sanatos
24	24	3 PESTE	(null)	11-11-2019	Pisica de Mare	F	(null)
25	25	4 PESTE	10-05-2023	01-09-2023	Piranha	M	Sanatos
26	26	3 PESTE	22-07-2020	10-12-2020	Calut de Mare	M	Sanatos
27	27	4 PESTE	18-02-2021	05-06-2021	Pastrav	F	Sanatos
28	28	3 PESTE	(null)	30-04-2018	Ton	M	Sanatos
29	29	4 PESTE	09-09-2015	10-10-2016	Morun	F	In observatie
30	30	9 PESTE	10-02-2024	25-02-2024	Somon	(null)	Carantina

```

---TABEL MAMIFER
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (1, 110, 'CARNIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (2, 390, 'ERBIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (3, 160, 'OMNIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (4, 450, 'ERBIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (5, 240, 'CARNIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (6, 31, 'ERBIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (7, 660, 'ERBIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (8, 100, 'CARNIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (9, 63, 'CARNIVOR');
INSERT INTO MAMIFER (id_animal, perioada_gestatie, tip_dieta) VALUES (10, 330, 'ERBIVOR');

SELECT * FROM MAMIFER;

```

Script Output x Query Result x

Task completed in 0,095 seconds

1 row inserted.

ID_ANIMAL	PERIOADA_GESTATIE	TIP_DIETA
1	110	CARNIVOR
2	390	ERBIVOR
3	160	OMNIVOR
4	450	ERBIVOR
5	240	CARNIVOR
6	31	ERBIVOR
7	660	ERBIVOR
8	100	CARNIVOR
9	63	CARNIVOR
10	330	ERBIVOR

10 rows selected.

```

---TABEL PASARE
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (11, 1.20, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (12, 0.50, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (13, 0.80, 'NU');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (14, 2.00, 'NU');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (15, 1.50, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (16, 1.10, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (17, 2.80, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (18, 1.40, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (19, 2.30, 'DA');
INSERT INTO PASARE (id_animal, anvergura_aripi, este_zburatoare) VALUES (20, 1.00, 'DA');

SELECT * FROM PASARE;

```

Script Output x Query Result x

Task completed in 0,108 seconds

1 row inserted.

ID_ANIMAL	ANVERGURA_ARIFI	ES
11	1,2	DA
12	,5	DA
13	,8	NU
14	2	NU
15	1,5	DA
16	1,1	DA
17	2,8	DA
18	1,4	DA
19	2,3	DA
20	1	DA

10 rows selected.

```

---TABEL PESTE
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (21, 'SARATA', 18.0, 10.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (22, 'SARATA', 26.0, 2.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (23, 'DULCE', 15.0, 1.5);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (24, 'SARATA', 22.0, 5.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (25, 'DULCE', 25.0, 1.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (26, 'SARATA', 24.0, 0.5);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (27, 'DULCE', 12.0, 1.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (28, 'SARATA', 20.0, 8.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (29, 'DULCE', 16.0, 4.0);
INSERT INTO PESTE (id_animal, tip_apa, temp_apa, adancime_minima) VALUES (30, 'DULCE', 14.0, 2.0);

SELECT * FROM PESTE;

```

Script Output x Query Result x

Task completed in 0,088 seconds

ID_ANIMAL	TIP_APA	TEMP_APA	ADANCIME_MINIMA
21	SARATA	18	10
22	SARATA	26	2
23	DULCE	15	1,5
24	SARATA	22	5
25	DULCE	25	1
26	SARATA	24 ,5	
27	DULCE	12	1
28	SARATA	20	8
29	DULCE	16	4
30	DULCE	14	2

10 rows selected.

```

Worksheet Query Builder
---TABEL HRANA
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (1, 'Carne de vita', 150.50, TO_DATE('2024-12-01', 'YYYY-MM-DD'), 'Carne');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (2, 'Fan uscat', 500.00, TO_DATE('2025-06-15', 'YYYY-MM-DD'), 'Furaje');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (3, 'Amestec seminte exotice', 45.00, TO_DATE('2024-10-20', 'YYYY-MM-DD'), 'Seminte');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (4, 'Peste oceanic congelat', 200.00, TO_DATE('2024-08-30', 'YYYY-MM-DD'), 'Peste');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (5, 'Fructe proaspete mixte', 60.00, TO_DATE('2024-05-10', 'YYYY-MM-DD'), 'Fructe');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (6, 'Legume asortate', 80.00, TO_DATE('2024-05-12', 'YYYY-MM-DD'), 'Legume');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (7, 'Suplimente calciu', 10.00, NULL, 'Supliment');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (8, 'Insecte vii', 5.00, NULL, NULL);
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (9, 'Lucerna', 300.00, TO_DATE('2025-01-10', 'YYYY-MM-DD'), 'Furaje');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (10, 'Carne de pui', 120.00, TO_DATE('2024-09-15', 'YYYY-MM-DD'), 'Carne');
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (11, 'Viermi de faina', 8.50, TO_DATE('2024-07-01', 'YYYY-MM-DD'), NULL);
INSERT INTO HRANA (id_hrana, denumire, stoc_kg, data_expirarii, categorie)
VALUES (12, 'Nectar pasari', 12.00, TO_DATE('2025-03-20', 'YYYY-MM-DD'), 'Lichid');
SELECT * FROM HRANA;

```

Script Output x Query Result x

Task completed in 0,119 seconds

ID_HRANA	DENUMIRE	STOC_KG	DATA_EXPIR	CATEGORIE
12	Nectar pasari	12	20-03-2025	Lichid

12 rows selected.

```
VALUES (12, 'Nectar pasari', 12.00, TO_DATE('2025-03-20', 'YYYY-
SELECT * FROM HRANA;
```

ID_HRANA	DENUMIRE	STOC_KG	DATA_EXPIRarii	CATEGORIE
1	1 Carne de vita	150,5	01-12-2024	Carne
2	2 Fan uscat	500	15-06-2025	Furaje
3	3 Amestec seminte exotice	45	20-10-2024	Seminte
4	4 Peste oceanic congelat	200	30-08-2024	Peste
5	5 Fructe proaspete mixte	60	10-05-2024	Fructe
6	6 Legume asortate	80	12-05-2024	Legume
7	7 Suplimente calciu	10 (null)		Supliment
8	8 Insecte vii	5 (null)		(null)
9	9 Lucerna	300	10-01-2025	Furaje
10	10 Carne de pui	120	15-09-2024	Carne
11	11 Viermi de faina	8,5	01-07-2024	(null)
12	12 Nectar pasari	12	20-03-2025	Lichid

```
---TABEL FURNIZOR
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (1, 'AgroFood S.R.L.', '0711222333', 'contact@agrofood.ro', 'Bucuresti', 'RO12345678');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (2, 'BioFerme S.A.', '0722333444', 'sales@bioferme.ro', 'Cluj-Napoca', 'RO87654321');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (3, 'OceanFish Impex', '0733444555', 'comenzi@oceanfish.ro', 'Constanta', 'RO11223344');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (4, 'Fructe Exotice SRL', '0744555666', 'import@fructe-exotice.ro', 'Ilfov', 'RO99887766');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (5, 'ZooVet Distribution', '0755666777', 'office@zoovet.ro', 'Timisoara', 'RO55667788');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (6, 'Fermierul Local Ion', '0766777888', NULL, 'Bacau', 'RO10203040');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (7, 'GreenLife SRL', NULL, 'hello@greenlife.ro', 'Brasov', 'RO40302010');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (8, 'Carnivor Expert', '0788999000', 'carne@expert.ro', NULL, 'RO50607080');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (9, 'AquaLife Systems', NULL, NULL, 'Galati', 'RO80706050');
INSERT INTO FURNIZOR (id_furnizor, nume, telefon, email, oras, cui)
VALUES (10, 'Nutritie Animala SA', '0799000111', 'suport@nutritie.ro', 'Iasi', 'RO13579246');

SELECT * FROM FURNIZOR;
```

Script Output x Query Result x

Task completed in 0,092 seconds

```

8 Carnivor Expert
9 AquaLife Systems
10 Nutritie Animala SA

10 rows selected.
```

```
SELECT * FROM FURNIZOR;
```

ID_FURNIZOR	NUME	TELEFON	EMAIL	ORAS	CUI
1	1 AgroFood S.R.L.	0711222333	contact@agrofood.ro	Bucuresti	RO12345678
2	2 BioFerme S.A.	0722333444	sales@bioferme.ro	Cluj-Napoca	RO87654321
3	3 OceanFish Impex	0733444555	comenzi@oceanfish.ro	Constanta	RO11223344
4	4 Fructe Exotice SRL	0744555666	import@fructe-exotice.ro	Ilfov	RO99887766
5	5 ZooVet Distribution	0755666777	office@zoovet.ro	Timisoara	RO55667788
6	6 Fermierul Local Ion	0766777888	(null)	Bacau	RO10203040
7	7 GreenLife SRL	(null)	hello@greenlife.ro	Brasov	RO40302010
8	8 Carnivor Expert	0788999000	carne@expert.ro	(null)	RO50607080
9	9 AquaLife Systems	(null)	(null)	Galati	RO80706050
10	10 Nutritie Animala SA	0799000111	suport@nutritie.ro	Iasi	RO13579246

```
---TABEL SPECTACOL
```

```

INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (1, 'Zborul Pasarilor de Prada', 'Arena Centrala', TO_DATE('2024-06-01 10:00', 'YYYY-MM-DD HH24:MI'), 45, 200);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (2, 'Hranirea Pinguinilor', 'Bazinul Nordic', TO_DATE('2024-06-01 12:30', 'YYYY-MM-DD HH24:MI'), 30, 100);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (3, 'Magia Delfinilor (Simulare)', 'Acvariu Mare', TO_DATE('2024-06-02 14:00', 'YYYY-MM-DD HH24:MI'), 60, 300);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (4, 'Prezentare Lei Asiatici', 'Zona Savana', TO_DATE('2024-06-03 16:00', 'YYYY-MM-DD HH24:MI'), 40, 150);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (5, 'Maimutele Jucause', 'Jungla Tropicala', TO_DATE('2024-06-05 11:00', 'YYYY-MM-DD HH24:MI'), 35, 120);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (6, 'Intercatiune Ferma', 'Curtea Copiilor', TO_DATE('2024-06-10 10:00', 'YYYY-MM-DD HH24:MI'), NULL, 50);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (7, 'Reptilele Misterioase', 'Terariu Expozitie', TO_DATE('2024-06-12 13:00', 'YYYY-MM-DD HH24:MI'), 45, 80);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (8, 'Show Papagali', 'Amfiteatru Mic', TO_DATE('2024-06-15 15:30', 'YYYY-MM-DD HH24:MI'), 30, NULL);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (9, 'Noaptea la Zoo', 'Intreaga Gradina', TO_DATE('2024-07-01 20:00', 'YYYY-MM-DD HH24:MI'), 120, 500);
INSERT INTO SPECTACOL (id_spectacol, nume, locatie, data_spectacol, durata_min, cap_spectatori)
VALUES (10, 'Demonstratie Dresaj', 'Arena Centrala', TO_DATE('2024-07-05 14:00', 'YYYY-MM-DD HH24:MI'), NULL, NULL);

```

ID_SPECTACOL	NUME	LOCATIE	DATA_SPECTACOL	DURATA_MIN	CAP_SPECTATORI
1	1 Zborul Pasarilor de Prada	Arena Centrala	01-06-2024	45	200
2	2 Hranirea Pinguinilor	Bazinul Nordic	01-06-2024	30	100
3	3 Magia Delfinilor (Simulare)	Acvariu Mare	02-06-2024	60	300
4	4 Prezentare Lei Asiatici	Zona Savana	03-06-2024	40	150
5	5 Maimutele Jucause	Jungla Tropicala	05-06-2024	35	120
6	6 Intercatiune Ferma	Curtea Copiilor	10-06-2024	(null)	50
7	7 Reptilele Misterioase	Terariu Expozitie	12-06-2024	45	80
8	8 Show Papagali	Amfiteatru Mic	15-06-2024	30	(null)
9	9 Noaptea la Zoo	Intreaga Gradina	01-07-2024	120	500
10	10 Demonstratie Dresaj	Arena Centrala	05-07-2024	(null)	(null)

```
SELECT * FROM SPECTACOL;
```

ID_SPECTACOL	NUME	LOCATIE	DATA_SPECTACOL	DURATA_MIN	CAP_SPECTATORI
1	1 Zborul Pasarilor de Prada	Arena Centrala	01-06-2024	45	200
2	2 Hranirea Pinguinilor	Bazinul Nordic	01-06-2024	30	100
3	3 Magia Delfinilor (Simulare)	Acvariu Mare	02-06-2024	60	300
4	4 Prezentare Lei Asiatici	Zona Savana	03-06-2024	40	150
5	5 Maimutele Jucause	Jungla Tropicala	05-06-2024	35	120
6	6 Intercatiune Ferma	Curtea Copiilor	10-06-2024	(null)	50
7	7 Reptilele Misterioase	Terariu Expozitie	12-06-2024	45	80
8	8 Show Papagali	Amfiteatru Mic	15-06-2024	30	(null)
9	9 Noaptea la Zoo	Intreaga Gradina	01-07-2024	120	500
10	10 Demonstratie Dresaj	Arena Centrala	05-07-2024	(null)	(null)

```

---TABEL VIZITATOR
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (1, 'Enache', 'Vlad', 'vlad.enache@mail.com', '0720111222');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (2, 'Barbu', 'Elena', 'elena.b@mail.com', '0730111333');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (3, 'Toma', 'Victor', 'victor.toma@mail.com', '0740111444');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (4, 'Nicolae', 'Ana', 'ana.nicolae@mail.com', '0750111555');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (5, 'Grigore', 'Marius', 'mgrigore@mail.com', '0760111666');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (6, 'Lazar', 'Simona', NULL, '0770111777');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (7, 'Dobre', 'Catalin', 'catalin.d@mail.com', NULL);
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (8, 'Iancu', 'Roxana', NULL, NULL);
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (9, 'Serban', 'Daniel', 'd.serban@mail.com', '0780111888');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (10, 'Nita', 'Carmen', 'carmen.nita@mail.com', '0790111999');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (11, 'Oprea', 'Florin', NULL, '0721123123');
INSERT INTO VIZITATOR (id_vizitator, nume, prenume, email, telefon)
VALUES (12, 'Voicu', 'Mihaela', 'mihaela.voicu@mail.com', NULL);

```

Script Output x Query Result x

Task completed in 0,091 seconds

12 Voicu	Mihaela
----------	---------

12 rows selected.

```
SELECT * FROM VIZITATOR;
```

Script Output x Query Result x

SQL | All Rows Fetched: 12 in 0,002 seconds

ID_VIZITATOR	NUME	PRENUME	EMAIL	TELEFON
1	Enache	Vlad	vlad.enache@mail.com	0720111222
2	Barbu	Elena	elena.b@mail.com	0730111333
3	Toma	Victor	victor.toma@mail.com	0740111444
4	Nicolae	Ana	ana.nicolae@mail.com	0750111555
5	Grigore	Marius	mgrigore@mail.com	0760111666
6	Lazar	Simona	(null)	0770111777
7	Dobre	Catalin	catalin.d@mail.com	(null)
8	Iancu	Roxana	(null)	(null)
9	Serban	Daniel	d.serban@mail.com	0780111888
10	Nita	Carmen	carmen.nita@mail.com	0790111999
11	Oprea	Florin	(null)	0721123123
12	Voicu	Mihaela	mihaela.voicu@mail.com	(null)

Worksheet Query Builder

```

---TABEL BILET
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (1, 1, 'ADULT', 50.00, TO_DATE('2024-06-01', 'YYYY-MM-DD'), 'UTILIZAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (2, 2, 'COFIL', 25.00, TO_DATE('2024-06-01', 'YYYY-MM-DD'), 'UTILIZAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (3, 3, 'STUDENT', 35.00, TO_DATE('2024-06-15', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (4, 4, 'PENSIONAR', 30.00, TO_DATE('2024-05-10', 'YYYY-MM-DD'), 'EXPIRAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (5, 5, 'GRUP', 200.00, TO_DATE('2024-07-01', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (6, 6, 'ADULT', 50.00, TO_DATE('2024-05-20', 'YYYY-MM-DD'), 'UTILIZAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (7, 7, 'ADULT', 50.00, TO_DATE('2024-08-15', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (8, 8, NULL, 0.00, TO_DATE('2024-06-10', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (9, 9, 'STUDENT', 35.00, TO_DATE('2024-04-10', 'YYYY-MM-DD'), 'ANULAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (10, 10, 'COFIL', 25.00, TO_DATE('2024-09-01', 'YYYY-MM-DD'), NULL);
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (11, 1, 'ADULT', 50.00, TO_DATE('2024-10-01', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (12, 11, NULL, 50.00, TO_DATE('2024-06-20', 'YYYY-MM-DD'), 'VALID');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (13, 12, 'PENSIONAR', 30.00, TO_DATE('2024-03-01', 'YYYY-MM-DD'), 'EXPIRAT');
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (14, 2, 'ADULT', 50.00, TO_DATE('2024-06-25', 'YYYY-MM-DD'), NULL);
INSERT INTO BILET (id_bilet, id_vizitator, tip_bilet, pret, data_valabilitate, status)
VALUES (15, 5, 'GRUP', 180.00, TO_DATE('2024-05-05', 'YYYY-MM-DD'), 'UTILIZAT');

```

Script Output x Query Result x

Task completed in 0,131 seconds

15 rows selected.

SELECT * FROM BILET;

Script Output x Query Result x

SQL | All Rows Fetched: 15 in 0,002 seconds

ID_BILET	ID_VIZITATOR	TIP_BILET	PRET	DATA_VALABILITATE	STATUS
1	1	1 ADULT	50	01-06-2024	UTILIZAT
2	2	2 COFIL	25	01-06-2024	UTILIZAT
3	3	3 STUDENT	35	15-06-2024	VALID
4	4	4 PENSIONAR	30	10-05-2024	EXPIRAT
5	5	5 GRUP	200	01-07-2024	VALID
6	6	6 ADULT	50	20-05-2024	UTILIZAT
7	7	7 ADULT	50	15-08-2024	VALID
8	8	8 (null)	0	10-06-2024	VALID
9	9	9 STUDENT	35	10-04-2024	ANULAT
10	10	10 COFIL	25	01-09-2024	(null)
11	11	1 ADULT	50	01-10-2024	VALID
12	12	11 (null)	50	20-06-2024	VALID
13	13	12 PENSIONAR	30	01-03-2024	EXPIRAT
14	14	2 ADULT	50	25-06-2024	(null)
15	15	5 GRUP	180	05-05-2024	UTILIZAT

```

---TABEL RECENZIE
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (1, 1, 1, 5, 'Leii au fost superbi! Un habitat foarte curat.', TO_DATE('2024-06-02', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (2, 2, 5, 4, 'Pasarile sunt frumoase, dar era cam galagie.', TO_DATE('2024-06-02', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (3, 4, 3, 5, 'Acvariul ne-a impresionat profund pe toti.', TO_DATE('2024-05-11', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (4, 6, 7, 3, 'Multe reptile erau ascunse si nu le-am putut vedea.', TO_DATE('2024-05-21', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (5, 5, 8, 5, 'Copiii au iubit ferma animalelor!');
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (6, 9, 2, 4, NULL, TO_DATE('2024-04-12', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu)
VALUES (7, 10, 1, 5, 'Excelent!');
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (8, 3, 6, 2, 'Ursul polar parea plictisit.', TO_DATE('2024-06-16', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu)
VALUES (9, 7, 4, 4, NULL);
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (10, 8, 5, 5, 'Zborul pasarilor m-a lasat fara cuvinte.', TO_DATE('2024-06-11', 'YYYY-MM-DD'));
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu)
VALUES (11, 1, 3, 5, NULL);
INSERT INTO RECENZIE (id_recenzie, id_vizitator, id_sector, nota, comentariu, data_review)
VALUES (12, 12, 9, 1, 'Zona de carantina era inchisa.', TO_DATE('2024-03-02', 'YYYY-MM-DD'));

SELECT * FROM RECENZIE;

```

Script Output x Query Result x

Task completed in 0,117 seconds

ID_RECENZIE	ID_VIZITATOR	ID_SECTOR	NOTA	COMENTARIU
12	12	9	1	Zona de carantina era inchisa.

12 rows selected.

ID_RECENZIE	ID_VIZITATOR	ID_SECTOR	NOTA	COMENTARIU	DATA_REVIEW
1	1	1	5	Leii au fost superbi! Un habitat foarte curat.	02-06-2024
2	2	2	5	Pasarile sunt frumoase, dar era cam galagie.	02-06-2024
3	3	4	3	5Acvariul ne-a impresionat profund pe toti.	11-05-2024
4	4	6	7	3Multe reptile erau ascunse si nu le-am putut vedea.	21-05-2024
5	5	5	8	5Copiii au iubit ferma animalelor!	06-05-2024
6	6	9	2	4(null)	12-04-2024
7	7	10	1	5Excelent!	29-04-2026
8	8	3	6	2Ursul polar parea plictisit.	16-06-2024
9	9	7	4	4(null)	29-04-2026
10	10	8	5	5Zborul pasarilor m-a lasat fara cuvinte.	11-06-2024
11	11	1	3	5(null)	29-04-2026
12	12	12	9	1Zona de carantina era inchisa.	02-03-2024

Worksheet Query Builder

```

--TABEL CONSULTATIE
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (1, 1, 3, TO_DATE('2024-05-10', 'YYYY-MM-DD'), 'Rana superficiala picior', 'Dezinfectie si bandaj', 4.5, 'Se va reevalua in 3 zile');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (2, 1, 5, TO_DATE('2024-05-12', 'YYYY-MM-DD'), 'Apatie usoara', 'Vitamine', 450.0, 'In observatie pentru modificari de dieta');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (3, 6, 18, TO_DATE('2024-05-15', 'YYYY-MM-DD'), 'Naparalire anormala', 'Supliment penaj', 3.2, 'Test de sange recomandat');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (4, 1, 9, TO_DATE('2024-01-16', 'YYYY-MM-DD'), 'Evaluare carantina', 'Deparazitare interna', 35.0, 'Animal nou sosit');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (5, 6, 29, TO_DATE('2024-04-20', 'YYYY-MM-DD'), 'Infectie bacteriana solzi', 'Antibiotic in apa', 120.5, 'Izolot temporar');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (6, 1, 1, TO_DATE('2024-02-10', 'YYYY-MM-DD'), 'Control de rutina', NULL, 195.0, 'Sanatos tun');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, diagnostic, tratament, greutate_masurata, observatii)
VALUES (7, 6, 11, 'Zgarietura cioc', 'Unguent', NULL, NULL);
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (8, 1, 7, TO_DATE('2024-05-01', 'YYYY-MM-DD'), NULL, NULL, 3500.0, 'Greutate in parametri normali');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (11, 1, 2, TO_DATE('2024-05-18', 'YYYY-MM-DD'), 'Probleme dentare', 'Detartraj', 280.0, 'Se recomanda dieta moale 3 zile');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (12, 6, 15, TO_DATE('2024-05-20', 'YYYY-MM-DD'), NULL, 'Vitamine penaj', 4.5, NULL);
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (13, 1, 22, TO_DATE('2024-05-21', 'YYYY-MM-DD'), 'Paraziti externi', 'Solutie speciala apa', NULL, 'Izolare 24h');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (14, 6, 8, TO_DATE('2024-06-01', 'YYYY-MM-DD'), 'Schiopatat picior stang', 'Repaus', 95.5, 'Fara leziuni osoase');
INSERT INTO CONSULTATIE (id_consultatie, id_medic, id_animal, data_consultatie, diagnostic, tratament, greutate_masurata, observatii)
VALUES (15, 1, 12, TO_DATE('2024-06-05', 'YYYY-MM-DD'), 'Control general', NULL, 0.8, 'Perfect sanatos');

```

Script Output x Query Result x

Task completed in 0,106 seconds

ID_CONSULTATIE	ID_MEDIC	ID_ANIMAL	DATA_CONSU	DIAGNOSTIC
14	6	8	01-06-2024	Schiopatat picior stang
15	1	12	05-06-2024	Control general

13 rows selected.

```

SELECT * FROM CONSULTATIE;

```

Script Output x Query Result x

All Rows Fetched: 13 in 0,003 seconds

ID_CONSULTATIE	ID_MEDIC	ID_ANIMAL	DATA_CONSULTATIE	DIAGNOSTIC	TRATAMENT	GREUTATE_MASURATA	OBSERVATII
1	1	3	31-05-2024	Rana superficiala picior	Dezinfectie si bandaj	4,5	Se va reevalua in 3 zile
2	2	1	512-05-2024	Apatie usoara	Vitamine	450	In observatie pentru modificari de dieta
3	3	6	1815-05-2024	Naparalire anormala	Supliment penaj	3,2	Test de sange recomandat
4	4	1	916-01-2024	Evaluare carantina	Deparazitare interna	35	Animal nou sosit
5	5	6	2920-04-2024	Infectie bacteriana solzi	Antibiotic in apa	120,5	Izolot temporar
6	6	1	110-02-2024	Control de rutina	(null)	195	Sanatos tun
7	7	6	1129-04-2026	Zgarietura cioc	Unguent	(null)	(null)
8	8	1	701-05-2024	(null)	(null)	3500	Greutate in parametri normali
9	11	1	218-05-2024	Probleme dentare	Detartraj	280	Se recomanda dieta moale 3 zile
10	12	6	1520-05-2024	(null)	Vitamine penaj	4,5	(null)
11	13	1	2221-05-2024	Paraziti externi	Solutie speciala apa	(null)	Izolare 24h
12	14	6	801-06-2024	Schiopatat picior stang	Repaus	95,5	Fara leziuni osoase
13	15	1	1205-06-2024	Control general	(null)	0,8	Perfect sanatos

```

---TABELE ASOCIATIVE
---TABEL PARTICIPA_LA
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (19, 5, 1, 15.5, 200.00, 'Excelenta, animal calm');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (20, 5, 1, 20.0, 250.00, 'Buna, usor agitat');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (13, 5, 2, 5.0, 100.00, 'Foarte entuziasmat dupa hrana');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (1, 5, 4, 30.0, 500.00, 'Obosit, necesita odihna');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (15, 5, 8, 8.0, NULL, 'Buna');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (11, 5, 8, NULL, 120.00, NULL);
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (10, 5, 6, 4.0, 50.00, 'Relaxat');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (6, 5, 6, NULL, NULL, 'Speriat la final');
INSERT INTO PARTICIPA_LA (id_animal, id_dresor, id_spectacol, ore_pregatire, bonus_financiar, stare_animal_final)
VALUES (7, 5, 10, 40.0, 800.00, NULL);

```

Script Output x Query Result x

Task completed in 0,085 seconds

10	5	6	4	50	Relaxat
6	5	6			Speriat la final
7	5	10	40	800	

9 rows selected.

```
SELECT * FROM PARTICIPA_LA;
```

Script Output x Query Result x

SQL All Rows Fetched: 9 in 0,001 seconds

	ID_ANIMAL	ID_DRESOR	ID_SPECTACOL	ORE_PREGATIRE	BONUS_FINANCIAR	STARE_ANIMAL_FINAL
1	19	5	1	15,5	200	Excelenta, animal calm
2	20	5	1	20	250	Buna, usor agitat
3	13	5	2	5	100	Foarte entuziasmat dupa hrana
4	1	5	4	30	500	Obosit, necesita odihna
5	15	5	8	8	(null)	Buna
6	11	5	8	(null)	120	(null)
7	10	5	6	4	50	Relaxat
8	6	5	6	(null)	(null)	Speriat la final
9	7	5	10	40	800	(null)

```

---TABEL INGRIJESTE
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (1, 2, 14, 'Curatenie tarc si hranire', TO_DATE('2023-02-01', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (2, 2, 10, 'Curatenie tarc', TO_DATE('2023-02-01', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (5, 7, 20, 'Monitorizare temperatura si igiena', TO_DATE('2022-08-10', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (13, 7, 15, 'Curatenie bazin gheata', TO_DATE('2022-09-01', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (21, 10, 8, 'Curatare filtre bazin', TO_DATE('2023-11-10', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (25, 10, 5, 'Mentinere ph apa', TO_DATE('2023-11-15', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (11, 2, NULL, 'Curatenie colivie', TO_DATE('2024-01-05', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (6, 7, 7, NULL, TO_DATE('2023-01-10', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (8, 2, 12, NULL, TO_DATE('2023-09-01', 'YYYY-MM-DD'));
INSERT INTO INGRIJESTE (id_animal, id_ingrijitor, ore_pe_sap, tip_activitate, data_inceput)
VALUES (30, 7, 10, 'Observare carantina', TO_DATE('2024-02-26', 'YYYY-MM-DD'));
SELECT * FROM INGRIJESTE;

---TABEL MANANCA
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica kg, portii pe zi, observatii) VALUES (1, 1, 7.5, 2,

```

Script Output x Query Result x

Task completed in 0,103 seconds

6				10-01-2023
8	2	12		01-09-2023
30	7	10	Observare carantina	26-02-2024

10 rows selected.

```

VALUES (30, 7, 10, 'Observare carantina', TO_DATE('2024-02-26', 'YYYY-MM-DD'));
SELECT * FROM INGRIJESTE;

---TABEL MANANCA

```

Script Output x Query Result x

SQL | All Rows Fetched: 10 in 0,001 seconds

ID_ANIMAL	ID_INGRIJITOR	ORE_PE_SAP	TIP_ACTIVITATE	DATA_INCEPUT
1	1	2	14 Curatenie tarc si hranire	01-02-2023
2	2	2	10 Curatenie tarc	01-02-2023
3	5	7	20 Monitorizare temperatura si igiena	10-08-2022
4	13	7	15 Curatenie bazin gheata	01-09-2022
5	21	10	8 Curatare filtre bazin	10-11-2023
6	25	10	5 Mentinere ph apa	15-11-2023
7	11	2	(null) Curatenie colivie	05-01-2024
8	6	7	7 (null)	10-01-2023
9	8	2	12 (null)	01-09-2023
10	30	7	10 Observare carantina	26-02-2024

```

---TABEL MANANCA
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (1, 1, 7.5, 2, 'Carne fara os in weekend');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (2, 2, 10.0, 3, 'Amestecat ocazional cu lucerna');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (3, 5, 2.0, 4, 'Fara citrice');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (5, 4, 12.0, 2, 'Se ofera inghetat vara');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (11, 3, 0.3, 2, 'Seminte decorticate');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (13, 4, 1.5, 3, 'Pesti mici, intregi');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (21, 4, 15.0, 1, 'Hranire o data la doua zile');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (7, 2, 50.0, 4, 'Se asigura apa din abundenta');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (7, 6, 15.0, 2, 'Legume taiate cuburi mari');
INSERT INTO MANANCA (id_animal, id_hrana, cant_zilnica_kg, portii_pe_zi, observatii)
VALUES (8, 1, 5.0, 1, 'Carne proaspata obligatoriu');

SELECT * FROM MANANCA;

```

Script Output x Query Result x

Task completed in 0,088 seconds

8	1	5	1 Carne proaspata obligatoriu
---	---	---	-------------------------------

10 rows selected.

Script Output x Query Result x

SQL | All Rows Fetched: 10 in 0,001 seconds

	ID_ANIMAL	ID_HRANA	CANT_ZILNICA_KG	PORTII_PE_ZI	OBSERVATII
1	1	1	7,5	2	Carne fara os in weekend
2	2	2	10	3	Amestecat ocazional cu lucerna
3	3	5	2	4	Fara citrice
4	5	4	12	2	Se ofera inghetat vara
5	11	3	0,3	2	Seminte decorticate
6	13	4	1,5	3	Pesti mici, intregi
7	21	4	15	1	Hranire o data la doua zile
8	7	2	50	4	Se asigura apa din abundenta
9	7	6	15	2	Legume taiate cuburi mari
10	8	1	5	1	Carne proaspata obligatoriu

```

---TABEL FURNIZEAZA
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (1, 8, 22.50, 2, 50.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (2, 1, 5.00, 3, 200.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (3, 4, 16.50, 7, 20.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (5, 4, 7.50, 1, 30.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (6, 1, 5.50, 1, 50.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (7, 5, 40.00, NULL, 5.00);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (9, 6, 3.50, 2, NULL);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (10, 2, 14.00, NULL, NULL);
INSERT INTO FURNIZEAZA (id_hrana, id_furnizor, pret_per_kg, timp_livrare_zile, cant_minima)
VALUES (12, 10, 75.00, 5, 10.00);

SELECT * FROM FURNIZEAZA;

```

Script Output x Query Result x
Task completed in 0,075 seconds

9	6	3,5	2	
10	2	14		
12	10	75	5	10

9 rows selected.

```
VALUES (12, 10, 75.00, 5, 10.00);
```

```
SELECT * FROM FURNIZEAZA;
```

Script Output x Query Result x
SQL | All Rows Fetched: 9 in 0,002 seconds

	ID_HRANA	ID_FURNIZOR	PRET_PER_KG	TIMP_LIVRARE_ZILE	CANT_MINIMA
1	1	8	22,5	2	50
2	2	1	5	3	200
3	3	4	16,5	7	20
4	5	4	7,5	1	30
5	6	1	5,5	1	50
6	7	5	40	(null)	5
7	9	6	3,5	2	(null)
8	10	2	14	(null)	(null)
9	12	10	75	5	10