
QUESTION 3:

Menu-Driven File Operations Using case:

Conditional statements:

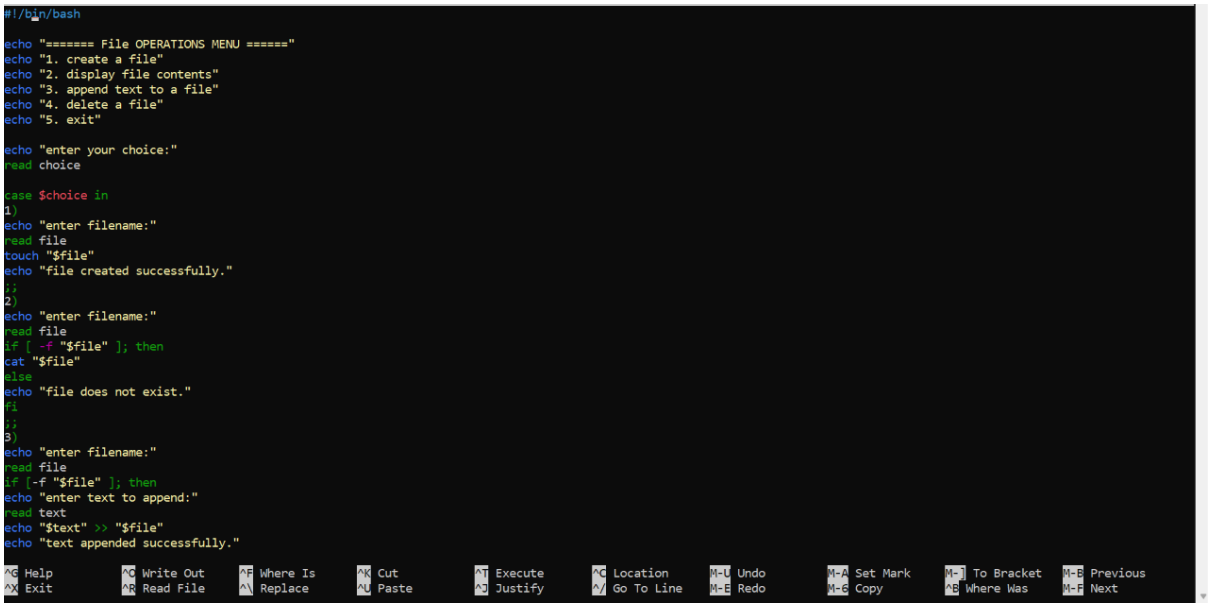


```
#!/bin/bash

echo "======= File OPERATIONS MENU ======"
echo "1. create a file"
echo "2. display file contents"
echo "3. append text to a file"
echo "4. delete a file"
echo "5. exit"

echo "enter your choice:"
read choice

case $choice in
1)
echo "enter filename:"
read file
touch "$file"
echo "file created successfully."
;;
2)
echo "enter filename:"
read file
if [ -f "$file" ]; then
cat "$file"
else
echo "file does not exist."
fi
;;
3)
echo "enter filename:"
read file
if [-f "$file" ]; then
echo "enter text to append:"
read text
echo "$text" >> "$file"
echo "text appended successfully."
```

^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket M-B Previous
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was M-F Next

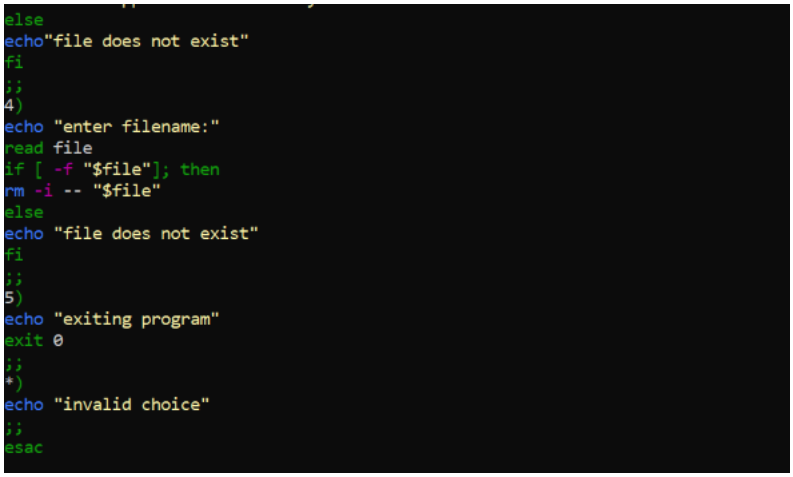

```
else
echo"file does not exist"
fi
;;
4)
echo "enter filename:"
read file
if [ -f "$file"]; then
rm -i -- "$file"
else
echo "file does not exist"
fi
;;
5)
echo "exiting program"
exit 0
;;
*)
echo "invalid choice"
;;
esac
```

`1)` / `2)` etc.

Defines a matching menu option in the `case` statement.

`touch "$file"`

Creates an empty file if it does not already exist.

`cat "$file"`

Displays the contents of a file.

`if [ -f "$file" ]`

Checks whether the specified path is a regular file.

`echo "$text" >> "$file"`

Appends text to the end of a file without overwriting existing content.

`rm -i -- "$file"`

Requests confirmation before deleting the specified file.

`exit 0`

Terminates the script with a success status.

`;;`


Ends the commands for the current `case` option.

`*)`

Handles any choice that does not match the listed options.

`esac`

Marks the end of the `case` statement.

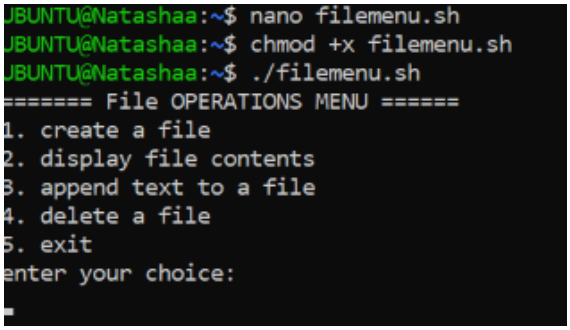

- `chmod +x filemenu.sh` — Gives the script execute permission.
- `./filemenu.sh` — Executes the shell script.