
# QUESTION 4:

## ➔ Directory Listing and Disk Usage Using Loops:

Control structure using loops

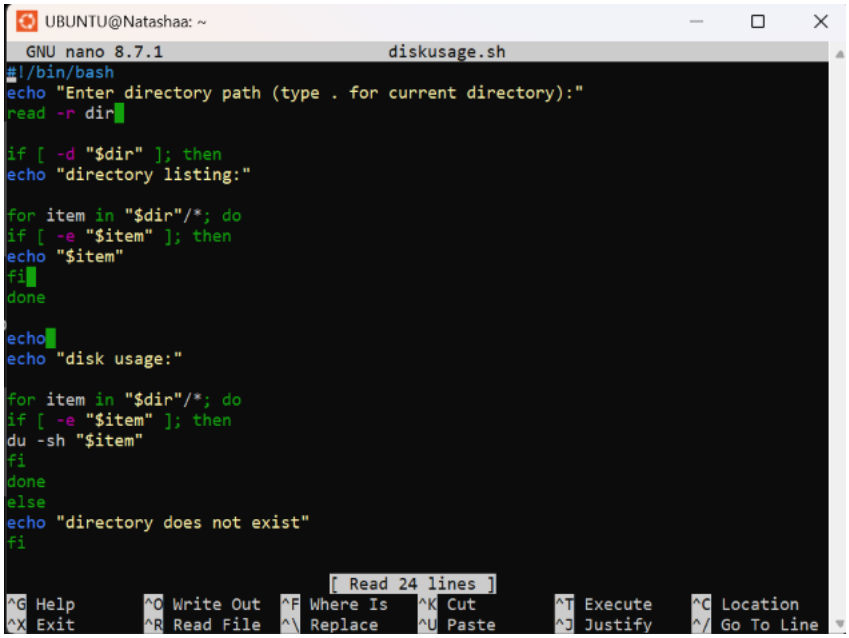


`if [ -d "$dir" ]`

Checks whether the specified path is a directory.

`for item in "$dir"/*`

Iterates over the non-hidden entries in the directory.

`if [ -e "$item" ]`

Checks whether the matched entry exists.

`echo "$item"`

Displays the path of each directory entry.

`du -sh "$item"`

Displays the disk usage of an individual file or directory in a human-readable summary.

`else`

Executes alternative commands if the directory check fails.

`fi`

Marks the end of an `if` statement.

```
done
```

Marks the end of a loop.

```
#!/bin/bash
```


Specifies Bash as the script interpreter.


```
chmod +x diskusage.sh
```

Makes the script executable.

```
./diskusage.sh
```

Runs the script from the current directory.

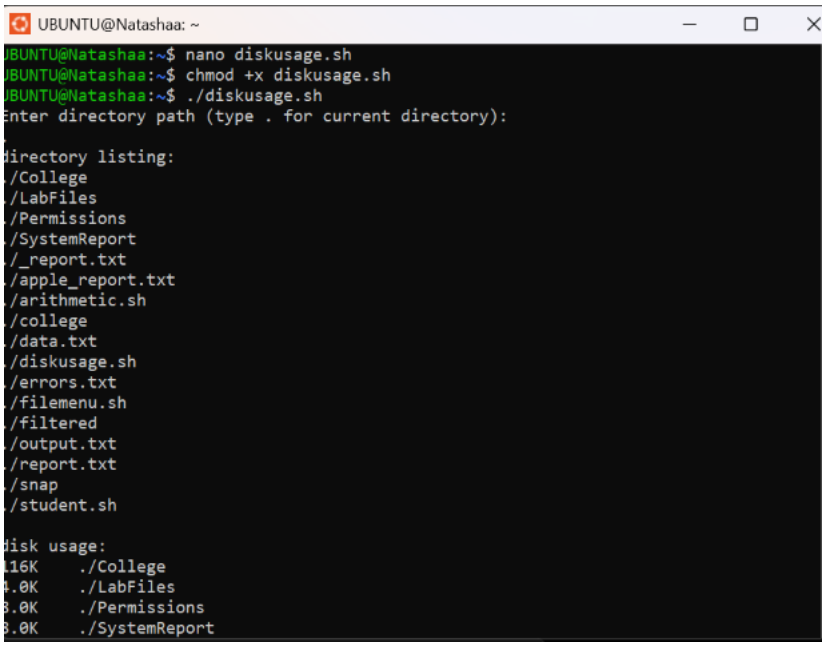

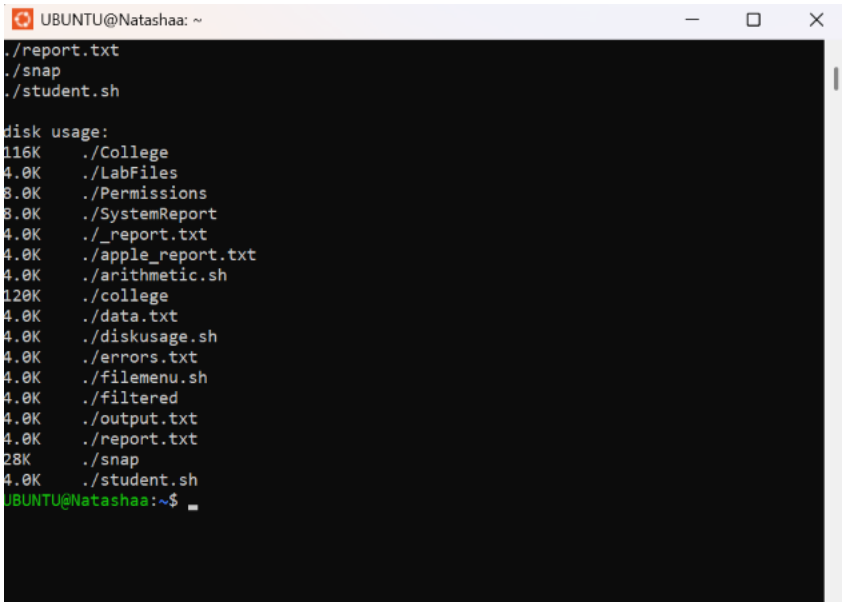


- `chmod +x diskusage.sh` — Gives the script execute permission.
- `./diskusage.sh` — Executes the shell script.