

QUESTION 5:

➔ Calculator Application Using Shell Functions.

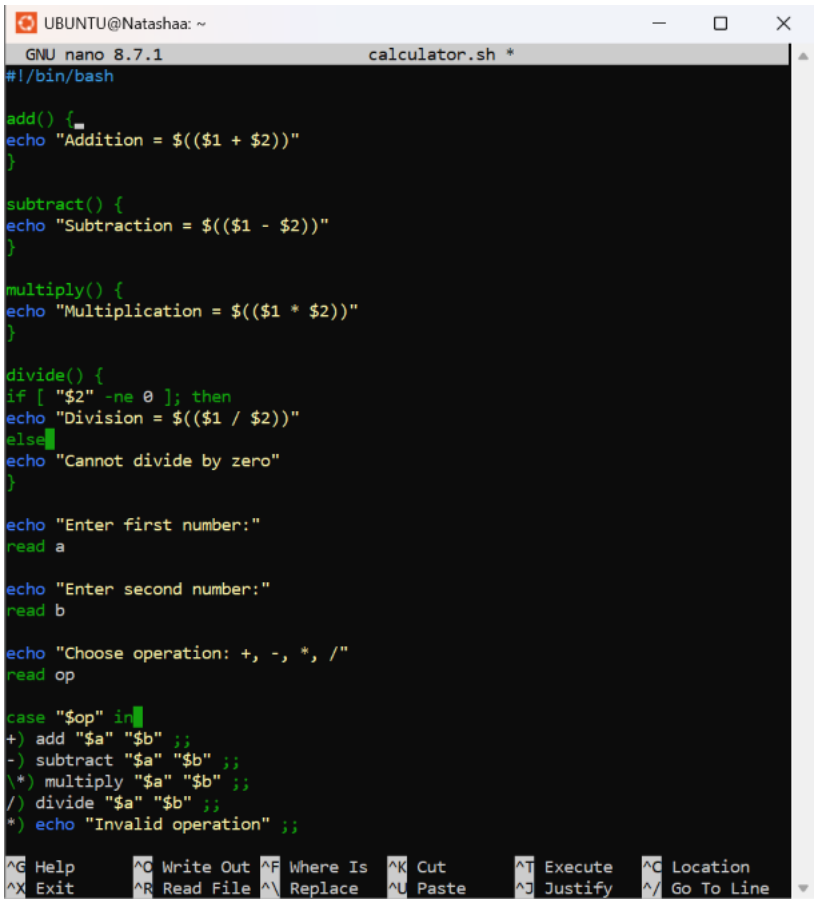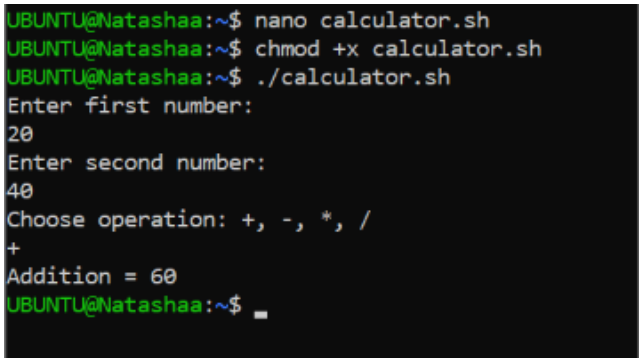

Function / command	Purpose
`add()`	Adds two numbers
`subtract()`	Subtracts the second number from the first
`multiply()`	Multiplies two numbers
`divide()`	Divides two numbers and checks for zero
`read`	Takes input from the user
`case`	Selects the operation based on the user's choice
`$1, $2`	Represent the first and second arguments passed to a function


UBUNTU@Natashaa:~$ nano calculator.sh
UBUNTU@Natashaa:~$ chmod +x calculator.sh
UBUNTU@Natashaa:~$ ./calculator.sh
Enter first number:
20
Enter second number:
40
Choose operation: +, -, *, /
+
Addition = 60
UBUNTU@Natashaa:~$