


intro-to-programming

and I bought more is a +I. 20 of kind for a +I and
it's more like number of average for each +I
for market this more and $\therefore C + D(1+D)$

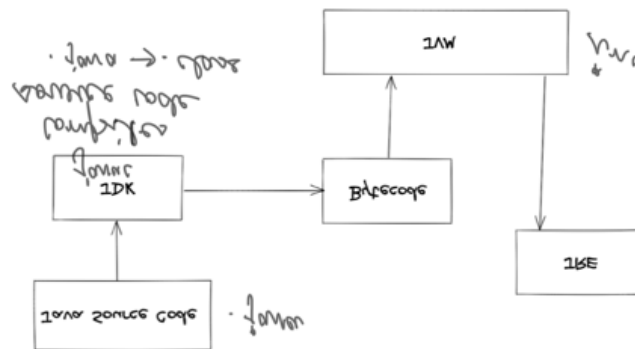

1. Stress
 2. Stressors
 3. Stressors
 4. Stressors
 5. Stressors
 6. Stressors
 7. Stressors
 8. Stressors
 9. Stressors
 10. Stressors
 11. Stressors
 12. Stressors
 13. Stressors
 14. Stressors
 15. Stressors
 16. Stressors
 17. Stressors
 18. Stressors
 19. Stressors
 20. Stressors
 21. Stressors
 22. Stressors
 23. Stressors
 24. Stressors
 25. Stressors
 26. Stressors
 27. Stressors
 28. Stressors
 29. Stressors
 30. Stressors
 31. Stressors
 32. Stressors
 33. Stressors
 34. Stressors
 35. Stressors
 36. Stressors
 37. Stressors
 38. Stressors
 39. Stressors
 40. Stressors
 41. Stressors
 42. Stressors
 43. Stressors
 44. Stressors
 45. Stressors
 46. Stressors
 47. Stressors
 48. Stressors
 49. Stressors
 50. Stressors
 51. Stressors
 52. Stressors
 53. Stressors
 54. Stressors
 55. Stressors
 56. Stressors
 57. Stressors
 58. Stressors
 59. Stressors
 60. Stressors
 61. Stressors
 62. Stressors
 63. Stressors
 64. Stressors
 65. Stressors
 66. Stressors
 67. Stressors
 68. Stressors
 69. Stressors
 70. Stressors
 71. Stressors
 72. Stressors
 73. Stressors
 74. Stressors
 75. Stressors
 76. Stressors
 77. Stressors
 78. Stressors
 79. Stressors
 80. Stressors
 81. Stressors
 82. Stressors
 83. Stressors
 84. Stressors
 85. Stressors
 86. Stressors
 87. Stressors
 88. Stressors
 89. Stressors
 90. Stressors
 91. Stressors
 92. Stressors
 93. Stressors
 94. Stressors
 95. Stressors
 96. Stressors
 97. Stressors
 98. Stressors
 99. Stressors
 100. Stressors

- գրադեռե օլլաթթու
- առաջ ԵՎԵՐԵՐԻՈՆ ԲՈՂԵՐ
20 ԼԵ-ԻՆՐԱԵՆԵՐՈՒՄ ԻՉ ՈՒՐ ԼԵՂԻՄԵՂ՝
II.1 ԵՆՈՂԵՐ ՊԵՆԵՐ ՄՈՐՄԻՆ ԵՐԵՂ
- ԼՈՐԵՆ ՄԵՂԻՈՐԵՐ ԼՈՒՐ ՈՒՐ ԼԵՂԵՐԲԵՂ՝
II.2
- ԻՄՊ՝ ԻՆՐԱԵՆԵՐ ՕԴՈՐՆ ՈՒՂ ՕԴՈՐՆ
- ՄՊԵՆ ՈՒՐ ՄԵՂԻՈՂ ԻՉ ԵՐԼԵՂ ՄՈՒՂ ԼՈՒՐՉ՝
- ԼՈՒՐ ԻՆ ՊԵՂ ԵՎԵՐԵՐԻՈՆ
ԻՆՐԱԵՆԵՐԸ:
II.3 ԵՎԵՐԵՐԻՈՆ



ex: obj of 1000s.

static variables are not destroyed

JVM contains the stack and heap memory allocations.

variables defined in the code and static block
all static variables are assigned when they

- initialization
with direct references. Any variable is variable
- resolves symbolic references from the type
- default values
- allocates memory for class variables
- JVM writes the class file
- linking
- an object of the class is created in heap
- resolves class file to be loaded
- loading:
(how JVM works) class loader

- 1. RAW stage code to byte code verifier to check the format of code
- 1. Given pointer range all pointers needed to execute the program.
- After we get the class file, the next thing happens at runtime:
 1. RAW
 1. Byte verifier
 1. Interpretation phase
 1. User interface toolkit
 1. Deployment technologies
- If consists of
- If is on interpretation backwards that provides environment to only run the program

115E

- [illegible]

1DK

terminated at 10.20 B. 2000. It was terminated
(with 10.20 B. 2000) with 10.20 B. 2000

