

# The left edge of Rule 30 without Rule 30: the stripe recursion, Wolfram’s number 2,107,985,255, and the forks beyond it

N. Berzai\*

30 September 2026; revised 8 October 2026

## Abstract

The left edge of the Rule 30 pattern grown from one black cell is made of diagonals that become periodic, with periods that are powers of two. Wolfram tabulated the depths at which the period first reaches 2, 4, 8, 16, 32 and gave the sixth, where it reaches 64, as “2,107,985,255 or more”. The eventual patterns of consecutive diagonals obey a two-term recursion with a closed form, which we run without simulating the rule; it is deterministic except at a diagonal that ends all white, where it forks. The eighth such diagonal of the seed is  $d = 1,420,878,968$ , a genuine fork: on one branch the period reaches 64 at exactly  $d = 2,107,985,255$ ; on the other the next frozen diagonal, 3,340,408,059, is a second fork, and the earliest period-64 onset on that side is 9,958,700,505. This fork and these onsets were, to our knowledge, first made public on 8 September 2026 in two independent code repositories [2, 7], the second onset in [7] only; we obtained the same integers independently on 24 September 2026. Beyond the doubling the first branch has no further fork up to  $10^{12}$ . Over more than  $10^{10}$  pairs, consecutive patterns differ in a binomially distributed number of cells; if this holds down to distance 0, forks come about once per  $2^P$  diagonals at period  $P$ , the rate of the known coin model [3, 4, 8], and the next doubling lies near  $10^{19}$ – $10^{20}$ , beyond any computation. We prove that at a fork the order–chaos front advances exactly when the frozen diagonal is black on the row after the previous front, and that, given the front’s path over the three preceding diagonals, five cells of the last three patterns force the seed onto the branch of Wolfram’s number. That path is the one input not proved; it is the same in all eight coin-driven models of the front whose path we recorded across the fork, and all twenty-eight models we ran take that branch. The centre column the stripes alone would produce, computed earlier to  $10^9$  terms in [3], passes every fair-coin test we applied to  $10^9$  bits but one, and the real centre column is that sequence XOR a transient bit that behaves, in every test we ran, as an independent coin.

## 1 Introduction

Rule 30 started from a single black cell produces a pattern whose right side looks random and whose left side is striped: each diagonal parallel to the left edge becomes periodic after a transient, with a period that is a power of two [4, 5, 9]. The period of the stripes grows. Wolfram [12, p. 871] lists the depths at which the maximal period first reaches 2, 4, 8, 16, 32 as 3, 8, 29, 400, 87,867 and the sixth, period 64, as “2,107,985,255 or more”. Gravner and Griffeath [4, §8] describe the eventual patterns as the labels of a tree and record that “the first genuine branching occurs for period 16 at generation 53,207”.

---

\*Computational and editorial assistance from Claude (Anthropic). Every numbered result carries a status label, defined in Section 1; no claim is made beyond its label.

This note does four things.

1. It writes the recursion between consecutive eventual patterns in closed form (Lemma 3.1) and runs it forward in C at about  $3 \cdot 10^7$  diagonals a second on one core, with no simulation of the rule. The recursion forks only at a diagonal that ends all white.
2. It recomputes the eighth such diagonal of the seed,  $d^* = 1,420,878,968$ , a genuine fork, on which one branch doubles the period at Wolfram’s number to the digit while the other forks again at 3,340,408,059 (Theorem 4.1) and first doubles at 9,958,700,505 [7]. These integers were public before this note [2, 7]; the attribution is at the end of this section. It adds that the branch of Wolfram’s number has no further fork up to  $10^{12}$  (Theorem 4.3).
3. It gives the measured reason why a seventh doubling is out of reach: consecutive patterns differ binomially, so forks come about once per  $2^P$  diagonals at period  $P$ , which matches the spacing of the doublings (Law 5.1). The rate  $2^{-P}$  is that of a known coin model [3, 4, 8]; what the note measures is the distribution.
4. It shows what decides which branch the picture takes. At a diagonal that ends all white the front between the striped and the chaotic region advances exactly when that diagonal is black on the row after the previous front (Theorem 6.2), and in the cases met at the seed’s forks this fixes the branch. For the seed at  $d^*$  a five-line derivation gives the branch of Wolfram’s number from five pattern cells and the front’s path modulo 32 over the three preceding diagonals (Theorem 6.5).

The one input not proved is that path, which every coin-driven model of the front that we recorded shares; we isolate it as the first open problem. The recursion itself is the forward form of the label tree of Gravner and Griffeath [4], and its closed form is the reset formula of [1], the closed form of any eventually periodic diagonal, applied to the eventual patterns; the parity rule at a frozen diagonal is Rowland’s [9], and that the two branches at a doubling are translates is in [4, §8]. Several facts proved below to keep the note self-contained were also public before it, and each is credited where it is stated: that a diagonal is frozen exactly when the two before it carry the same pattern is Lemma A of [8]; the landing rule and the monotone front of Lemma 2.1 and the background column of Section 7 are in [3]; and whether the stripes can cross the centre column was asked in [13]. Running the recursion forward in place of the rule is not new either: two code repositories did so before us, past  $d^*$ . The eighth frozen diagonal,  $d^* = 1,420,878,968$ , and the period-64 onset at 2,107,985,255 on one of its two branches were, to our knowledge, first made public on 8 September 2026 in two independent code repositories: Dibujaron/rule30 [2] and Patto1155/rule30-foundry [7], the second from a run of about 30 August 2026. We obtained the same integers independently on 24 September 2026 and learned of these repositories on 1 October 2026. We found the numbers in no paper, preprint or OEIS entry. The second repository also follows both branches at every fork up to  $1.2 \cdot 10^{10}$ ; the only other period-64 onset it records is at 9,958,700,505, on the other side of the fork. Neither repository determines which branch the seed takes, and neither do we. What we have not found elsewhere, to our knowledge, is the reading of Wolfram’s number as the smallest onset over the branches (Remark 4.2), the absence of a further fork on the branch of Wolfram’s number up to  $10^{12}$  (Theorem 4.3), the distribution of the distance between consecutive patterns at periods 32 and 64 (Law 5.1; the coin model, its rate  $2^{-P}$  and its even split between doublings and genuine forks are known [3, 4, 8, 11]), the advance criterion and the conditional derivation of the seed’s branch (Theorems 6.2 and 6.5), and the edge-machine evidence (Computation 6.4). The note is self-contained: the facts about the front that its proofs use are proved in Section 2. Our longer manuscript [1] is cited only for context. Results carry a status: PROVED; EXACT for a finite computation reproducible from the accompanying code; MEASURED for a statistical statement; KNOWN for the literature; OPEN.

## 2 Setting

Rule 30 is  $u_x^{t+1} = u_{x-1}^t \oplus (u_x^t \vee u_{x+1}^t)$  on  $x \in \mathbb{Z}$ , from  $u_x^0 = [x = 0]$ . The *diagonal frame* is  $D_d(t) = u_{d-t}^t$  for  $d, t \geq 0$ : diagonal  $d = 0$  is the left edge  $x = -t$ , which is always black. In this frame the rule reads

$$D_{d+1}(t+1) = D_{d-1}(t) \oplus (D_d(t) \vee D_{d+1}(t)) \quad (d, t \geq 0, D_{-1} \equiv 0). \quad (1)$$

Every  $D_d$  is eventually periodic with minimal period  $p_d$  a power of two [5, 4, 9]. Let  $r_d: \mathbb{N} \rightarrow \mathbb{F}_2$  be the periodic sequence with  $D_d(t) = r_d(t)$  for all large  $t$  (the *label* of diagonal  $d$ ),  $\tau_d$  the least  $\tau$  with  $D_d(t) = r_d(t)$  for all  $t \geq \tau$ , and  $\Delta_d = D_d \oplus r_d$  the *defect*, which has finite support ending at row  $\tau_d - 1$  (empty if  $\tau_d = 0$ ). The *front* is  $M_d = \max(\tau_{d-1}, \tau_d) - 1$ , the last row on which diagonal  $d - 1$  or  $d$  is still transient. We say row  $t$  lies *beyond the front* of diagonal  $d$  if  $t \geq M_d + 1$ ; there both  $D_{d-1}(t) = r_{d-1}(t)$  and  $D_d(t) = r_d(t)$ . Diagonal  $d$  is *frozen* if  $r_d \equiv 0$ , that is, if it ends all white. The front *moves* (or advances) at  $d$  if  $M_d > M_{d-1}$ , and *stalls* at  $d$  otherwise. We call the sequence of labels the *wall*, and a sequence of labels generated by the recursion of Section 3, with a choice made at each fork, a *lineage*. Figure 1 shows the picture.

The diagonal  $d = 0$  is black on every row:  $u_{-t}^t = u_{-t-1}^{t-1} \oplus (u_{-t}^{t-1} \vee u_{-t+1}^{t-1}) = 0 \oplus (0 \vee 1) = 1$  by induction, so  $r_0 \equiv 1$  and  $\tau_0 = 0$ . The rest of what the proofs below use about labels and fronts is the following. Its parts were public before this note: (b) is in [4]; (a) with the split of the picture into labels and defect, the monotone front (c), the landing rule (d) and (e) are in Dibujaron/rule30 [3], where the landing rule is checked on 60,065 of 60,065 diagonals (commit a8dbbc0 of 8 September 2026). By (c) and the definition of  $M_d$ ,  $M_d + 1 = \max_{j \leq d} \tau_j$ , and the code of Wolfram's 2019 prize post takes such a running maximum [13]. We prove the lemma to keep the note self-contained.

**Lemma 2.1** (labels and the front; PROVED). *(a) Background equation.  $r_{d+1}(t+1) = r_{d-1}(t) \oplus (r_d(t) \vee r_{d+1}(t))$  for all  $d \geq 0$  and all  $t$ , with  $r_{-1} \equiv 0$  and the labels extended periodically to all integers.*

*(b) No two consecutive labels are both zero.*

*(c) Monotonicity.  $M_d \leq M_{d+1}$ .*

*(d) Landing rule. Either  $M_{d+1} = M_d$ , or diagonal  $d$  is not frozen and  $M_{d+1} = n := \min\{t \geq M_d + 1 : r_d(t) = 1\}$ , the first black cell of  $r_d$  beyond the front; in the second case the defect of diagonal  $d + 1$  is 1 on the rows  $M_d + 1, \dots, n$  and ends there,  $\tau_{d+1} - 1 = M_{d+1} = n$ .*

*(e) If diagonal  $d$  is frozen,  $M_{d+1} = M_d$ .*

*Proof.* (a) For  $t$  beyond  $\tau_{d-1}, \tau_d, \tau_{d+1}$  the three diagonals equal their labels and (1) reads as stated; both sides are periodic in  $t$ , so the identity holds for all  $t$ . (b) Suppose  $r_{d-1} = r_d \equiv 0$  with  $d \geq 1$ . Then (a) with  $d - 1$  in place of  $d$  gives  $0 = r_d(t+1) = r_{d-2}(t)$ , so  $r_{d-2} \equiv 0$  too, and descending,  $r_0 \equiv 0$ , which is false. (This is the argument of [4, Proposition 3.3].) (c), (d), (e) Subtracting (a) from (1) gives, for every  $t$ ,

$$\Delta_{d+1}(t+1) = \Delta_{d-1}(t) \oplus (D_d(t) \vee D_{d+1}(t)) \oplus (r_d(t) \vee r_{d+1}(t)).$$

If  $t \geq \tau_d$  and  $t \geq \tau_{d+1}$  the last two terms cancel, so  $\Delta_{d-1}(t) = \Delta_{d+1}(t+1) = 0$  for  $t \geq \max(\tau_d, \tau_{d+1})$ : hence  $\tau_{d-1} \leq \max(\tau_d, \tau_{d+1})$ , which is (c). For  $t \geq M_d + 1$  the first term vanishes and  $D_d = r_d$ , so, using  $(x \vee a) \oplus (x \vee b) = \neg x \wedge (a \oplus b)$ ,

$$\Delta_{d+1}(t+1) = \neg r_d(t) \wedge \Delta_{d+1}(t) \quad (t \geq M_d + 1).$$

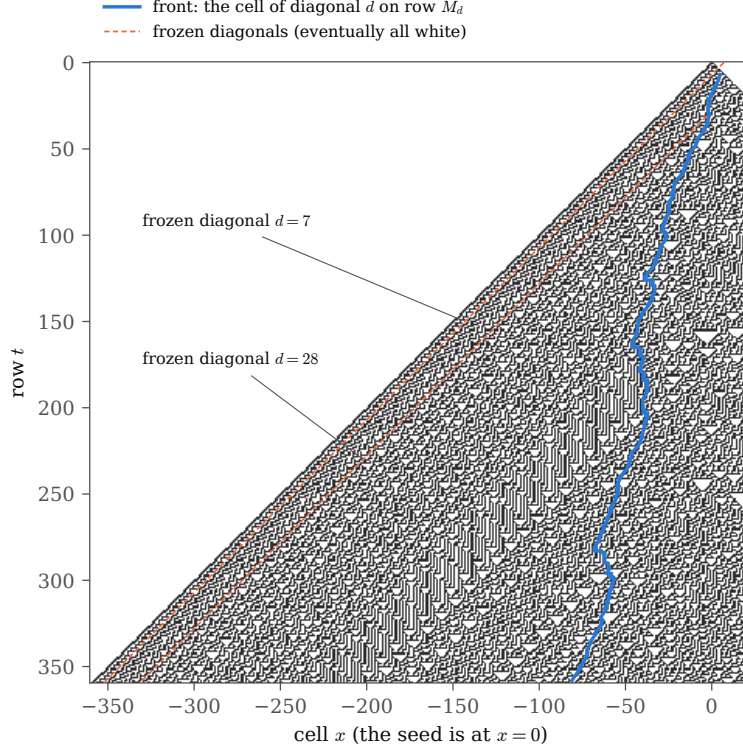


Figure 1: The left edge of Rule 30 from one cell, rows 0–359. Diagonals run from upper right to lower left. Left of the blue front each diagonal is periodic (the stripes); right of it the pattern is still transient. The frozen diagonals  $d = 7$  and  $d = 28$  are all white from rows 0 and 31 on (dashed);  $d = 2$ , white from row 2 on, runs along the edge and is not marked. Here the front leans left by about 0.2 cells per row; over the first 800,000 diagonals its average lean is 0.24.

If  $r_d \equiv 0$  the defect  $\Delta_{d+1}$  is constant from row  $M_d + 1$  on, hence 0 there, so  $\tau_{d+1} \leq M_d + 1$  and, with (c),  $M_{d+1} = M_d$ : this is (e). Otherwise  $\Delta_{d+1}$  keeps its value  $\Delta_{d+1}(M_d + 1)$  on the rows  $M_d + 1, \dots, n$ , where  $r_d$  is white, and is 0 from row  $n + 1$  on. If that value is 0 then  $\tau_{d+1} \leq M_d + 1$  and  $M_{d+1} = M_d$  by (c). If it is 1 then  $\tau_{d+1} = n + 1$ , so  $M_{d+1} = \max(\tau_d, n + 1) - 1 = n$ , since  $n \geq M_d + 1 \geq \tau_d$ . This is (d).  $\square$

In the cases and ranges listed here, the labels of a left half of Rule 30, driven by its boundary column from a finite initial state, are the seed's up to a translation of rows: this is KNOWN for every finite seed up to diagonal 53,207 [4, §8], was reported for the inputs tried in [3] (commit 47f8ab5), and is EXACT for seven combinations of boundary column, some random, and initial state up to diagonal 12,000 [1]. It does not hold for every finite initial state beyond diagonal 53,207 [10]; see the paragraph after Proposition 6.3. We use this only as a measured hypothesis, in Proposition 6.3.

### 3 The stripe recursion

**Lemma 3.1** (PROVED). *Let  $(a, b) = (r_{d-1}, r_d)$  and  $c = r_{d+1}$ . Then  $c(t+1) = a(t) \oplus b(t) \oplus (-b(t) \wedge c(t))$  for all  $t$ .*

(a) *If  $b \not\equiv 0$ , extend  $a, b, c$  periodically to all integers and let  $u^* < t$  be the last row before  $t$  with  $b(u^*) = 1$ . Then  $c(t) = a(u^*) \oplus 1 \oplus \bigoplus_{u^* < s < t} a(s)$ . So  $c$  is the unique periodic solution, and its*

period divides  $\text{lcm}(p_{d-1}, p_d)$ .

- (b) If  $b \equiv 0$  (diagonal  $d$  is frozen),  $c(t) = c(0) \oplus \bigoplus_{0 \leq s < t} a(s)$  for  $t \geq 0$ . Both solutions are periodic, and they are complements. Their minimal period is  $p_{d-1}$  if  $a$  has even weight on a period and  $2p_{d-1}$  if odd.

*Proof.* The recursion is Lemma 2.1(a), since  $b \vee c = b \oplus (\neg b \wedge c)$ . Where  $b(s) = 1$  the recursion gives  $c(s+1) = a(s) \oplus 1$  whatever  $c(s)$  was; where  $b(s) = 0$  it gives  $c(s+1) = a(s) \oplus c(s)$ . Iterating from  $u^*$  gives (a). Every solution agrees with (a) after the first black cell of  $b$ , so the periodic one is unique and inherits every common period of  $a$  and  $b$ . In (b),  $c(t+p) = c(t) \oplus \bigoplus_{s=t}^{t+p-1} a(s)$  for  $p = p_{d-1}$ , which is  $c(t)$  at even weight and  $\neg c(t)$  at odd weight. Since  $a(t) = c(t) \oplus c(t+1)$ , every period of  $c$  is a period of  $a$ , so the minimal period of  $c$  is  $p$  at even weight and  $2p$  at odd weight.  $\square$

Lemma 3.1 is that reset formula applied to the labels, and part (b) is Rowland's parity law [9]. The one-step law behind the reset formula is Rowland's Lemma 3 [9]; it is also in [8], in Lean in [3], and in [6]. The recursion also runs backwards:  $a(t) = c(t+1) \oplus b(t) \oplus (\neg b(t) \wedge c(t))$  recovers  $r_{d-1}$  from  $(r_d, r_{d+1})$ , so each pair of consecutive labels has exactly one predecessor pair, and this *backward map* commutes with translation of rows. Read backwards, the wall is the tree of Gravner and Griffeath [4].

**Corollary 3.2** (PROVED). (i) Diagonal  $d \geq 2$  is frozen if and only if  $r_{d-2} = r_{d-1}$ : forks are twins. (ii) The running maximum of  $p_d$  grows only across a frozen diagonal, from  $d-1$  to  $d+1$ , and then by a factor of two. (iii) At a frozen diagonal whose predecessor label has odd weight, the two candidates are translates of each other by  $p_{d-1}$  rows. At each frozen diagonal of Table 1 where it has even weight, no translation maps one candidate to the other, so the branches are different walls.

*Proof.* (i) Put  $c \equiv 0$  in the recursion:  $a = b$ . Conversely if  $a = b \neq 0$  then (a) gives  $c(t) = a(u^*) \oplus 1 \oplus 0 = 0$ ; and  $a = b \equiv 0$  cannot occur by Lemma 2.1(b). (ii) By Lemma 3.1(a),  $p_{d+1} \leq \max(p_{d-1}, p_d)$  unless  $d$  is frozen; if it is,  $p_{d+1} \leq 2p_{d-1}$  by (b), and  $2p_{d-1}$  exceeds the running maximum only if  $p_{d-1}$  equals it. (iii) At odd weight  $c(t+p_{d-1}) = \neg c(t)$ , and  $\neg c$  is the other candidate. At the even-weight frozen diagonals of Table 1 the candidate weights are 4/12 at 53,207, 6/10 at 58,286 and 14/18 at  $d^*$ , so they are not translates; at 3,340,408,059 both weigh 16, and a direct check of the 32 rotations finds none that maps one to the other. No later pair of consecutive labels on one branch is a translate of the pair of the same index on the other either: the backward map, which recovers  $(r_{j-1}, r_j)$  from  $(r_j, r_{j+1})$ , commutes with translation, so such a pair would make the candidates translates.  $\square$

Part (i) is Lemma A of Patto1155/rule30-foundry [8] (commit d612567 of 19 August 2026), proved there in both directions; it is also in [3] (commit 59a9c26 of 8 September 2026, and in Lean). For (ii) compare the pair-period law, Lemma 2 of [6]: the largest period up to diagonal  $d$  is  $\max(p_{d-1}, p_d)$ . The first statement of (iii) is in [4, §8]. Every frozen diagonal is a fork of the recursion; we call it a *doubling* when  $r_{d-1}$  has odd weight, since the period then doubles and the two branches are one wall up to translation, and a *genuine fork* when the weight is even.

*Validation* (EXACT). Started from  $(r_{19}, r_{20})$  and given the seed's branch at each fork, the recursion reproduces the labels of a direct simulation at all 799,980 diagonals up to 800,000. Implementations with 64- and 128-bit pattern words, run from  $d = 90,000$ , stop at the same frozen diagonal  $d^*$  with the same labels and the same count of diagonals of each period. Exact periods for  $d < 10^6$  were public before this note: [8] (commit ae8d14d, dated 19 August 2026) has them by direct simulation, with the same seven frozen diagonals up to 87,866 as in Table 1 and period 32 first at  $d = 87,867$ .

| frozen diagonal $d$        | period of $r_{d-1}$ | weight | type         | new period, first at      |
|----------------------------|---------------------|--------|--------------|---------------------------|
| 2                          | 1                   | 1      | doubling     | 2 at $d = 3$              |
| 7                          | 2                   | 1      | doubling     | 4 at $d = 8$              |
| 28                         | 4                   | 3      | doubling     | 8 at $d = 29$             |
| 399                        | 8                   | 3      | doubling     | 16 at $d = 400$           |
| 53,207                     | 16                  | 6      | genuine fork |                           |
| 58,286                     | 16                  | 10     | genuine fork |                           |
| 87,866                     | 16                  | 5      | doubling     | 32 at $d = 87,867$        |
| 1,420,878,968              | 32                  | 20     | genuine fork |                           |
| 2,107,985,254 <sup>a</sup> | 32                  | 17     | doubling     | 64 at $d = 2,107,985,255$ |
| 3,340,408,059 <sup>b</sup> | 32                  | 16     | genuine fork |                           |

Table 1: Frozen diagonals of the seed’s lineage (EXACT), with the period and weight of  $r_{d-1}$ . Odd weight gives a doubling, even weight a genuine fork. The branches at  $d^* = 1,420,878,968$  are 93425cac and 6cbda353; <sup>a</sup>on the branch 6cbda353, <sup>b</sup>on the branch 93425cac. The last three rows were made public earlier in [2, 7]; see the attribution after Theorem 4.1.

## 4 The eighth frozen diagonal and Wolfram’s number

**Theorem 4.1** (EXACT; made public earlier in [2, 7]). *The frozen diagonals of the seed’s lineage up to the fork, and on each branch after it up to the next frozen diagonal, are those of Table 1. The eighth,  $d^* = 1,420,878,968$ , is a genuine fork:  $r_{d^*-1}$  has period 32 and weight 20, and the candidates for  $r_{d^*+1}$  are 93425cac and 6cbda353 (bit  $t$  of the 32-bit word is the cell on row  $t$  modulo 32). On the branch 6cbda353 the next frozen diagonal is 2,107,985,254, of odd weight 17, and the period first reaches 64 at  $d = 2,107,985,255$ . On the branch 93425cac the next frozen diagonal is 3,340,408,059, of even weight 16, and the period stays at most 32 up to it.*

*Attribution.* The integers of Theorem 4.1 were public before this note. The eighth frozen diagonal,  $d^* = 1,420,878,968$ , and the period-64 onset at 2,107,985,255 on one of its two branches were, to our knowledge, first made public on 8 September 2026 in two independent code repositories. Dibujaron/rule30 [2] gives  $d^*$  as the eighth all-white diagonal, with two complementary continuations. On one the next all-white diagonal is 2,107,985,254 and the period doubles at 2,107,985,255, which it identifies with Wolfram’s figure. On the other the next are 3,340,408,059 and 4,989,445,007, with no doubling below  $5.16 \cdot 10^9$ . Patto1155/rule30-foundry [7], from a run of about 30 August 2026, gives the first branch point at  $d^* + 1$  with the two words 93425cac and 6cbda353, and the doubling at 2,107,985,255 on the second. It follows both branches at every fork up to  $1.2 \cdot 10^{10}$  and records one further doubling there, at 9,958,700,505, on the side of the first word. So on the branch 93425cac, which forks again at 3,340,408,059, the earliest period-64 onset is 9,958,700,505; this onset was, to our knowledge, first made public in [7]. Our own runs of 24 and 25 September 2026 follow every branch up to  $2 \cdot 10^{10}$  and give the same events below  $1.2 \cdot 10^{10}$ . Their logs are not in the accompanying repository, whose logs follow that branch only to 3,340,408,059, so this statement is not part of Theorem 4.1. We obtained the same integers independently on 24 September 2026 and learned of these repositories on 1 October 2026. We found the numbers in no paper, preprint or OEIS entry. Neither repository determines which branch the seed takes (Section 6).

*Remark 4.2.* By Theorem 4.1 neither branch at  $d^*$  reaches period 64 before 2,107,985,255, so that number is the smallest period-64 onset over the branches. Wolfram’s “2,107,985,255 or more” is consistent with a computation of this kind that met the fork at  $d^*$  and reported the smallest onset as a lower bound (the other side of the fork is not one outcome but a tree of branches, whose earliest onset is 9,958,700,505 [7]). We have not found this reading stated. The match of the onset

with Wolfram’s number is noted in [2], which infers from it that the seed takes this branch and lists that step as not checked. [12] gives no reason for “or more”. We do not claim to know how the number was obtained.

**Theorem 4.3** (EXACT). *Beyond 2,107,985,255 the lineage of the branch 6cbda353 has no frozen diagonal up to  $d = 10^{12}$ , so its period-64 regime lasts at least until  $d = 10^{12}$ . The computation beyond  $1.508 \cdot 10^{11}$  ran on a second machine, from a checkpoint of the first, in 8,492 steps of  $10^8$  diagonals. Thirteen of them, at six places up to  $6.503 \cdot 10^{11}$ , were recomputed on the first machine by two separately written programs, with 64- and 128-bit pattern words, and agree to the last hex digit.*

The statement does not depend on the branch taken at 2,107,985,254. That frozen diagonal has odd weight, so its two candidates are translates (Corollary 3.2(iii)). By the uniqueness in Lemma 3.1(a) the two lineages after it are then translates of each other, and being frozen is invariant under translation. Inside the regime a label occasionally has minimal period 32, as Lemma 3.1(a) allows: 188 of the  $8.492 \cdot 10^{11}$  labels computed on the second machine, against  $197.7 \pm 14.1$  expected for uniformly random 64-bit patterns.

## 5 The fork law

**Law 5.1** (MEASURED). *In a regime of period  $P$ , the number of rows in a period where consecutive labels  $r_d$  and  $r_{d+1}$  differ is distributed as  $\text{Binomial}(P, \frac{1}{2})$ .*

Figure 2 shows the evidence. Over the  $1.42 \cdot 10^9$  consecutive pairs of the seed’s period-32 regime from  $d = 90,000$  to the fork, the counts fit the binomial with  $\chi^2 = 29.7$  on the 31 classes with expectation at least 5 (distances 1–31); at distances 0 and 32, where 0.33 pairs are expected, 1 and 0 are seen. Over the first  $10^{10}$  pairs of the period-64 regime they fit it with  $\chi^2 = 51.7$  on the 47 classes with expectation at least 5, and on both tails: at distance 8, 2.4 pairs are expected and 3 seen; at 56 and 57, 2.4 and 0.3 are expected and 1 and 1 seen.

By Corollary 3.2(i) a frozen diagonal is the distance-0 class, so if the law holds down to distance 0, frozen diagonals come at rate  $2^{-P}$ ; the single pair at distance 0 against 0.33 expected at  $P = 32$  is all the direct evidence at that distance. Heuristically, if about half of them have odd weight, as for independent uniform patterns, about half end the regime, and the expected length of a period- $P$  regime is about  $2^{P+1}$  diagonals:  $1.3 \cdot 10^5$  at  $P = 16$ ,  $8.6 \cdot 10^9$  at  $P = 32$ ,  $3.7 \cdot 10^{19}$  at  $P = 64$ . This coin model is not ours. The model, its rate  $2^{-P}$  and its even split between doublings and genuine forks are in the literature and in both repositories [3, 4, 8, 11], and [8] (commit ae8d14d) predicts the next doubling near  $8.6 \cdot 10^9$ . The seed’s period-16 regime is 87,467 long with three frozen diagonals; on the branch of Wolfram’s number its period-32 regime is  $2.1 \cdot 10^9$  long with two. Both are within Poisson scatter of these values. So a period of 128 is expected near  $10^{19}$ – $10^{20}$  diagonals, and if the seed takes that branch (Theorem 6.5), 2,107,985,255 is the last doubling of its left edge within reach of computation.

The law is the wall’s own pseudo-randomness statement: the orbit of the recursion on the  $4^P$  label pairs looks, in the distances between consecutive labels, like a sequence of independent uniform patterns. What is proved is only its link to the forks, Corollary 3.2(i). We know no route to a proof of the law itself, which would need a mixing property of the recursion’s orbit.

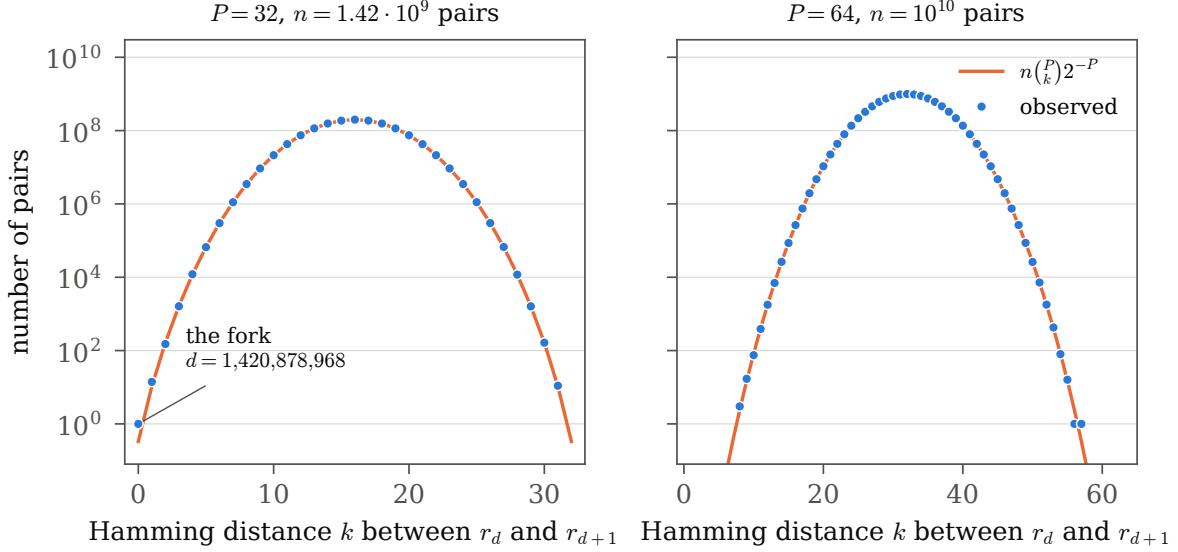


Figure 2: The fork law. Number of consecutive label pairs at Hamming distance  $k$  (dots) against  $n\binom{P}{k}2^{-P}$  (line). Left: the period-32 regime of the seed from  $d = 90,000$  to the fork; the single pair at  $k = 0$  is the fork  $d^*$ . Right: the first  $10^{10}$  pairs of the period-64 regime.

## 6 Which branch the picture takes

Which branch the seed takes at  $d^*$  is, to our knowledge, not determined in any public source. The two repositories that made the fork public both leave it open: [7] records the branch of the actual diagonal as unresolved, and [2] infers the seed's branch from the match with Wolfram's number and lists that step as not checked. This section does not determine it either. It proves what decides the branch at a frozen diagonal, and it derives the seed's branch at  $d^*$  from one hypothesis that is measured, not proved (Theorem 6.5). The branch rule, Theorem 6.1, is not new in kind: that one bit of the transient decides the branch is Rowland's Lemma 3 [9], and [7] (log of 9 September 2026) selects the branch by the phase and one boundary bit at the seven frozen diagonals below  $10^6$ .

**Theorem 6.1** (branch rule; PROVED). *Let  $d$  be frozen with  $\tau_d \geq 1$ , so  $D_d(t) = 0$  for  $t \geq \tau_d$  and  $D_d(\tau_d - 1) = 1$ . Then  $D_{d+1}(\tau_d) = D_{d-1}(\tau_d - 1) \oplus 1$  and  $D_{d+1}(t+1) = D_{d-1}(t) \oplus D_{d+1}(t)$  for  $t \geq \tau_d$ . The label taken is the candidate with*

$$r_{d+1}(\tau_d - 1) = 1 \oplus \bigoplus_{t \geq \tau_d - 1} \Delta_{d-1}(t).$$

*The branch is fixed by the cells of diagonal  $d - 1$  from row  $\tau_d - 1$  on.*

*Proof.* Apply (1) at row  $\tau_d - 1$ , where  $D_d = 1$  forces the OR to 1, and at rows  $t \geq \tau_d$ , where  $D_d = 0$  leaves  $D_{d+1}(t)$ . Both candidates  $c$  satisfy  $c(t+1) = r_{d-1}(t) \oplus c(t)$ . Subtracting,  $\Delta_{d+1}(t+1) = \Delta_{d-1}(t) \oplus \Delta_{d+1}(t)$  for  $t \geq \tau_d$ , so  $\Delta_{d+1}$  is eventually the constant  $\Delta_{d+1}(\tau_d) \oplus \bigoplus_{t \geq \tau_d} \Delta_{d-1}(t)$ , which must vanish. Expanding  $\Delta_{d+1}(\tau_d)$  with the first identity and the candidate recursion at row  $\tau_d - 1$  gives the displayed condition.  $\square$

**Theorem 6.2** (advance criterion; PROVED). *Let  $d \geq 2$  be frozen and  $m = M_{d-1}$ . From row  $m + 1$  on,  $D_d$  keeps its value until the first black cell of  $r_{d-1}$  at or after  $m + 1$ , and is white after it. Hence the front advances at  $d$  if and only if  $D_d(m + 1) = 1$ . It then lands on  $\min\{t \geq m + 1 : r_{d-1}(t) = 1\}$*

and the branch taken has  $r_{d+1}(M_d + 1) = 0$ . Otherwise  $M_d = m$ . If the front moved at  $d - 1$ , the criterion reads: the front stalls at  $d$  if and only if  $D_d(m) = 1$ , and then the branch taken has  $r_{d+1}(m) = 0$ . In that case a black cell of  $r_{d-3}$  strictly between the last two landing rows  $M_{d-2}$  and  $m$  forces the stall.

*Proof.* By Corollary 3.2(i),  $r_{d-2} = r_{d-1} =: r$ . For  $t \geq m + 1$  both  $D_{d-2}(t)$  and  $D_{d-1}(t)$  equal  $r(t)$ , since  $t$  lies beyond the front  $M_{d-1} = m$ . So (1) gives  $D_d(t + 1) = r(t) \oplus (r(t) \vee D_d(t))$ , which is 0 where  $r(t) = 1$  and  $D_d(t)$  where  $r(t) = 0$ . This proves the first sentence. Since  $r_d \equiv 0$ ,  $\tau_d - 1$  is the last black row of  $D_d$ . If  $D_d(m + 1) = 1$  that row is the first black cell  $n$  of  $r$  at or after  $m + 1$ , so  $M_d = n$ . At row  $n$ ,  $D_{d+1}(n + 1) = D_{d-1}(n) \oplus (D_d(n) \vee D_{d+1}(n)) = 1 \oplus 1 = 0$ , and row  $n + 1$  lies beyond the front of  $d + 1$ , which is  $M_{d+1} = M_d = n$ . If  $D_d(m + 1) = 0$  then  $D_d$  is white from  $m + 1$  on, so  $\tau_d \leq m + 1$  and  $M_d = m$ . After a move at  $d - 1$ , the landing row  $m$  is a black cell of  $r_{d-2} = r$  and carries the defect of diagonal  $d - 1$  (Lemma 2.1(d)), so  $D_{d-1}(m) = \neg r(m) = 0$  and  $D_{d-2}(m) = r(m) = 1$ . So  $D_d(m + 1) = 1 \oplus D_d(m)$ . At a stall  $D_d(m) = 1$  and  $D_d$  is white from  $m + 1$  on, so  $\tau_d = m + 1$ , and Theorem 6.1 gives  $r_{d+1}(m) = 1 \oplus \Delta_{d-1}(m) = 0$ , since  $\Delta_{d-1}$  is 1 at its landing row  $m$  and 0 beyond it. On the window  $W = (M_{d-2}, m)$  the label  $r$  is white, because  $m$  is the first black cell after  $M_{d-2}$ . There  $D_d(s + 1) = D_{d-1}(s) \vee D_d(s)$ , so  $D_d$  never decreases on  $W$ , while  $D_{d-1}(s + 1) = r_{d-3}(s) \oplus D_{d-1}(s)$ . Counting back from  $D_{d-1}(m) = 0$ , the last black cell  $u$  of  $r_{d-3}$  in  $W$  gives  $D_{d-1}(u) = 1$ , hence  $D_d(u + 1) = 1$  and  $D_d(m) = 1$ .  $\square$

*Check (EXACT).* At six of the seven frozen diagonals of the seed up to 87,866 the front either advances (2, 28 and 58,286) or stalls right after a move (399, 53,207 and 87,866). In all six the branch given by Theorem 6.2 is the seed's, on a direct simulation of the cells. The remaining one,  $d = 7$ , is white from row 0 on ( $\tau_7 = 0$ ), and the front moves neither there nor at  $d = 6$ , so neither case applies. A related check was public earlier: in [7] (log of 9 September 2026), at the same seven frozen diagonals, the phase and one boundary bit select the seed's branch.

**Proposition 6.3** (phase congruence; PROVED with an EXACT step; its hypotheses MEASURED). *Call a left machine the cells  $x \leq -1$  evolved by the rule from a finite initial state, with column 0 replaced by a given boundary sequence; it has its own diagonal frame, labels, defects and front, defined as above but with diagonals indexed from its own left edge (the leftmost black cell, which recedes one cell per row), and the seed's left half is the left machine driven by the seed's own centre column. Suppose a left machine has on a stretch of diagonals containing 20,000–87,866 or 90,000–800,000 the seed's labels translated by  $s_w$  rows and the seed's fronts translated by  $s_b$  rows, and that its front stays left of its boundary column there. Then  $s_b \equiv s_w$  modulo the period of that regime, 16 or 32. If the stretch ends at a frozen diagonal where the seed's front advances, or stalls right after a move, the machine takes the seed's branch there translated by  $s_b$  rows; at even weight this is the translation by  $s_w$ .*

*Proof.* The landing rule holds for the machine. Its proof, Lemma 2.1(d), uses the background equation, the definitions, and (1) only on rows beyond the front. For the machine (1) holds at every cell left of its boundary column, which includes those rows by hypothesis, and the background equation holds because every diagonal is periodic far down, where it lies in the left half. Written in the seed's rows, the machine's landing rule says that the seed's landing rule holds shifted by  $s = s_b - s_w$  at every diagonal where the front moves. EXACT: the shifted rule holds for  $s \equiv 0$  at all 37,086 moves of the period-16 regime between diagonals 20,000 and 87,866, and at all 385,784 moves of the period-32 regime between diagonals 90,000 and 800,000, and fails for every other residue; the best other residue satisfies it at 26.1% of the moves in both regimes. The branch then follows from Theorem 6.2: the selected candidate is the one white on a row fixed relative to the

front,  $M_d + 1$  after an advance and  $m$  after a stall, which for the machine is that row translated by  $s_b$ . The machine's candidates are the seed's translated by  $s_w$ . At even weight they have the regime's period or a divisor of it, so the translations by  $s_w$  and  $s_b$  agree. At odd weight the two candidates are translates of each other by  $p_{d-1}$ , and the one white on the machine's row is the seed's choice translated by  $s_b$ .  $\square$

Its hypotheses are the universality of the wall beyond period 8, KNOWN for every finite seed to diagonal 53,207 [4, §8] and EXACT for the seven driven machines of Section 2 to 12,000 [1], and the universality of the front; both are measured in the accompanying repository on six machines (the boundary columns  $(01)^\infty$ ,  $(0011)^\infty$ , a coin and the constant 1, and the seed's column with two random initial states), on which the congruence holds in both regimes, twelve cases in all. Proposition 6.3 is a mechanism by which the agreement of all seeds up to the first genuine branching, recorded by Gravner and Griffeath [4, §8], can persist beyond it. It need not persist for every seed: a gist of 21 August 2026 [10] gives a starting state of 53,209 bits for which the diagonal after 53,207 takes the other candidate; we checked this by direct simulation (EXACT). The author also reports that more than  $2^{17}$  random starting states all gave the seed's candidate.

**Computation 6.4** (EXACT). The edge machine of the accompanying repository evolves (1) on the rows  $M_d - 64$  to  $M_d + 66$  around the front, diagonal by diagonal, with the labels computed by Lemma 3.1 and one transient bit per diagonal, the cell  $D_{d+1}(M_d - 64)$ , entering 64 rows on the transient side of the front. The window determines the next diagonal on the same rows, and the new front is read where the new diagonal last differs from its label, so given the true bits the machine reproduces the seed's front exactly. A Python version run with the true bits does so with no deviation over 3,000 to 5,000 diagonals at three window depths, and the C version agrees with it over 200,000 diagonals with constant input bits. We drove that bit with a fair coin. Twenty runs from a crystal start at  $d = 90,000$  (the window filled with the labels, with no transient, and the front put at the seed's row  $M_{90,000} = 120,085$ ) all reach  $d^*$ , all have  $M_{d^*} \equiv 1$  modulo 32, and all take the branch **6cbda353**. Eight further runs, started  $2 \cdot 10^6$  diagonals before  $d^*$  with start rows 7 apart, have one and the same front history modulo 32 over the sixteen diagonals  $d^* - 12, \dots, d^* + 3$ , although their absolute rows differ by up to 2,336 (Figure 3). The runs are exact as computations; as evidence about the seed they are MEASURED and not calibrated: checked against an exact simulation of the seed between  $4 \cdot 10^6$  and  $4 \cdot 10^7$ , the same kind of machine with a window of up to 256 rows was unanimous and wrong at one event [1].

**Theorem 6.5** (the seed's branch at  $d^*$ ; PROVED given the front's path). *Suppose that, as in each of the eight recorded machines of Computation 6.4,  $M_{d^*-3} \equiv 29$  modulo 32, the front moves at  $d^* - 2$ , and  $M_{d^*-1} = M_{d^*-2}$ . Then the front advances at  $d^*$ , and the seed's branch is **6cbda353**, the one on which the period doubles at 2,107,985,255.*

*Proof.* Write  $d = d^*$ . The label cells used are  $r_{d-3}(30) = 0$ ,  $r_{d-3}(31) = 1$ ,  $r_{d-2}(31) = 1$ ,  $r_{d-1}(0) = 0$  and  $r_{d-1}(1) = 1$  (rows modulo 32), read from  $r_{d-3} = \mathbf{b792cb87}$  and  $r_{d-2} = r_{d-1} = \mathbf{dae372fa}$ . By the landing rule the move at  $d - 2$  goes from  $M_{d-3}$  to the next black cell of  $r_{d-3}$ , which is  $M_{d-3} + 2$ . So  $M_{d-2} = M_{d-1} = m$  with  $m = M_{d-3} + 2 \equiv 31$ .

1.  $D_{d-2}(m) = \neg r_{d-2}(m) = 0$ : the defect at the landing row of the move at  $d - 2$  (Lemma 2.1(d)).
2.  $D_{d-1}(m + 1) = r_{d-1}(m + 1) = r_{d-1}(0) = 0$ , since row  $m + 1$  lies beyond the front  $M_{d-1} = m$ .
3.  $D_{d-3}(m) = r_{d-3}(m) = 1$ , since row  $m$  lies beyond the front  $M_{d-3} = m - 2$ .
4. By (1) on diagonal  $d - 1$ :  $0 = D_{d-1}(m + 1) = D_{d-3}(m) \oplus (D_{d-2}(m) \vee D_{d-1}(m)) = 1 \oplus D_{d-1}(m)$ , so  $D_{d-1}(m) = 1$ .

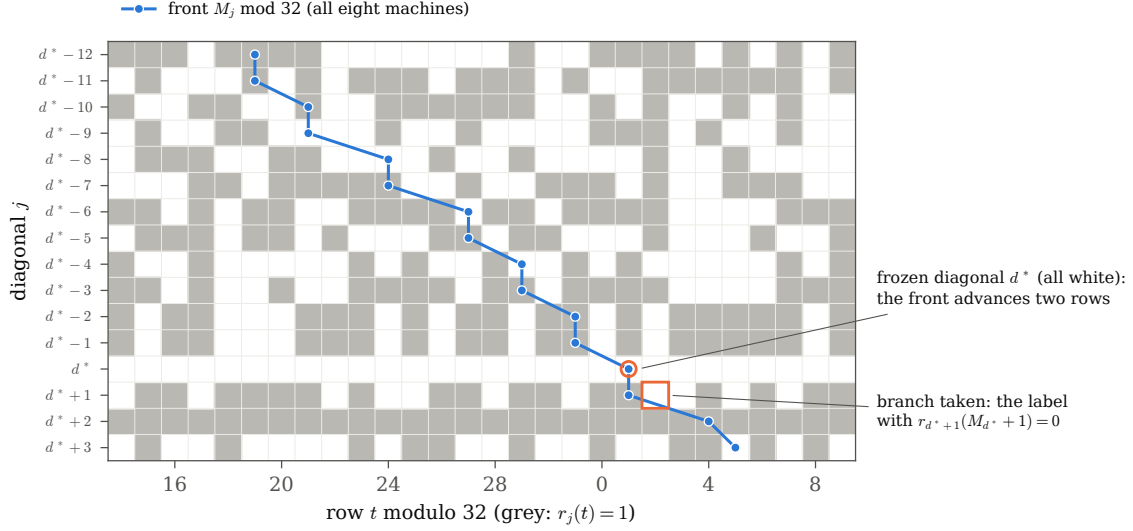


Figure 3: The front’s path through the labels at the eighth frozen diagonal  $d^* = 1,420,878,968$ . Rows are diagonals  $j$ , columns are rows  $t$  modulo 32, grey cells are  $r_j(t) = 1$ . Each move from diagonal  $j - 1$  to  $j$  lands on the first grey cell of row  $j - 1$  after the previous front, as the landing rule requires. The frozen diagonal is all white; the front advances there from 31 to 1 (Theorem 6.2), and the branch taken is the candidate that is white in the cell after the new front (square).

5. By (1) on diagonal  $d$ :  $D_d(m + 1) = D_{d-2}(m) \oplus (D_{d-1}(m) \vee D_d(m)) = 0 \oplus 1 = 1$ .

By Theorem 6.2 the front advances to the first black cell of  $r_{d-1}$  at or after row  $m + 1 \equiv 0$ , which is  $m + 2 \equiv 1$ , and the branch has  $r_{d+1}(m + 3) = r_{d+1}(2) = 0$ . Bit 2 of `6cbda353` is 0 and bit 2 of `93425cac` is 1.  $\square$

*Remark 6.6* (the wall alone does not decide; EXACT). Take every front history of depth 8 before  $d^*$  that is consistent with the landing rule, from every starting phase. Propagating (1) as a constraint from the known cells (every label cell beyond its front, and the defect at each landing row), as in the proof of Theorem 6.5, forces an advance for 1,038 of the 4,096 histories, a stall for 1,791, and neither for 1,267. Both verdicts occur, at depth 5, at every frozen diagonal of the seed from 28 to 87,866. So at none of these frozen diagonals does the wall alone decide the branch: paths of the front that are all consistent with it force different branches. That the stripes do not fix the branch is known in substance [7, 9, 10]. Nor does the path always decide it: at 28 and 58,286 the seed’s own advance is not forced by this propagation at any depth up to 32, and there the transient decides. The hypothesis of Theorem 6.5 is a statement about the front’s path, which is measured, not proved.

*Remark 6.7* (the doubling itself; EXACT). Eight coin-driven machines, started  $2 \cdot 10^6$  diagonals before 2,107,985,254, all stall there. Their branches split four to four, because the candidates `b6e14797491eb868` and `491eb868b6e14797` (bit  $t$  of the 64-bit word is the cell on row  $t$  modulo 64) are translates by 32 rows and each machine picks by its front row modulo 64. Seven of the eight share one front history modulo 32, a move to row 8 modulo 32 five diagonals before the doubling and then stalls, a case Theorem 6.2 does not cover; the eighth is at row 26. Seen from the front, the seven take the same label, so which translate the seed takes is decided by its front row modulo 64, and no datum of the period-32 wall fixes that. So the absolute phase of the seed’s period-64 wall

is one bit the recursion cannot supply. Frozen diagonals, forks and everything measured relative to the front do not depend on it.

## 7 What the wall alone produces

The labels define a centre column of their own,  $b_B(t) = r_t(t)$ : the cell the stripes would put on the centre column if every diagonal were periodic from the start. Lemma 3.1 computes it without the rule,  $10^9$  bits in 35 seconds. This column is not new. Dibujaron/rule30 [3] (commits of 7 and 8 September 2026) gives the settled configuration, in which the labels form a Rule 30 evolution of their own, and its centre column, to  $10^9$  terms and in Lean; it also reports coin-like statistics for the column. The tests below are our own runs.

MEASURED:  $b_B$  passes every fair-coin test we applied to  $10^9$  bits but one. Its density is 0.500029, its run counts for lengths 1 to 12 are within 1.3 standard deviations of a coin's, and the  $\chi^2$  of its blocks of length 8, 12 and 16 lie 1.5, 0.3 and 0.2 standard deviations below a coin's mean. No context of up to 16 bits predicts it better than a coin does; that test was calibrated against a coin and against the real column at equal length. It has no period up to  $10^7$  on its last  $10^8$  bits. At the 26 lags we tested between 1 and 128 its autocorrelation is within 2.1 standard deviations of zero, except at lag 64, where it is 6.2 standard deviations below, a trace of the period-32 stripes; this is the one test it fails. On rows 90,001–1,130,000 it agrees with the real centre column  $c$  on a fraction 0.49973 ( $z = -0.55$ ).

**Proposition 7.1** (decomposition; PROVED, with a MEASURED reading).  *$c(t) = b_B(t) \oplus \Delta_t(t)$  for every  $t$ . On rows 1,000–1,130,000 the transient bit  $\Delta_t(t)$  behaves as a fair coin: density 0.50015, the  $2 \times 2$  table of  $c$  against  $b_B$  flat to  $10^{-3}$ , and every conditional frequency we measured within 2.1 standard deviations of  $\frac{1}{2}$ : given the wall's phase ( $t$  modulo 16, 32 or 64), the three wall cells around it, the distance to the next black cell of  $r_t$ , the period, whether the front moves at diagonal  $t$ , how far row  $t$  is from the front, and the mode of the defect there.*

The identity is immediate, since  $D_t(t) = u_0^t = c(t)$ ; the split of the picture into a settled part and a defect is in [3]. For every  $t$  from 20 to 800,000,  $\tau_t > t$ : row  $t$  lies in the transient of diagonal  $t$ , so  $\Delta_t(t)$  is a live transient bit (the front row,  $M_t \approx 1.32t$ , is far past it). That this persists for all  $t$  is, up to one row, the conjecture that  $\tau_d \geq d$  for every  $d \geq 20$  (Conjecture H of [1]; checked to  $d = 4 \cdot 10^7$ , OPEN beyond), which says that the stripes never cross the centre column. The check to  $4 \cdot 10^7$  is by an exact direct simulation of the seed, in which two independently written simulators give the same  $\tau_d$  on every diagonal [1]. That simulation is not in the accompanying repository, so the check is not EXACT in the sense of this note. The statement is not ours: Wolfram asked it as a question in 2019 [13], and it is stated in [8] (commit 08786d1) and in [3]. Exact settling times were public to  $d = 78,287$  in the data file of [13] (78,288 diagonals; OEIS A363346 has 1,000 terms), and the inequality was checked to  $d = 200,000$  in [3]. The centre column is therefore a sequence the wall computes, XOR a transient bit on which, as far as measured, nothing the stripes know has any influence.

## 8 The front: speed and stalls

MEASURED: in the coin-driven edge machine the front advances 1.321294 rows per diagonal on the seed's period-32 wall, the mean of twenty runs over  $2.8 \cdot 10^{10}$  diagonals in all (spread between runs 0.000019, error of the mean 0.000004), and 1.321438 on the period-64 wall, four runs over  $1.2 \cdot 10^{10}$  (spread 0.000007). On each block of  $10^8$  diagonals the twenty coins agree to within 0.0001

(standard deviation), while the twenty-run means of different blocks vary with standard deviation 0.00013, seven times what the coins alone would give, so the speed is a property of the wall. On period-16 walls it is about 1.333. The speed of the seed's own front was measured before: [12, p. 871] gives 0.252 cells per row for the boundary, [3] 0.243 over  $10^6$  rows, and [8] a settling row near  $1.34d$ . The stall lengths have one geometric tail at both periods, with ratio 0.433 at period 32 and 0.434 at period 64. Leaving out the one stall at the start of each run, while the transient fills in from the crystal start, the longest stalls seen are 24 at period 32 and 26 at period 64, against  $P - 1 = 31$  and 63. Extrapolating the tail, a stall of 32 is expected once per  $2.7 \cdot 10^{12}$  diagonals and one of 64 once per  $10^{24}$ . This is the margin of the empirical bound  $k_i \leq P_i - 1$  on the length  $k_i$  of the  $i$ th run of consecutive stalls,  $P_i$  the period there, which holds on the seed exactly up to diagonal 800,000 [1]. In [1] we prove that  $\tau_d \geq d$  for all  $d \geq 20$  follows from the finite check  $\tau_d \geq d$  for  $20 \leq d \leq 36$  together with two inequalities on the front holding from diagonal 36 on: one on the stall runs,  $k_i \leq \sigma_i - d_i - P_i + 1$  with  $\sigma_i$  the row and  $d_i$  the diagonal at which the run begins, which asks much less than  $k_i \leq P_i - 1$  once the slack  $\sigma_i - d_i$  is large (on the seed's data it grows like  $0.32 d_i$ , so a stall run would have to last about  $0.32 d_i - P_i$  diagonals to violate it); and one on a second quantity, the cancellation depth of the defects, checked exactly to 800,000 there and not addressed here.

## 9 Open problems

Each of the following is OPEN.

1. *The front's path at  $d^*$ .* Prove that the seed's front has the path the coin-driven models show,  $M_{d^*-3} \equiv 29$  modulo 32, a move, then a stall. This makes Theorem 6.5 unconditional. More generally, explain why fronts driven by independent coins keep one phase against the wall (Computation 6.4), although the wall alone does not fix the branch (Remark 6.6).
2. *The fork law.* Prove that the distance between consecutive labels is asymptotically binomial within each regime, or only that frozen diagonals occur at rate  $2^{-P(1+o(1))}$ .
3. *The transient bit.* Prove anything about  $\Delta_t(t)$  jointly with  $b_B(t)$ . Since  $c(t) = b_B(t) \oplus \Delta_t(t)$  and  $b_B$  is computable, every statistical question about the centre column is one about this pair.

## Data and code

All code, data and logs are in the accompanying repository:

<https://github.com/nateberzai-svg/rule30-left-edge>

- The recursion: `scripts/wall_recursion.c` and `scripts/wall_recursion128.c`; logs, including the frontier run and the second machine's checkpoints, in `results/wall_recursion_logs`.
- The edge machine: `scripts/edge_machine.c`; runs in `results/edge_machine_runs`.
- The fork law: `scripts/label_distance.c`; logs in `results/fork_law`.
- Theorem 6.5 and Remarks 6.6–6.7: `scripts/stall_lookback_trace.py` and `scripts/stall_census.py`; labels and machine logs in `results/fork_mechanism`.
- Section 7: `scripts/frozen_column.py` and `scripts/frozen_column_autocorr.py`; logs in `results/frozen_column`.

- The figures: `paper/figures/make_figures.py`.
- `paper/verify_claims.py` runs 45 checks on statements of this note and prints each statement with the value it finds. It recomputes from the labels and fronts to 800,000 (`paper/data, results`): the validation of Section 3, Table 1 to that depth, Corollary 3.2(i) on the data, the check after Theorem 6.2, the census of Proposition 6.3, and  $\tau_t > t$ . It reruns the scripts of Theorem 6.5 and Remark 6.6 and, given a C compiler, thirteen steps of the frontier run. The other checks read the logs of the long runs (the recursion beyond 800,000, the distance counts, the edge machines, the tests of Section 7) and do not repeat them, with one exception: the autocorrelations of Section 7 are recomputed when the  $10^9$ -bit column has been regenerated. From the logged counts the checks recompute the  $\chi^2$  values and the means. One check reads validation counts from the two ledger entries. Not checked: figures quoted from other sources; the starting state of [10], whose check is `scripts/check_other_branch_state.py`; the agreement of the 64- and 128-bit programs at  $d^*$ ; and a few figures tied to no check, such as the speed on period-16 walls.

## References

- [1] N. Berzai, The centre column of Rule 30: excluded periods, decimation of the Duhamel class, and the front of the diagonal defects, manuscript, 2026; `paper/RULE30_PAPER.pdf` in the repository above.
- [2] Dibujaron (D. McPolstra), *rule30*, code repository, commit 94833d2 of 8 September 2026: `blueprint/crystals.md`, item 55, `explorer/orbit32.mjs`, and the note of that date on the left-diagonal periods in `docs/attacks`, claim C4; <https://github.com/Dibujaron/rule30/commit/94833d21c1efc1e826df3c137777b580817c5e16>.
- [3] Dibujaron (D. McPolstra), *rule30*, code repository, further commits of 7 to 13 September 2026, among them 0a1cda2, 47f8ab5, b7b9195 and 980d553 of 7 and 8 September (the settled configuration and its centre column), a8dbbc0 of 8 September (the masking document), 59a9c26 of 8 September (the period wall), 94e15f8 and 9c853e4 of 9 and 10 September, and the Lean lemmas; <https://github.com/Dibujaron/rule30/commit/a8dbbc0d0de88096352da61fc203504d64620d0d>.
- [4] J. Gravner, D. Griffeath, Robust periodic solutions and evolution from seeds in one-dimensional edge cellular automata, *Theoret. Comput. Sci.* 466 (2012) 64–86.
- [5] E. Jen, Global properties of cellular automata, *J. Stat. Phys.* 43 (1986) 219–242.
- [6] T. Nersissian, Diagonal periods and Newton supports of Rules 30, 86 and 135, arXiv:2609.25077 (18 September 2026).
- [7] Patto1155, *rule30-foundry*, code repository, commit 04f30f6 (pull request 32) of 8 September 2026, from a run of about 30 August 2026: the log of 8 September 2026 in `docs/experiment-logs` and the run file in `runs/b1-recovered-2026-09-08`; <https://github.com/Patto1155/rule30-foundry/commit/04f30f6085210b476e64d742c77dc7c69a075791>. The log of 9 September 2026 in the same folder is from commit 1afaa25 of that date.
- [8] Patto1155, *rule30-foundry*, code repository, commits of 19 August 2026: d612567 (Lemma A, in the log of that date on the period-doubling criterion in `docs/`

- experiment-logs) and 08786d1 (the wedge), both on the main branch since 28 August 2026, and ae8d14d; <https://github.com/Patto1155/rule30-foundry/commit/d6125676233ae176b0ed0c6257d3368a397cbe3f>.
- [9] E. S. Rowland, Local nested structure in Rule 30, *Complex Systems* 16 (2006) 239–258.
  - [10] szymon-lania, Starting state for rule 30 that produces “the other” version of diagonal 53209, gist, 21 August 2026, described in its author’s comment on E. Rowland’s video *The Hidden Structure of Rule 30*; <https://gist.github.com/szymon-lania/2535d62468a7912137b5002d900ebdd6> and <https://www.youtube.com/watch?v=HcGjCcLEgN4>.
  - [11] S. Wolfram, Random sequence generation by cellular automata, *Adv. Appl. Math.* 7 (1986) 123–169.
  - [12] S. Wolfram, *A New Kind of Science*, Wolfram Media, 2002.
  - [13] S. Wolfram, Announcing the Rule 30 Prizes, *Stephen Wolfram Writings*, 1 October 2019, with the data file its code reads (78,288 left diagonals); <https://writings.stephenwolfram.com/2019/10/announcing-the-rule-30-prizes/>.