

# WorldDynamics.jl: A Julia Package for Developing and Simulating Integrated Assessment Models

Pierluigi Crescenzi<sup>1,2</sup>, Emanuele Natale<sup>2</sup>, Aurora Rossi<sup>2¶</sup>, and Paulo Bruno Serafim<sup>1</sup>

<sup>1</sup> Gran Sasso Science Institute, L'Aquila, Italy <sup>2</sup> COATI, INRIA d'Université Côte d'Azur, Sophia Antipolis, France ¶ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Open Journals](#) ↗

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).


## Summary

WorldDynamics.jl is an open-source package for the Julia programming language (Bezanson et al., 2017) that provides a modern framework for developing, simulating, and investigating Integrated Assessment Models (in short, IAMs). IAMs are numerical models that estimate possible scenarios for the evolution of human society with respect to fundamental aspects such as capital investment, food production, natural resources, population size, and pollution, among others (Parker et al., 2002). The current version of the package implements the family of IAMs developed by the Club of Rome, which is a non-profit, informal organization of intellectuals and business leaders dedicated to the critical discussion of pressing global issues (Club of Rome, 1968). In particular, the library includes Forrester's World1 and World2 models (Forrester, 1970, 1973), the influential World3 model of Meadows et al (D. L. Meadows et al., 1974), and its 1994 and 2003 updated versions (D. H. Meadows et al., 2004). These models are typically structured into several sectors, which are, in turn, composed of several differential-algebraic systems of equations (in short, DAEs): this modular structure makes it easy to manipulate the sectors individually and to combine different DAEs into a unique model (see Figure 1, which represents the structure of the World3 model). The package benefits from Julia's scientific computing ecosystem, in particular from the efficient solver implementations for various differential equations provided by the DifferentialEquations.jl package (Rackauckas & Nie, 2017) and from the ability of the ModelingToolkit.jl package to compose differential-algebraic equations (Ma et al., 2021). WorldDynamics.jl provides also several support functions, which allowed us to convert the original systems of finite-difference equations into DAEs and to easily replicate all the plots included in the above-mentioned references (see, for example, Figure 2). It also allows the possibility of easily changing the parameter values and the systems of equations in order to simulate different scenarios. In other words, WorldDynamics.jl facilitates the use of advanced scientific computing approaches for both classical and new models.

## Statement of need

Predicting the evolution of human society is a challenging and pressing question that science has always tried to address. The development of IAMs has been a major step in this direction, and more recently the use of computers has revolutionized the way these models are developed. The World3 model is considered one of the most influential computer simulations of the world-wide socio-economic system ever made. After it, many other models have been proposed, such as the DICE model (Nordhaus, 2018), originally proposed in 1992, and the most recent Earth4All model (Dixson-Declève et al., 2022; Randers & Collste, 2022). However, most of these models are implemented by using proprietary software, so that, even if the model specification is open source, it is not possible to verify how the model itself is simulated since

the implementation of the DAE solvers and of the functions used in the model description is not open source. Moreover, these software usually contain a limited set of solvers and, in general, they do not take advantage of modern approaches to scientific computing (Cavana et al., 2021). Therefore, our goal is to fulfill the need for a modern, open-source, flexible, and easy-to-use framework for IAMs that can be used to replicate and compare the results of existing models and to promote in-depth analysis of critical global issues, as well as a source of inspiration for the development of new models.

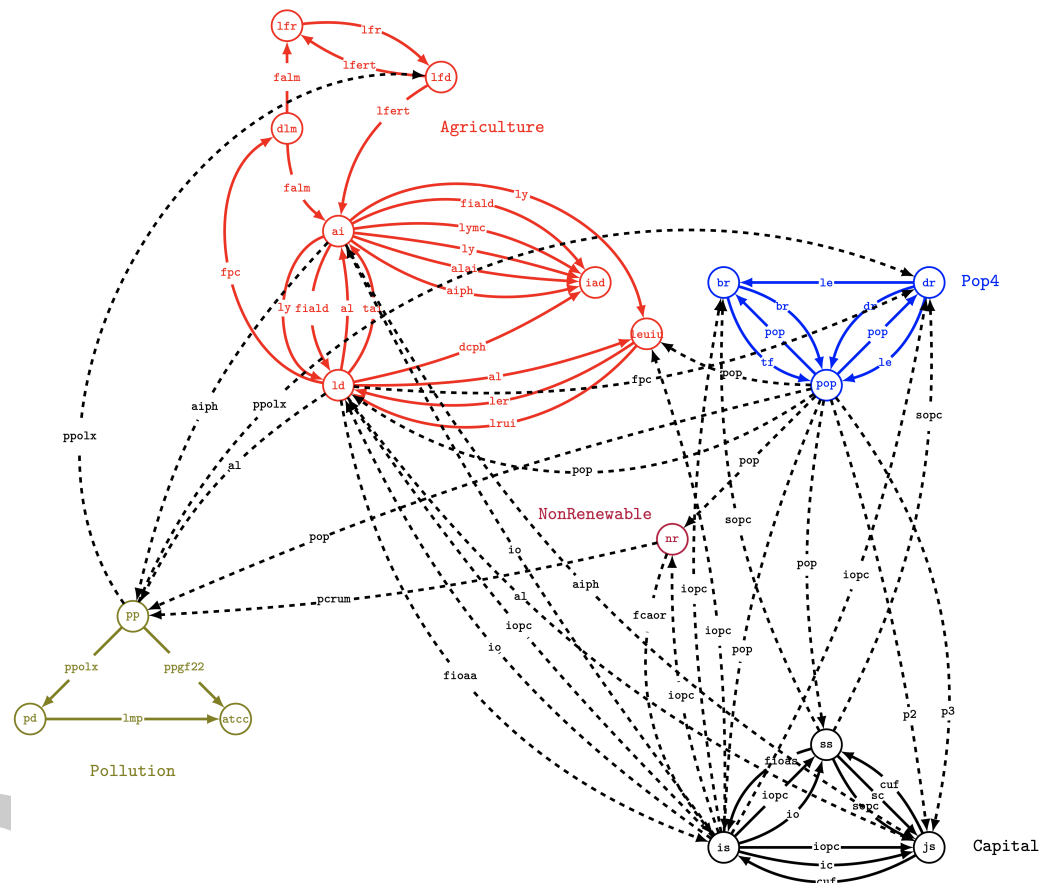

**Figure 1:** The World3 model (D. L. Meadows et al., 1974). The model contains 5 sectors: agriculture (red), population (blue), pollution (green), non-renewable resources (violet), and capital (black). Each circle denotes a DAE and each connection indicates that a variable (labeling the connection) is defined in a DAE (the tail circle) and used in another DAE (the head circle).


## Functionality

WorldDynamics.jl comes with a tutorial which introduces the main functionalities of the package. In particular, the tutorial presents the following main features of WorldDynamics.jl.

- Replication of all the figures of the books describing the World1, World2, and World3 models.
- Execution of sensitivity analysis by modifying initial values of variables.
- Analysis of alternative scenarios obtained by modifying the parameters of a model or the interpolation tables (used to approximate non-linear functions by means of linear segments).

- 59     ■ Comparative analysis of performances and solutions obtained by different solvers.
- 60     ■ Implement all the necessary modules required to create a new model using the framework.

Fig. 7.7

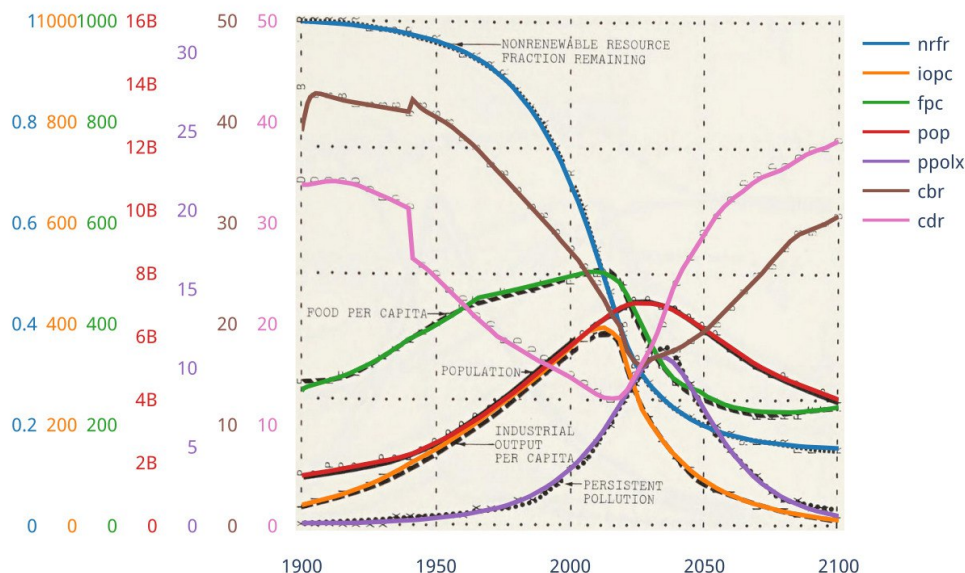

**Figure 2:** An example of the reproduction of a figure 7-7, World 3 reference run, included in (D. L. Meadows et al., 1974). The colored curves, which are generated by our package, have been superimposed on the original plots of the book (dotted, dashed, and one-character curves).

## Related packages and implementations

Besides the official implementation in Stella (which was included in the CD-ROM attached to (D. H. Meadows et al., 2004)), which is one of the most popular system dynamics simulation environments, World2 and World3 have been repeatedly implemented in several different programming languages and simulation environments, such as Modelica (Cellier, 2008), Simulink (Mediavilla et al., 2014) and Vensim (Fiddaman, 2010). Here, we mention some implementations of these models in three popular programming languages. In Python, there are several repositories whose code implements some of the IAMs proposed by the Club of Rome: in our opinion, the most complete description of the World2 and World3 models and of their implementation is given in (Vanwynsberghe, 2021). An implementation of World2 in R is described in (Mignan, 2020), while an implementation of the same model in C++ is given in (Hay, 2021). In the Julia ecosystem, there are some IAMs implemented using the Mimi framework `Mimi.jl`, such as the one included in `MimiPAGE2009.jl`, a package that implements a model for estimating the social cost of carbon emissions (Moore et al., 2018). `ClimateMARGO.jl` is an idealized framework for optimizing climate control strategies implementing the MARGO model (Drake et al., 2021).

## Future work

The current version of the package could be enhanced in various ways. The package will be extended in order to include other more recent IAMs, such as the Earth4All model (Dixson-Declève et al., 2022). Moreover, a wide range of tools available in the Julia ecosystem

could be used to improve the quality of the models, such as the addition of global sensitivity analysis algorithms (Dixit & Rackauckas, 2022), the use of data-driven differential equations to automatically discover the models (Martensen et al., 2021), and optimizing parameter values for some aspects of the models using the optimization package JuMP.jl (Lubin et al., 2023).

## Acknowledgments

This work has been supported by the French government through the UCAJEDI and UCA DS4H “Investments in the Future” projects managed by the National Research Agency (ANR) with reference numbers ANR-15-IDEX-0001 and ANR-17-EURE-0004. This project has also been funded by the AAP2-2022 of the Laboratoire d’Informatique, Signaux et Systèmes de Sophia Antipolis (I3S) of the Université Côte d’Azur (UCA) and the authors are grateful to the OPAL infrastructure from Université Côte d’Azur for providing resources and support.

## References

- Bezanson, J., Edelman, A., Karpinski, S., & Shah, V. B. (2017). Julia: A fresh approach to numerical computing. *SIAM Review*, 59(1), 65–98. <https://doi.org/10.1137/141000671>
- Cavana, R. Y., Dangerfield, B. C., Pavlov, O. V., Radzicki, M. J., & Wheat, I. D. (Eds.). (2021). *Feedback Economics: Economic Modeling with System Dynamics*. Springer International Publishing.
- Cellier, F. E. (2008). World3 in Modelica: Creating system dynamics models in the Modelica framework. *Proceedings of the 6th International Modelica Conference*, 2, 393–400.
- Club of Rome. (1968). <https://www.clubofrome.org/>
- Dixit, V. K., & Rackauckas, C. (2022). GlobalSensitivity. JI: Performant and parallel global sensitivity analysis with julia. *Journal of Open Source Software*, 7(76), 4561. <https://doi.org/10.21105/joss.04561>
- Dixon-Declève, S., Gaffney, O., Ghosh, J., Randers, J., Rockström, J., & Stoknes, P. E. (2022). *Earth for All: a Survival Guide for Humanity*. New Society Publishers.
- Drake, H. F., Rivest, R. L., Edelman, A., & Deutch, J. (2021). A simple model for assessing climate control trade-offs and responding to unanticipated climate outcomes. *Environmental Research Letters*, 16(10). <https://doi.org/10.1088/1748-9326/ac243e>
- Fiddaman, T. (2010). *WORLD3-03 - MetaSD*. <https://metasd.com/2010/04/world3-03/>
- Forrester, J. W. (1970). *A World Dynamics Model: Introductory Exercise*.
- Forrester, J. W. (1973). *World Dynamics (second edition)*. Wright Allen Press Publishing.
- Hay, A. (2021). *Jay Forrester’s World2 from 1971 Recreated in C++*. <https://github.com/anthay/World2/>
- Lubin, M., Dowson, O., Garcia, J. D., Huchette, J., Legat, B., & Vielma, J. P. (2023). JuMP 1.0: Recent improvements to a modeling language for mathematical optimization. *Mathematical Programming Computation*. <https://doi.org/10.48550/arXiv.2206.03866>
- Ma, Y., Gowda, S., Anantharaman, R., Laughman, C., Shah, V., & Rackauckas, C. (2021). *ModelingToolkit: A composable graph transformation system for equation-based modeling*. <https://doi.org/10.48550/arXiv.2103.05244>
- Martensen, J., Rackauckas, C., & others. (2021). *DataDrivenDiffEq.jl*. Zenodo. <https://doi.org/10.5281/zenodo.5083412>

- 122 Meadows, D. H., Randers, J., & Meadows, D. L. (2004). *Limits to Growth: The 30-Year*  
123 *Update* (Illustrated edition). Chelsea Green Publishing. ISBN: 978-1-931498-58-6
- 124 Meadows, D. L., Behrens, W. W., Meadows, D. H., Naill, R. F., Randers, J., & Zahn, E.  
125 (1974). *Dynamics of growth in a finite world*. Wright-Allen Press Cambridge, MA.
- 126 Mediavilla, M., Miguel, L. J., Retortillo, P., de Castro, C., & Blázquez, L. F. (2014). Appli-  
127 cation of fuzzy tools to the automatic analysis of system dynamics models: An example  
128 of World3. *IFAC Proceedings Volumes*, 47(3), 8983–8988. [https://doi.org/10.3182/](https://doi.org/10.3182/20140824-6-ZA-1003.01654)  
129 [20140824-6-ZA-1003.01654](https://doi.org/10.3182/20140824-6-ZA-1003.01654)
- 130 Mignan, A. (2020). *World2 model, from DYNAMO to R*. [https://towardsdatascience.com/](https://towardsdatascience.com/world2-model-from-dynamo-to-r-2e44fdbd0975)  
131 [world2-model-from-dynamo-to-r-2e44fdbd0975](https://towardsdatascience.com/world2-model-from-dynamo-to-r-2e44fdbd0975)
- 132 Moore, F. C., Rising, J., Lollo, N., Springer, C., Vasquez, V., Dolginow, A., Hope, C., &  
133 Anthoff, D. (2018). Mimi-PAGE, an open-source implementation of the PAGE09 integrated  
134 assessment model. *Scientific Data*, 5(1), 180187. <https://doi.org/10.1038/sdata.2018.187>
- 135 Nordhaus, W. (2018). Evolution of modeling of the economics of global warming: Changes  
136 in the DICE model, 1992–2017. *Climatic Change*, 148(4), 623–640. [https://doi.org/10.](https://doi.org/10.1007/s10584-018-2218-y)  
137 [1007/s10584-018-2218-y](https://doi.org/10.1007/s10584-018-2218-y)
- 138 Parker, P., Letcher, R., Jakeman, A., Beck, M. B., Harris, G., Argent, R. M., Hare, M., Pahl-  
139 Wostl, C., Voinov, A., Janssen, M., Sullivan, P., Scoccimarro, M., Friend, A., Sonnenshein,  
140 M., Barker, D., Matejcek, L., Odulaja, D., Deadman, P., Lim, K., ... Bin, S. (2002).  
141 Progress in integrated assessment and modelling. *Environmental Modelling & Software*,  
142 17(3), 209–217. [https://doi.org/10.1016/S1364-8152\(01\)00059-7](https://doi.org/10.1016/S1364-8152(01)00059-7)
- 143 Rackauckas, C., & Nie, Q. (2017). Differentialequations.jl—a performant and feature-rich  
144 ecosystem for solving differential equations in julia. *Journal of Open Research Software*,  
145 5(1), 15. <https://doi.org/10.5334/jors.151>
- 146 Randers, J., & Collste, D. (2022). *The Earth4All model of human wellbeing on a finite planet*  
147 *towards 2100* (p. 66). <https://doi.org/10.31223/X50W8D>
- 148 Vanwynsberghe, C. (2021). *Exploring the Limits to Growth with Python*. [https:](https://towardsdatascience.com/exploring-the-limits-to-growth-with-python-674133874eed)  
149 [/towardsdatascience.com/exploring-the-limits-to-growth-with-python-674133874eed](https://towardsdatascience.com/exploring-the-limits-to-growth-with-python-674133874eed)