Error Mitigation With Mitiq

Symposium on Quantum Undergraduate Inquiry & Discovery

Nate Stemen

June 3, 2023

Overview

1. Overview of Quantum Error Mitigation (QEM)
    - Zero-Noise Extrapolation (ZNE)
    - Probabilistic Error Cancellation (PEC)
2. Overview of Mitiq
3. Unitary Fund

What is error mitigation?



What is error mitigation?

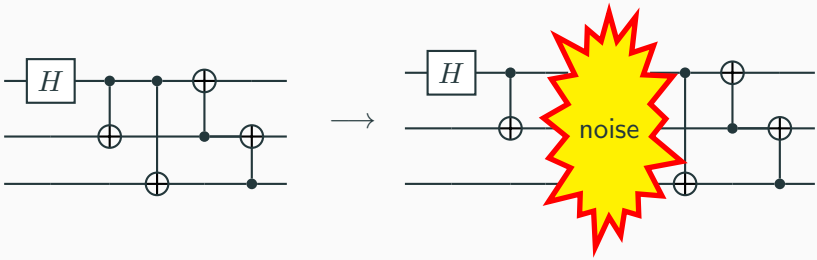

What is error mitigation?

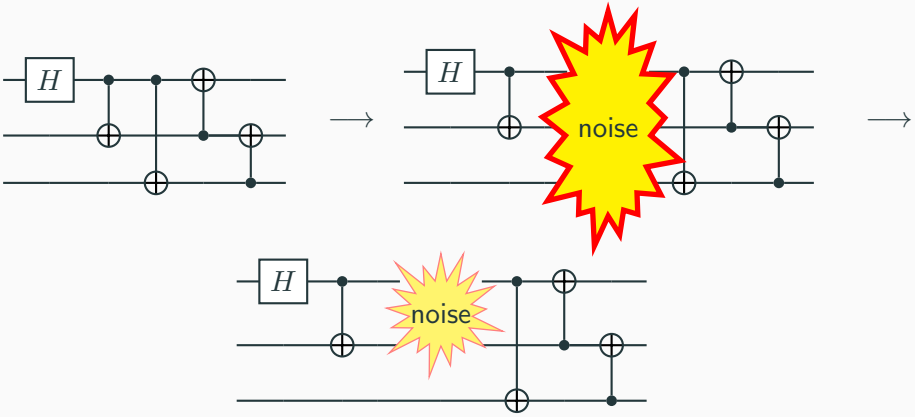

What about error correction?

Scheme for reducing decoherence in quantum computer memory

Peter W. Shor*
AT&T Bell Laboratories, Room 2D-149, 600 Mountain Avenue, Murray Hill, New Jersey 07974
(Received 17 May 1995)

Recently, it was realized that use of the properties of quantum mechanics might speed up certain computations dramatically. Interest has since been growing in the area of quantum computation. One of the main difficulties of quantum computation is that decoherence destroys the information in a superposition of states contained in a quantum computer, thus making long computations impossible. It is shown how to reduce the effects of decoherence for information stored in quantum memory, assuming that the decoherence process acts independently on each of the bits stored in memory. This involves the use of a quantum analog of error-correcting codes.

What about error correction?

Scheme for reducing decoherence in quantum computer memory

Peter W. Shor*
AT&T Bell Laboratories, Room 2D-149, 600 Mountain Avenue, Murray Hill, New Jersey 07974
(Received 17 May 1995)

Recently, it was realized that use of the properties of quantum mechanics might speed up certain computations dramatically. Interest has since been growing in the area of quantum computation. One of the main difficulties of quantum computation is that decoherence destroys the information in a superposition of states contained in a quantum computer, thus making long computations impossible. It is shown how to reduce the effects of decoherence for information stored in quantum memory, assuming that the decoherence process acts independently on each of the bits stored in memory. This involves the use of a quantum analog of error-correcting codes.

Error Correction

- Encode logical qubits into many physical qubits
- Intermediate measurements produce syndromes
- Use syndromes to correct errors

What about error correction?

Scheme for reducing decoherence in quantum computer memory

Peter W. Shor*
AT&T Bell Laboratories, Room 2D-149, 600 Mountain Avenue, Murray Hill, New Jersey 07974
(Received 17 May 1995)

Recently, it was realized that use of the properties of quantum mechanics might speed up certain computations dramatically. Interest has since been growing in the area of quantum computation. One of the main difficulties of quantum computation is that decoherence destroys the information in a superposition of states contained in a quantum computer, thus making long computations impossible. It is shown how to reduce the effects of decoherence for information stored in quantum memory, assuming that the decoherence process acts independently on each of the bits stored in memory. This involves the use of a quantum analog of error-correcting codes.

Error Correction

- Encode logical qubits into many physical qubits
- Intermediate measurements produce syndromes
- Use syndromes to correct errors

Error Mitigation

- Perform multiple and different noisy computations
- Collect results
- Infer ideal expectation values

What about error correction?

Scheme for reducing decoherence in quantum computer memory

Peter W. Shor*
AT&T Bell Laboratories, Room 2D-149, 600 Mountain Avenue, Murray Hill, New Jersey 07974
(Received 17 May 1995)

Recently, it was realized that use of the properties of quantum mechanics might speed up certain computations dramatically. Interest has since been growing in the area of quantum computation. One of the main difficulties of quantum computation is that decoherence destroys the information in a superposition of states contained in a quantum computer, thus making long computations impossible. It is shown how to reduce the effects of decoherence for information stored in quantum memory, assuming that the decoherence process acts independently on each of the bits stored in memory. This involves the use of a quantum analog of error-correcting codes.

Error Correction

- Encode logical qubits in[to] [many] physical qubits
- In[terme]diate measurements produce syndromes
- Use syndromes to correct errors

Scalable, but unfeasible

Error Mitigation

- Perform multiple and different noisy computations
- Collect results
- Infer ideal expectation values

What about error correction?

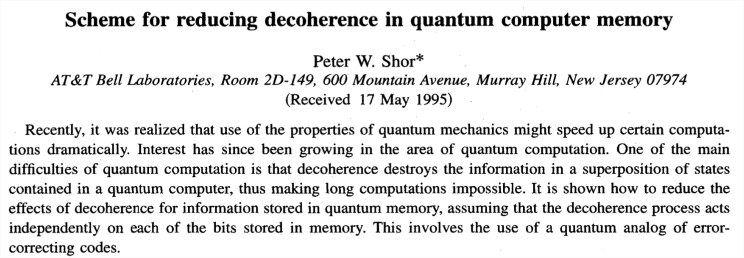

Scheme for reducing decoherence in quantum computer memory

Peter W. Shor*
AT&T Bell Laboratories, Room 2D-149, 600 Mountain Avenue, Murray Hill, New Jersey 07974
(Received 17 May 1995)

Recently, it was realized that use of the properties of quantum mechanics might speed up certain computations dramatically. Interest has since been growing in the area of quantum computation. One of the main difficulties of quantum computation is that decoherence destroys the information in a superposition of states contained in a quantum computer, thus making long computations impossible. It is shown how to reduce the effects of decoherence for information stored in quantum memory, assuming that the decoherence process acts independently on each of the bits stored in memory. This involves the use of a quantum analog of error-correcting codes.

Error Correction

- Encode logical qubits in
- physical qubits
- Int ements produce sy
- Use syndromes to correct errors

Scalable, but unfeasible

Error Mitigation

- Perform multiple and diff oisy computations
- Co
- Inf expectation values

Unscalable*, but feasible

QEM Methods

Zero-Noise Extrapolation

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

Symmetry-based techniques



$$M\,|\psi\rangle = |\psi\rangle$$

$$\rho = \frac{M\rho M}{\mathrm{tr}(M\rho)}$$

Probabilistic Error Cancellation



Dynamical Decoupling/Randomized Compiling



Learning-based methods

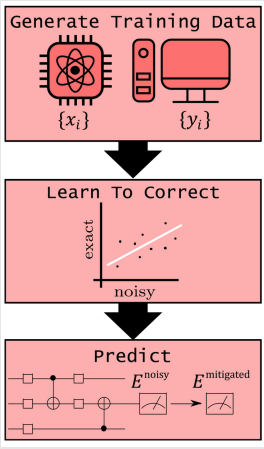

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

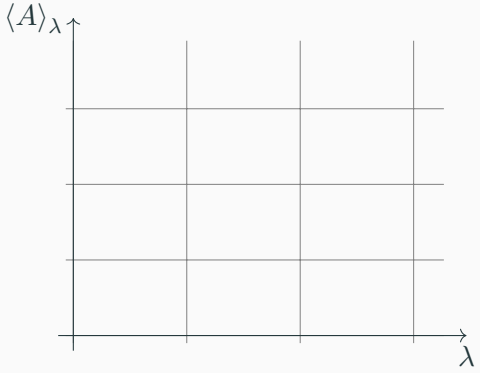

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

How do we scale the noise **up**?

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

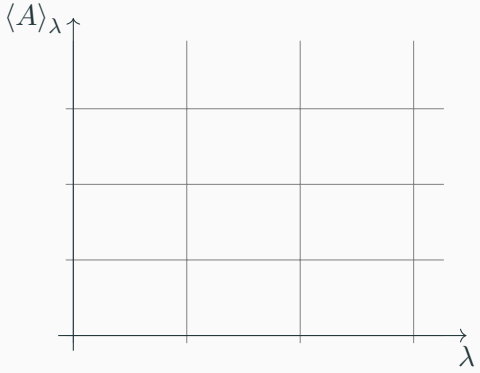

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

How do we scale the noise **up**?

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

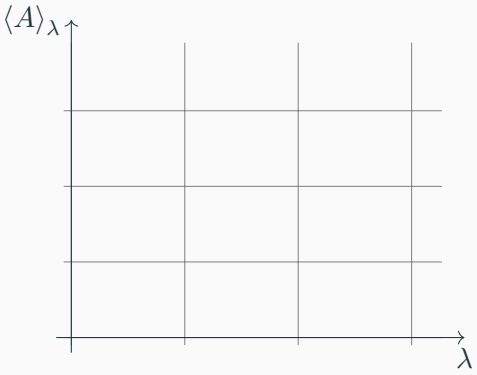

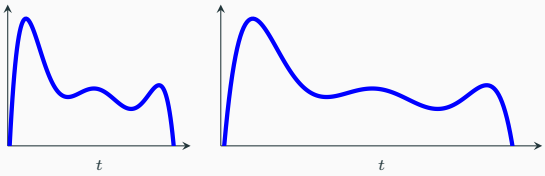

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

How do we scale the noise **up**?

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

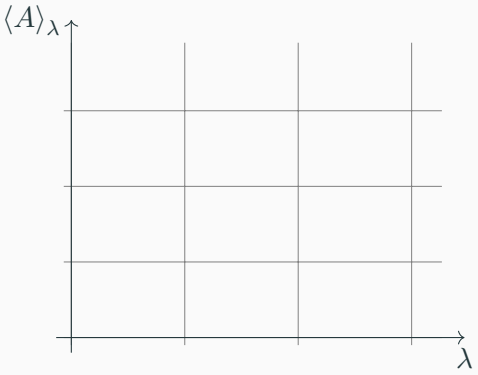

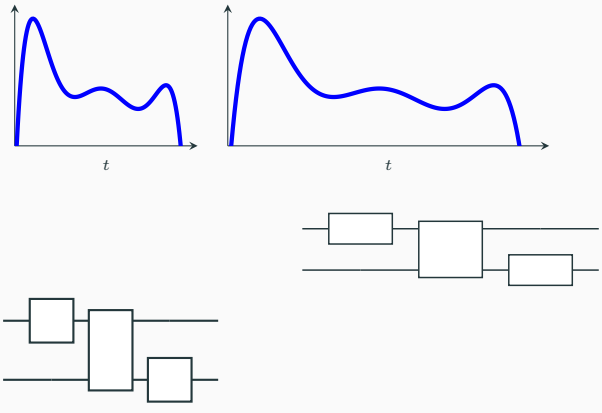

Zero-Noise Extrapolation (ZNE)

Key Idea

Scale noise up, extrapolate back to zero-noise value.

How do we scale the noise **up**?

$$\partial_t \rho = -i[H, \rho] + \lambda \mathcal{L}(\rho)$$

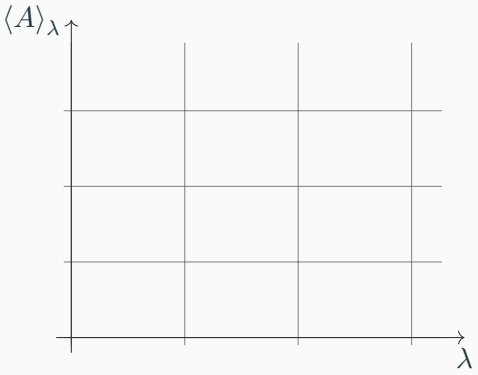

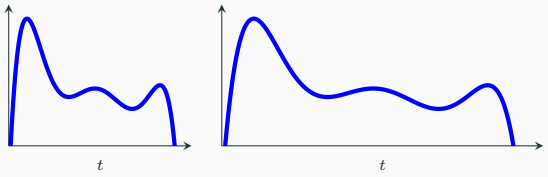





Probabilistic Error Cancellation (PEC)

Key Idea

Use noisy operations to build up noiseless ones by selective cancellation and sampling.

Probabilistic Error Cancellation (PEC)

Key Idea

Use noisy operations to build up noiseless ones by selective cancellation and sampling.

$$\mathcal{U} = \sum_{i=1}^{n} a_i \mathcal{O}_i$$

- $\mathcal{O}_i$: implementable operations

Probabilistic Error Cancellation (PEC)

Key Idea

Use noisy operations to build up noiseless ones by selective cancellation and sampling.

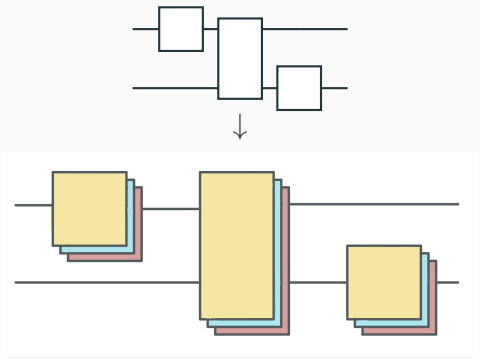

$$\mathcal{U} = \sum_{i=1}^{n} a_i \mathcal{O}_i$$

- $\mathcal{O}_i$: implementable operations

Probabilistic Error Cancellation (PEC)

Key Idea

Use noisy operations to build up noiseless ones by selective cancellation and sampling.

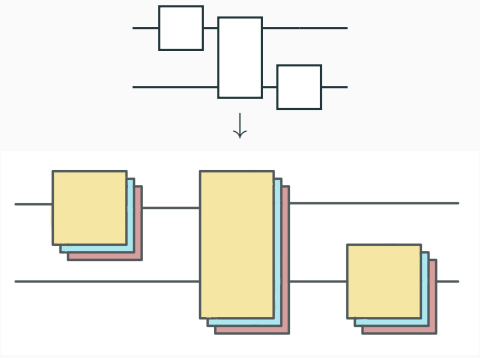

$$\mathcal{U} = \sum_{i=1}^{n} a_i \mathcal{O}_i$$

$$\langle A \rangle_{\text{PEC}} = \frac{\gamma}{M} \sum_{i=1}^{M} \sigma_i \langle A \rangle_i$$

- $\mathcal{O}_i$: implementable operations
- σ_i: Sign of i^{th} circuit
- M: # of circuits
- γ: overall negativity (product of representation one-norms)

Running quantum programs in practice

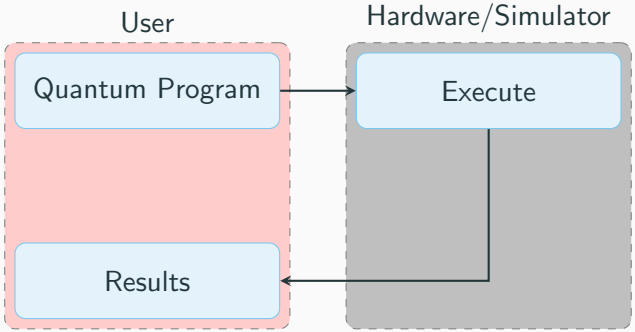

Running quantum programs in practice with Mitiq

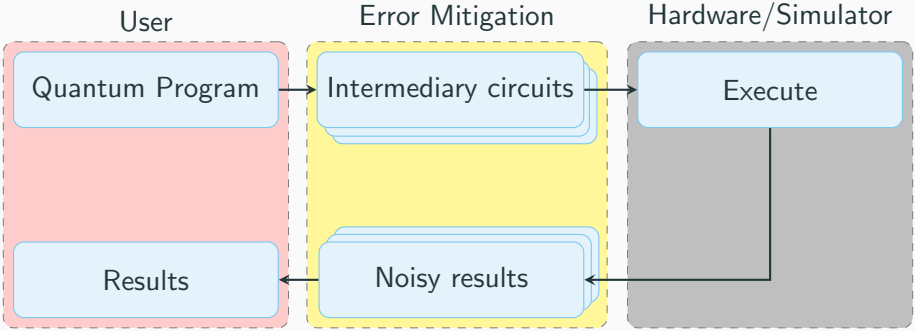

Mitiq: Demo!

https://mitiq.readthedocs.io/

Does it work?

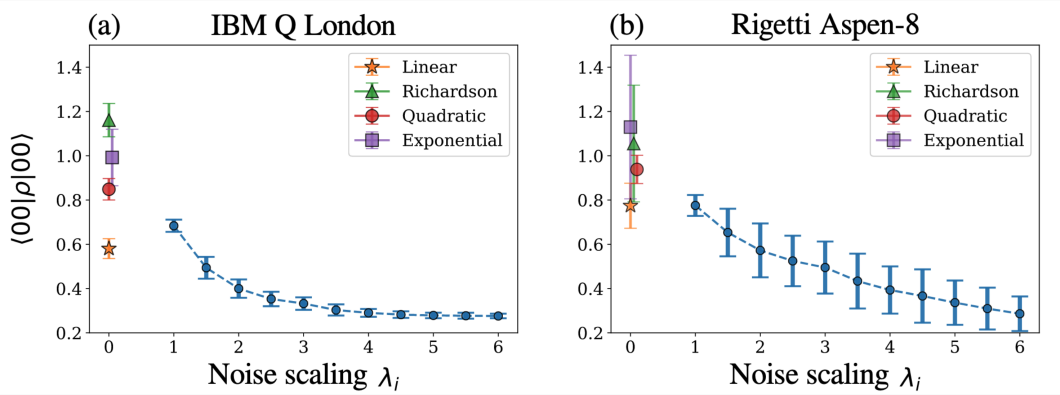

Quantum 6, 774 (2022).

Unitary Fund

- 501(c)(3) nonprofit dedicated to growing the quantum open-source ecosystem

Unitary Fund

Microgrant Program:

- 70+ Microgrants awarded
- 23 countries
- 16+ publications
- 30+ libraries, ∼6k commits
- 2 startups, 2 nonprofit

- 501(c)(3) nonprofit dedicated to growing the quantum open-source ecosystem
- Run microgrant program; $4k grants to those developing cool quantum projects in the open

Unitary Fund

- 501(c)(3) nonprofit dedicated to growing the quantum open-source ecosystem
- Run microgrant program; $4k grants to those developing cool quantum projects in the open
- Develop mitiq

Unitary Fund

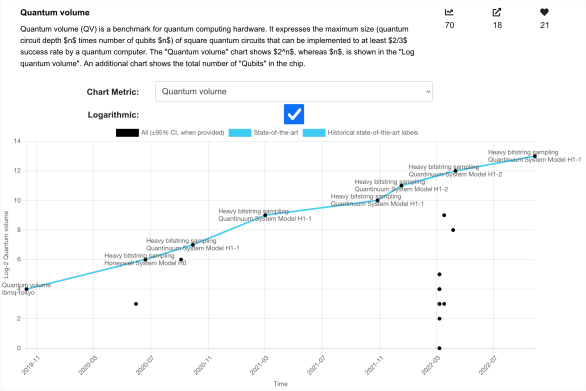

https://metriq.info

- 501(c)(3) nonprofit dedicated to growing the quantum open-source ecosystem
- Run microgrant program; $4k grants to those developing cool quantum projects in the open
- Develop mitiq
- Run metriq (`metriq.info`): a platform for community driving quantum benchmarks

Unitary Fund

- UnitaryHACK
  - 33 participating projects
  - 152 bounties with cash prizes worth over $15k
  - `https://unitaryhack.dev`
- `http://discord.unitary.fund`
  - Community calls for projects: Mitiq, QIR Alliance, QuTiP, OpenQAOA

- 501(c)(3) nonprofit dedicated to growing the quantum open-source ecosystem
- Run microgrant program; $4k grants to those developing cool quantum projects in the open
- Develop mitiq
- Run metriq (`metriq.info`): a platform for community driving quantum benchmarks
- Community development

Summary

- QEM is a growing field of research working towards better results for existing quantum computers.
- ZNE and PEC are promising, and easy to use techniques.
- Mitiq can provide out-of-the-box support for running quantum programs with QEM.
- Unitary Fund is growing the quantum open-source community and ecosystem.

Thank you!