
MEGAMC® 1600

Fusion Capability for 20" OD to 65" OD (500mm - 1600mm)

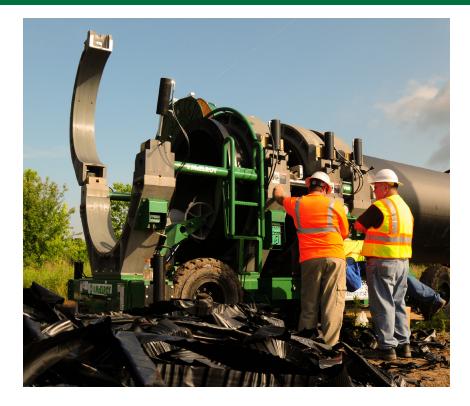

OVERVIEW

Enormous job ahead? The **MegaMc® 1600** fusion machine can tackle the largest of pipe jobs, with the ability to butt fuse pipe sizes from 20" OD to 65" OD (500mm – 1600mm). The newest MegaMc machine features four jaws with an astounding 30,000 lbs. of clamping force per jaw for improved gripping and rerounding of pipe. With 88,000 lbs. of fusion force, operators will find they have extra force in reserve to overcome drag.


Packed within its road-approved 102" width are key features that will inspire big love for this big machine.


FEATURES

- 30,000 lbs. of clamping force per jaw help round pipe ends and offer better gripping
- 88,000 lbs. of available fusion force allows you to fuse thicker wall pipes and overcome heavier drag forces
- A new facer with stronger internals is 40% faster, making it easier to face heavy-wall pipe
- Complete fourth jaw can be removed as a whole unit, for enhanced convenience in fusing prefabricated fittings onto the pipe
- Automatic hydraulic heater stripping improves open and close times
- 102" width suitable for most flatbed trailers and is road shippable without permit in most of the U.S.
- Simple-to-use independent jaw control puts more flexibility in the hands of the operator
- Advanced digital heater control offers better temperature control

SPECIFICATIONS

Fuses Pipe Sizes:	20" OD - 65" OD (500mm - 1600mm)
MODELS	
A6500103:	
A6500102:	Medium Cylinder Force, 220V-240V, 50/60Hz, 3 Phase
A6500104:	Medium Cylinder Force, 380V-415V, 50Hz, 3 Phase
A6500105:	High Cylinder Force, 380V-415V, 50Hz, 3 Phase
WEIGHT	
Machine:	21,000 lbs (9,525 Kg)
Facer:	1,200 lbs (544 Kg)
20-48" Heater:	600 lbs (272.2 Kg)
48-65" Heater:	713.5 lbs (323.6 Kg)
Spreader Bar:	1,000 lbs (453.6 Kg)
HYDRAULICS	
Maximum System Pressure:	
Hydraulic Reservoir Capacity:	35 Gallons (132 Liters)
POWER	
20-48" Heater Power:	35,000 Watt
48-65" Heater Power:	
Facer Power:	Hydraulic
CHASSIS	
Frame:	Welded steel tube construction
Front Axle:	Articulating
MOBILITY	
Tires:	8.25 -15LT High Load Rating
Transportation:	Pulled via towing ring
Lifting:	Lift points and lifting assembly





MEGAMC 1600

INCLUSIONS

The MegaMc 1600 includes fusion machine, facer, 48" and 65" heaters and lifting assembly. Specifications subject to change without notice.

