# CEGE0023: Offshore and Coastal Engineering

# Laboratory Report - Wave-flume experiment: wave generation and wave-data analysis

Alex (Nathalie Alexandra) Tcherdakoff

SN: 18006289 - Computer Science MEng - SoRA

# Risk Assessment

Department:	Civil, Enviro	onmental 8	& Geomatic Engineering	Risk Ass	essment Form
WORK/PROJE	CT TITLE: C	CEGE0023	3 Lab Visit.		
LOCATION(S):	Fluids Lab (E	309)			
DESCRIPTION	OF WORK:				
	Obser	vation of v	wave generation and meas	surement in a wave	flume
PERSONS INV	OLVED: CEO	GE0023 S	Students, PGTA (Konstant	nos Chasapis)	
HAZARD IDEN	TIFICATION	(state the ha	azards involved in the work)		
Moving parts of general fluids la			lectrical equipment and ca	bles, open water in	flumes, laser devices,
RISK ASSESS	MENT (make a	an assessme	ent of the risks involved in the v	vork and where possible	state high, medium or low risk)
A low risk of ph	ysical injury b	y moving	parts, a low risk of falling,	a low risk of electric	cal shock.
CONTROL ME	ASURES (stat	te the contro	ol measures that are in place fo	r the protection of staff)	
Do not open the Stay away from In the case of th	e electrical cu moving parts ne fire alarm le	pboards o of the wa eave the la	ab and the building followi	oment.	scape routes.
Do not open the Stay away from In the case of the Take care when Don't approach	e electrical cu moving parts ne fire alarm le walking arou areas marked	pboards o s of the wa eave the la and the lab d as dange	or any other electrical equi nve generators. ab and the building followi o, step over cables and oth	oment. ng designated fire es er obstacles.	scape routes.
Do not open the Stay away from In the case of the Take care when Don't approach Do not touch of SUPERVISOR I, the undersign will be controlled in accordance with the Stay and the Stay are supported by	e electrical cup moving parts ne fire alarm le a walking arou areas marked move any ob DECLARATIO and, have assigned by the methowith Department	pboards of softhe was eave the label as dange of the was dange of the control of	or any other electrical equipose generators.  ab and the building following, step over cables and otherous.  out permission of a lab tector work, titled above, and detected on this form (delete as a	oment.  ng designated fire exer obstacles.  chnician or a PGTA	scape routes.  no significant risk/the risks the work will be carried out
Do not open the Stay away from In the case of the Take care when Don't approach Do not touch of SUPERVISOR I, the undersign will be controlle	e electrical cup moving parts ne fire alarm le a walking arou areas marked move any ob DECLARATIO and, have assigned by the methowith Department	pboards of softhe was eave the label as dange of the was dange of the control of	or any other electrical equipose generators.  ab and the building following, step over cables and otherous.  out permission of a lab tector work, titled above, and detected on this form (delete as a	oment.  ng designated fire exer obstacles.  chnician or a PGTA	no significant risk/the risks
Do not open the Stay away from In the case of the Take care when Don't approach Do not touch of SUPERVISOR I, the undersign will be controlled in accordance when Euger Signed:	moving parts ne fire alarm le walking arou areas marked move any ob DECLARATIO ded, have assi d by the meth with Department	pboards of softhe was eave the label as dange of the was dange of the control of	or any other electrical equipose generators.  ab and the building following, step over cables and otherous.  out permission of a lab tector work, titled above, and detected on this form (delete as a	oment.  Ing designated fire exercises obstacles.  Inhician or a PGTA  Inhician or a PG	no significant risk/the risks
Do not open the Stay away from In the case of the Take care when Don't approach Do not touch of SUPERVISOR I, the undersign will be controlled in accordance of Name: Euger Signed: STUDENT DEC I, the undersign the measures of supervisor of an end of the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the supervisor of t	moving parts ne fire alarm le walking arou areas marked move any ob DECLARATIO hed, have assed by the meth with Department by Buldakov CLARATION hed, have assided have assigned to printy additional re	pboards of a softhe was eave the label and the label das dange ojects with the label of a softhe label eave the	or any other electrical equipose generators.  ab and the building following, step over cables and otherous.  out permission of a lab tector of the step over cables and detector of the step over cables and otherous.  work, titled above, and detector of practice.	pment.  Ing designated fire ester obstacles.  Inhician or a PGTA  Indicated that there is not applicable and that  Date:  Ingree to work carefull as described on this to my attention.	no significant risk/the risks the work will be carried out 28 Oct 2019
Do not open the Stay away from In the case of the Take care when Don't approach Do not touch of SUPERVISOR I, the undersign will be controlled in accordance of Name: Euger Signed: STUDENT DEC I, the undersign the measures of supervisor of an end of the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the stay away from the supervisor of an end of the supervisor of t	moving parts ne fire alarm le walking arou areas marked move any ob DECLARATIO hed, have assed by the meth with Department by Buldakov CLARATION hed, have assided have assigned to printy additional re	pboards of a softhe was eave the label and the label das dange ojects with the label of a softhe label eave the	or any other electrical equipose generators.  ab and the building following, step over cables and otherous.  out permission of a lab tector of the step over cables and detector of the step over cables and otherous.  work, titled above, and detector of practice.	pment.  Ing designated fire ester obstacles.  Inhician or a PGTA  Indicated that there is not applicable and that  Date:  Ingree to work carefull as described on this to my attention.	no significant risk/the risks the work will be carried out 28 Oct 2019

#### 1 Abstract

This report contains an analysis of the wave-data from recorded waves generated in a laboratory wave-flume experiment. The analysis covers both regular waves (with frequencies f = 0.5Hz, 1Hz, and 1.5Hz and respective nominal amplitudes A = 4cm, 3cm, and 2cm), as well as random waves (specifically, a 5 minute long sequence simulating a random sea state).

### 2 Experiment Description

This experiment is performed in a wave-flume, of which the dimensions are:

- 13m length (working section)
- 45cm width
- 40cm depth (water height at rest)

At either end of the wave-flume are piston-type wavemakers: the right-side wavemaker generates the waves, while the left-side wavemaker is to absorb the waves in order to eliminate reflection. However, the wavemaker is more efficient at absorbing long waves; in order to reduce overall reflections and absorb short waves, a horizontal flat metal perforated plate is placed just below water surface, in front of the wave absorber piston. While it is impossible to eliminate all reflections, the aim is to limit them as much as possible to limit experimental error. The wavermakers are connected to a control system, the input to which is the amplitude and frequency of generated regular waves, multiple of which can be superposed in order to create random waves or wave groupings. Wave generation is done using 2 pieces of software: the wave synthesizer designs specific experiments, which can be fed as input to the wave making program, which directly controls the wavemaker movement. There are 5 wave probes placed throughout the flume in order to measure wave data: these must be calibrated in order to provide a 1 Volt/cm water level change signal to their connected wave monitor. If they are not calibrated properly, this can also lead to experimental error. The data logger then translates the analogue signal from the wave monitor to digital signal, and tranfers the data to the data acquisition software which can both save and inspect the data.




Figure 1: Wave flume layout and positions of wave probes [1]

#### 3 Results

#### 3.1 Regular wave record analysis

The measured wave data for probes 2, 3, and 4 can be represented using Python [2] (applies to all the graphs in this paper):

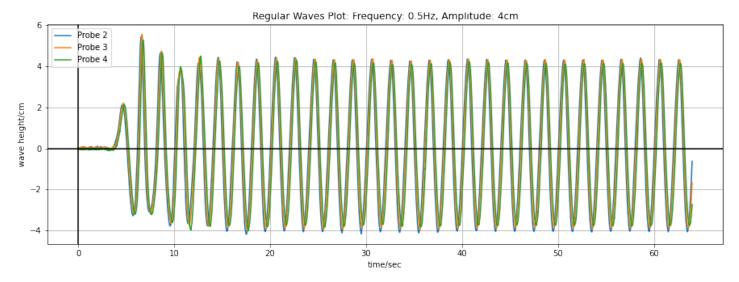


Figure 2: Regular Waves (Frequency = 0.5Hz, Amplitude = 4cm) Profile Representation measured from probes 2 through 4

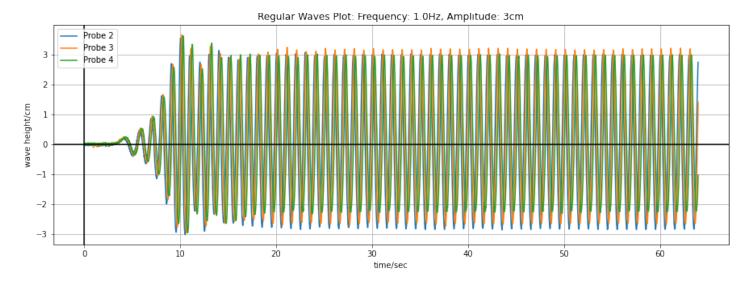


Figure 3: Regular Waves (Frequency = 1.0Hz, Amplitude = 3cm) Profile Representation measured from probes 2 through 4

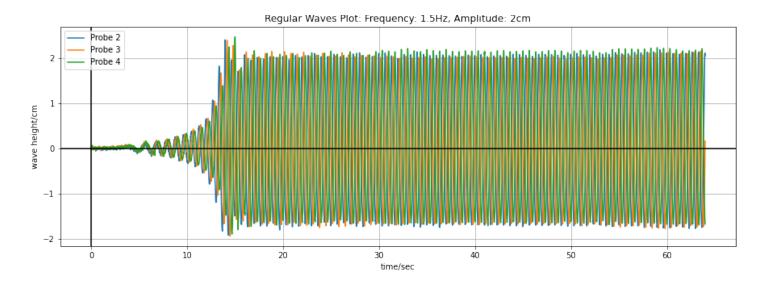


Figure 4: Regular Waves (Frequency = 1.5Hz, Amplitude = 2cm) Profile Representation measured from probes 2 through 4

The previous plots show an overview of the data, including the transitional period at the beginning. In order to analyse the wave record and compare the data, it is more appropriate to graph 1 period (not from the beginning) per record. The following periods were taken from approximately the middle of the records:

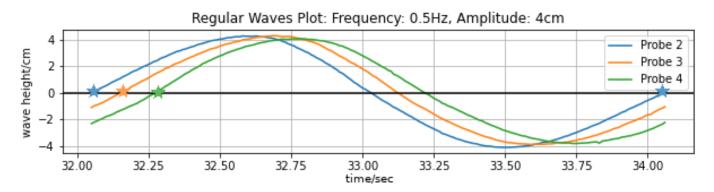


Figure 5: Regular Waves (Frequency = 0.5Hz, Amplitude = 4cm) Period Representation measured from probes 2 through 4

#### Regular Waves Plot: Frequency: 1.0Hz, Amplitude: 3cm

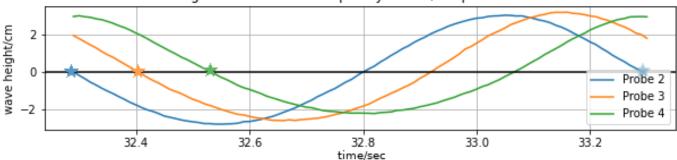


Figure 6: Regular Waves (Frequency = 1.0Hz, Amplitude = 3cm) Period Representation measured from probes 2 through 4



Figure 7: Regular Waves (Frequency = 1.5Hz, Amplitude = 2cm) Period Representation measured from probes 2 through 4

The following can be calcuated from the data, using the same Python program to measure times between different phases for different probes as was used to generate the previous 3 plots: (theoretical period : T = 1/f)

	Given Dat	a	Measured Period (determined programmatically)			
Wave Frequency	Amplitude	Theoretical Period	Probe 2	Probe 3	Probe 4	
f = 0.5Hz	A = 4cm	T = 1/0.5 = 2.00s	34.06 - 32.05 = 2.01s	34.16 - 32.16 = 2.00s	34.28 - 32.28 = 2.00s	
f = 1.0Hz	A = 3cm	T = 1/1.0 = 1.00s	33.30 - 32.29 = 1.01s	33.41 - 32.41 = 1.00s	33.57 - 32.57 = 1.00s	
f = 1.5Hz	A = 2cm	T = 1/1.5 = 0.67s	32.81 - 32.14 = 0.67	32.98 - 32.31 = 0.67s	33.15 - 32.48 = 0.67	

Table 1: Regular Wave Record Analysis: table of results

The difference between the theoretical and the measured periods is negligible: they are nearly identical. However, now the comparison can be made between the measured celerities: the theoretical celerity can be determined, as in theory the regular waves can be represented as sine waves where the surface elevation  $\eta(x,t) = 2\pi A * sin(t/T - x/L)$  and the theoretical celerity C = L/T (the theoretical celerity in Table 2 was determined using the provided calculator). The distance between probes 2 and 4 is 0.4m, this as well as the delay between can be used to calculate the measured celerity:  $C_M = 0.4/(P_4 - P_2)$  m/s where  $P_2$  and  $P_4$  are the starting times of the measured periods from Table 1.

Wave Frequency	Amplitude	Theoretical Period	Theoretical Celerity	Measured Celerity
f = 0.5Hz	A = 4cm	T = 2.00s	C = 1.84747746  m/s	$C_M = 0.4/(34.28 - 34.06) = 1.81818 \text{ m/s}$
f = 1.0Hz	A = 3cm	T = 1.00s	C = 1.46373472  m/s	$C_M = 0.4/(33.57 - 33.30) = 1.481481 \text{ m/s}$
f = 1.5Hz	A = 2cm	T = 0.67s	C = 1.04448977  m/s	$C_M = 0.4/(33.15 - 32.81) = 1.176471 \text{ m/s}$

Table 2: Regular Wave Record Analysis: table of celerities

The measured celerities of the first 2 waves are identical to the theoretical celerity values to  $10^{-1}$  degrees of precision. These differences can be attributed to the inevitable experimental errors (coming from refections and probe calibration for example). The 3rd wave's measured and theoretical celerities are more different, only identical to 1 degree of precision.

#### 3.2 Wave length calculation

Using the measured and theoretical periods and celerities, the measured and theoretical lengths of each wave can be calculated as L = C \* T m; these measured and theoretical values can then be compared:

Wave Frequency	Amplitude	Theoretical Wave Length $L = C * T$	Measured Wave Length
f = 0.5Hz	A = 4cm	L = 1.84747746 * 2.00 = 3.69495492  m	$L_M = 1.81818 * 2.00 = 3.63636 \text{ m}$
f = 1.0Hz	A = 3cm	L = 1.46373472 * 1.00 = 1.46373472  m	$L_M = 1.481481 * 1.00 = 1.481481 \text{ m}$
f = 1.5Hz	A = 2cm	L = 1.04448977 * 0.67 = 0.699808146  m	$L_M = 1.176471 * 0.67 = 0.7882356 \text{ m}$

Table 3: Regular Wave Record Analysis: table of lengths

As expected (given the results for the measured celerity), the theoretical and measured values of the first 2 waves are identical to  $10^{-2}$  degrees of precision, and the 3rd to 1 degree. From these results, it can be determined for each wave if it corresponds to shallow-water, intermediate-water or deep-water regime: given the water depth (1) d = 40cm or d = 0.40 m, and that:

• shallow water: d/L < 1/25

• transitional water: 1/25 < d/L < 1/2

• deep water: d/L > 1/2

Wave Frequency	Amplitude	d/L	Depth
f = 0.5Hz	A = 4cm	0.40/3.69495492 = 0.1082557	0.04 < 0.1082557 < 0.5: intermediate water
f = 1.0Hz	A = 3cm	0.40/1.46373472 = 0.27327356	0.04 < 0.27327356 < 0.5: intermediate water
f = 1.5Hz	A = 2cm	0.40/0.699808146 = 0.57158522	0.57158522 > 0.5: deep water

Table 4: Regular Wave Record Analysis: table of depths

The 3rd wave being in the deep-water regime is possibly the reason the measured and theoretical values of wave-length and celerity are more different than for the other 2 waves.

#### 3.3 Celerity and wave length: theoretical relationship

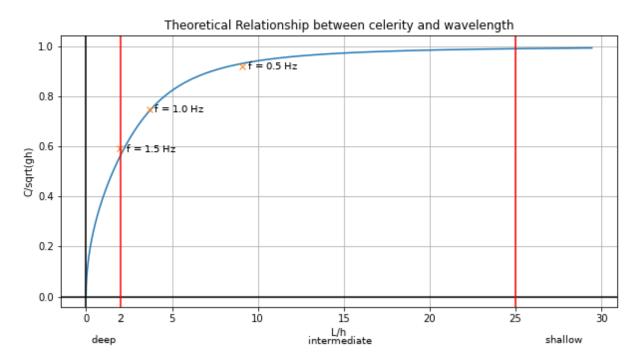


Figure 8: Theoretical relationship between celerity and wave length

#### 3.4 Measured vs. theoretical waves

Using 1 wave period measured by probe 3 for each wave, the wave height can be calculated and compared to the nominal wave height:

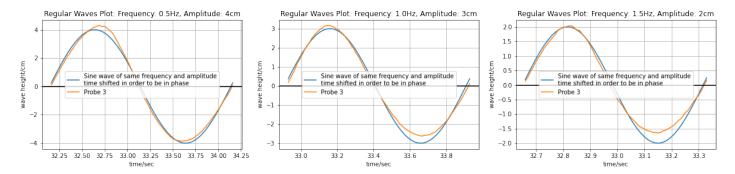


Figure 9: Regular Wave Periods measured by Probe 3 compared to sine wave (frequencies f = 0.5 Hz, 1.0 Hz, and 1.5 Hz respectively, from left to right)

For all of the experimental waves, probe 3 measures a higher peak and trough than the expected sinusoidal wave; this can be observed in the following plot with scaled values, and the wave periods overlaid:

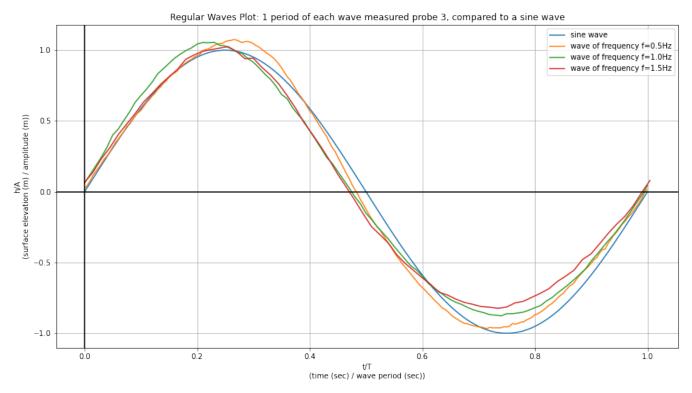


Figure 10: Single wave period measured by probe 3 for each experimental wave, scaled and compared to a sine wave

The higher peaks and shallower troughs as well as assymetry of the wave shapes in the experimental wave data measured by probe 3 can be explained by the unavoidable experimental errors (such as probe calibration errors, reflections due to wave absorption being imperfect), and a mismatch between the linear wave generation and the nonlinear nature of the experimental components.

#### 3.5 Wave amplitude variations

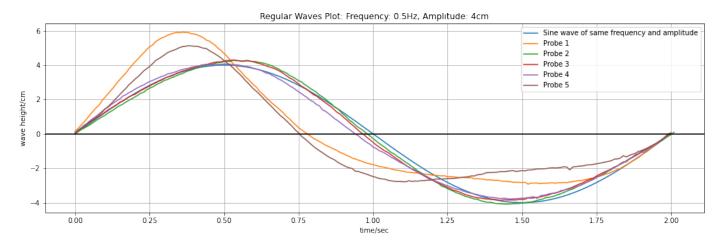


Figure 11: Regular Waves (Frequency = 0.5Hz, Amplitude = 4cm): time-shifted period-comparison of all probes and a sine wave

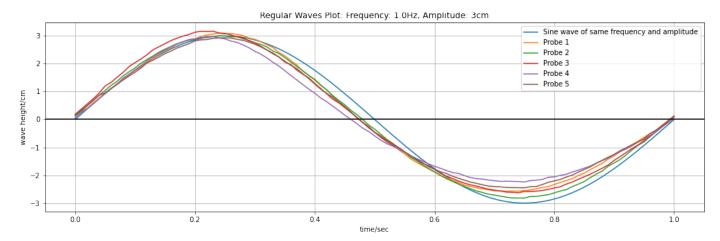


Figure 12: Regular Waves (Frequency = 1.0Hz, Amplitude = 3cm): time-shifted period-comparison of all probes and a sine wave

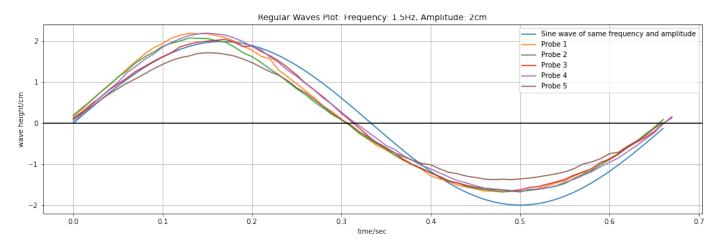


Figure 13: Regular Waves (Frequency = 1.5Hz, Amplitude = 2cm): time-shifted period-comparison of all probes and a sine wave

The previous Figures 11, 12, and 13 show analyses of developed periodic wave records for all probes compared to each other and to a regular sine wave of the same frequency and amplitude. These graphs show that the wave amplitudes are indeed **not** constant in space or time, as probes 1 and 5 for the 1st wave show higher peaks and shallower troughs than the rest of the probes as well as the sine wave, for example, and probe 5 for the 3rd waves shows overall lower peaks as well as shallower troughs. The inconsistencies with the first and last probes can be associated with the probes' proximity to the 2

wavemakers, and overall amplitude inconsistencies in the experiment can also be associated with experimental error (such as wave probe calibration imperfection, residual wave reflections, etc..) as well as, again, the mismatch between the linear wave generation, and the non-linear nature of the waves (assymetry in wave shape also leads to different wave amplitudes at different locations).

#### 3.6 Wave front evolution

The wave front evolution can be analysed using probes 1 and 5's recordings for all the waves, specifically observing the beginning of the waves. The peaks and troughs of the values are encompassed by envelopes:

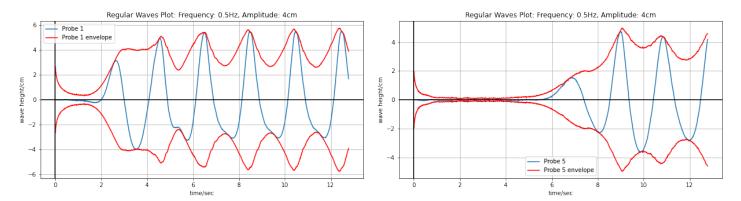


Figure 14: Wave Front Evolution for wave of frequency f = 0.5 Hz as measured by Probe 1 and 5 with wave envelopes

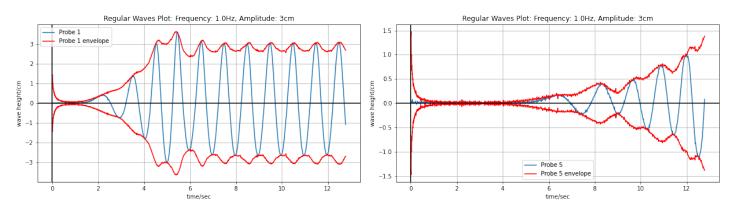


Figure 15: Wave Front Evolution for wave of frequency f = 1.0 Hz as measured by Probe 1 and 5 with wave envelopes

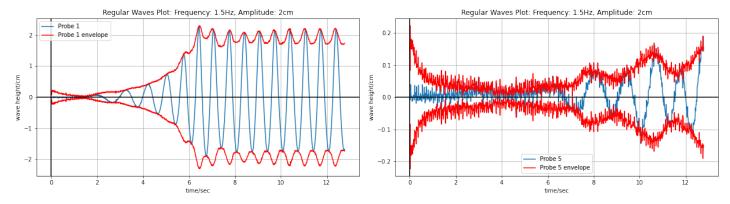


Figure 16: Wave Front Evolution for wave of frequency f = 1.5 Hz as measured by Probe 1 and 5 with wave envelopes

These envelopes can then be directly compared to each other (as seen in Figures 17, 18, and 19):

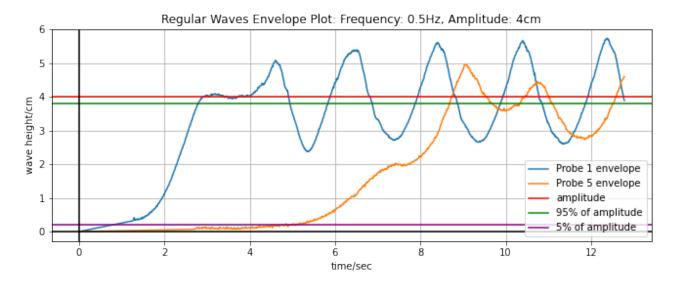


Figure 17: Regular Waves (Frequency = 0.5Hz, Amplitude = 4cm): Probes 1 and 5 envelopes comparison

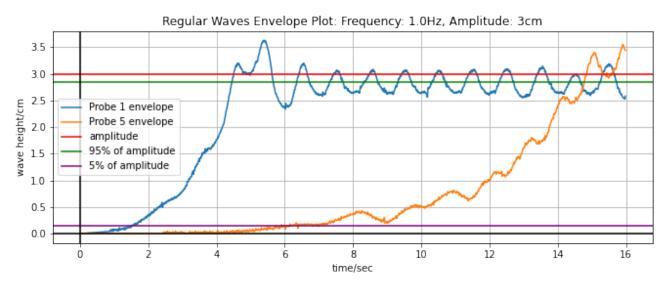


Figure 18: Regular Waves (Frequency = 1.0Hz, Amplitude = 3cm): Probes 1 and 5 envelopes comparison

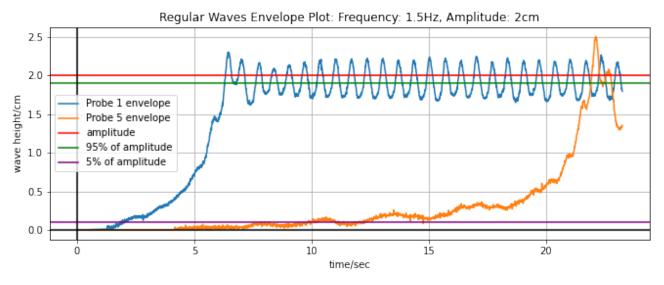


Figure 19: Regular Waves (Frequency = 1.5Hz, Amplitude = 2cm): Probes 1 and 5 envelopes comparison

For Figures 17, 18, and 19, the wave height at the location of each probe grew to a small value (at 5% of the height of a developed regular wave) is identified by the blue and orange curves crossing the purple line (the exact values determined

programatically [2]). There are 8m between probes and 5 1, so  $C_M = 8/(P_5 - P_1)$  where  $P_5$  and  $P_1$  are the probe 5 and 1 crossings, respectively. The values calculated for theoretical celerity C in previous sections still hold. 5% of each of these waves' amplitudes qualifies as shallow water, therefore the group velocity  $C_g$  for all these waves is the same as shallow water celerity  $C_s = \sqrt{gh} = \sqrt{9.80665 * 0.40} = 1.98057$  m/s for all waves.

The following values in Table 5 can therefore be derived in order to compare them:

Amplitude	$P_1$	$P_5$	Measured Celerity	Theoretical Celerity	Group Velocity = Shallow Water Celerity
			$C_M = 2.05655527 \text{ m/s}$	,	
			$C_M = 1.81818182 \text{ m/s}$	,	J - /
A = 2  cm	1.85s	7.83s	$C_M = 1.33779264 \text{ m/s}$	C = 1.04448977  m/s	

Table 5: Table of celerity calculations: probes 1 and 5 first recording of 5% of the wave amplitude

For the first 2 waves, the measured celerities are closest to the group velocity (or the shallow-water celerity), whereas for the third wave, the measured celerity is nearest to the theoretical celerity (this could be due to experimental error, or partially to the fact that out of the 3 sets of waves, the 3rd one corresponds to a deeper-water regime).

#### 3.7 Different speeds of energy propagation in the wave front

For Figures 17, 18, and 19, the wave height at the location of each probe grew to a small value (at 95% of the height of a developed regular wave) is identified by the blue and orange curves crossing the green line (the exact values determined programatically [2]). The values for measured celerity, theoretical celerity, and shallow water celerity from the previous section still hold. However, the waves here are not shallow, they are of the depth-regime previously specified: the first 2 waves qualified previously as transitional water and the 3rd wave as deep water. Therefore, the group velocity  $C_g$  for the first 2 waves is:

$$\bullet \ \ C_g = \frac{1 + \frac{4\pi h/L}{\sinh(4\pi h/L)}}{2} * C \ \text{for the first 2 waves (using the previously calculated theoretical wavelengths)}$$
 
$$\circ \ \ C_g = \frac{1 + \frac{4\pi 0.40/3.69495492}{\sinh(4\pi 0.40/3.69495492)}}{2} * C = 0.873617 * C = 1.61398772 \text{ m/s for wave 1}$$
 
$$\circ \ \ C_g = \frac{1 + \frac{4\pi 0.40/3.69495492}{\sinh(4\pi 0.40/3.69495492)}}{2} * C = 0.610884 * C = 0.894179745 \text{ m/s for wave 2}$$

•  $C_g = \frac{C}{2} = 0.522244885$  m/s for the 3rd wave

The following values in Table 6 can therefore be derived:

Amplitude	$P_1$	$P_5$	Measured Celerity	Theoretical Celerity	Group Velocity	Shallow Water Celerity
A = 4  cm	2.8s	8.68s	$C_M = 1.36054422 \text{ m/s}$	C = 1.84747746  m/s	$C_g = 1.61398772 \text{ m/s}$	
		l	$C_M = 0.775193799 \text{ m/s}$	,	, <i>a</i> ,	,
A = 2  cm	6.3s	21.92s	$C_M = 0.512163893 \text{ m/s}$	C = 1.04448977  m/s	$C_g = 0.522244885 \text{ m/s}$	

Table 6: Table of celerity calculations: probes 1 and 5 first recording of 95% of the wave amplitude

Here, all the measured celerities are nearest in value to the group velocity.

Different speeds of energy propagation in the wave front are observed as the more reliable of all the theoretical celerities was shown here to be the one that fluctuates depending on the depth regime of the water observed: the group velocity. Reasons for this include probes 1 and 5's proximities to the wavemakers performing opposing actions (and the absorbing plate), as well as the mismatch between the nonlinear nature of the waves and the supposedly linear wave generation, and finally, experimental errors. Certain fluctuations are also more likely to have inaccuracies, as the absorbing mechanism is more effective at reducing the longer waves: shorter waves are therefore more likely to be counteracted by unabsorbed reflections, possibly explaining the 3rd wave's measured celerity in the previous section.

#### 3.8 Random wave record analysis

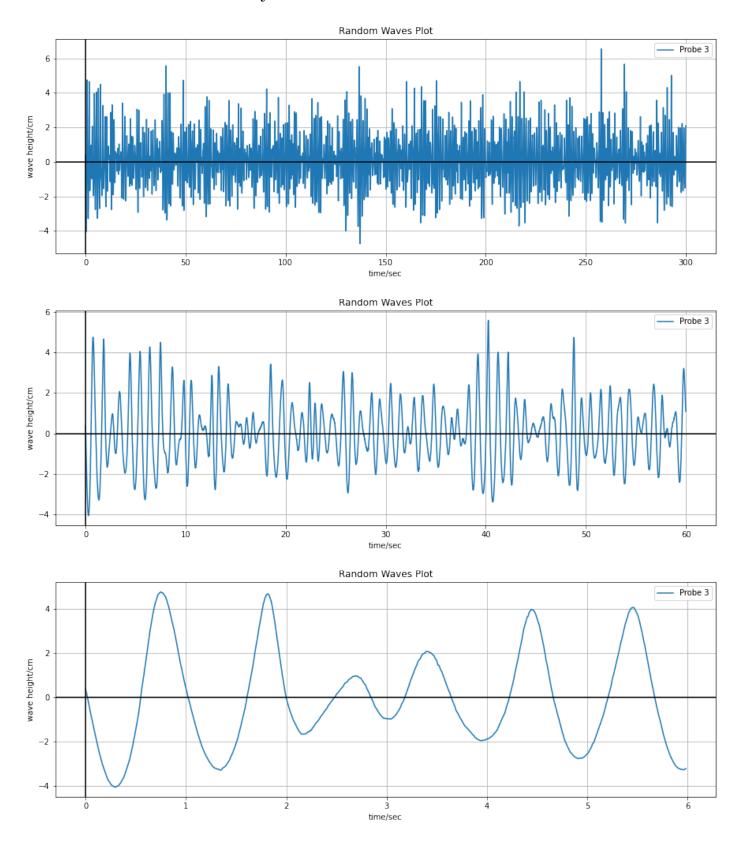


Figure 20: Random Sea State: randomly generated waves - analysis at different scales

#### 3.9 Maximum wave height for 3 hour storm at project site

Use Froude similarity law to scale the random wave experimental data to full-scale conditions of your Design Project site. Calculate the corresponding values of  $H_s$ ,  $T_z$  and the duration of the wave sequence. Assuming Rayleigh distribution,

find expected maximum wave height for a 3 hours storm at your project site. Comment on the applicability of Rayleigh distribution.

# 4 Conclusions

## References

- [1] Wave generation in a wave-flume experiment and analysis of experimental wave data Experiment Description and Report Assignment
- [2] Github Repository by user Nathalex (Nathalie Alexandra "Alex" Tcherdakoff) https://github.com/nathalex/Wave-Flume-Lab-Report