

beautitled

User Manual

Version 0.3.1

Nathan Scheinmann

Table of Contents

Chapter 1: Introduction	3
1.1 Features	3
Chapter 2: Quick Start	4
2.1 Installation	4
2.2 Basic Usage	4
2.3 Parts	4
3.1 Part with Image	4
3.2 Disabling Full-Page Parts	5
3.3 Native Headings as Parts	5
Chapter 3: Configuration	6
3.1 Complete Parameter Reference	6
3.2 Custom Numbering Patterns	8
Chapter 4: Available Styles	9
4.1 Style Categories	9
1.1 Next Generation (Recommended)	9
1.2 Legacy Collection (Unchanged)	9
Chapter 5: Examples	11
5.1 Example 1: Basic Document with Chapter	11
5.2 Example 2: Without Chapter (Sections Only)	12
5.3 Example 3: Academic Style with Custom Colors	13
5.4 Example 4: English Document	14
5.5 Example 5: Without Numbering	15
5.6 Example 6: Different Styles Comparison	16
Chapter 6: Table of Contents	17
6.1 Basic Usage	17
6.2 Custom Title	17
6.3 Parameters	17
6.4 Simple Style with Sections Only	17
6.5 Mixing Styles	18
6.6 TOC Configuration Options	18
6.7 Available TOC Styles (11)	18
Chapter 7: Cross-References	21
7.1 Labelling a Heading	21
7.2 Referencing	21
7.3 Numbering Depth	22
7.4 Parameters	22
7.5 Notes	22
Chapter 8: Page Breaks	23
Chapter 9: Built-in Presets	24
9.1 Complete Example	24
9.2 Language Presets	24

9.3 Color Themes	24
Chapter 10: Running Headers	25
10.1 Basic Usage	25
10.2 Parameters	25
10.3 Notes	25
Chapter 11: Unnumbered Headings	26
11.1 Behavior in 0.2.7	26
11.2 Example	26
11.3 With beautitled-init	26
Chapter 12: French Colon Spacing	27
Chapter 13: Tips and Best Practices	28
13.1 Choosing a Style	28
13.2 Print Considerations	28
13.3 Combining with Other Packages	28
Chapter 14: Changelog	29
14.1 Version 0.3.1	29
14.2 Version 0.3.0	29
14.3 Version 0.2.7	29
14.4 Version 0.2.0	30

Introduction

beautitiled is a Typst package that provides 22 beautiful, print-friendly title styles for documents. Three next-generation styles offer a calmer, sleeker direction while all 19 original renderers remain available unchanged.

1 Features

- **3 next-generation styles** - A focused contemporary collection for new documents
- **19 legacy styles** - Existing style names and rendering remain compatible
- **Print-friendly** - All styles use minimal ink (no heavy backgrounds)
- **Fully configurable** - Colors, sizes, spacing, and numbering
- **Multilingual** - Customizable prefixes for any language
- **Native Typst support** - Works with = Heading syntax
- **Optional parts** - LaTeX-like parts above chapters
- **Four heading levels** - Chapter, section, subsection, subsubsection
- **Cross-references** - `beautitiled-ref` for labelled heading refs with optional page numbers

Quick Start

| 1 Installation

```
#import "@preview/beautitled:0.3.1": *
```

| 2 Basic Usage

```
#import "@preview/beautitled:0.3.1": *
```

```
#beautitled-setup(style: "anchor")
```

```
#show: beautitled-init
```

```
= My Chapter Title
```

```
== My Section Title
```

```
=== My Subsection Title
```

```
==== My Subsubsection Title
```

| 3 Parts

Typst has arbitrary heading levels, but no dedicated LaTeX-style `\part`. **beautitled** adds `#part[...]` and can also remap native headings when parts are enabled. Using `#part[...]` automatically makes parts the highest outline level for the rest of the document. Without parts, chapters remain the highest level.

By default (`part-fullpage: true`), each part occupies its own dedicated page with the title vertically and horizontally centered — matching LaTeX's default `\part` behavior. Every style has its own coherent part renderer.

```
#beautitled-setup(style: "modern")
```

```
#show: beautitled-init
```

```
#part[Foundations]
```

```
#chapter[Numbers]
```

```
#section[Integers]
```

3.1 Part with Image

An optional image can be placed above or below the title on the part page. The caption uses Typst's native figure rendering:

```
#part(  
  image: image("cover.png", width: 70%),  
  image-caption: [A conceptual overview],  
  image-position: "below", // "above" or "below" (default: "below")  
)[Advanced Topics]
```

3.2 Disabling Full-Page Parts

To use inline parts (no dedicated page), set `part-fullpage: false` globally or override per call:

```
#beautitled-setup(part-fullpage: false)
```

// Or per call:

```
#part(fullpage: false)[Appendices]
```

3.3 Native Headings as Parts

With `enable-parts: true`, native headings become:

```
#beautitled-setup(style: "modern", enable-parts: true)  
#show: beautitled-init
```

= Foundations

== Numbers

=== Integers

==== Arithmetic

===== Divisibility

Configuration

All configuration is done through the `beautitled-setup` function. You can call it multiple times to change settings at any point in your document.

1 Complete Parameter Reference

Parameter	Default	Description
<code>style</code>	<code>"titled"</code>	The visual style to use (see Available Styles)
<code>primary-color</code>	<code>rgb("#2c3e50")</code>	Main color for titles
<code>secondary-color</code>	<code>rgb("#7f8c8d")</code>	Secondary color for labels and decorations
<code>accent-color</code>	<code>rgb("#2980b9")</code>	Accent color for highlights
<code>background-color</code>	<code>white</code>	Background color (rarely used)
<code>part-size</code>	<code>24pt</code>	Font size for part titles
<code>chapter-size</code>	<code>18pt</code>	Font size for chapter titles
<code>section-size</code>	<code>14pt</code>	Font size for section titles
<code>subsection-size</code>	<code>12pt</code>	Font size for subsection titles
<code>subsubsection-size</code>	<code>11pt</code>	Font size for subsubsection titles
<code>enable-parts</code>	<code>false</code>	<code>false</code> : = Heading is a chapter; <code>true</code> : = Heading is a part and <code>==</code> Heading is a chapter
<code>show-part-number</code>	<code>true</code>	Show part numbers
<code>show-chapter-number</code>	<code>true</code>	Show chapter numbers
<code>show-section-number</code>	<code>true</code>	Show section numbers
<code>show-subsection-number</code>	<code>true</code>	Show subsection numbers
<code>show-chapter-in-section</code>	<code>true</code>	Show chapter info in section labels (titled style)

part-numbering	auto	Typst numbering pattern for parts, or auto for the style default
chapter-numbering	auto	Typst numbering pattern for chapters, or auto for the style default
section-numbering	auto	Typst numbering pattern for sections, or auto for the style default
subsection-numbering	auto	Typst numbering pattern for subsections, or auto for the style default
subsubsection-numbering	auto	Typst numbering pattern for subsubsections, or auto for the style default
part-prefix	"Partie"	Text before part number
chapter-prefix	"Chapter"	Text before chapter number
section-prefix	"Section"	Text before section number
subsection-prefix	"Sous-section"	Text before subsection number (used by beautitled-ref)
subsubsection-prefix	"Paragraphe"	Text before subsubsection number (used by beautitled-ref)
part-above	2em	Space above parts
part-below	1.2em	Space below parts
chapter-above	1.2em	Space above chapters
chapter-below	0.5em	Space below chapters
section-above	0.5em	Space above sections
section-below	0.4em	Space below sections
subsection-above	0.5em	Space above subsections
subsection-below	0.3em	Space below subsections
part-fullpage	true	Give each part its own vertically-centred page (LaTeX default)
part-pagebreak	true	Page break before parts after the first (inline mode only)
chapter-pagebreak	false	Page break before chapters after the first
toc-part-size	14pt	Font size for part entries in the table of contents

| 2 Custom Numbering Patterns

Set *-numbering options to Typst numbering patterns. `auto` preserves the selected style's default number rendering.

```
#beautitled-setup(  
  part-numbering: "A",  
  chapter-numbering: "I",  
  section-numbering: "I.1",  
  subsection-numbering: "I.1.a",  
  subsubsection-numbering: "I.1.a.i",  
)
```

The same rendered numbers are used in headings, the table of contents, and `beautitled-ref`.

Available Styles

1 Style Categories

1.1 Next Generation (Recommended)

- **folio** - Quiet contemporary editorial typography
- **terrace** - Tight number-and-title grid with generous top spacing
- **anchor** - One axis and one rail bind the label-number tag to the title

terrace and anchor include curated vertical-spacing profiles and start chapters on a new page by default. Explicit spacing and page-break settings still override the profile.

These styles also honor heading-font, allowing display typography to be changed independently from the body font:

```
#beautitled-setup(style: "anchor", heading-font: "Your Sans Font")
```

1.2 Legacy Collection (Unchanged)

1.2.1 Original

- **titled** - Boxed sections with floating labels showing chapter info (DEFAULT)

1.2.2 General Purpose

- **classic** - Traditional academic with underlines
- **modern** - Clean geometric with accent colors
- **elegant** - Refined with decorative ornaments
- **bold** - Strong left border emphasis
- **creative** - Student portfolio style
- **minimal** - Ultra-clean with maximum whitespace
- **vintage** - Classic book ornamental style

1.2.3 Educational

- **schoolbook** - Textbook style for lessons
- **notes** - Course notes and study materials
- **clean** - Maximum simplicity

1.2.4 Academic

- **technical** - Engineering documentation style
- **academic** - Professional academic with underlined chapters
- **textbook** - Bold numbers with clear hierarchy
- **scholarly** - Centered chapters with thin rules
- **classical** - Small caps, refined and minimal
- **educational** - Left border with large colored numbers
- **structured** - Boxed chapter numbers
- **magazine** - Editorial/magazine style

Examples

1 Example 1: Basic Document with Chapter

Chapitre 1: Vector Geometry

Ch. 1 : Vector Geometry — SECTION 1

Vector Space

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Basic Definitions

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

Code:

```
#beautitled-setup(style: "titled", show-chapter-in-section: true)
#show: beautitled-init
```

```
= Vector Geometry
```

```
== Vector Space
```

```
Lorem ipsum dolor sit amet...
```

=== Basic Definitions
Ut enim ad minim veniam...

| 2 Example 2: Without Chapter (Sections Only)

SECTION 1

Vectors

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1 Vector Addition

Ut enim ad minim veniam, quis nostrud exercitation.

Code:

```
#beautitled-setup(style: "titled", show-chapter-in-section: false)
#show: beautitled-init
```

```
== Vectors
Lorem ipsum dolor sit amet...
=== Vector Addition
Ut enim ad minim veniam...
```

Chapitre 1

Introduction to Analysis

1.1 Limits and Continuity


Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1.1 Definition of Limits

Ut enim ad minim veniam, quis nostrud exercitation.

Code:

```
#beautitled-setup(  
  style: "academic",  
  primary-color: rgb("#1a5276"),  
  secondary-color: rgb("#5dade2"),  
  chapter-size: 20pt,  
  section-size: 15pt,  
)  
#show: beautitled-init  
  
= Introduction to Analysis  
== Limits and Continuity  
...
```

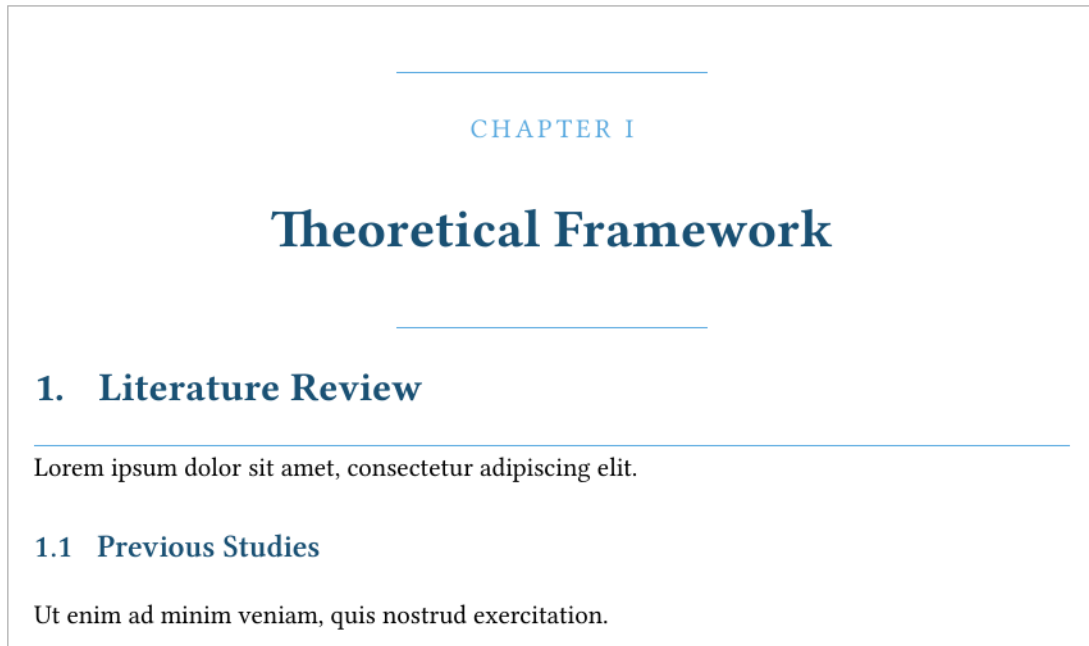

Code:


```
#beautitled-setup(  
  style: "scholarly",  
  chapter-prefix: "Chapter",  
  section-prefix: "Section",  
)  
#show: beautitled-init
```

= Theoretical Framework

== Literature Review

...

| 5 Example 5: Without Numbering

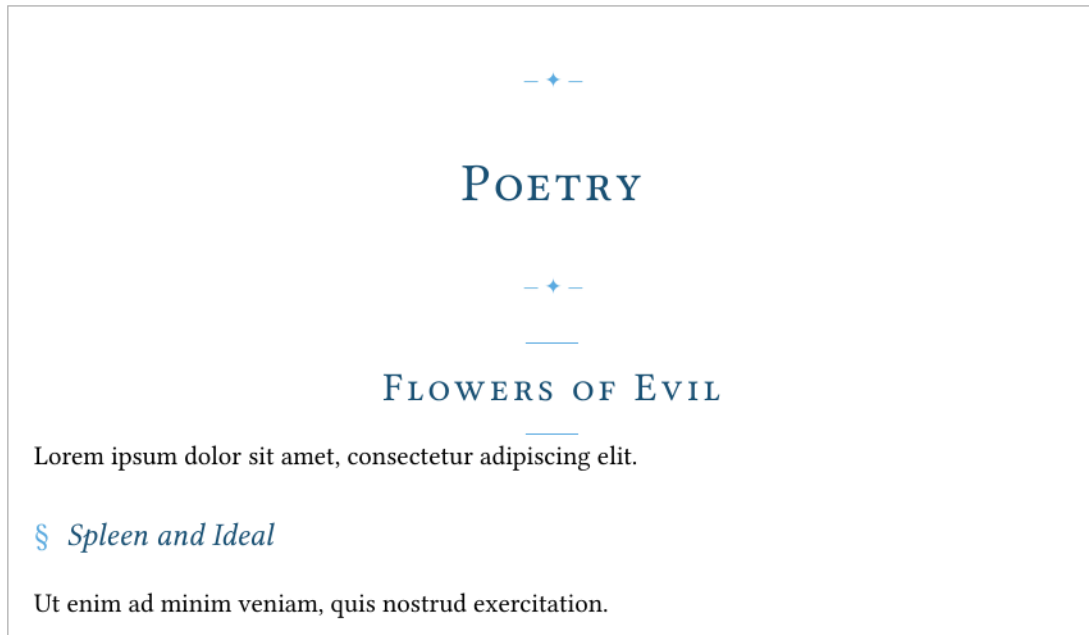

Code:

```
#beautitled-setup(  
  style: "elegant",  
  show-chapter-number: false,  
  show-section-number: false,  
  show-subsection-number: false,  
)  
#show: beautitled-init  
  
= Poetry  
== Flowers of Evil  
...
```

| 6 Example 6: Different Styles Comparison

Modern Style:

Chapter

■ Section

Content...

Classical Style:

CHAPTER

Section

Content...

Textbook Style:

Chapter

Section

Content...

Educational Style:

| Chapter

Section

Content...

Table of Contents

beautitled provides a styled table of contents that matches your heading style.

1 Basic Usage

```
#beautitled-toc()
```

2 Custom Title

```
#beautitled-toc(title: "Contents")  
#beautitled-toc(title: "Table of Contents")  
#beautitled-toc(title: "Sommaire")
```

3 Parameters

Parameter	Default	Description
title	"Table of Contents"	Title displayed above the TOC
depth	3	Maximum heading level to include (1=chapters, 2+=sections, 3+=subsections)
style	none	Override style for TOC (none = use heading style)
title-align	center	Title alignment: center, left, or right

4 Simple Style with Sections Only

For a clean, flat TOC showing only sections (no chapters):

```
#beautitled-toc(  
  title: "Table of Contents",  
  style: "simple",  
  title-align: left,
```

```
depth: 2, // Show chapters and sections only
)
```

| 5 Mixing Styles

You can use different styles for your headings and TOC:

```
#beautitled-setup(style: "titled")
#show: beautitled-init
```

```
// TOC uses "scholarly" style
#beautitled-toc(title: "Contents", style: "scholarly")
```

```
= First Chapter
```

```
...
```

| 6 TOC Configuration Options

These options can be set via beautitled-setup:

Parameter	Default	Description
toc-style	none	Different style for TOC (overrides heading style)
toc-indent	1em	Indentation per level
toc-part-size	14pt	Font size for parts in TOC
toc-chapter-size	14pt	Font size for chapters in TOC
toc-section-size	11.5pt	Font size for sections in TOC
toc-subsection-size	10pt	Font size for subsections in TOC
toc-fill	repeat[.]	Fill between title and page number
toc-show-subsections	true	Include subsections in TOC

| 7 Available TOC Styles (11)

The next-generation TOCs are complete page systems: **folio** uses an editorial measure and a fixed folio column, **terrace** uses a strict leader-free grid, and **anchor** keeps each chapter and its children attached to a common visual rail.

folio

terrace spacing-first

Contents

PART I: FOUNDATIONS	2
Chapter 1: Reading the built environment	3
1.1 Context and proportion	3
1.1.1 The human scale	3
1.2 Material and light	3
Chapter 2: Making a coherent system	3
2.1 Rhythm and hierarchy	4
1.1 Details that orient	4
2.2 Structure and variation	4

Contents

Part I: Foundations	2
Chapter 1: Reading the built environment	3
1.1 Context and proportion	3
1.1.1 The human scale	3
1.2 Material and light	3
Chapter 2: Making a coherent system	4
2.1 Rhythm and hierarchy	4
1.1 Details that orient	4
2.2 Structure and variation	4

anchor clarity-first

Contents

Part I: Foundations	2
Chapter 1: Reading the built environment	3
1.1 Context and proportion	3
1.1.1 The human scale	3
1.2 Material and light	3
Chapter 2: Making a coherent system	4
2.1 Rhythm and hierarchy	4
1.1 Details that orient	4
2.2 Structure and variation	4

titled (default)

titled	
Chapter 1 : Introduction	1
1.1 Context	1
1.1.1 History	2

classic

modern

classic	
Chapter 1 : Introduction	1
1.1 Context	1

modern	
Chapter 1 : Introduction	1
▶ 1.1 Context	1

elegant

elegant	
CHAPTER 1 : INTRODUCTION	1
1.1 Context	1

bold

bold	
CHAPTER 1 : INTRODUCTION	1
1.1 Context	1

minimal

minimal	
Chapter 1 : Introduction	1
1.1 Context	1

scholarly

scholarly	
Chapter 1 : Introduction	1
1.1 Context	1

simple

simple	
1 Vector Space	2
2 Linear Dependence	3
3 Vector Norm	7

Cross-References

beautitled provides `beautitled-ref` (alias: `btl-ref`) to create clickable, numbered references to any labelled heading — part, chapter, section, subsection, or subsubsection.

1 Labelling a Heading

Pass a `label:` named argument to any heading function:

```
#part(label: <part-found>)[Foundations]
#chapter(label: <ch-intro>)[Introduction]
#section(label: <sec-overview>)[Overview]
```

Or with native headings when using `beautitled-init`. The label goes where it would on any ordinary Typst heading, and the reference resolves through `beautitled`'s own counters and numbering configuration — you never read `counter(heading)` yourself:

```
#beautitled-setup(enable-parts: false)
#show: beautitled-init
```

```
= Introduction <ch-intro>
== Overview <sec-overview>
```

Both forms are interchangeable: a native `== Overview <sec-overview>` and a direct `#section(label: <sec-overview>)[Overview]` produce the same reference.

2 Referencing

```
See #beautitled-ref(<ch-intro>)           // → "Chapitre 1"
See #beautitled-ref(<sec-overview>)       // → "Section 1.1"
See #btl-ref(<ch-intro>)                  // short alias
See #beautitled-ref(<ch-intro>, show-page: true) // → "Chapitre 1 (p. 2)"
See #beautitled-ref(<sec-overview>, short: true) // → "1.1"
See #beautitled-ref(<sec-overview>, supplement: [Sec.]) // → "Sec. 1.1"
```

Under `beautitled-init`, Typst's own reference syntax works too and produces the same text:

```
See @sec-overview           // → "Section 1.1"
See @sec-overview[Sec.]    // → "Sec. 1.1"
```

Documents that use only direct heading calls, without `beautitled-init`, can enable `@label` with `#show ref: beautitled-show-ref`.

| 3 Numbering Depth

A reference always prints exactly what its heading prints — same counters, same numbering pattern. Subsections therefore follow `subsection-numbering`: with the default `auto` they read 5.2, and a pattern that includes the chapter gives the full hierarchical number:

```
#beautitled-setup(subsection-numbering: "1.1.1")
// Subsection 2 of section 5 of chapter 1:
#beautitled-ref(<sub>) // → "Sous-section 1.5.2"
#beautitled-ref(<sub>, short: true) // → "1.5.2"
```

The same holds for `section-numbering` and `subsubsection-numbering`.

| 4 Parameters

Parameter	Type	Default	Description
<code>target</code>	<code>label</code>	—	The label attached to the heading
<code>show-page</code>	<code>bool</code>	<code>false</code>	Append a page number in parentheses
<code>page-prefix</code>	<code>str</code>	<code>"p. "</code>	Prefix before page number
<code>short</code>	<code>bool</code>	<code>false</code>	Omit prefix word; show number only (e.g. 1.1 instead of Section 1.1)
<code>supplement</code>	<code>auto, none, content</code>	<code>auto</code>	Replaces the prefix word; <code>auto</code> keeps the configured prefix, <code>none</code> drops it

| 5 Notes

- The displayed prefix ("Chapitre", "Section", "Sous-section", "Paragraphe", etc.) respects the active language preset, and can be overridden per level with `part-prefix`, `chapter-prefix`, `section-prefix`, `subsection-prefix` and `subsubsection-prefix`.
- When `show-part-number: false` (or the heading was called with `numbered: false`), the heading's title is shown instead of a number.
- The reference is a clickable hyperlink to the heading's location in the document.

Page Breaks

Enable automatic page breaks before chapters:

```
#beautitled-setup(  
  style: "textbook",  
  chapter-pagebreak: true,  
)  
#show: beautitled-init
```

= First Chapter

// Content...

= Second Chapter // Automatic page break here

// Content...

Note: The first chapter does not trigger a page break.

Built-in Presets

beautitled includes several presets for common configurations. Presets are called **before** beautitled-init:

1 Complete Example

```
#import "@preview/beautitled:0.3.1": *

// 1. Choose a style
#beautitled-setup(style: "scholarly")

// 2. Apply language preset
#preset-english()

// 3. Apply color theme
#theme-ocean()

// 4. Initialize
#show: beautitled-init

= My Chapter
== My Section
```

2 Language Presets

```
#preset-french()      // "Chapitre", "Section"
#preset-english()    // "Chapter", "Section"
#preset-german()     // "Kapitel", "Abschnitt"
#preset-no-numbers() // Hide all numbering
```

3 Color Themes

```
#theme-ocean()  // Blue tones
#theme-forest() // Green tones
#theme-royal()  // Purple tones
#theme-mono()   // Grayscale
#theme-warm()   // Orange/brown tones
#theme-coral()  // Red tones
```


Running Headers

`beautitled-header` returns the formatted title of the most recent chapter (or section, depending on `level`) for use in a page header. It works with both the `beautitled-init` show-rule approach (native = Heading syntax) and direct function calls (`#chapter[...]`, `#section[...]`, etc.).

1 Basic Usage

```
#set page(header: context [  
  #beautitled-header(level: 1) // show current chapter title  
  #h(1fr)  
  #counter(page).display()  
)
```

2 Parameters

Parameter	Type	Default	Description
<code>level</code>	<code>int</code>	<code>1</code>	Logical heading level: 1 = chapter, 2 = section, etc. Automatically adjusts when <code>enable-parts: true</code> .

3 Notes

- Returns `[]` (empty content) if no matching heading has appeared on or before the current page — safe to use from page 1.
- When `enable-parts: true`, the internal heading levels are shifted by one, so `level: 1` still means “chapter” from the caller’s perspective.
- The returned title matches the outline title (includes numbering prefix).

Unnumbered Headings

Any heading function accepts `numbered: false` to suppress both the display number and its increment from the display counter. The heading still appears in the document, the outline, and bookmarks — it simply has no number.

1 Behavior in 0.2.7

Before 0.2.7, calling `#chapter(numbered: false)[Preface]` would skip the display number but still advance the internal display counter, so the next numbered chapter would jump from e.g. Chapter 1 to Chapter 3. Since 0.2.7, the display counter is **not** incremented for unnumbered headings.

The **occurrence counter** (used for page-break logic) is always incremented, so automatic page breaks still fire correctly even for unnumbered headings.

2 Example

```
#chapter(numbered: false)[Preface] // no number, counter stays at 0
#chapter[Introduction]             // displays as "Chapter 1"
#chapter[Methods]                  // displays as "Chapter 2"
```

3 With beautitled-init

Native headings can be made unnumbered with `heading(numbering: none):`

```
#show: beautitled-init
```

```
#heading(level: 1, numbering: none)[Preface] // unnumbered chapter
= Introduction                             // Chapter 1
```

Note: when using the show-rule approach the numbered parameter is controlled by the native heading's numbering field rather than a `numbered: argument`.

French Colon Spacing

beautitled includes a `colon-space()` helper that inserts a non-breaking space before a colon when the document language is French (`text.lang == "fr"`), and nothing otherwise. This is used automatically in heading labels and outline titles; you do not normally need to call it directly.

The helper is exported from the package for cases where you want consistent colon spacing in your own content:

```
#import "@preview/beautitled:0.3.1": colon-space
```

Question#`colon-space()`: Why?

When `lang: "fr"` is set via `#set text(lang: "fr")`, this renders as “Question : Why?” (with the required typographic thin-space before the colon). In all other languages it renders as “Question: Why?” (no extra space).

Tips and Best Practices

1 Choosing a Style

- **For lower, more deliberate chapter openings:** terrace, anchor
- **For the clearest label-number-title grouping:** anchor
- **For contemporary books and essays:** folio
- **For math/science textbooks:** titled, schoolbook, textbook, academic
- **For course notes:** notes, clean, minimal
- **For formal academic papers:** scholarly, classical, academic
- **For creative projects:** creative, modern, magazine
- **For classic book feel:** vintage, elegant

2 Print Considerations

All styles are designed to be print-friendly:

- No heavy background fills
- Thin strokes and borders
- High contrast text
- Minimal ink usage

3 Combining with Other Packages

beautitiled works well with other Typst packages. Just make sure to call `beautitiled-setup` after importing the package.

beautitiled keeps the native `counter(heading)` synchronized with its internal counters, so packages that read the heading counter (theorem numbering, exercise-bank's `number-prefix: "heading"`, running headers) work without configuration, in both `native = Heading` mode and direct function-call mode. Without `parts`, the first component of `counter(heading)` is the chapter number; with `enable-parts: true` it is the part number (the chapter comes second) — packages reading only the first component should use the exported `chapter-counter` in that case.

Changelog

1 Version 0.3.1

- Native `@label` references to beautitled headings under `beautitled-init`; `@label[Sec.]` replaces the prefix word
- New `beautitled-show-ref` show rule for direct heading calls without `beautitled-init`
- New `supplement` parameter on `beautitled-ref`; new `subsection-prefix` and `subsubsection-prefix` options
- Fixed `beautitled-ref` on native headings (numbers were one short) and with custom numbering patterns

2 Version 0.3.0

- Added three next-generation styles: `folio`, `terrace`, and `anchor`
- Added spacing-aware chapter-opening profiles for `terrace` and `anchor`
- Added matching part and table-of-contents rendering for each new style
- Added separate `beautitled-next-styles` and `beautitled-legacy-styles` registries
- New styles honor the existing `heading-font` configuration
- Native `counter(heading)` is now kept in sync with the internal counters (previously it stayed at zero), for interoperability with `heading-counter` consumers
- Kept all 19 legacy renderers and the `titled` default unchanged

3 Version 0.2.7

- New `beautitled-header(level:)` function for running page headers
- `numbered: false` no longer advances the display counter (unnumbered headings are truly unnumbered)
- `colon-space()` helper exported for French typographic colon spacing
- French colon spacing applied to part outline titles

| 4 Version 0.2.0

- Initial release
- 19 styles
- Full configuration support
- Native Typst heading support
- Language presets
- Color themes
- Styled Table of Contents
- Page break support

Style Showcase

3 next-generation + 19 legacy styles


folio




terrace spacing-first




anchor clarity-first

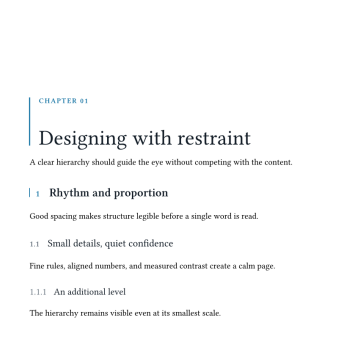


titled

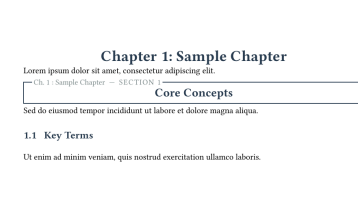


classic

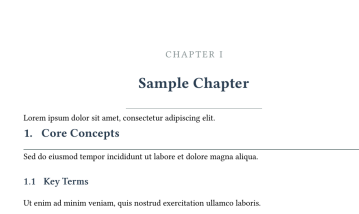


modern

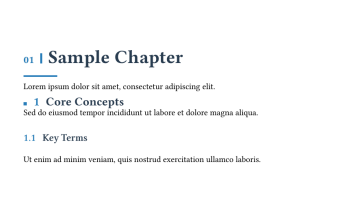


elegant

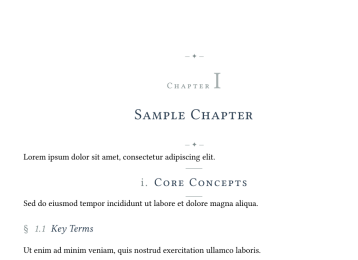

bold

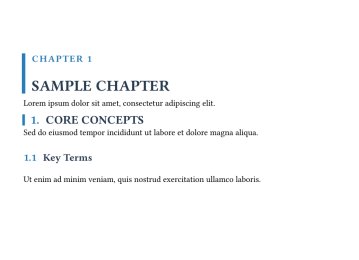

creative

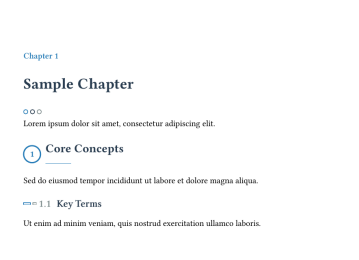

minimal



vintage



schoolbook



0 1

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

+ + +

Chapter

I

Sample Chapter

– ♡ –

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

⦿ 1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

Chapter 1 — Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1. Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

notes

Chapter 1 | Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1. Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

clean

1. Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1. Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

technical

CHAPTER 1

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

academic

Chapter 1

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

textbook

1 CHAPTER

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

scholarly

CHAPTER I

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1. Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

classical

Chapter 1

SAMPLE CHAPTER

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

§1. Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

educational

1

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1.1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

structured

1 Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

1 Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1.1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.

magazine

01

CHAPTER

Sample Chapter

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

SECTION 1

Core Concepts

Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

1 Key Terms

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris.