

simple-plot

Typst Package

Mathematical Function Plotting

A lightweight library for creating elegant mathematical plots

Version 0.9.0

Nathan Scheinmann

Contents

1. Introduction	4
1.1. Features	4
1.2. Installation	4
1.3. Quick Start	4
2. Basic Usage	5
2.1. Plotting Functions	5
2.2. Mathematical Functions Reference	5
2.3. Function Domain	7
2.4. Function Labels	8
2.5. Data Points and Scatter Plots	8
3. Grid Options	10
3.1. Grid Modes	10
3.2. Minor Grid Subdivisions	10
3.3. Grid Label Break	12
4. Axis Configuration	13
4.1. Axis Position	13
4.2. Axis Extension	13
5. Tick Configuration	14
5.1. Default Integer Ticks	14
5.2. Custom Tick Step	14
5.3. Tick Label Step	16
5.4. Unit Label Only	16
5.5. Custom Tick Positions	18
5.6. Hide Origin Label	18
6. Markers	19
6.1. Available Marker Types	19
6.2. Using Markers	20
7. Convenience Functions	21
7.1. <code>plot-fn</code> - Quick Function Plot	21
7.2. <code>scatter / data</code> - Point Sets	21
7.3. <code>line-plot</code> - Connected Line Plot	22
7.4. <code>func-plot</code> - Function Plot Helper	22
7.5. <code>parametric</code> - Ellipses and Hyperbolas	23
7.6. <code>fill-area</code> - Fill Under a Curve	23
7.7. <code>area-between</code> - Fill Between Two Curves	24
7.8. <code>fill-closed</code> - Fill a Parametric Closed Curve	25
7.9. <code>vline / hline</code> - Reference Lines	25
7.10. <code>note</code> - Text Annotation	26
7.11. <code>riemann-sum</code> - Riemann Sum Rectangles	27
7.12. <code>volume-of-revolution</code> - Volume of revolution diagram	29
8. Global Configuration	31
8.1. Setting Defaults	31
8.2. Resetting Defaults	31
9. Styling	32
9.1. Custom Styles	32
9.2. Default Style Values	32
10. Parameter Reference	34
10.1. <code>plot</code> Function	34
10.2. Function/Data Specification	36
10.3. <code>riemann-sum</code> Function	37
10.4. <code>volume-of-revolution</code> Function	38

11. Complete Examples	39
11.1. Trigonometric Functions	39
11.2. Polynomial with Fine Grid	40
11.3. Minimal Style Plot	41
11.4. Data with Trend Line	42

1. Introduction

`simple-plot` is a Typst package for creating clean, elegant mathematical plots. Built on CeTZ, it provides an intuitive interface for plotting functions, data points, and creating publication-ready graphs.

1.1. Features

- Plot mathematical functions with automatic sampling
- Parametric curves (ellipses, hyperbolas, closed shapes)
- Scatter plots and line plots with customizable markers
- Fill areas under curves or between two curves (solid or hatched)
- Clean integer-based tick system by default
- Major and minor grid with elegant styling
- Gap-based grid line breaks around tick labels (`grid-label-break`)
- Automatic axis extension beyond grid
- Flexible axis positioning (origin, bottom/left, custom)
- Multiple label display options (`unit-label-only`, `label-step`)
- Function labels with flexible positioning
- Text annotations and reference lines (`vline`, `hline`)
- Riemann sum rectangles with left, right, midpoint, lower, and upper methods
- Volume of revolution diagrams with end caps, disks, and tilted axes
- Clipping for clean rendering at boundaries
- Global defaults and style overrides

1.2. Installation

Import the package in your Typst document:


```
#import "@preview/simple-plot:0.9.0": plot
```

1.3. Quick Start

Code

```
#plot(  
  width: 6, height: 5,  
  xmin: -3, xmax: 3, ymin: -2, ymax: 4,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  show-grid: true,  
  (fn: x => x * x, stroke: blue + 1.5pt),  
)
```

Preview

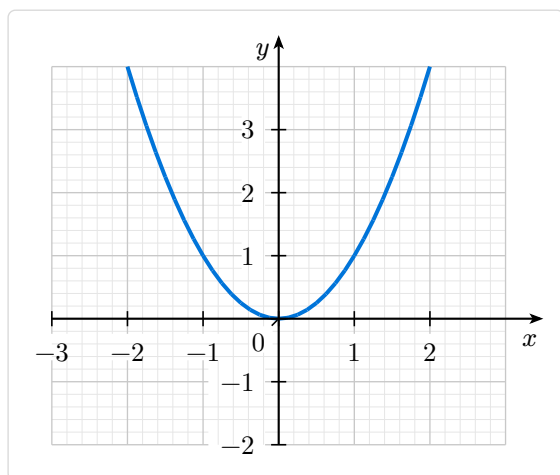

2. Basic Usage


2.1. Plotting Functions

Plot mathematical functions by passing a dictionary with `fn`:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: -4, xmax: 4, ymin: -1.5, ymax: 1.5,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  show-grid: "major",  
  (fn: x => calc.sin(x), stroke: blue + 1.5pt),  
  (fn: x => calc.cos(x), stroke: red + 1.5pt),  
)
```

Preview

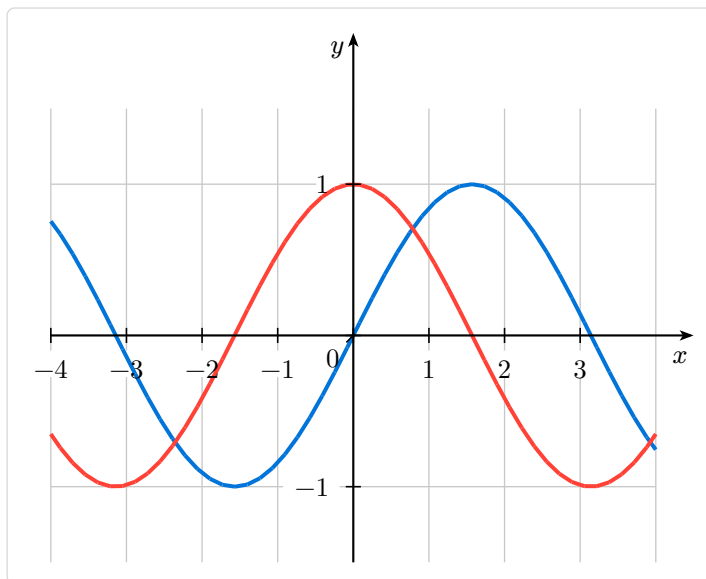

2.2. Mathematical Functions Reference

Functions are defined using Typst's `calc` module. Here are the most common mathematical functions:

Function	Typst syntax
Power x^n	<code>calc.pow(x, n)</code>
Square root $\sqrt{x}$	<code>calc.sqrt(x)</code>
Absolute value $ x $	<code>calc.abs(x)</code>
Sine $\sin(x)$	<code>calc.sin(x)</code>
Cosine $\cos(x)$	<code>calc.cos(x)</code>
Tangent $\tan(x)$	<code>calc.tan(x)</code>
Exponential e^x	<code>calc.exp(x)</code>
Natural log $\ln(x)$	<code>calc.ln(x)</code>
Log base b	<code>calc.log(x, base: b)</code>
Maximum	<code>calc.max(a, b)</code>
Minimum	<code>calc.min(a, b)</code>

Important: When using constants in calculations, use decimal notation (e.g., 2.0 instead of 2) to avoid type errors. For example:

- ✓ $x \Rightarrow x * x / 2.0$
- ✗ $x \Rightarrow x * x / 2$ (*may cause errors*)

This is because Typst's type system requires consistent float arithmetic.

To draw a function with a hole or discontinuity, return **none** from the function at that point — the line will break without connecting across the gap:

```
// Draws 1/x with a break at x=0
(fn: x => if calc.abs(x) < 0.01 { none } else { 1.0 / x }, stroke: blue + 1.5pt)
```


2.3. Function Domain

Specify a custom domain for functions:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: 0, xmax: 5, ymin: 0, ymax: 3,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  axis-x-pos: "bottom", axis-y-pos: "left",  
  show-grid: "major",  
  (fn: x => calc.sqrt(x), domain: (0, 5), stroke: blue + 1.5pt),  
)
```

Preview

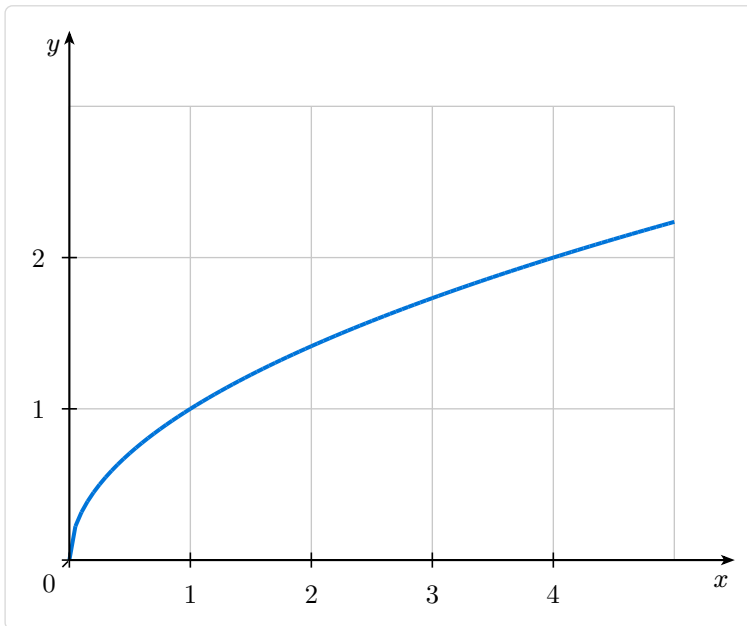


2.4. Function Labels

Add labels to your functions:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: -3, xmax: 3, ymin: -2, ymax: 4,  
  xlabel: $x$, ylabel: $y$,  
  show-grid: "major",  
  (  
    fn: x => x * x,  
    stroke: blue + 1.5pt,  
    label: $f(x) = x^2$,  
    label-side: "above",  
    label-pos: 0.75,  
  ),  
)
```

Preview

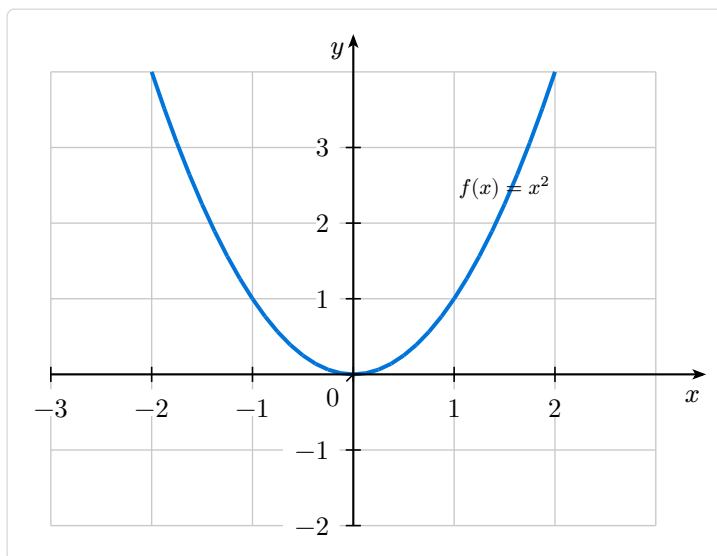


2.5. Data Points and Scatter Plots

Plot discrete data points:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: 0, xmax: 6, ymin: 0, ymax: 10,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  axis-x-pos: "bottom", axis-y-pos: "left",  
  show-grid: "major",  
  (  
    data: ((1, 2), (2, 4), (3, 5), (4, 7), (5, 9))),  
    mark: "o",  
    mark-size: 0.15,  
    stroke: blue + 1pt,  
  ),  
)
```

Preview

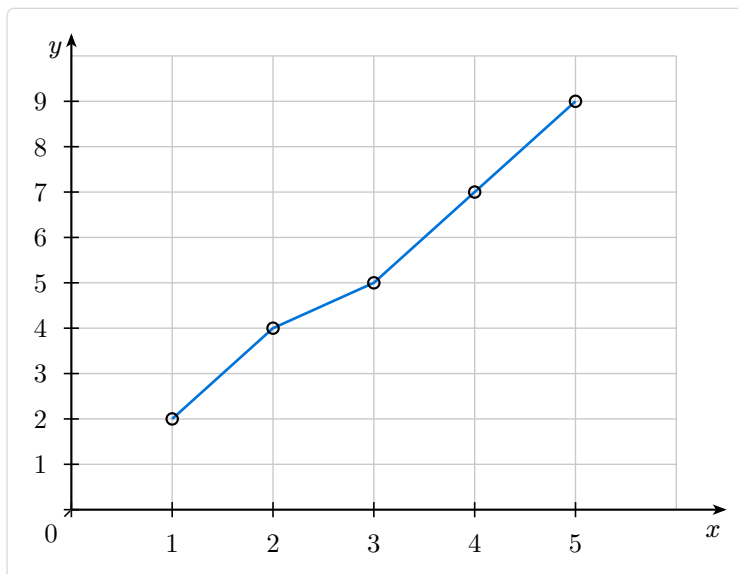

3. Grid Options

3.1. Grid Modes

Control grid display with `show-grid`:




Code

```
// Major grid only
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-grid: "major",
)

// Minor grid only
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-grid: "minor",
)

// Both grids
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-grid: "both",
)
```

Preview




3.2. Minor Grid Subdivisions

Control the number of subdivisions with `minor-grid-step`:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: 0, xmax: 4, ymin: 0, ymax: 3,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  axis-x-pos: "bottom", axis-y-pos: "left",  
  show-grid: "both",  
  minor-grid-step: 10, // 10 subdivisions per unit  
  (fn: x => calc.sqrt(x), domain: (0, 4), stroke: blue + 1.5pt),  
)
```

Preview

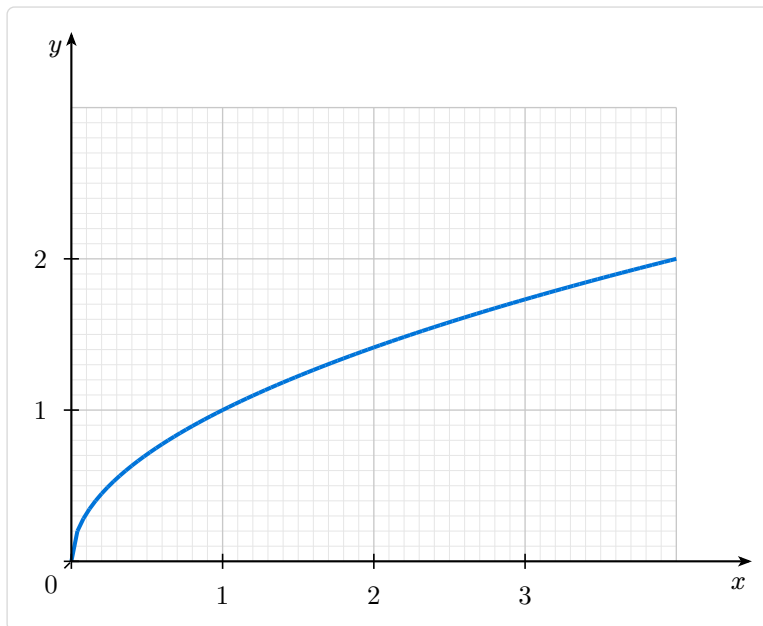


3.3. Grid Label Break

The `grid-label-break` option (enabled by default) draws grid lines with gaps around tick labels, creating an elegant break effect. Unlike a white-box approach, this works on any background color:

Code

```
#plot(  
  width: 10, height: 8,  
  xmin: -4, xmax: 4, ymin: -3, ymax: 3,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  show-grid: "both",  
  minor-grid-step: 5,  
  grid-label-break: true, // Default  
  (fn: x => calc.sin(x) * 2, stroke: blue + 1.5pt),  
)
```

Preview

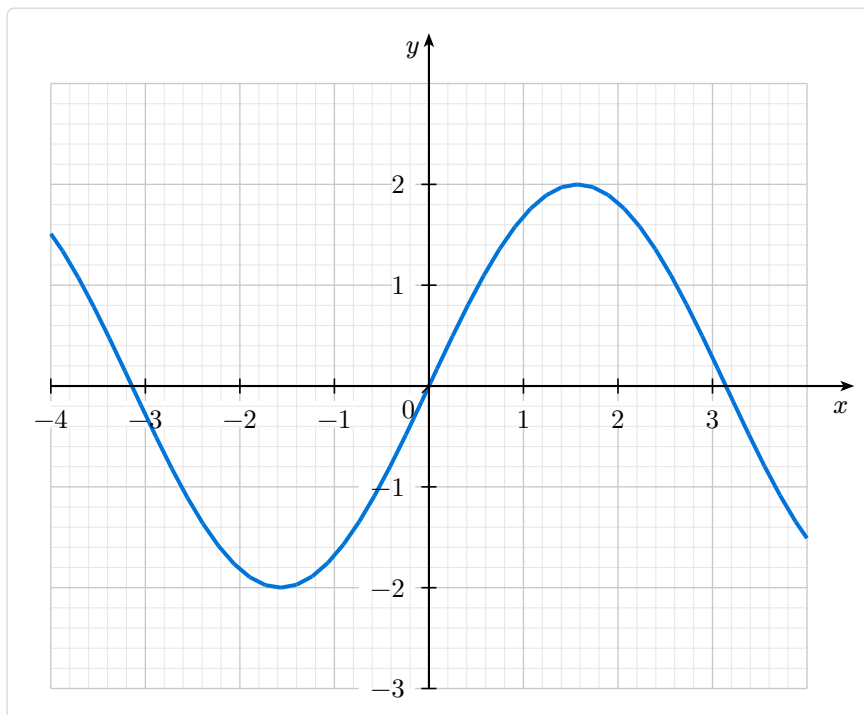

4. Axis Configuration

4.1. Axis Position


Position axes at origin (default), bottom/left, or custom values:

Code

```
// Through origin (default)
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-grid: "major",
)

// Bottom and left
#plot(
  width: 5, height: 4,
  xmin: 0, xmax: 4, ymin: 0, ymax: 3,
  axis-x-pos: "bottom",
  axis-y-pos: "left",
  show-grid: "major",
)
```

Preview

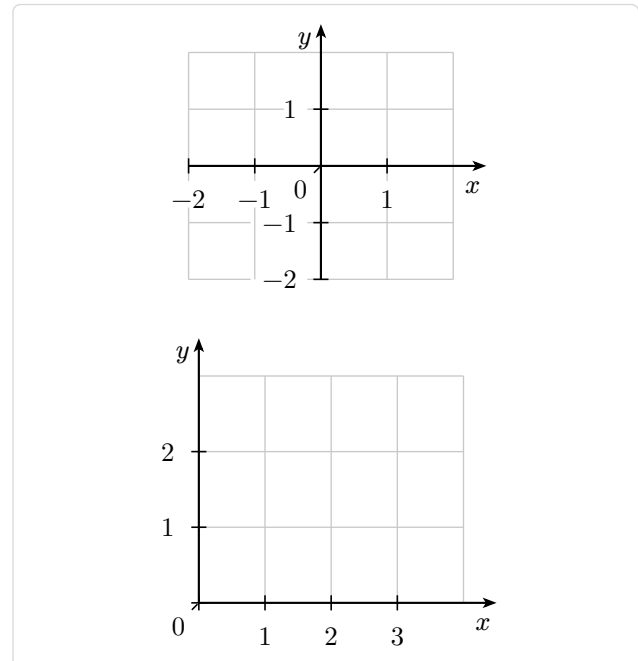

4.2. Axis Extension


By default, axes extend 0.5 units beyond the grid on the arrow side. Customize with `axis-x-extend` and `axis-y-extend`:

Code

```
// Default extension (0, 0.5)
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-grid: "major",
)

// Custom extension
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  axis-x-extend: (0.5, 1),
  axis-y-extend: (0.5, 1),
  show-grid: "major",
)
```

Preview

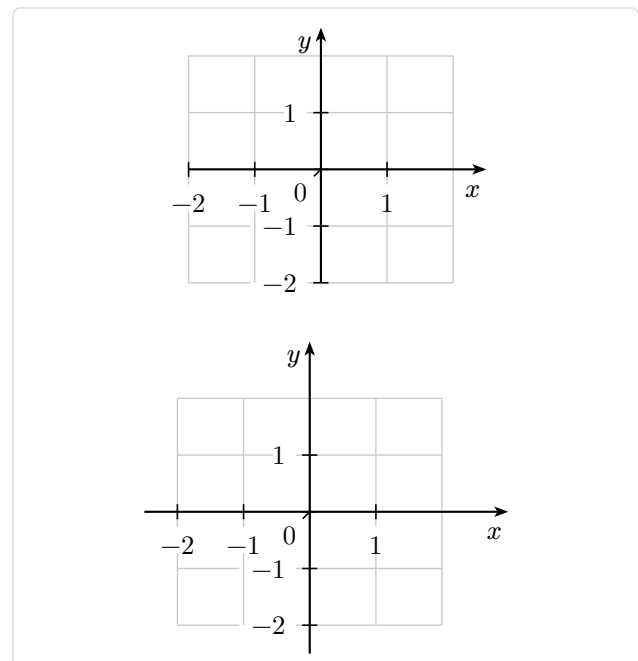

5. Tick Configuration


5.1. Default Integer Ticks

By default, ticks are placed at every integer (step = 1):

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: -3, xmax: 4, ymin: -2, ymax: 3,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  show-grid: "major",  
  (fn: x => x, stroke: blue + 1.5pt),  
)
```

Preview

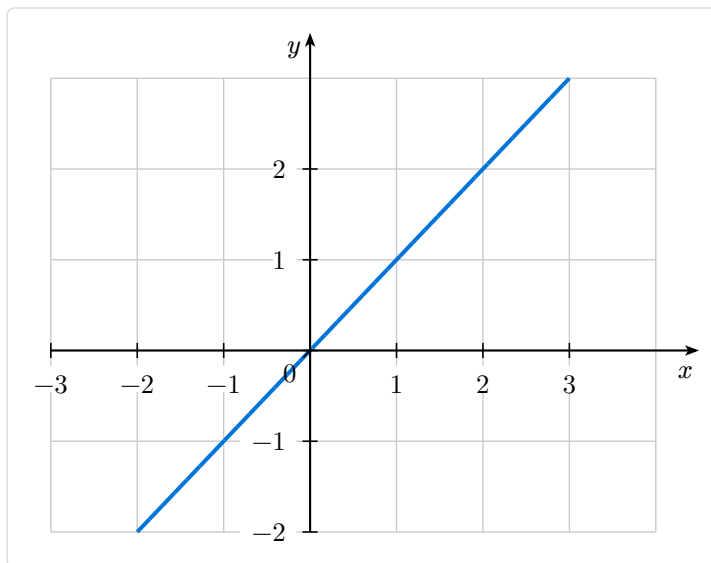


5.2. Custom Tick Step

Change tick spacing with `xtick-step` and `ytick-step`:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: 0, xmax: 3, ymin: 0, ymax: 2,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  axis-x-pos: "bottom", axis-y-pos: "left",  
  xtick-step: 0.5,  
  ytick-step: 0.5,  
  show-grid: "major",  
  (fn: x => x * x / 3, stroke: blue + 1.5pt),  
)
```

Preview

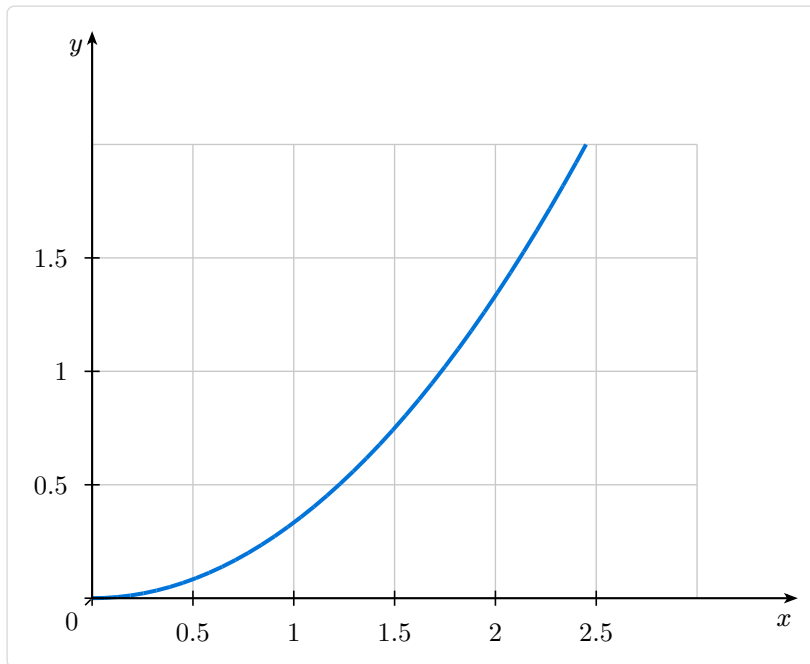


5.3. Tick Label Step

Show labels only at every N-th tick with `xtick-label-step` and `ytick-label-step`:

Code

```
#plot(
  width: 8, height: 6,
  xmin: -6, xmax: 6, ymin: -4, ymax: 4,
  xlabel:  $x$ , ylabel:  $y$ ,
  xtick-label-step: 2, // Labels at -6, -4, -2, 2, 4, 6
  ytick-label-step: 2, // Labels at -4, -2, 2, 4
  show-grid: "major",
  (fn: x => calc.sin(x) * 3, stroke: blue + 1.5pt),
)
```

Preview

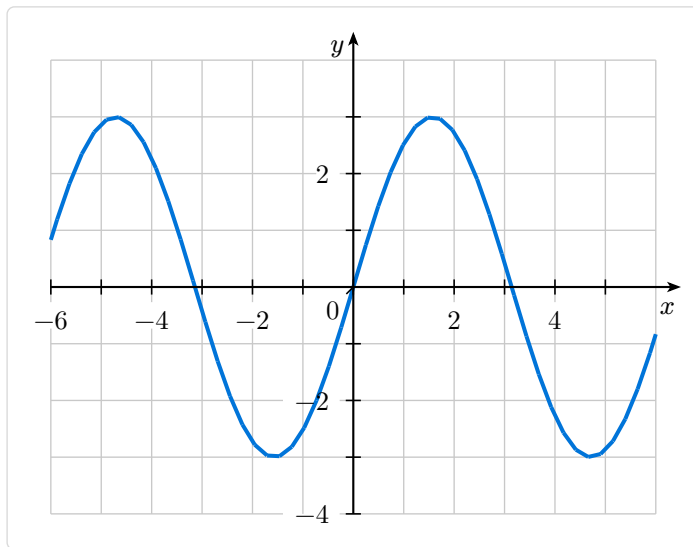


5.4. Unit Label Only

Show only “1” on each axis for a minimal style:

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: -3, xmax: 3, ymin: -3, ymax: 3,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  unit-label-only: true,  
  show-origin: false,  
  show-grid: "major",  
  (fn: x => x * x - 1, stroke: blue + 1.5pt),  
)
```

Preview

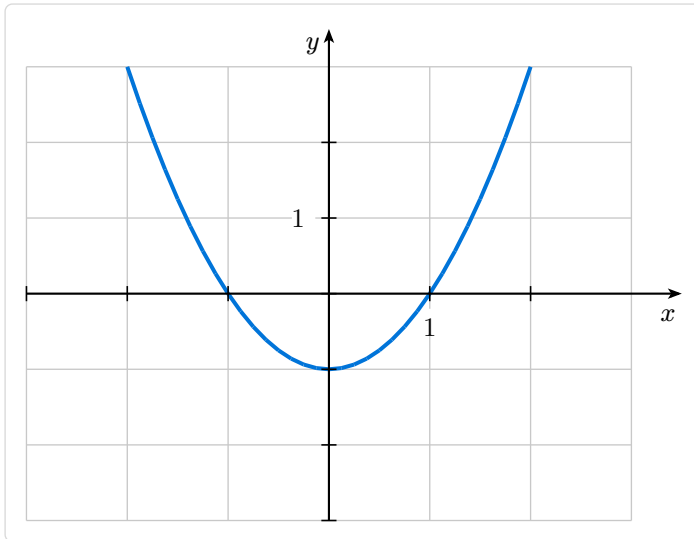


5.5. Custom Tick Positions

Specify exact tick positions with `xtick` and `ytick`:

Code

```
#plot(
  width: 8, height: 6,
  xmin: -4, xmax: 4, ymin: -2, ymax: 2,
  xlabel:  $x$ , ylabel:  $y$ ,
  xtick: (-calc.pi, -calc.pi/2, 0, calc.pi/2, calc.pi),
  xtick-labels: ( $-\pi$ ,  $-\pi/2$ ,  $0$ ,  $\pi/2$ ,  $\pi$ ),
  show-grid: "major",
  (fn: x => calc.sin(x), stroke: blue + 1.5pt),
)
```

Preview

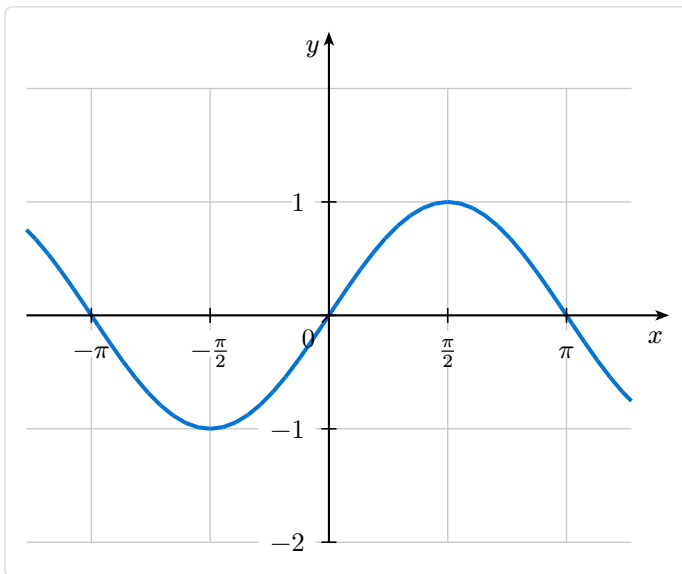

5.6. Hide Origin Label



Control the “0” label at the origin:

Code

```
// With origin (default)
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-origin: true,
  show-grid: "major",
)

// Without origin
#plot(
  width: 5, height: 4,
  xmin: -2, xmax: 2, ymin: -2, ymax: 2,
  show-origin: false,
  show-grid: "major",
)
```

Preview



6. Markers

6.1. Available Marker Types

The following markers are available:


Marker	Description
"o"	Circle (outline)
"*"	Circle (filled)
"square"	Square (outline)
"square*"	Square (filled)
"triangle"	Triangle up (outline)
"triangle*"	Triangle up (filled)
"diamond"	Diamond (outline)
"diamond*"	Diamond (filled)
"star"	Star (outline)
"star*"	Star (filled)
"+"	Plus sign
"x"	Cross
" "	Vertical bar
"_"	Horizontal bar

6.2. Using Markers

Code

```
#plot(  
  width: 8, height: 6,  
  xmin: 0, xmax: 7, ymin: 0, ymax: 5,  
  axis-x-pos: "bottom", axis-y-pos: "left",  
  show-grid: "major",  
  data(((1, 1), (2, 2), (3, 2.5))), mark: "o", mark-stroke: blue),  
  data(((1, 2), (2, 3), (3, 3.5))), mark: "square*", mark-fill: red, mark-stroke: red),  
  data(((1, 3), (2, 4), (3, 4.2))), mark: "triangle", mark-stroke: green),  
)
```

Preview

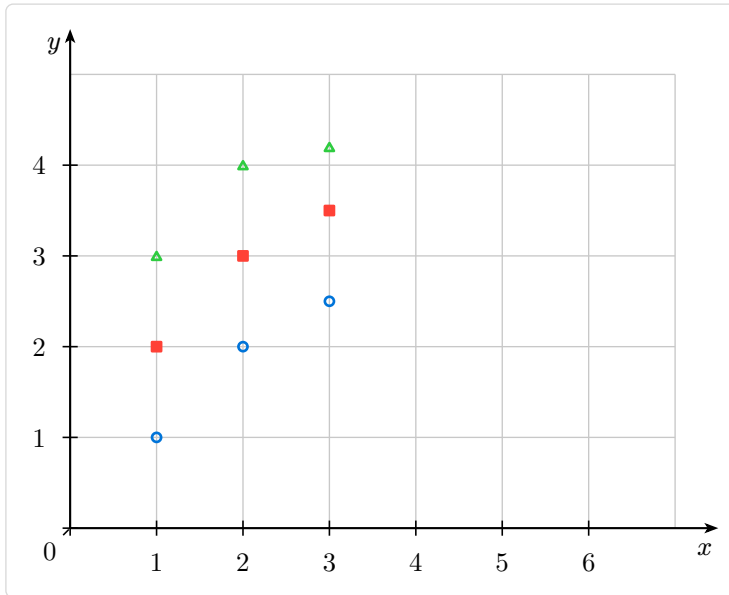

7. Convenience Functions


7.1. plot-fn - Quick Function Plot

Plot a single function with automatic y-scaling:

Code

```
#plot-fn(  
  x => calc.sin(x) * 2.0,  
  domain: (-4, 4),  
  stroke: blue + 1.5pt,  
)
```

Preview

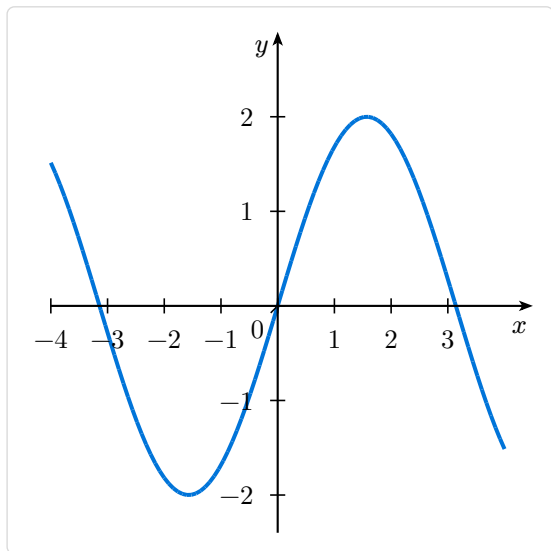

Parameters:

Parameter	Type	Default	Description
fn	function	—	Function to plot
domain	array	(-5, 5)	X domain
ymin / ymax	float/auto	auto	Y bounds; auto = computed from samples
stroke	stroke	blue + 1.2pt	Line style
..args	any	—	Forwarded to plot()

7.2. scatter / data - Point Sets

scatter and data are identical functions. Use them to create isolated point specifications. Set **connect: true** to join points with a line.

```
#plot(  
  xmin: 0, xmax: 4, ymin: 0, ymax: 6,  
  scatter(((1, 2), (2, 4), (3, 5))), mark: "o", mark-fill: blue),  
  data(((1, 1.5), (2, 3.5), (3, 4.5))), mark: "*", mark-fill: red),  
)
```

Parameters (both functions):

Parameter	Type	Default	Description
-----------	------	---------	-------------

points	array	—	Array of (x, y) tuples
mark	string	"*"	Marker type
mark-size	float	0.12	Marker size in cm
mark-fill	color	blue	Marker fill color
mark-stroke	stroke	blue + 0.8pt	Marker stroke
connect	bool	false	Join points with a line
stroke	stroke	none	Line stroke when connect: true
label	content	none	Series label
label-pos	float	0.8	Position along series in [0, 1]
label-anchor	string	"south-west"	Label anchor

7.3. line-plot - Connected Line Plot

Create a line plot with markers (points joined by default):

```
#plot(
  xmin: 0, xmax: 4, ymin: 0, ymax: 6,
  line-plot(((1, 2), (2, 4), (3, 5))), stroke: blue + 1pt, mark: "o"),
)
```

Parameters:

Parameter	Type	Default	Description
points	array	—	Array of (x, y) tuples
stroke	stroke	blue + 1.2pt	Line stroke
mark	string	"o"	Marker type
mark-size	float	0.1	Marker size in cm
mark-fill	color	white	Marker fill
mark-stroke	stroke	blue + 0.8pt	Marker stroke
label	content	none	Series label
label-pos	float	0.8	Position along series in [0, 1]
label-anchor	string	"south-west"	Label anchor

7.4. func-plot - Function Plot Helper

Build a function series spec with full marker and label control:

```
#let my-func = func-plot(
  x => calc.sin(x),
  stroke: blue + 1.5pt,
  label: $sin(x)$,
  mark: "o",
  mark-interval: 15, // marker every 15th sample
)
#plot(xmin: -4, xmax: 4, ymin: -1.5, ymax: 1.5, my-func)
```

Parameters:

Parameter	Type	Default	Description
fn	function	—	Function to plot
domain	array/auto	auto	X domain; auto = full plot range
stroke	stroke	blue + 1.2pt	Line style
samples	int	100	Sample count
mark	string	"none"	Marker type
mark-size	float	0.1	Marker size in cm
mark-fill	color	blue	Marker fill
mark-stroke	stroke	blue + 0.8pt	Marker stroke
mark-interval	int	10	Draw a marker every N-th sample
label	content	none	Curve label
label-pos	float	0.8	Position in [0, 1]
label-anchor	string	"south-west"	Label anchor

7.5. parametric - Ellipses and Hyperbolas

Draw curves that are not single-valued functions of x , such as ellipses:

```
#plot(
  xmin: -3, xmax: 3, ymin: -2, ymax: 2,
  parametric(t => 2 * calc.cos(t), t => calc.sin(t), domain: (0, 2 * calc.pi)),
)
```

For a hyperbola branch, use a finite parameter interval:

```
#plot(
  xmin: -4, xmax: 4, ymin: -3, ymax: 3,
  parametric(t => (calc.exp(t) + calc.exp(-t)) / 2, t => (calc.exp(t) - calc.exp(-t)) / 2,
  domain: (-1.5, 1.5)),
  parametric(t => -(calc.exp(t) + calc.exp(-t)) / 2, t => (calc.exp(t) - calc.exp(-t)) / 2,
  domain: (-1.5, 1.5)),
)
```

Parameters:

Parameter	Type	Default	Description
fn-x	function	—	X coordinate as function of t
fn-y	function	—	Y coordinate as function of t
domain	array	(0.0, 1.0)	Parameter range (t_1, t_2)
stroke	stroke	blue + 1.2pt	Curve stroke
samples	int	100	Number of parameter samples

7.6. fill-area - Fill Under a Curve

Fill the region between a function and a baseline (default: $y = 0$):

```
#plot(
  xmin: 0, xmax: calc.pi, ymin: -0.2, ymax: 1.2,
```

```
fill-area(x => calc.sin(x), domain: (0, calc.pi), color: blue.lighten(70%)),
(fn: x => calc.sin(x), domain: (0, calc.pi), stroke: blue + 1.5pt),
)
```

Use **baseline** for a non-zero base level, or **hatch** for hatched fills:

```
fill-area(x => calc.sin(x), domain: (0, calc.pi),
  hatch: "ne", hatch-spacing: 5pt, hatch-stroke: blue + 0.5pt)
```

Parameters:

Parameter	Type	Default	Description
fn	function	—	Function $f(x)$ bounding the top of the region
domain	array/auto	auto	X interval; auto = full plot range
baseline	float	0.0	Y-value of the bottom of the region
color	color	luma(220)	Fill color; none for hatch-only
hatch	string/none	none	Hatch pattern: "ne", "nw", "h", "v", "cross", "grid"
hatch-spacing	length	5pt	Spacing between hatch lines
hatch-stroke	stroke	luma(80) + 0.5pt	Hatch line stroke
samples	int	80	Sample count

7.7. area-between - Fill Between Two Curves

Fill the region enclosed by two functions:

```
#plot(
  xmin: -1, xmax: 3, ymin: -1, ymax: 10,
  area-between(x => x * x, x => 3 * x, domain: (0, 3),
    color: green.lighten(60%)),
  (fn: x => x * x, stroke: blue + 1.5pt),
  (fn: x => 3 * x, stroke: red + 1.5pt),
)
```

Parameters:

Parameter	Type	Default	Description
fn1	function	—	First bounding function
fn2	function	—	Second bounding function
domain	array/auto	auto	X interval; auto = full plot range
color	color	luma(220)	Fill color; none for hatch-only
hatch	string/none	none	Hatch pattern
hatch-spacing	length	5pt	Hatch line spacing
hatch-stroke	stroke	luma(80) + 0.5pt	Hatch line stroke
samples	int	80	Sample count

7.8. fill-closed - Fill a Parametric Closed Curve

Fill the interior of a closed parametric curve (the curve should start and end at the same point):

```
#plot(
  xmin: -3, xmax: 3, ymin: -2, ymax: 2,
  fill-closed(t => 2 * calc.cos(t), t => calc.sin(t),
    domain: (0, 2 * calc.pi), color: blue.lighten(70%)),
  parametric(t => 2 * calc.cos(t), t => calc.sin(t),
    domain: (0, 2 * calc.pi), stroke: blue + 1.5pt),
)
```

Parameters:

Parameter	Type	Default	Description
fn-x	function	—	X coordinate as function of t
fn-y	function	—	Y coordinate as function of t
domain	array	(0.0, 1.0)	Parameter range; curve should be closed
color	color	luma(220)	Fill color; none for hatch-only
hatch	string/none	none	Hatch pattern
hatch-spacing	length	5pt	Hatch line spacing
hatch-stroke	stroke	luma(80) + 0.5pt	Hatch line stroke
samples	int	80	Sample count

7.9. vline / hline - Reference Lines

Draw vertical or horizontal reference lines at a fixed coordinate:

```
#plot(
  xmin: -3, xmax: 3, ymin: -2, ymax: 4,
  (fn: x => x * x - 1, stroke: blue + 1.5pt),
  vline(1.0, stroke: red + 0.8pt + (dash: "dashed")),
  hline(0.0, stroke: gray + 0.8pt),
)
```

Use ymin/ymax (for vline) or xmin/xmax (for hline) to draw partial lines:

```
vline(2.0, ymin: 0, ymax: 4)           // vertical from y=0 to y=4
hline(1.5, xmin: 0, xmax: 3)          // horizontal from x=0 to x=3
```

vline parameters:

Parameter	Type	Default	Description
x0	float	—	X position of the line
stroke	stroke	luma(100) + 0.6pt	Line stroke
ymin	float/auto	auto	Bottom y limit (default: plot ymin)
ymax	float/auto	auto	Top y limit (default: plot ymax)

hline parameters:

Parameter	Type	Default	Description
-----------	------	---------	-------------

y0	float	—	Y position of the line
stroke	stroke	luma(100) + 0.6pt	Line stroke
xmin	float/auto	auto	Left x limit (default: plot xmin)
xmax	float/auto	auto	Right x limit (default: plot xmax)

7.10. note - Text Annotation

Place a text annotation at a data-coordinate position:

```
#plot(
  xmin: -3, xmax: 3, ymin: -2, ymax: 4,
  (fn: x => x * x - 1, stroke: blue + 1.5pt),
  note([$f(x) = x^2 - 1$], pos: (1.5, 2.5), anchor: "west", size: 9pt),
)
```

Parameters:

Parameter	Type	Default	Description
body	content	—	Annotation text or content
pos	array	—	(x, y) in data coordinates
anchor	string	“center”	Text anchor point
size	length	9pt	Font size

7.11. riemann-sum - Riemann Sum Rectangles

Draw left, right, midpoint, lower, or upper Riemann sum rectangles for a function. Use it as a plot item alongside the function curve or fill-area.

The five methods:


- "left" / "right" / "mid" — evaluation at the left endpoint, right endpoint, or midpoint of each sub-interval
- "lower" / "upper" — true infimum / supremum sampled within each sub-interval; correct for any function shape including U-curves

7.11.1. Basic Example

Code

```
#plot(
  width: 8, height: 5,
  xmin: 0, xmax: calc.pi, ymin: 0, ymax: 1.2,
  axis-x-pos: "bottom", axis-y-pos: "left",
  riemann-sum(
    x => calc.sin(x),
    domain: (0.0, calc.pi),
    n: 6, method: "mid",
    color: blue.lighten(75%),
  ),
  (fn: x => calc.sin(x), domain: (0.0, calc.pi), stroke: blue + 1.5pt),
)
```


Preview

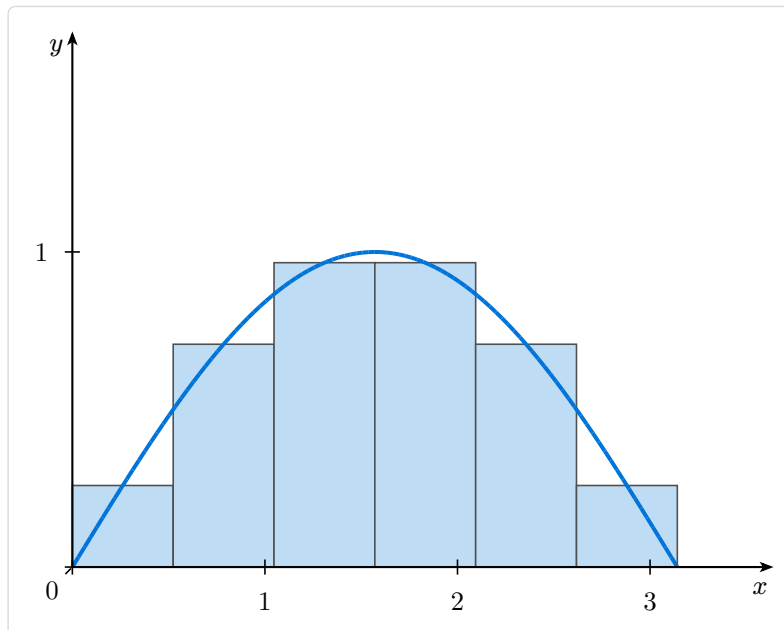

7.11.2. Annotations: show-points, show-dx, show-xi

Turn on the annotation overlays for pedagogical diagrams:

```
riemann-sum(
  x => x * x,
  domain: (0.0, 3.0),
  n: 6, method: "right",
  color: blue.lighten(80%),
  show-points: true,           // dots at evaluation points with arrows
  show-dx: true, dx-rect: 2,   // Δx bracket under rectangle 2
  show-xi: true,               // x0 ... x6 labels along the axis
)
```

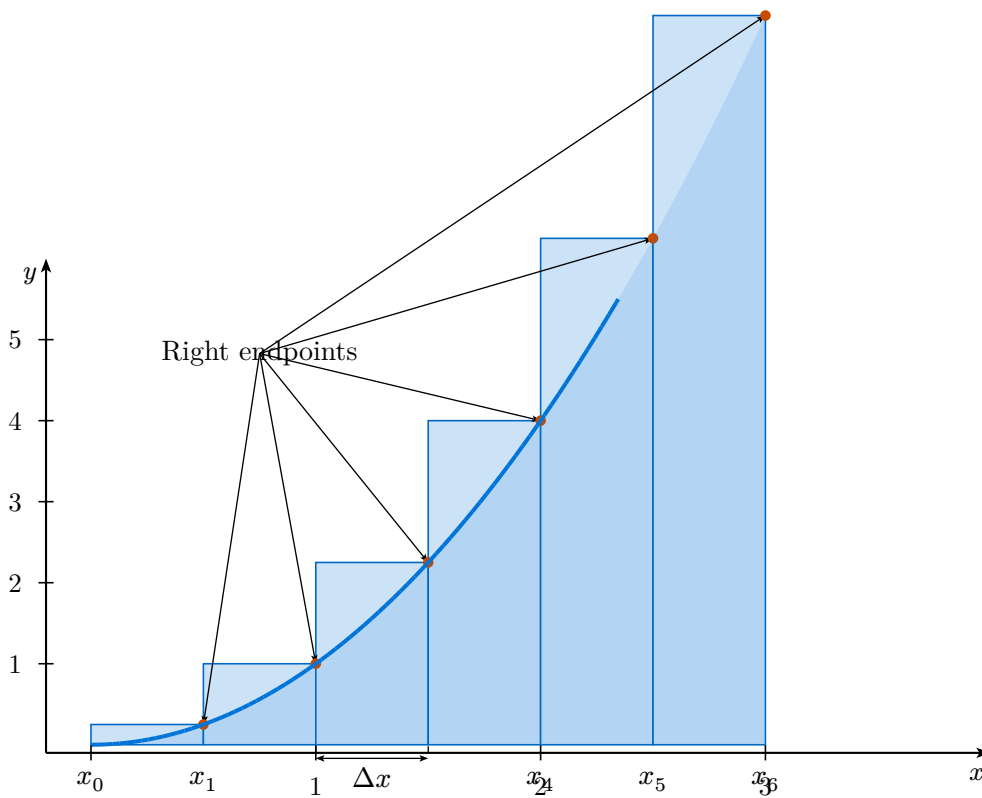

7.11.3. xi-show-values

Set `xi-show-values: true` to display the actual numeric values of the subdivision points instead of the symbolic x_i notation:

```
riemann-sum(fn, domain: (0.0, 4.0), n: 4, method: "left",
            show-xi: true, xi-show-values: true)
```

7.11.4. Hatch patterns

Use `hatch` together with `hatch-spacing` and `hatch-stroke` to draw hatched rectangles. Set `color: none` for hatch-only (no fill):

```
riemann-sum(fn, domain: ..., n: 6, method: "mid",
            color: none,
            hatch: "ne", hatch-spacing: 4pt, hatch-stroke: blue + 0.6pt)
```

Available hatch styles: "ne", "nw", "h", "v", "cross", "grid".

7.12. volume-of-revolution - Volume of revolution diagram


Draw a 3D-style solid generated by rotating a profile $y = f(x)$ around a horizontal or oblique axis. The renderer draws the filled body, front and back cap ellipses, intermediate disk cross-sections, axis arrow, coordinate y-axis, and optional labels.

7.12.1. Basic Example

Code

```
#volume-of-revolution(  
  x => calc.sqrt(x),  
  domain: (0.0, 4.0),  
  n-disks: 5,  
  width: 8.0, height: 4.0,  
  show-yaxis: true,  
  label-a: $0$, label-b: $4$,  
  label-f: $f(x)=\sqrt{x}$,  
)
```

Preview

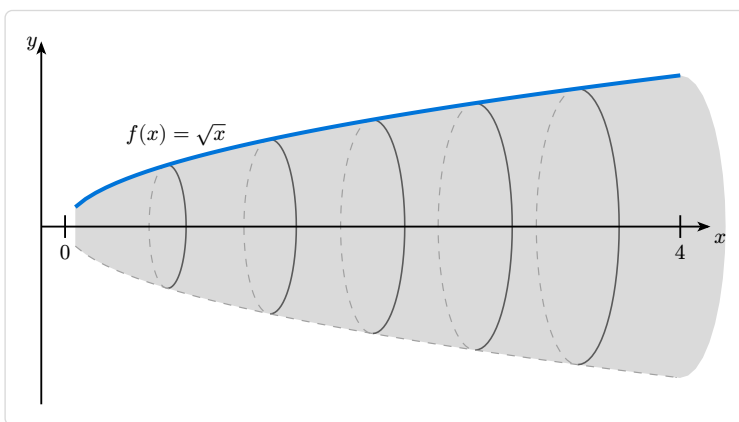


7.12.2. Axis of Revolution


Use `axis-y` to revolve around $y = c$ (shifted horizontal axis), or `axis-slope` for an oblique axis $y = mx +$ `axis-y`:

```
// Around y = 1  
#volume-of-revolution(x => 1.0 + calc.sqrt(x), domain: (0, 4), axis-y: 1.0)  
  
// Around y = x (oblique)  
#volume-of-revolution(x => x * x, domain: (0.01, 2), axis-slope: 1.0)
```

Around $y = 1$

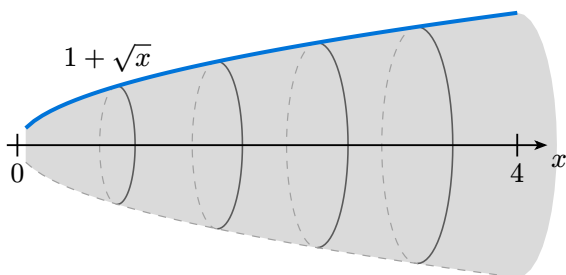

Around $y = x$ (oblique)

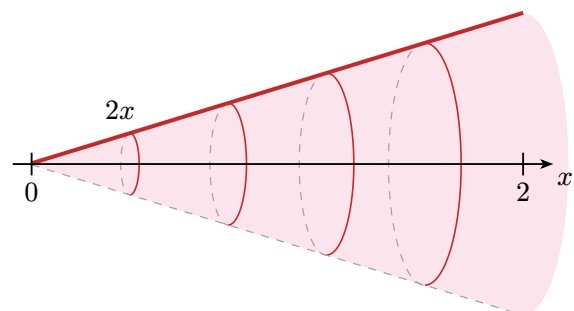

7.12.3. show-back and show-radius-marker

`show-back: false` hides the dashed back half and bottom profile — useful for side-by-side comparisons. `show-radius-marker: true` draws a vertical dimension marker at the y-axis:

```
#volume-of-revolution(fn, domain: ...,
  show-back: false,
  show-radius-marker: true,
  yaxis-x: 2.0,    // place y-axis at x=2, not the auto left position
  label-y:  $\sqrt{2}$ ,
)
```

7.12.4. show-y-axis and y-axis placement

The coordinate y-axis is positioned automatically to the left of the solid by default. Use `y-axis-x` / `yaxis-x` to fix it at a specific x-value, `y-axis-offset` to change the automatic gap, and `y-axis-extend` to control how far the axis extends above and below the solid:

```
#volume-of-revolution(fn, domain: ...,
  show-yaxis: true,
  y-axis-offset: 0.6,          // more gap from the volume
  y-axis-extend: (0.2, 0.5),  // tighter below, more above
)
```

8. Global Configuration

8.1. Setting Defaults

Use `set-plot-defaults` to configure defaults for all subsequent plots. Any `plot` parameter can be used, including `style`:

```
#set-plot-defaults(  
  width: 8,  
  height: 6,  
  show-grid: "both",  
  minor-grid-step: 5,  
  style: (  
    axis: (stroke: navy + 0.8pt, arrow: (symbol: "stealth", fill: navy, scale: 0.55)),  
    ticks: (stroke: navy + 0.6pt, label-fill: navy),  
  ),  
)  
  
// All subsequent plots will use these defaults  
#plot(xmin: -3, xmax: 3, ymin: -2, ymax: 2, ...)
```

Per-call `style`: arguments are merged on top of the default style, so you can override individual properties without restating the full style.

8.2. Resetting Defaults

Reset to original defaults:

```
#reset-plot-defaults()
```

9. Styling

9.1. Custom Styles

Override default styles with the `style` parameter:

```
#plot(  
  xmin: -3, xmax: 3, ymin: -2, ymax: 2,  
  style: (  
    background: (fill: rgb("#202124")),  
    axis: (  
      stroke: white + 1pt,  
      arrow: (symbol: "stealth", fill: white, scale: 0.55),  
    ),  
    grid: (  
      major: (stroke: luma(120) + 0.6pt),  
      minor: (stroke: luma(80) + 0.3pt),  
    ),  
    ticks: (  
      length: 0.12,  
      stroke: white + 0.6pt,  
      label-size: 0.7em,  
      label-fill: white,  
    ),  
    labels: (  
      fill: white,  
    ),  
  ),  
  ...  
)
```

9.2. Default Style Values

Property	Default	Description
background.fill	none	Plot background fill
background.stroke	none	Plot background stroke
axis.stroke	black + 0.8pt	Axis line style
axis.arrow	(symbol: "stealth", fill: black, scale: 0.55)	Arrow head style
grid.major.stroke	luma(200) + 0.5pt	Major grid line style
grid.minor.stroke	luma(230) + 0.3pt	Minor grid line style
ticks.length	0.1	Tick mark length (cm)
ticks.stroke	black + 0.6pt	Tick mark style
ticks.label-size	0.65em	Tick label font size
ticks.label-fill	black	Tick label color
ticks.label-offset	0.15	Distance from tick to label
plot.stroke	blue + 1.2pt	Default function stroke
plot.samples	100	Default sample count
marker.size	0.12	Default marker size
labels.size	0.8em	Axis label font size

<code>labels.fill</code>	<code>black</code>	Axis label color
--------------------------	--------------------	------------------

10. Parameter Reference

10.1. plot Function

Dimensions and Bounds:

Parameter	Type	Default	Description
width	float	6	Plot width in cm
height	float	6	Plot height in cm
scale	float	1	Scale factor for entire plot
xmin	float	−5	Minimum x value
xmax	float	5	Maximum x value
ymin	float	−5	Minimum y value
ymax	float	5	Maximum y value

Axis Configuration:

Parameter	Type	Default	Description
xlabel	content	x	X-axis label
ylabel	content	y	Y-axis label
xlabel-pos	string/array	“end”	“end”, “center”, or (x, y)
ylabel-pos	string/array	“end”	“end”, “center”, or (x, y)
xlabel-anchor	string	“north”	Anchor for x label
ylabel-anchor	string	“east”	Anchor for y label
xlabel-offset	array	(0.0, −0.05)	X label offset (cm)
ylabel-offset	array	(-0.05, 0.0)	Y label offset (cm)
axis-x-pos	string/float	0	“bottom”, “center”, or y-value
axis-y-pos	string/float	0	“left”, “center”, or x-value
axis-x-extend	float/array	(0, 0.5)	X-axis extension (left, right)
axis-y-extend	float/array	(0, 0.5)	Y-axis extension (bottom, top)

Tick Configuration:

Parameter	Type	Default	Description
xtick	array/none	auto	Custom x tick positions
ytick	array/none	auto	Custom y tick positions
xtick-step	float	1	X tick spacing
ytick-step	float	1	Y tick spacing
xtick-labels	array/none	auto	Custom x tick labels
ytick-labels	array/none	auto	Custom y tick labels
xtick-label-step	int	1	Show x label every N ticks
ytick-label-step	int	1	Show y label every N ticks

<code>show-origin</code>	bool	true	Show “0” at origin
<code>origin-label-offset</code>	array	(-0.11, -0.11)	Origin “0” label offset from (0,0) in cm
<code>origin-label-anchor</code>	string	“north-east”	Origin “0” label anchor
<code>origin-leader</code>	bool	true	Draw a subtle leader line from origin label toward (0,0)
<code>origin-leader-stroke</code>	stroke	black + 0.6pt	Origin leader stroke
<code>origin-leader-gap</code>	float	0.025	Gap from (0,0) before leader starts (cm)
<code>origin-leader-end-gap</code>	float	0.025	Gap before the label anchor (cm)
<code>unit-label-only</code>	bool	false	Show only “1” on axes
<code>tick-label-size</code>	length	0.65em	Tick label font size
<code>axis-label-size</code>	length	0.8em	Axis label font size

Grid Configuration:

Parameter	Type	Default	Description
show-grid	bool/string	false	true, false, “major”, “minor”, “both”
minor-grid-step	int	5	Subdivisions per major tick
grid-label-break	bool	true	Break grid lines around labels

Styling:

Parameter	Type	Default	Description
style	dictionary	none	Style overrides (see Styling section)
series	array	none	Pre-built array of series specs (alternative to positional args)

10.2. Function/Data Specification

Each plot item is a dictionary with these fields:

Field	Type	Description
fn	function	Function to plot: $x \Rightarrow y$ (return <code>none</code> to create a hole/discontinuity)
data	array	Data points: $((x_1, y_1), (x_2, y_2), \dots)$
connect	bool	Connect data points with a line (default: <code>true</code> for <code>fn</code> , <code>false</code> for <code>data</code>)
domain	array	Function domain: $(x_{\min}, x_{\max})$
samples	int	Number of samples for function (default: 100)
stroke	stroke	Line style (default: <code>blue + 1.2pt</code>)
mark	string	Marker type (default: <code>"none"</code>)
mark-size	float	Marker size in cm (default: 0.12)
mark-fill	color	Marker fill color (default: black)
mark-stroke	stroke	Marker stroke style (default: <code>black + 0.8pt</code>)
label	content	Label text placed near the curve
label-pos	float	Position along the curve in $[0, 1]$ (default: 1.0)
label-side	string	Label placement relative to curve: <code>"above"</code> , <code>"below"</code> , <code>"left"</code> , <code>"right"</code> , <code>"above-left"</code> , etc.
label-anchor	string	CeTZ anchor override (alternative to <code>label-side</code>)

10.3. riemann-sum Function

Parameter	Type	Default	Description
fn	function	—	Function $f(x)$ to approximate
domain	array	plot range	Interval (a, b); overrides the plot's x-range
n	int	4	Number of rectangles
method	string	"right"	"left", "right", "mid", "lower", "upper"
baseline	float	0.0	Y-level of rectangle bases (default: x-axis)
color	color	luma(220)	Rectangle fill; none for hatch-only
stroke	stroke	luma(80) + 0.6pt	Rectangle border stroke
hatch	string/none	none	Hatch pattern: "ne", "nw", "h", "v", "cross", "grid"
hatch-spacing	length	5pt	Spacing between hatch lines
hatch-stroke	stroke	luma(80) + 0.5pt	Stroke for hatch lines
samples	int	20	Samples per sub-interval for "lower" / "upper" methods
show-points	bool	false	Draw a dot at each evaluation point
point-color	color	rgb("#c94a00")	Dot fill color
point-size	float	0.07	Dot radius in cm
point-label	content/auto/none	auto	Arrow label near dots; auto = method name, none = dots only
point-label-pos	array/auto	auto	(x, y) in data coords; auto = upper-right of dots
show-dx	bool	false	Draw a Δx dimension bracket under one rectangle
dx-rect	int/auto	auto	Rectangle to annotate (0-based); auto = middle rectangle
dx-label	content	Δx	Label displayed inside the bracket
show-xi	bool	false	Draw $x_0, x_1, \dots, x_n$ at subdivision points
xi-labels	array/auto	auto	Custom label array; auto = subscripted x_i notation
xi-show-values	bool	false	Show numeric x-values instead of x_i notation

10.4. volume-of-revolution Function

solid-of-revolution is an alias kept for backward compatibility.

Parameter	Type	Default	Description
fn	function	—	Profile function $f(x)$; the curve that is revolved
domain	array	(0.0, 4.0)	Interval (a, b) — the revolution interval
n-disks	int	4	Number of intermediate disk cross-sections to show
width / height	float	5.0 / 3.5	Canvas size in cm
samples	int	60	Number of points sampled along the profile curve
axis-y	float	0.0	Y-value of horizontal revolution axis ($y = c$)
axis-slope	float	0.0	Slope m : revolution axis is $y = mx + \text{axis-y}$
show-axis	bool	true	Draw the revolution axis with an arrowhead
show-y-axis / show-yaxis	bool	false	Draw a coordinate y-axis at the left cap
y-axis-x / yaxis-x	float/auto	auto	X-position for the y-axis; auto = left of volume
y-axis-offset	float	0.45	Gap between y-axis and the volume when auto
y-axis-extend	array	(0.35, 0.45)	Y-axis padding (below, above) the solid
show-radius-marker	bool	false	Draw a vertical radius dimension marker at yaxis-x
show-back	bool	true	Show the back half of the solid (dashed ellipses + bottom curve)
show-labels	bool	true	Show a , b , f labels
profile-stroke	stroke	blue + 1.5pt	Top profile curve stroke
disk-color	color	luma(218)	Solid body fill color
disk-stroke	stroke	luma(90) + 0.6pt	Disk edge stroke
axis-stroke	stroke	black + 0.7pt	Revolution axis stroke
label-a / label-b	content	$\$a\$$ / $\$b\$$	Labels at domain endpoints
label-f	content	$\$f\$$	Function label near the profile curve
label-y	content	$\$y\$$	Label for the coordinate y-axis


11. Complete Examples

11.1. Trigonometric Functions

Code

```
#plot(
  width: 10, height: 6,
  xmin: -2 * calc.pi, xmax: 2 * calc.pi,
  ymin: -1.5, ymax: 1.5,
  xlabel:  $x$ , ylabel:  $y$ ,
  xtick: (-2*calc.pi, -calc.pi, 0, calc.pi, 2*calc.pi),
  xtick-labels: ( $-2\pi$ ,  $-\pi$ ,  $0$ ,  $\pi$ ,  $2\pi$ ),
  show-grid: "major",
  (fn: x => calc.sin(x), stroke: blue + 1.5pt, label:  $\sin(x)$ , label-pos: 1),
  (fn: x => calc.cos(x), stroke: red + 1.5pt, label:  $\cos(x)$ , label-pos: 0),
)
```

Preview

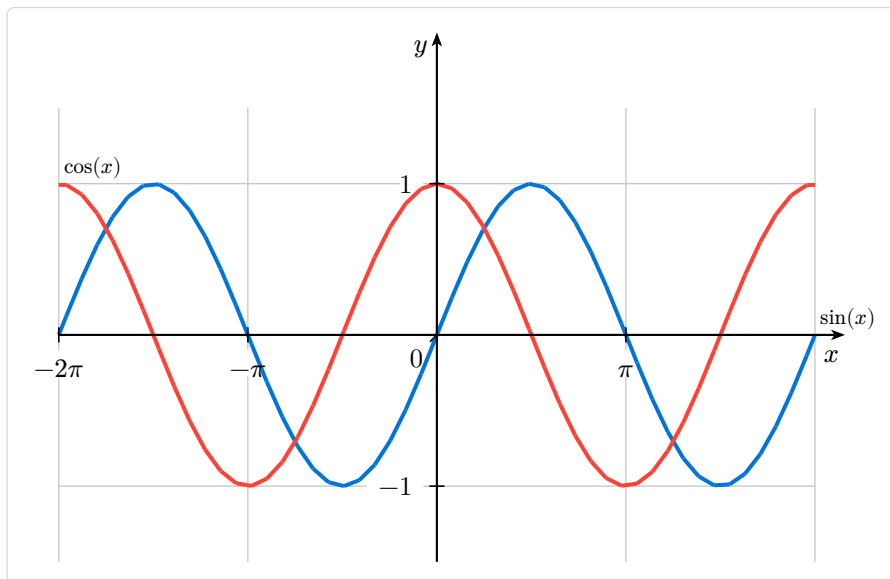


11.2. Polynomial with Fine Grid

Code

```
#plot(  
  width: 10, height: 8,  
  xmin: -3, xmax: 3, ymin: -5, ymax: 10,  
  xlabel: $x$, ylabel: $y$,  
  show-grid: "both",  
  minor-grid-step: 5,  
  (  
    fn: x => x * x * x - 3 * x + 1,  
    stroke: blue + 1.5pt,  
    label: $f(x) = x^3 - 3x + 1$,  
    label-side: "above",  
    label-pos: 0.85,  
  ),  
)
```

Preview

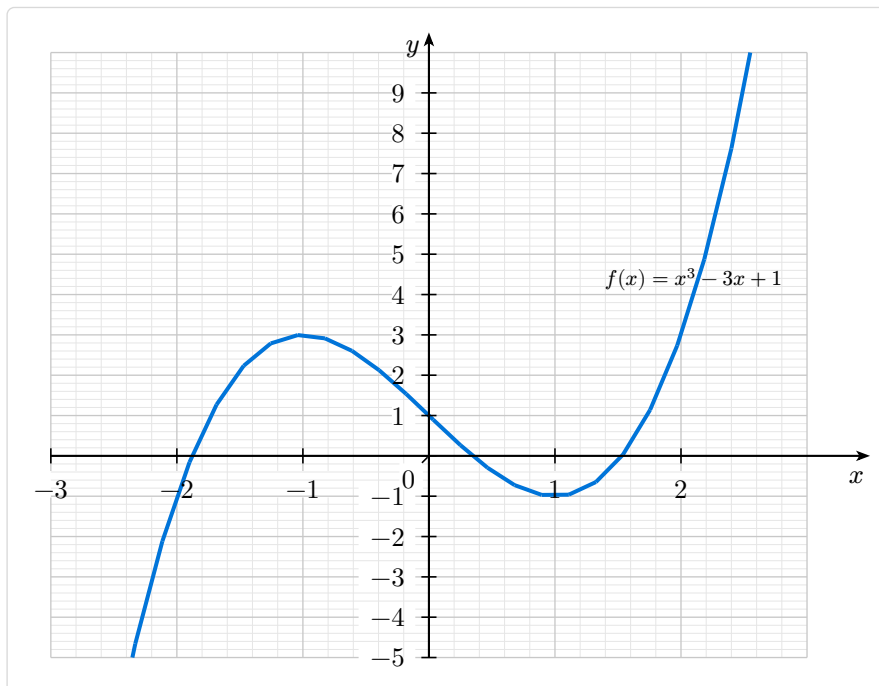


11.3. Minimal Style Plot

Code

```
#plot(  
  width: 10, height: 8,  
  xmin: -4, xmax: 4, ymin: -2, ymax: 6,  
  xlabel:  $x$ , ylabel:  $y$ ,  
  show-grid: "major",  
  unit-label-only: true,  
  show-origin: false,  
  (fn: x => x * x, stroke: blue + 1.5pt),  
  (fn: x => -x * x + 5, stroke: red + 1.5pt),  
)
```

Preview

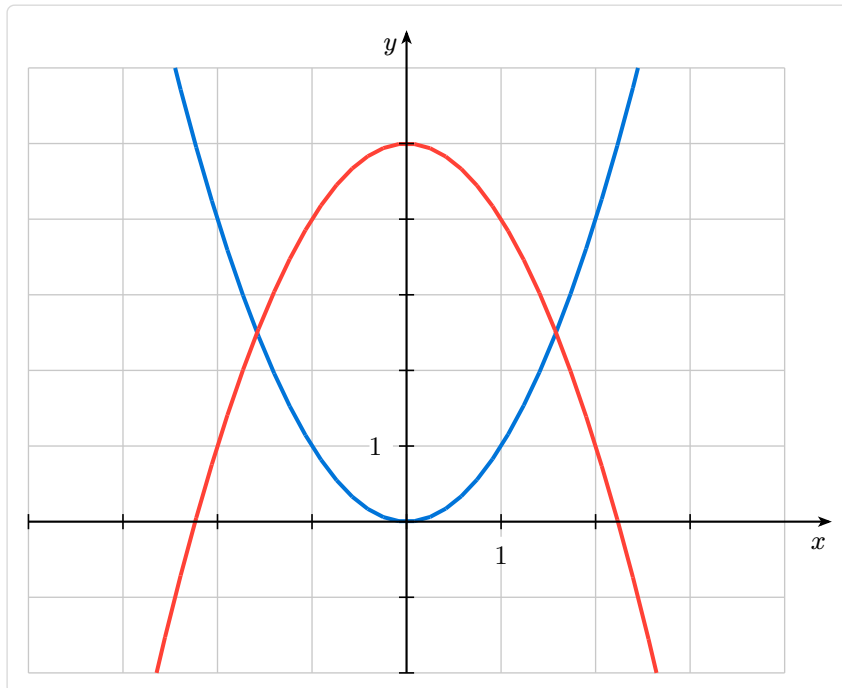

11.4. Data with Trend Line

Code

```
#plot(
  width: 10, height: 7,
  xmin: 0, xmax: 6, ymin: 0, ymax: 12,
  xlabel: "Time (s)", ylabel: "Distance (m)",
  axis-x-pos: "bottom", axis-y-pos: "left",
  show-grid: "both",
  minor-grid-step: 5,
  (fn: x => 2 * x, stroke: gray + 1pt, domain: (0, 6)), // Trend line
  (
    data: ((0.5, 1.2), (1, 2.3), (2, 3.8), (3, 6.2), (4, 7.9), (5, 10.1)),
    mark: "o",
    mark-size: 0.12,
    stroke: none,
  ),
)
```

Preview

