


absl::container\_internal  
::raw\_hash\_set::raw\_hash\_set

absl::container\_internal  
::raw\_hash\_set::rehash

absl::container\_internal  
::CommonFields::set\_full\_soo

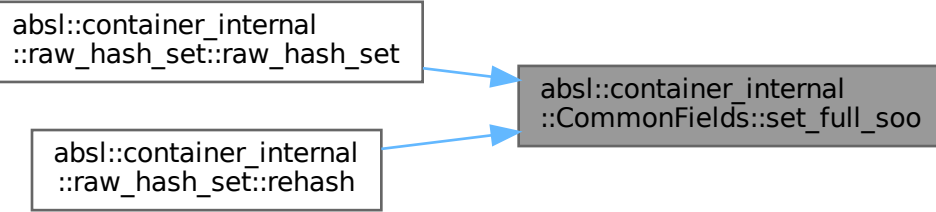

```
graph LR; A["absl::container_internal::raw_hash_set::raw_hash_set"] --> C["absl::container_internal::CommonFields::set_full_soo"]; B["absl::container_internal::raw_hash_set::rehash"] --> C;
```

The diagram illustrates a mapping or dependency from two source functions to a single target function. On the left, there are two white rectangular boxes. The top box contains the text 'absl::container\_internal::raw\_hash\_set::raw\_hash\_set'. The bottom box contains the text 'absl::container\_internal::raw\_hash\_set::rehash'. On the right, there is a gray rectangular box containing the text 'absl::container\_internal::CommonFields::set\_full\_soo'. Two blue arrows originate from the right side of the two white boxes and point towards the left side of the gray box, indicating that both source functions are associated with or map to the target function.